

DRAFT INTEGRATED MONITORING PROGRAM (IMP)

Revised: August 21, 2015

TABLE OF CONTENTS

1.0	Summary	1
1.1	Integrated Monitoring Program	1
1.2	IMP Requirements	2
1.3	Receiving Water Monitoring	4
1.4	Storm Water Outfall-based Monitoring	5
1.5	Non-storm Water Outfall-based Monitoring	9
1.6	Municipal Action Levels	14
1.7	New Development/Redevelopment Tracking	15
1.8	Regional/Special Studies	16
1.9	Toxicity Monitoring	17
1.9.1	Sensitive Species Selection	17
1.9.2	Freshwater Sensitive Species Selection	18
1.9.3	Toxicity Identification Evaluation (TIE)	19
1.9.4	Toxicity Reduction Evaluation	20
1.10	Chemical TMDL and Water Discharged Characteristics Monitoring	21
1.11	TMDL Compliance Schedule	24
1.12	MAL Monitoring	27
1.13	Action Level Monitoring	28
1.14	Additional Monitoring Required for WMP Compliance	29
1.15	Non-storm Water Monitoring for IC/ID	33
1.16	Reporting Requirements	34
1.17	Monitoring Protocols	34
1.18	Implementation Schedules (Milestones)	39

TABLES

TABLE I	Land Use Breakdown	3
TABLE II	Land Use Breakdown Regarding HUC12 Sub Watersheds	3
TABLE III	Receiving Water Monitoring Locations	5
TABLE IV	Land Use Breakdown – Monitoring Locations	7
TABLE V	Outfall Field Screening Points Location	8
TABLE VI	List of Constituents	22
TABLE VII	Los Angeles River Watershed TMDLs (including Tributary Reach 2 of the Rio Hondo) and Peck Road Park Lake	22
TABLE VIII	San Gabriel River Watershed TMDLs	24
TABLE IX	Metals and Selenium TMDLs for San Gabriel River	25
TABLE X	Metals TMDL for Reach 2 of the Rio Hondo	25
TABLE XI	Bacteria TMDL for Reach 2 of the Rio Hondo	26
TABLE XII	Nutrients for Reach 2 of the Rio Hondo	26
TABLE XIII	Trash TMDL – Reach 2 of the Rio Hondo	27
TABLE XIV	Municipal Action Levels	28
TABLE XV	Non-Storm Water Action Levels Los Angeles River	28
TABLE XVI	Non-Storm Water Action Levels San Gabriel River	29
TABLE XVII	WMP Monitoring for Non-TMDL Water Quality Standards	30
TABLE XVIII	Implementation Schedule	39

APPENDICES

APPENDIX A	MAPS	41
APPENDIX A-1	Outfall Location Map	42
APPENDIX A-1.1	Strom Drains, Outfalls & Open Channels Map	44
APPENDIX A-2	Receiving Water Monitoring Location	46
APPENDIX A-3	Field Screening Point Locations HUC 12	48
APPENDIX A-4	Watershed/Sub Watershed Map	50
APPENDIX A-5	Storm Drain/Catch Basin Map	52
APPENDIX A-6	City Land Use Map	54
APPENDIX A-7	Spreading Grounds Location Map	56
APPENDIX B	2010 303(d) List for Los Angeles and San Gabriel Rivers and Tributaries	58

Section One **Monitoring and Reporting Program (MRP)**

1.0 Summary

The Los Angeles County MS4 permit (Order R4-2012-0175) includes compliance with a Monitoring and Report Program (No. CI-6948), (MRP). The MRP addresses several types of monitoring required by the permit, including: (1) TMDL monitoring at the outfall and receiving water; (2) municipal action levels (MALs) monitoring at the outfall; (3) monitoring action levels (non-stormwater) at the outfall; (4) new development/re-development effectiveness tracking (limited to observations); (5) compliance with municipal action level (MAL) parameters; (6) regional studies; (7) toxicity testing, and (8) Receiving Water Monitoring, including the following CWA 303(d)-listed Pollutants that are not addressed by a TMDL: Cyanide from Rio Hondo Reach 2 (at spreading grounds); Indicator Bacteria from San Gabriel River Reach 3 (Whittier Narrows to Ramona); and Benthic-Macroinvertebrate Bioassessments, Indicator Bacteria, and pH from Walnut Creek Wash (drains from Puddingstone Reservoir). The purpose of the monitoring is to facilitate an evaluation of the adequacy of control measures in meeting the specified limitations, which are listed in the LA County MS4 Permit Attachment E, O and P. The City intends to meet these requirements through its **Integrated Monitoring Program** (IMP) submittal.

1.1 Integrated Monitoring Program

The City has opted for an **Integrated Monitoring Program** (IMP) to comply with monitoring and SWMP/WMP requirements under the MS4 permit. In accordance with the MRP, the IMP includes the following elements: (1) receiving water monitoring; (2) storm water outfall based



monitoring; (3) non-storm water outfall based monitoring; and new development/re-development effectiveness tracking; (4) compliance with municipal action level (MAL) parameters; (5) regional studies; and (6) toxicity testing.

1.2 **IMP Requirements**

Through the Integrated Monitoring Program (IMP), the City proposes to consolidate applicable monitoring program requirements as specified in attachment E of the MS4, which *provides flexibility to allow Permittees to coordinate monitoring efforts on a watershed or sub-watershed basis to leverage monitoring resources in an effort to increase cost-efficiency and effectiveness and to closely align monitoring with TMDL monitoring requirements and Watershed Management Programs*. The City has contacted the Upper San Gabriel River CIMP Group and is in the process of collaborating with them to cost share the Receiving Water Monitoring in the San Gabriel River Watershed. The City has also contacted the Rio Hondo/San Gabriel River Water Quality CIMP Group and is in the process of collaborating with them to cost share Receiving Water Monitoring in the Los Angeles River Watershed. Though the SWAMP should be responsible for performing ambient monitoring, it is not known when, if ever, it intends to conduct ambient monitoring in these reaches. In the meantime, the City recognizes that the ambient monitoring approach will yield accurate data needed to evaluate the beneficial uses and facilitate compliance with ambient TMDL WLAs and other water quality standards.

GIS maps have been developed to depict the geographic boundaries of the monitoring plan, including the receiving waters, the MS4 catchment drainages and outfalls, sub-watershed boundaries, land use, and proposed receiving water monitoring stations. Outfall monitoring

points are shown on the maps along with the HUC-12 sub watershed boundaries. The maps are contained in **Appendix A**.

The City of Irwindale drains into Los Angeles River Watershed via Reach 2 of the Rio Hondo and into the San Gabriel River Watershed at Reach 3. The Table below summarizes the land use breakdown:

Table I – Land use Breakdown

Land Use	Rio Hondo Channel		San Gabriel River		Total	
	Acres	Percentage	Acres	Percentage	Acres	Percentage
Residential	6.16	0.1%	53.51	0.9%	59.67	0.98%
Commercial	1.20	0.02%	124.87	2.1%	126.07	2.07%
Industrial	400.02	6.6%	2255	37.1%	2655.02	43.7%
Public	321.06	5.3 %	2052.57	33.7%	2373.63	39%
Vacant	32.81	0.5 %	294.44	5%	327.25	5.4%
Transportation	54.88	0.9%	538.33	8.9%	593.21	9.8%
Total	816.13	13.4%	5318.72	86.6%	6134.85	100%

Table II – Land Use Breakdown regarding HUC -12 Sub Watersheds

Land Use	Santa Anita Wash- Rio Hondo		Big Dalton Wash		Santa Fe Flood Control Basin - SGR	
	Acres	Percentage	Acres	Percentage	Acres	Percentage
Residential	6.16	0.1%	50.81	0.8%	2.7	0.04%
Commercial	1.20	0.02%	10.51	0.2%	114.36	1.9%
Industrial	400.02	6.6%	380.13	6.3%	1874.9	30.8%
Public	321.06	5.3 %	91.27	1.5%	1951.36	32.09%
Vacant	32.81	0.5 %	143.40	2.4%	151.04	2.5%
Transportation	54.88	0.9%	173.26	2.8%	310.19	5.1%
Total	816.13	13.4%	849.38	13.9%	4404.6	72.6%

1.3 Receiving Water Monitoring

The MS4 permit requires receiving water monitoring to be performed at in-stream mass emissions stations; additional receiving water compliance points approved by the Regional Board's Executive Officer; and additional locations that are representative of impacts from MS4 discharges. The objectives of receiving water monitoring are: (1) determine if receiving water limitations are being achieved; (2) assess trends in pollutant concentrations over time, or during specified; and (3) determine whether the designated beneficial uses are fully supported based on water chemistry, as aquatic toxicity and bio-assessment monitoring.

The City of Irwindale is located in the Los Angeles River Watershed Management Area and San Gabriel River Watershed Management Area. The City drains into Sawpit Wash via the Buena Vista Channel and goes into Rio Hondo Reach 2, which is tributary to the Los Angeles River System. Receiving Water Monitoring will be conducted three times per year.

The City has contacted the Upper San Gabriel River CIMP Group and is in the process of collaborating with them to cost share the Receiving Water Monitoring in the San Gabriel River Watershed. The City has also contacted the Rio Hondo/San Gabriel River Water Quality CIMP Group and is in the process of collaborating with them to cost share the Receiving Water Monitoring in the Los Angeles River Watershed.

The City will also participate in receiving water monitoring above the Los Angeles River Estuary as required by the Dominguez Channel and Greater Los Angeles and Long Beach Harbor Waters Toxic Pollutants TMDL. The City intends to collaborate with cities that are in the

"Other Group" in Exhibit A of the Gateway Contract (attachment).

The table below summarizes the location of Receiving Water Monitoring:

Table III – Receiving Water Monitoring Locations

Water Body	Waterbody Location	Drainage Area	Coordinates	
			Latitude	Longitude
San Gabriel River	USGR_R4_RAM and USGR_WCW_BP	TBD		
Rio Hondo Channel	RHSGR_PRP_LAKE	TBD		
DC and LA & LB Harbor	LAR Estuary	850 Square	33.772925	-118.2034833
DC and LA & LB Harbor	Mouth of SGR (2 nd street & SGR)	640 Square	33.791567	-118.230747

**The City of Irwindale entered into a contract agreement with the Los Angeles Gateway Region Integrated Regional Water Management Joint Powers Authority for cost sharing for the installation of monitoring equipment and monitoring pursuant to the Harbor Toxic Pollutants TMDL for both the Los Angeles River and San Gabriel River Watersheds.*

The City has been participating in the following TMDL Monitoring Plans:

- Monitoring Work Plan to Assess Nutrients Loading from the Municipal Separate Storm Sewer System in Los Angeles River Watershed (March 23, 2005).
- Coordinated Monitoring Plan for Los Angeles River Watershed Bacteria TMDL- Compliance Monitoring (March 23, 2013).
- Los Angeles River Metals TMDL Coordinated Monitoring Plan (March 25, 2008) – (Approved April 11, 2008).

1.4 Storm Water Outfall-Based Monitoring

The City is committed to stormwater monitoring at the outfall in accordance with the 2012 MS4 Permit. Outfall monitoring will be limited to: (1) aiding in determining compliance with WQBELs (TMDL WLAs and other water quality standards measured against ambient

standards); and (2) evaluating stormwater discharges against Municipal Action Levels (MALs).

The City has identified five (5) outfalls from which discharges are released to receiving waters. See **Appendix A-1** for outfall and sampling locations. The City intends to monitor outfalls BDW-029, SGR-074, and SAWPW-074A each year.

It should be noted that the outfalls are not actual monitoring locations from which samples can be taken because they are located within LACFCD property which is not accessible to the City (see picture below). Instead, the City has identified the storm drain manhole points nearest to the outfall(s).



These are referred to in federal stormwater regulations as “field screening” points. Their locations indicate a mix of industrial, commercial, and residential uses and, therefore, are representative. Stormwater discharges from the outfall sampling points will be measured against ambient TMDL standards. The ambient standard is one that is required to assure that beneficial uses of receiving waters are protected against impairment. Sampling results will be reported to the Regional Board annually.

The City plans to conduct stormwater outfall monitoring three times a year, during the wet season (October 1 through May 15), with at least one month between sampling in accordance with 40 CFR §122.21(g)(7). Each of the three outfalls is representative to the extent it includes drainage areas from a mix of land uses. According to Appendix A-3 of the IMP, the City falls within 3 HUC-12 drainage areas; therefore, 3 field screening points, one for each HUC-12 drainage area, will be monitored per year. At the end of the 5 year term of the permit the City will be able to evaluate persistent exceedances of TMDLs and other water quality standards and propose adjustments to BMPs and other actions in the Report of Waste Discharge (ROWD), the MS4 permit reapplication that is due to the Regional Board 180 days prior to the expiration of the current permit (May of 2017).

The City will use the data to determine compliance with WQBELs, expressed as ambient TMDL WLAs, and to measure stormwater discharges against municipal action levels (MALs).

Stormwater outfall based monitoring, receiving water, and non-storm water outfall based monitoring will include analysis for 303(d) listed pollutants as referenced in Appendix B of this IMP.

Table IV – Land Use Breakdown – Monitoring Locations

Land Use Type	Drainage Area (Acres & Percentage)				
	M1	M2	M3	M4	M5
Residential	6.16	2.70	-	38.1	12.7
Commercial	1.20	114.4	11.01	7	3.5
Industrial	400.02	874.9	108.6	253.42	126.71
Public	321.06	951.4	44.02	60.8	30.4
Vacant	32.81	151.04	95.4	95.6	47.8
Transportation	54.88	310.19	140.5	115.5	57.7

Total	816.13 (13.4%)	2404.6 (39.5%)	399.5 (6.6%)	570.4 (9.4%)	278.8 (4.9%)
--------------	---------------------------------	---------------------------------	-------------------------------	-------------------------------	-------------------------------

Table V – Outfall and Field Screening Points Location

ID No.	Outfall Coordinates	Outfall Location	Ownership	Size (in)	Outfall material	Picture
BUENV C 016	34.117730; -117.9921806	Mountain Ave.	LACFCD	54	Reinforced Concrete Box (RCB)	
SGR 074A	34.09931667; -117.9835083	Olive St.	LACFCD	87	Reinforced Concrete Box (RCB)	
BDW 023	34.0935111; -117.9430611	Azusa Canyon Rd.	LACFCD	60	Reinforced Concrete Box (RCB)	
BDW 028	34.097125; -117.9340472	Irwindale Ave.	LACFCD	72	Reinforced Cement Concrete (RCC)	
BDW 029	34.098375; -117.9299306	Olive St. & Big Dalton Wash	LACFCD	54	Reinforced Concrete Box (RCB)	
ID No.	Field Screening Coordinates	Field Screening Location	Ownership	Size (in)	Field Screening material	Picture
1	34.09975833; -117.93325	Irwindale Ave.	LACFCD	36	Manhole Pipe to Pipe Main Line	
2	34.10209444; -117.9314556	Olive St. & Irwindale Ave.	LACFCD	36	Junction Structure-Pipe to RCB	
3	34.09777778; -117.9406139	Azusa Canyon Rd.	LACFCD	36	Manhole Pipe to Pipe Main Line	
4	34.115103; -117.999837	Mountain Ave.	LACFCD	36	Manhole Concrete Box Storm Drain	
5	34.107486; -117.974075	River grade Rd.	LACFCD	36	Manhole Pipe to Pipe Main Line	

1.5 Non-Storm Water Outfall-Based Monitoring

As per the Los Angeles County MS4 Permit, non-stormwater outfall based monitoring must be included in the IMP as outlined in Part IX of Attachment E. The City's non-stormwater outfall based screening and monitoring process is outlined below:

- **Field Screening:** The criteria for screening of non-stormwater outfall discharges are defined as a major municipal separate storm sewer outfall (or "major outfall") that discharges from a single pipe with an inside diameter of 36 inches or more or its equivalent (discharge from a single conveyance other than circular pipe which is associated with a drainage area of more than 50 acres); or for municipal separate storm sewers that receive storm water from lands zoned for industrial activity (based on comprehensive zoning plans or the equivalent), an outfall that discharges from a single pipe with an inside diameter of 12 inches or more or from its equivalent (discharge from other than a circular pipe associated with a drainage area of 2 acres or more). Outfalls greater than or equal to 36 inches in diameter will be located and mapped using GIS. The field screening events will take place during dry weather, i.e., on days with <0.1 inch of rain and no less than 72 hours after a rain event. Observations will be conducted during working hours. During observations, staff will complete an **Outfall Screening Form** containing information such as date, time, weather, flow amount, visual turbidity, trash, and odor. Photographs will also be taken during inspections.
- **Inventory of Screening Points:** An inventory will be developed for major MS4 outfalls with known significant non-stormwater

discharges. The inventory database will be updated annually.

- **No further Assessment:** No further Assessment will be reported in the inventory database if no flow is observed on at least 2 out of 3 visits. However, the City will conduct at least one re-assessment of its non-stormwater outfall-based screening and monitoring program during the term of the LA County MS4 Permit. The City shall make the changes in its written program documents, implement these changes in practice, and describe the changes within the next annual report.
- **Prioritization Criteria & Source Investigation:** Based on data collected during the screening process, the City will identify screening points with significant non-stormwater discharges and those requiring no further action. The data collected as part of the outfall screening process will be used to prioritize outfalls for source investigation. The City will complete 25% of source identification inventory by December 28, 2015 and 100% by December 28, 2017.
- **Implement Source Identification:** If necessary, the City will implement source identification in prioritized order, consistent with the City's IC/ID Program. The City's contribution will be quantified if the discharge is comprised of multiple sources. Upstream jurisdictions and the Regional Board will be notified if the source originates outside the City's jurisdiction.

Monitoring Non-storm Water Discharge Exceedance Criteria: The City will monitor outfall screening points conveying significant discharges comprised of unknown or conditionally exempt non-stormwater discharges, or continuing illicit discharges. Discharges with the following characteristics will be considered significant:

- Discharges from major outfalls subject to dry weather TMDLs
- Discharges for which existing monitoring data exceeds non-storm water Action Levels identified in Attachment G
- Non-Storm water discharges that have caused or have the potential to cause overtopping of downstream diversions (if applicable)
- Discharges exceeding a proposed threshold discharge rate
- Other characteristics determined during the field screening:
 - Garden hose amount of flow or greater (~5 gpm)
 - Persistent Flows (flow observed twice from same outfall)
 - Visual and olfactory observations: turbidity, trash, floatables, foam, algae, odor, etc.
- **Flows that are conditionally exempt or natural flows.** In addition, an outfall subject to an approved dry weather TMDL will be monitored per the TMDL monitoring plan. Monitoring frequency may be reduced to twice per year beginning the second year of monitoring provided that pollutant concentrations during the first year do not exceed WQBELs, non-storm water Action Levels, or water quality standards on the 303(d) list for the receiving water or downstream receiving waters. The City will submit a written request to the Executive Officer of the Regional Water Board to reduce or eliminate monitoring of specified pollutants, based on an evaluation of the monitoring data. Outfall(s) will be monitored for flow and constituents identified in Attachment E of the MS4 permit, and other pollutants identified on the 303(d) list. The following parameters shall be monitored:
 - Flow
 - Pollutants assigned a WQBEL or RWL to implement TMDL

Provisions applicable to the receiving waterbody

- Other Pollutants identified on the CWA 303(d) list for receiving water
- Pollutants identified in a TIE conducted in response to observed aquatic toxicity during dry weather at the nearest downstream receiving water monitoring station during the last sample event or, where the TIE conducted on the receiving water sample was inconclusive. If the discharge exhibits aquatic toxicity, then a TIE shall be conducted.
- Other parameters in Table E - 2 identified as exceeding the lowest applicable water quality objective in the nearest downstream receiving water monitoring station per Part VI.D.1.d. of the MS4 Permit.

Non-stormwater outfall based monitoring, receiving water, and outfall based monitoring will include analysis for 303(d) listed pollutants as referenced in Appendix B of this IMP.

The City will perform outfall visual and sampling monitoring in connection with illicit connection and discharge elimination requirements in keeping with the 2012 MS4 Permit. Non- storm water discharge monitoring will conform to 122.26(d)(1)(D) for the purpose of screening for illicit connections and dumping, which specifies visual monitoring at outfalls for dry weather (non-storm water discharges).

Visual monitoring shall be performed twice a year during dry periods. If flow is observed samples for the outfall (or field screening points):

...samples shall be collected during a 24 hour period with a minimum period of four hours between samples. For all such samples, a narrative description of the color, odor, turbidity, the presence of an oil sheen or surface scum as well as any other relevant observations regarding the potential presence of non-

storm water discharges or illegal dumping shall be provided.

In addition, regulations require a narrative description of the results from sampling for fecal coliform, fecal streptococcus, surfactants (MBAS), residual chlorine, fluorides and potassium; pH, total chlorine, total copper, total phenol, and detergents (or surfactants) shall be provided along with a description of the flow rate. These analytes will be used as potential indicators of illicit discharges, which would trigger an up-stream investigation to identify the source of the suspected illicit discharge or connection. If the source of the illicit discharge/connection and discharger is identified, the City shall notify the discharger that it will need to halt the discharge and, if not feasible, will require the discharger to obtain a discharge permit.

Conducting visual monitoring of field screening points for non-stormwater discharges will be difficult for Reach 2 of the Rio Hondo. Outfalls in this flood control channel, as shown below, are equipped with iron flap gates that open to allow stormwater to be discharged to the floor of the channel.



The flap gate opens to a degree that is determined by the amount of stormwater flow expressed as cubic feet per second (cfs). It is estimated that the amount of flow that is needed to open the gate is at least 10 cfs from a one inch storm. During dry periods, non-stormwater cannot leave the storm drain connected to the flap-gated outfall. In other words, there will be no non-stormwater discharge releases to the channel. Nevertheless, the City will monitor Reach 2 Rio Hondo outfalls at upstream manhole sampling points to verify that there is no discharge from these outfalls. Non-stormwater outfall monitoring of significant non-stormwater discharges that cannot be eliminated will occur 4 times during the year following source identification, or at the frequency identified in a TMDL Monitoring Plan if an outfall is subject to dry weather TMDLs.

1.6 **Municipal Action Levels**

The purpose of municipal action levels (MALs) is not clear and appears to be superfluous given the permit's other monitoring requirements. All of the MAL constituents are already addressed by TMDLs and federally mandated monitoring for certain constituents¹. The MS4 Permit's Fact Sheet mentions that the purpose of MAL monitoring is to evaluate the effectiveness of a Permittee's stormwater management program in reducing pollutant loads from drainage areas as a means of determining compliance with the maximum extent practical (MEP) standard. It is also

¹Total nitrogen, total phosphorous, Ammonia N, TKN, Total PCBs, Chlordane, Dieldrin, 4,4 – DDD, 4,4 – DDE, 4,4 – DDT, Cadmium, Chromium, copper, lead, zinc, E-Coli, fecal coliform

intended to evaluate the effectiveness of post-construction BMPs. The permit, however, does not explain how MAL monitoring will accomplish those ends. Further, it is not clear how MALs can evaluate post-construction BMPs.

Since MAL constituents are included in other stormwater monitoring requirements, the City will effectively be meeting this requirement. The permit's monitoring program also requires non-stormwater MAL compliance, which the City will comply with as part of its monitoring program.

1.7 **New Development/Redevelopment Tracking**

The PLDP requires tracking new development and redevelopment projects within 60 days after the permit's adoption (unless a permittee chooses to participate in watershed management program). Although not a monitoring requirement per se, permittees are nevertheless required to maintain a database containing the following information:

- name of the project and developer,
 - project location and map (preferably linked to the GIS storm drain map),
 - date of Certificate of Occupancy,
 - 85th percentile storm event for the project design (inches per 24 hours),
 - 95th percentile storm event for projects draining to natural water bodies
-
- (inches per 24 hours), related to hydromodification
 - other design criteria required to meet hydromodification requirements for drainages to natural water bodies,
 - project design storm (inches per 24-hours),
 - project design storm volume (gallons or MGD),
 - percent of design storm volume to be retained on site
 - design volume for water quality mitigation treatment BMPs, if any.
 - if flow-through, water quality treatment BMPs are approved, provide the one year, one-hour storm intensity as depicted on the most



- recently issued isohyetal map published by the Los Angeles County Hydrologist,
- percent of design storm volume to be infiltrated at an off-site mitigation or groundwater replenishment project site
 - percent of design storm volume to be retained or treated with bio-filtration at an off-site retrofit project,
 - location and maps (preferably linked to the GIS storm drain map required in Part VII.A of this MRP) of off-site mitigation, groundwater replenishment, or retrofit sites documentation of issuance of requirements to the developer.

The City intends to meet this requirement through a revised SUSMP evaluation form.

1.8 **Regional/Special Studies**

The Southern California Stormwater Monitoring Coalition (SMC) Regional Watershed Monitoring Program was initiated in 2008. This program is conducted in collaboration with the Southern California Coastal Water Research Project (SCCWRP), State Water Board's Surface Water Ambient Monitoring Program, three Southern California Regional Water Quality Control Boards (Los Angeles, Santa Ana, and San Diego) and several county storm water agencies (Los Angeles, Ventura, Orange, Riverside, San Bernardino and San Diego). SCCWRP acts as the facilitator to organize the program and completes data analysis and report preparation. The SMC monitoring program seeks to coordinate and leverage existing monitoring efforts to produce regional estimates of condition, improve data comparability and quality assurance, and maximize data availability, while conserving monitoring expenditures. The primary goal of this program is to implement an ongoing, large - scale regional monitoring program for Southern California's coastal streams and rivers. The monitoring program addresses three main questions:



- What is the condition of streams in Southern California?;
- What are the stressors that affect stream condition?; and
- Are conditions getting better or worse?

In order to continue the implementation efforts of the SMC monitoring program, the City will support or provide monitoring data as described at the SMC sites within the Watershed Management Area(s) that overlap with the City's jurisdictional area.

1.9 **Toxicity Monitoring**

The MRP of the MS4 Permit requires toxicity testing at the outfall and in the receiving water. If toxicity is present in the receiving water, the City will perform toxicity testing on water samples taken from field screening (manhole sample) points to make sure that the toxicity is coming from the City's jurisdictional area. A sufficient number of samples specified in the MRP shall be collected to perform both the required toxicity test and TIE studies.

1.9.1 **Sensitive Species Selection**

The MRP states that a sensitivity screening is required to select the most sensitive test species unless "a sensitive test species has already been determined, or if there is prior knowledge of potential toxicant(s) and a test species is sensitive to such toxicant(s), then monitoring shall be conducted using only that test species." Previous relevant studies conducted in the watershed should be considered. Such studies may have been completed via previous MS4 sampling, wastewater NPDES sampling, or special studies conducted within the watershed. The following sub-sections discuss the species-selection process for assessing aquatic

toxicity in receiving waters.

1.9.2 **Freshwater Sensitive Species Selection**

As described in the MRP, if samples are collected in receiving waters with salinity less than 1 part per thousand (ppt), or from outfalls discharging to receiving waters with salinity less than 1 ppt, toxicity tests should be conducted on the most sensitive species in accordance with *Short-term Methods for Estimating the Chronic Toxicity of Effluents and Receiving Waters to Freshwater Organisms*. The freshwater test species identified in the MRP are:

- A static renewal toxicity test with the fathead minnow, *Pimephales promelas* (Larval Survival and Growth Test Method 1000.04).
- A static renewal toxicity test with the daphnid, *Ceriodaphnia dubia* (Survival and Reproduction Test Method 1002.05).
- A static non-renewal toxicity test with the green alga, *Selenastrum capricornutum* (also named *Raphidocelis subcapitata*) (Growth Test Method 1003.0).

The three test species were evaluated to determine if either a sensitive test species had already been established or, if there is prior knowledge of potential toxicant(s), to determine if a test species is sensitive to such toxicant(s). In reviewing the available data in the Los Angeles and San Gabriel Watersheds, metals, historical organics, and pyrethroids have been identified as problematic and are generally considered the primary aquatic life toxicants of concern found in urban runoff. Given the knowledge of the presence of these potential toxicants in the watershed, the sensitivities of each of the three species were considered to evaluate which is the most sensitive to the potential toxicants in the watersheds.

As *C. dubia* is identified as the most sensitive to known potential



toxicant(s) typically found in receiving waters and urban runoff in the freshwater portions of the watershed, it was chosen as the most sensitive species. This species also has the advantage of being easily maintained by means of in-house mass cultures. The simplicity of the test, the ease of interpreting results, and the smaller volume necessary to run the test, make it a valuable screening tool. The ease of sample collection and higher sensitivity will support assessing the presence of ambient receiving water toxicity or long term effects of toxic storm water over time.

As such, toxicity testing in the freshwater portions of the watershed will be conducted using *C. dubia*. However, *C. dubia* test organisms are typically cultured in moderately hard waters and can have increased sensitivity to elevated water hardness greater than 400 mg/L CaCO₃, which is beyond their typical habitat range. Because of this, in instances where hardness in site waters exceeds 400 mg/L (CaCO₃), an alternative test species may be used. *Daphnia magna* is more tolerant to high hardness levels and is a suitable substitution for *C. dubia* in these instances.

1.9.3 **Toxicity Identification Evaluation (TIE)**

A toxicity test sample is immediately subject to TIE procedures to identify the toxic chemical(s), if either the survival or sub-lethal endpoint demonstrates a Percent Effect value equal to or greater than 50% at the IWC. Percent Effect is defined as the effect value denoted as the difference between the mean control response and the mean IWC response, divided by the mean control response, multiplied by 100. A TIE shall be performed to identify the causes of toxicity using the same species



and test method and, as guidance, U.S. EPA manuals: *Toxicity Identification Evaluation (TIE)*; *Characterization of Chronically Toxic Effluents, Phase I* (EPA/600/6 - 91/005F, 1992); *Methods for Aquatic Toxicity Identification Evaluations, Phase II Toxicity Identification Procedures for Samples Exhibiting Acute and Chronic Toxicity* (EPA/600/R - 92/081, 1993); *Methods for Aquatic Toxicity Identification Evaluations, Phase III Toxicity Confirmation Procedures for Samples Exhibiting Acute and Chronic Toxicity* (EPA/600/R-92/081,1993); and *Marine Toxicity Identification Evaluation (TIE): Phase I Guidance Document* (EPA/600/R - 96 - 054, 1996).

The TIE should be conducted on the test species demonstrating the most sensitive toxicity response at a sampling station. A TIE may be conducted on a different test species demonstrating a toxicity response with the caveat that once the toxicant(s) are identified, the most sensitive test species triggering the TIE shall be further tested to verify that the toxicant has been identified and addressed. A TIE Prioritization Metric (see Appendix 5 in SMC Model Monitoring Program) may be utilized to rank sites for TIEs.

1.9.4 **Toxicity Reduction Evaluation (TRE)**

If a toxicant or class of toxicants could not be conclusively identified through a TIE conducted on the receiving water sample, the City will conduct toxicity testing at the outfall at the next sampling event during the same condition (i.e., either wet weather or dry weather), in which the toxicity was observed in the receiving water. If the toxicant is present in the discharge from the outfall, at levels above the applicable receiving water limitation, a TRE shall be performed for that toxicant. The TRE shall include all reasonable steps to identify the source(s) of toxicity and discuss appropriate



BMPs that have been identified; the City shall submit a TRE Corrective Action Plan to the Regional Water Board Executive Officer for approval. At a minimum, the plan shall include a discussion of the following:

- The potential sources of pollutant(s) causing toxicity.
- A list of municipalities and agencies that may have jurisdiction over sources of pollutant(s) causing toxicity.
- Recommended BMPs to reduce the pollutants(s) causing toxicity.
- Proposed post - construction control measures to reduce the pollutant(s) causing toxicity.
- Follow - up monitoring to demonstrate that the toxicants have been reduced or eliminated.

1.10 **Chemical TMDL and Water Discharged Characteristics Monitoring**

Chemical TMDL sampling will be performed at field screening points for stormwater discharges at least three times a year in accordance with the MRP. For stormwater outfall monitoring, the parameters in Table E-2 identified as exceeding the lowest applicable water quality objective in the nearest downstream receiving water monitoring station will be monitored. Sampling and analysis will be in keeping with USEPA guidance. In the Rio Hondo Reach 2 of the Los Angeles River, the constituents are flow, hardness, pH, dissolved oxygen, temperature, specific conductivity, TSS and SSC, Table E-2 pollutants, copper, lead, zinc, ammonia as N, Nitrite-N, Nitrite-N +nitrate-N, suspended sediments, e-coli, and trash. The San Gabriel River constituents include the same as the Rio Hondo Reach 2 with the exception of Cadmium, ammonia as N, Nitrite-N, Nitrite-N +nitrate-N, e-coli, bacteria and trash.

The table VI below specifies each TMDL WLA to which the City is subject.

Table VI – List of Constituents

LAR – Rio Hondo Reach 2	SGR Reach 3
Flow, hardness, pH, dissolved oxygen, temperature, specific conductivity, TSS & SSC	Flow, hardness, pH, dissolved oxygen, temperature, specific conductivity, TSS & SSC
Table E-2 Pollutants	Table E-2 Pollutants
Copper, Lead, Zinc, Cadmium	Copper, Lead, Zinc
Ammonia as N, Nitrate-N, Nitrite-N, Nitrite-N + nitrate-N	-
Suspended Sediment: Copper, Lead, Silver, Zinc, Chlordane, DDT, PCBs & PAHs	Suspended Sediment: Copper, Lead, Silver, Zinc, Chlordane, DDT, PCBs & PAHs
E-coli	-
Trash	-
-	Bacteria
Toxicity, TIE	Toxicity, TIE
303(d) listed pollutants	303(d) listed pollutants

For the Los Angeles River Bacteria TMDL, the City will be submitting a Load Reduction Strategy (LRS) for Segment B Tributaries (Rio Hondo and Arroyo Seco) by March 23, 2016. We are contracting directly with Paradigm Environmental to complete this compliance plan.

The City of Irwindale entered into a contract agreement with the Los Angeles Gateway Region Integrated Regional Water Management Joint Powers Authority for cost sharing for the installation of monitoring equipment and monitoring pursuant to the Harbor Toxic Pollutants TMDL for both the Los Angeles and San Gabriel Rivers.

Tables VII and VIII identify WLAs for TMDL based receiving water, stormwater outfall, and non-stormwater outfall based monitoring.

**Table VII - Los Angeles River Watershed TMDLs
(Including Tributary Reach 2 of the Rio Hondo) and Peck Road Park Lake**

Wet Weather WLAs*				
Water Body	Copper	Lead	Zinc	Cadmium
Reach 2 Rio Hondo ²	1.5*10 ⁻⁸ *daily volume(L)-9.5	5.6*10 ⁻⁸ *daily volume(L)-3.85	1.4*10 ⁻⁷ *daily volume(L)-83	2.8*10 ⁻⁹ *daily volume(L)-1.8
Water Body	Bacteria	Daily Maximum	Geometric Mean	



Reach 2 Rio Hondo	E-Coli	235/100mL**	126/100 mL	
Water Body	NH3-N	NO3-N	NO2-N	NO3-N+NO2-N
Reach 2 Rio Hondo	10.1 mg/l***	8 mg/L	1 mg/L	8 mg/L
Water Body	Trash	2014 (10%)	2015 (3.3%)	2016 (0%)
Reach 2 Rio Hondo	Gallons of uncompressed trash	1235	408	0
Water Body	Phosphorus	Nitrogen	PCBs Associated With Suspended Sediment	PCBs In the Water column
Peck Road Park Lake Eastern	496 lb/yr	3487 lb/yr	1.29 µg/kg Dry weight	0.17 ng/L
Water Body	Phosphorus	Nitrogen	PCBs Associated With Suspended Sediment	PCBs In the Water column
Peck Road Park Lake Near Lake	28.2 lb/yr	207 lb/yr	1.29 µg/kg Dry weight	0.17 ng/L
Water Body	Chlordane Associated With Suspended Sediment	Chlordane In the Water column	DDT Associated With Suspended Sediment	4-4' DDT In the Water column
Peck Road Park Lake Eastern	1.73 µg/kg Dry weight	0.59 ng/L	5.28µg/kg Dry weight	0.59 ng/L
Water Body	Chlordane Associated With Suspended Sediment	Chlordane In the Water column	PCBs Associated With Suspended Sediment	4-4' DDT In the Water column
Peck Road Park Lake Near Lake	1.73 µg/kg Dry weight	0.59 ng/L	5.28µg/kg Dry weight	0.59 ng/L



Water Body	Dieldrin Associated With Suspended Sediment	Dieldrin In the Water column	Trash
Peck Road Park Lake Eastern	0.43µg/kg Dry weight	0.14 ng/L	0 gal/yr
Water Body	Dieldrin Associated With Suspended Sediment	Dieldrin In the Water column	Trash
Peck Road Park Lake Near Lake	0.43µg/kg Dry weight	0.14 ng/L	0 gal/yr

*With the exception of metals, WLAs listed for bacteria, nitrogen compounds, and trash are for wet and dry weather, or for annual discharge (i.e., trash).

** Dry weather E.coli Interim WLA for Rio Hondo is 2 X10⁹ MPN/Day.

*** 30-day average WLA for NH3-N is 2.3 mg/l.

Note: Annual Allowable Exceedance Days of the Single Sample Objective (days) will be as specified in Attachment O Part D.4.a

Table VIII - San Gabriel River Watershed TMDLs

Wet Weather WLA			
Water Body	Copper	Lead	Zinc
San Gabriel River Reach 2*	N/A	81.34 mg/l x daily storm volume (L)	N/A

*The City does not drain into Reach 2 of the San Gabriel River.

Monitoring for all constituents that will be tested will be conducted according to test procedures approved under 40CFR Part 136 for the analysis unless another test procedure is required under 40 CFR subchapters N and O or otherwise specified in LA County MS4 Permit.

1.11 TMDL Compliance Schedule

Tables III through VI below show the following compliance



deadlines for: (1) interim and final TMDL waste load allocations (WLAs) for the metals and selenium TMDL for the San Gabriel River; (2) interim and final WLAs bacteria TMDL for Reach 2 of the Rio Hondo; (3) interim and final WLAs for the metals TMDL for the Rio Hondo; (4) interim and final nutrients TMDL WLAs for the Rio Hondo; and (5) trash TMDL for the Los Angeles River.

Table IX - Metals and Selenium TMDLs for San Gabriel River

TMDL Pollutant	Target	Interim WLA
All Metals	<ul style="list-style-type: none"> 30% of the total drainage area meeting dry-weather WLAs & 10% meeting the wet-weather WLAs 	September 30, 2017
	<ul style="list-style-type: none"> 70% of the total drainage area meeting dry-weather WLAs & 35% meeting the wet-weather WLAs 	September 30, 2020
TMDL Pollutant	Target	Final WLA
	<ul style="list-style-type: none"> 100% of the total drainage area meeting dry-weather WLAs & 65% meeting the wet-weather WLAs 	September 30, 2023
	<ul style="list-style-type: none"> 100% of the total drainage area meeting the wet weather WLAs 	September 30, 2026

Table X – Metals TMDL for Reach 2 of the Rio Hondo

TMDL Pollutant	Target	Interim WLA
All Metals	<ul style="list-style-type: none"> 75% drainage area meeting dry-weather WLA 	January 11, 2020
	<ul style="list-style-type: none"> 100% of the total drainage area meeting dry-weather WLAs & 50% meeting the wet-weather WLAs 	January 11, 2024
TMDL Pollutant	Target	Final WLA
All Metals	<ul style="list-style-type: none"> 100% total drainage area meeting dry & wet weather WLA 	January 11, 2028

Table XI – Bacteria TMDL for Reach 2 of the Rio Hondo

TMDL Pollutant	Compliance Target	Interim WLA
Bacteria	<ul style="list-style-type: none"> 75% drainage area meeting dry-weather WLA 	January 11, 2020
	<ul style="list-style-type: none"> 100% of the total drainage area meeting dry-weather WLAs & 50% meeting the wet-weather WLAs 	January 11, 2024
First Phase – Segment B Tributaries (Rio Hondo and Arroyo Seco)		
	<ul style="list-style-type: none"> Submit a Load Reduction Strategy (LRS) for Segment B tributaries 	March 23, 2016
	<ul style="list-style-type: none"> Complete implementation of LRS 	September 23, 2020
	<ul style="list-style-type: none"> Achieve interim (or final) water quality-based effluent limitations and submit report to Regional Water Board 	September 23, 2023
Second Phase, if necessary – Segment B Tributaries (Rio Hondo and Arroyo Seco) for LRS approach only		
	<ul style="list-style-type: none"> Submit a new LRS 	September 23, 2024
	<ul style="list-style-type: none"> Complete implementation of LRS 	March 23, 2028
	<ul style="list-style-type: none"> Achieve final water quality-based effluent limitations Segment B tributaries or demonstrate that non-compliance is due to upstream contributions and submit report to Regional Water Board 	March 23, 2030
TMDL Pollutant	Compliance Target	Final WLA
Bacteria	<ul style="list-style-type: none"> 100% total drainage area meeting dry & wet weather WLA 	January 11, 2028

Table XII – Nutrients for Reach 2 of the Rio Hondo

TMDL Pollutant	Compliance Target	Interim WLA
Nutrients	<ul style="list-style-type: none"> None pending confirmation from Regional Board (nutrients are associated with POTWs) 	None
TMDL Pollutant	Compliance Target	Final WLA
Nutrients	<ul style="list-style-type: none"> None pending confirmation from Regional Board (nutrients are associated with POTWs) 	None



Table XIII – Trash TMDL – Reach 2 of the Rio Hondo

Year	Implementation	Waste Load Allocation	Compliance Point
Sept 30, 2008	Year 1	60% of Baseline Waste Load Allocations for the Municipal permittees and Caltrans	60% of the baseline load
Sept 30, 2009	Year 2	50% of Baseline Waste Load Allocations for the Municipal permittees; and Caltrans	55% of the baseline load calculated as a 2-year annual average
Sept 30, 2010	Year 3	40% of Baseline Waste Load Allocations for the Municipal permittees; and Caltrans	50% of the baseline load calculated as a rolling 3-year annual average
Sept 30, 2011	Year 4	30% of Baseline Waste Load Allocations for the Municipal permittees and Caltrans	40% of the baseline load calculated as a rolling 3-year annual average
Sept 30, 2012	Year 5	20% of Baseline Waste Load Allocations for the Municipal permittees; and Caltrans	30% of the baseline load calculated as a rolling 3-year annual average
Sept 30, 2013	Year 6	10% of Baseline Waste Load Allocations for the Municipal permittees; and Caltrans	20% of the baseline load calculated as a rolling 3-year annual average
Sept 30, 2014	Year 7	0% of Baseline Waste Load Allocations for the Municipal permittees; and Caltrans	10% of the baseline load calculated as a rolling 3-year annual average
Sept 30, 2015	Year 8	0% of Baseline Waste Load Allocations for the Municipal permittees; and Caltrans	3.3% of the baseline load calculated as a rolling 3-year annual average
Sept 30, 2016	Year 9	0% of Baseline Waste Load Allocations for the Municipal permittees; and Caltrans	0% of the baseline load calculated as a rolling 3-year annual average

1.12 MAL Monitoring

Stormwater sampling against MAL analytes shall be performed at



the same time stormwater monitoring is performed for other purposes and with the same frequency – three times during the wet season. The table below identifies the MAL analytes and their numeric limitations.

Table XIV - Municipal Action Levels

Metals	Unit	Total
Cadmium	ug/l	2.52
Chromium	ug/l	20.2
Copper	ug/l	71.12
Lead	ug/l	102
Zinc	ug/l	641.3
Nickel	ug/l	27.43
Mercury	Ug/l	0.32
Conventional Pollutants	Unit	MAL
Total Phosphorus	mg/l	0.80
Nitrate & Nitrite	mg/l	1.85
Kjedahl Nitrogen (TKN)	mg/l	4.59
COD	mg/l	247.5
TSS	mg/l	264.1
pH	-	6 -9

1.13 Action Level Monitoring

The tables below lists non-stormwater action level analytes for the Los Angeles River and San Gabriel River.

Table XV - Non-stormwater Action Levels Los Angeles River

Analyte	Units	Average Monthly	Daily Maximum
pH	Standard units	6.5-8.5 ¹	
E. coliBacteria	#/100ml	126 ²	235 ³
Chloride	mg/L	250 ⁴	--
NitriteNitrogen.Total(as N)	mg/L	1.0 ⁵	--
Sulfate	mg/L	250 ⁴	--
Total Dissolved Solids	mg/L	500 ⁴	--
Turbidity	NTU	5 ⁵	--
Aluminum,TotalRecoverable	ug/L	1.0 ⁵	--
Cyanide,TotalRecoverable	ug/L	4.3	8.5



Copper, Total Recoverable	ug/L	6	6
Mercury, Total Recoverable	ug/L	0.051	0.10
Selenium, Total Recoverable	ug/L	4.1	8.2

¹Within the range of 6.5 to 8.5 at all times.

²E. coli density shall not exceed a geometric mean of 125/100 ml

³E. coli density shall not exceed a geometric mean of 235/100 ml

⁴in accordance with applicable water quality objectives contained in Chapter 3 of the Basin Plan

⁵Applicable only to discharges to receiving waters or receiving waters with underlying groundwater designated for Municipal and Domestic Supply (MUN) use as specified in Tables 2-1 and 2-2 of the Basin Plan.

⁶Action levels are hardness dependent. See section VII of Attachment G of LA County Permit for a listing of the applicable action levels.

Table XVI – Non-stormwater Action Levels San Gabriel River

Analyte	Units	Average Monthly	Daily Maximum
pH	Standard Units	6.0 – 9.0 ¹	
E. coli Bacteria	#/100ml	126 ²	235 ³
Chloride	mg/l	250 ⁴	--
Nitrite Nitrogen, Total (as N)	mg/l	1.0 ⁵	--
Sulfate	mg/l	250 ⁴	--
TDS	mg/l	500 ⁴	--
Aluminum, Total Recoverable	mg/l	1.0 ⁵	--
Cyanide, Total Recoverable	ug/L	4.3	8.5
Cadmium, Total Recoverable	ug/L	0.005	--
Copper, Total Recoverable	ug/L	6	6
Lead, Total Recoverable	ug/L	0.05	--
Selenium, Total Recoverable	ug/L	0.05	--
Nickel, Total Recoverable	ug/L	0.1	--
Silver, Total Recoverable	ug/L	0.1	--
Zinc, Total Recoverable	ug/L	5.0	--

¹Within the range of 6 to 9 at all times.

²E. coli density shall not exceed a geometric mean of 126/100 ml

³E. coli density shall not exceed a geometric mean of 235/100 ml

⁴in accordance with applicable water quality objectives contained in Chapter 3 of the Basin Plan

⁵Applicable only to discharges to receiving waters or receiving waters with underlying groundwater designated for Municipal and Domestic Supply (MUN) use as specified in Tables 2-1 and 2-2 of the Basin Plan.

⁶Action levels are hardness dependent. See section VII of Attachment G of LA County Permit for a listing of the applicable action levels.

1.14 Additional Monitoring Required for WMP Compliance

MRP section VI.C.2.a.i and ii requires additional outfall monitoring tasks for permittees that opt for the WMP. They include pollutants that are currently not TMDLs but are nevertheless 303(d) listed (e.g. cyanide for Reach 2 of the Rio Hondo). Attachment E, in LA County MS4 Permit Order No. R4-2012-0175, will be utilized to determine which other water quality standards should be included in additional monitoring



requirements.

The purpose of this monitoring task is to identify non-TMDL pollutants that are causing impairments to beneficial uses of receiving waters and to evaluate the effectiveness of BMPs implemented through the SWMP/WMP. They are also included to determine if non-TMDL pollutants are causing or contributing to exceedances of receiving water limitations.

Resulting data generated from WMP-related monitoring will be, along with TMDL monitoring, loaded into the water quality model. These pollutants will be added to the stormwater outfall sampling list.

Table XVII - WMP Monitoring for Non-TMDL Water Quality Standards

CONSTITUENTS	USEPA METHOD	MLs
CONVENTIONAL POLLUTANTS		mg/L
Oil and Grease	EPA 1664	5
Total Phenols	EPA 420.1	0.1
Cyanide	EPA 4500-CNC	0.005
pH	EPA 150.1	0 – 14
Temperature	NA	None
Dissolved Oxygen	NA	Sensitivity to 5 mg/L
BACTERIA		MPN/100ml
Total Coliform	SM 9221B	10,000
CONSTITUENTS		MLs
Fecal Coliform	SM 9222 B	104
Enterococcus	SM 9230 B	400
E. coli	SM 9223 B	235
GENERAL		mg/L
Dissolved Phosphorus	SM 4500-PC	0.05
Total Phosphorus	SM 4500-PC	0.05
Turbidity	EPA 180.1	0.1 NTU
Total Suspended Solids	EPA 160.2	2
Total Dissolved Solids	EPA 160.1	2
Volatile Suspended Solids	EPA 160.4	2
Total Organic Carbon	SM 5310 B	1
Total Petroleum Hydrocarbon	EPA 1664	5
Biochemical Oxygen Demand	SMOL-5210	2
Chemical Oxygen Demand	SM 5220D	20-900
Total Ammonia-Nitrogen	EPA 350.2	0.1



Total Kjeldahl Nitrogen	EPA 351.2	0.1
Nitrate-Nitrite	EPA 4110	0.1
Alkalinity	EPA 310.1	2
Specific Conductance	EPA 120.1	1umho/cm
Total Hardness	EPA 130.2	2
MBAS	SM 5540 C	0.5
Chloride	EPA 300	2
Fluoride	EPA 300	0.1
Methyl tertiary butyl ether (MTBE)	EPA 4110	1
Perchlorate	EPA 314.0	4 ug/l
METALS(Dissolved & Total)		µg/L
Aluminum	EPA 200.8	100
Antimony	EPA 200.8	0.5
Arsenic	EPA 200.8	1
Beryllium	EPA 200.8	0.5
Cadmium	EPA 200.8	0.25
Chromium (total)	EPA 200.8	0.5
Chromium (Hexavalent)	EPA 200.8	5
Copper	EPA 200.8	0.5
Iron	EPA 200.8	100
Lead	EPA 200.8	0.5
Mercury	EPA 1631	0.5
Nickel	EPA 200.8	1
Selenium	EPA 200.8	1
Silver	EPA 200.8	0.25
Thallium	EPA 200.8	1
zinc	EPA 200.8	1
SEMIVOLATILE ORGANIC COMPOUNDS		
ACIDS		µg/L
2-Chlorophenol	EPA 625	2
4-Chloro-3-methylphenol	EPA 625	1
2,4-Dichlorophenol	EPA 625	1
2,4-Dimethylphenol	EPA 625	2
2,4-Dinitrophenol	EPA 625	5
2-Nitrophenol	EPA 625	10
4-Nitrophenol	EPA 625	5
Pentachlorophenol	EPA 625	2
Phenol	EPA 625	1
2,4,6-Trichlorophenol	EPA 625	10
BASE/NEUTRAL		µg/L
Acenaphthene	EPA 625	1
Acenaphthylene	EPA 625	2
Anthracene	EPA 625	2
Benzedine	EPA 625	5
1,2 Benzanthracene	EPA 625	5
Benzo(a)pyrene	EPA 625	2
Benzo(g,h,i)perylene	EPA 625	5
3,4 Benzoflouranthene	EPA 625	10



Benzo(k)flouranthene	EPA 625	2
Bis(2-Chloroethoxy) methane	EPA 625	5
Bis(2-Chloroisopropyl) ether	EPA 625	2
Bis(2-Chloroethyl) ether	EPA 625	1
Bis(2-Ethylhexyl) phthalate	EPA 625	5
4-Bromophenyl Phenyl ether	EPA 625	5
Butyl benzyl phthalate	EPA 625	10
2-Chloroethyl vinyl ether	EPA 625	1
2-Chloronaphthalene	EPA 625	10
4-Chlorophenyl phenyl ether	EPA 625	5
Chrysene	EPA 625	5
Dibenzo(a,h)anthracene	EPA 625	0.1
1,3-Dichlorobenzene	EPA 625	1
1,4-Dichlorobenzene	EPA 625	1
1,2-Dichlorobenzene	EPA 625	1
3,3-Dichlorobenzidine	EPA 625	5
Diethyl phthalate	EPA 625	2
Dimethyl phthalate	EPA 625	2
di-n-Butyl phthalate	EPA 625	10
2,4-Dinitrotoluene	EPA 625	5
2,6-Dinitrotoluene	EPA 625	5
4,6 Dinitro-2-methylphenol	EPA 625	5
1,2-Diphenylhydrazine	EPA 625	1
di-n-Octyl phthalate	EPA 625	10
Fluoranthene	EPA 625	0.05
Fluorene	EPA 625	0.1
Hexachlorobenzene	EPA 625	1
Hexachlorobutadiene	EPA 625	1
Hexachloro-cyclopentadiene	EPA 625	5
Hexachloroethane	EPA 625	1
Indeno(1,2,3-cd)pyrene	EPA 625	0.05
Isophorone	EPA 625	1
Naphthalene	EPA 625	0.2
Nitrobenzene	EPA 625	1
N-Nitroso-dimethyl amine	EPA 625	5
N-Nitroso-diphenyl amine	EPA 625	1
N-Nitroso-di-n-propyl amine	EPA 625	5
Phenanthrene	EPA 625	0.05
Pyrene	EPA 625	0.05
1,2,4-Trichlorobenzene	EPA 625	1
CHLORINATED PESTICIDES		µg/L
Aldrin	EPA 608	0.005
alpha-BHC	EPA 608	0.01
beta-BHC	EPA 608	0.005
delta-BHC	EPA 608	0.005
gamma-BHC (lindane)	EPA 608	0.02
alpha-chlordane	EPA 8270	0.1
gamma-chlordane	EPA 8270	0.1



4,4'-DDD	EPA 8270	0.05
4,4'-DDE	EPA 8270	0.05
4,4'-DDT	EPA 8270	0.01
Dieldrin	EPA 608	0.01
alpha-Endosulfan	EPA 608	0.02
beta-Endosulfan	EPA 608	0.01
Endosulfan sulfate	EPA 608	0.05
Endrin	EPA 608	0.01
Endrin aldehyde	EPA 608	0.01
Heptachlor	EPA 608	0.01
Heptachlor epoxide	EPA 608	0.01
Toxaphene	EPA 608	0.5
POLYCHLORINATED BIPHENYLS*		µg/L
Aroclor-1016	EPA 608	0.5
Aroclor-1221	EPA 608	0.5
Aroclor-1232	EPA 608	0.5
Aroclor-1242	EPA 608	0.5
Aroclor-1248	EPA 608	0.5
Aroclor-1254	EPA 608	0.5
Aroclor-1260	EPA 608	0.5
Congeners ³	EPA 8270C	NA
ORGANOPHOSPHATE PESTICIDES		µg/L
Atrazine	EPA 8141A/B	2
Chlorpyrifos	EPA 8141A/B	0.05
Cyanazine	EPA 8141A/B	2
Diazinon	EPA 8141A/B	0.01
Malathion	EPA 8141A/B	1
Prometryn	EPA 8141A/B	2
Simazine	EPA 8141A/B	2
HERBICIDES		µg/L
2,4-D	EPA 8151A	10
Glyphosate	EPA 8151A	5
2,4,5-TP-SILVEX	EPA 8151A	0.5
SOLIDS		mg/L
Total Suspended Solids (TSS)	SM 2540D	2
Suspended Sediment Concentration (SSC)	STM D3977-97C	NA
Volatile Suspended Solids	EPA 1684	2

*Monitoring for PCBs (in sediment or water) will be reported as the summation of aroclors and a minimum of 40 congeners (preferably at least 50 congeners) using EPA Methods 8270 and 1668C (as appropriate) and high resolution mass spectrometry.

1.15 Non-stormwater Monitoring for IC/ID

As mentioned above, the City proposes to perform non-stormwater monitoring to detect and eliminate illicit connections and discharges in accordance with 40 CFR 122.26. Monitoring will consist of dry weather



visual observations at outfalls or field screening points that shall be conducted monthly during the dry season (May 1 to September 30). If flow is detected, grab samples are to be taken within a 24 hour period and measured against fecal coliform, fecal streptococcus, surfactants (MBAS), residual chlorine, fluorides, and potassium. Other constituents may be added later based on USEPA's ICID-DE guidance manual.

1.16 Reporting Requirements

The City shall comply with all reporting requirements specified in the MRP. Currently TMDL reports for trash, nutrients, and TMDL constituents are reported with the MS4 permit annual report, which is due in December of each year. The City cannot begin to report monitoring results until the IMP has been approved by the Regional Board, (expected to happen 4 months after the June 28th WMP submittal date). A standardized annual report form is being developed that will include reporting criteria for the MS4 permit, TMDLs, MALs and certain water quality standards.

1.17 Monitoring Protocols

The MRP requires a variety of monitoring requirements that are governed by monitoring protocols established by USEPA, which are summarized below.

1. Receiving Monitoring Protocol

Minimum required receiving water monitoring frequencies are defined in section VI.C of Attachment E in the MS4 Permit. The parameters in Table E-2 of the LA County MS4 Permit will be monitored in the first year of monitoring during the first significant rain event of the storm



year. Wet weather is defined as when the flow with the receiving water is at least 20% greater than the base flow. As per San Gabriel River Metals and Impaired Tributaries Metals and Selenium TMDLs, wet weather is defined in San Gabriel Reach 2 and all upstream reaches and tributaries of San Gabriel River Reach 2 as when maximum daily flow of the river is equal to or greater than 260 cubic feet per second (cfs) as measured at USGS 11085000, located at the bottom of Reach 3, just above the Whittier Narrows Dam. As per Los Angeles River and Tributaries Metals TMDL, wet weather is defined as any day when the maximum daily flow in the Los Angeles River is equal to or greater than 500 cfs measured at the Wardlow gage station. Wet weather monitoring will occur at least three times per year for all applicable parameters with the exception for aquatic toxicity. Aquatic toxicity monitoring will be conducted at a minimum of twice per year. The first wet weather event with a predicted rainfall of 0.25 inch and with a 70% probability 24 hours prior to rainfall will be targeted for monitoring. At a minimum two additional rainfall events with a minimum separation of three dry days (less than .1 inch of rain per day) between monitoring will be monitored to meet the minimum requirement of three storm events per year. Moreover, two additional rainfall events will be monitored within the same wet weather season. Receiving water monitoring shall be coordinated to start as soon as possible following storm water outfall monitoring to better reflect the potential impact from MS4 discharges.

Dry weather is defined as when the flow with the receiving water is less than 20% of the base flow or as defined by the effective TMDLs within the watershed. The parameters in Table E-2 of the LA County MS4 Permit will be monitored in the first year during the critical dry weather event. Dry weather monitoring requirements are defined in section VI.D of Attachment E in the MS4 Permit. Monitoring shall take place a minimum



of two times per year for all parameters, or more if required by a TMDL monitoring plan. At least one of the monitoring events shall take place during the historically driest month of the year. Typically the driest months of the year are July through August, which will be utilized for the time period of which at least one of the monitoring events occurs. (http://www.huffingtonpost.com/2012/08/08/hottest-month-on-record-july-2012_n_1756217.html-Aug12, 2015)

II. Non-storm water outfall based sampling Protocol

Dry weather samples will be collected on days when no measurable precipitation has occurred within the last three days. Grab samples will be taken for constituents that are required to be collected by grab sampling. If the City cannot install an automated sampler, grab samples will be collected. Flow will be estimated for storm water outfall monitoring sites based on drainage area, impervious cover, and precipitation data.

III. Outfall Based sampling protocol

For each field screening point, sample shall be collected of storm water discharge from three storm events occurring at least one month apart in accordance with the requirements indicated below:

- For storm water discharges, all samples shall be collected from and shall be taken each hour of discharge for the first 24 hours of flows when the receiving water is at least 20% greater than the base flow. The flow-weighted composite sample for a storm water discharge may be taken with a continuous sampler or as a combination of a minimum of three sample aliquots taken in each hour of discharge for the first 24 hours of the discharge or for the entire discharge if the storm event is less than 24 hours, with each aliquot being separated by a minimum period of twenty




minutes. In addition, the City will target the first storm event of the storm year with a predicted rainfall of at least 0.25 inch with a 70% probability of at least 24 hours prior to the event start time. Another two wet weather samples will be taken when the predicted rain event is equal to or more than 0.1 inch and a minimum of 3 consecutive days of dry weather.

- ***Alternate Protocol for Composite Sampling:*** The outfall samples will be collected manually by taking at least three discrete grab samples during each of the first three hours of discharge (if the event lasts longer than three hours). If the event lasts less than three hours at least three discrete grab samples shall be collected during each hour of discharge for the entire duration of the storm event. Samples must be collected at least 15 minutes apart. The result will be at least nine discrete samples. These samples will be composited into a single flow-weighted sample. Flow at the outfall will be estimated by recording the time required to fill a container of known volume.

IV. Toxicity Monitoring/Testing Protocol

The approach to conducting aquatic toxicity monitoring is presented in Figure C-1, which describes a general evaluation process for each sample collected as part of routine sampling conducted twice per year in wet weather and once per year in dry weather. Monitoring begins in the receiving water and the information gained is used to identify constituents for monitoring at outfalls to support the identification of pollutants.

Figure C-1 – Aquatic Toxicity Monitoring Approach

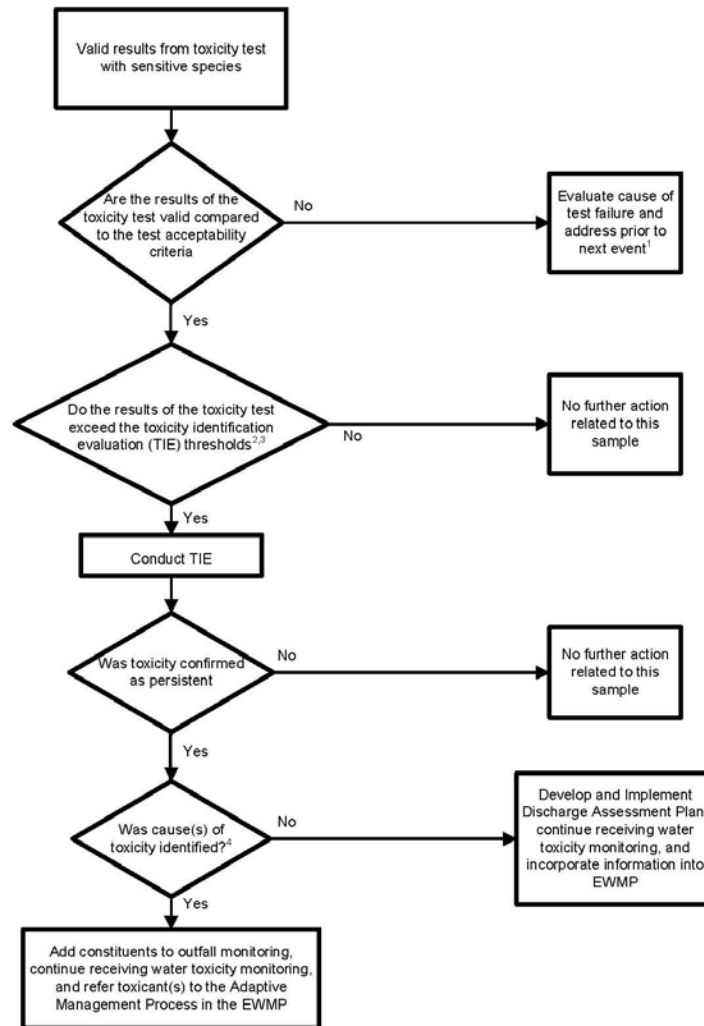

Footnotes

1. Test failure includes pathogen or epibiont interference, which should be addressed prior to the next toxicity sampling event. Additionally, lab control organisms may fail to meet test standards. As a result of test failure, toxicity samples will be collected during the next wet weather event, or as soon as possible following notification of test failure for dry event samples.
2. For freshwater, the TIE threshold is equal to or greater than 50% ($\geq 50\%$) mortality in an acute (wet weather) or chronic (dry weather) test. If a $\geq 50\%$ effect in a sub-lethal endpoint for chronic test is observed during dry weather, a follow up sample will be collected within two weeks of the completion of the initial sample collection. If the follow up sample exhibits a $\geq 50\%$ effect, a TIE will be initiated.
3. For marine waters and estuarine waters, the TIE threshold is the percent effect value $\geq 50\%$. If a $\geq 50\%$ or greater effect is observed during dry weather a follow up sample will be collected within two weeks of the initial sample collection and if the follow up sample exhibits a $\geq 50\%$ effect, a TIE will be initiated.
4. The goal of conducting Phase I TIEs is to identify the cause of toxicity so that outfall monitoring can incorporate the toxicant(s) into the list of constituents monitored during outfall monitoring. Thus, if specific toxicant(s) or the analytical class of toxicants (i.e., metals that are analyzed via EPA Method 200.8) are identified, sufficient information is available to inform the addition of pollutants to the list of pollutants monitored during outfall monitoring.



1.18 Implementation Schedule (Milestones)

The table below provides a schedule for implementing MRP/IMP tasks. **Table XVIII – Implementation Schedule**

Task	Deadline Date
<ul style="list-style-type: none"> Submit IMP to Regional Board 	No later than June 28, 2014
<ul style="list-style-type: none"> Using GIS mapping, provide land use overlay of City's storm drain system 	No later than June 28, 2014
<ul style="list-style-type: none"> Using GIS mapping, show City's storm drain system including catch basins and connections to receiving waters 	No later than June 28, 2014
<ul style="list-style-type: none"> Using GIS mapping, identify watersheds and sub-watersheds based on Los Angeles County's HUC 12 equivalent boundaries 	No later than June 28, 2014
<ul style="list-style-type: none"> Using GIS mapping identify groundwater recharge facilities into which City drains 	No later than June 28, 2014
<ul style="list-style-type: none"> Using GIS mapping, identify: stormwater outfalls and field screening points; mass emission and other in-stream monitoring points/stations; and ambient monitoring locations established by the Regional Board's Surface Water Ambient Monitoring Program (SWAMP); and locations established by the Council for Watershed Health. 	No later than June 28, 2014
<ul style="list-style-type: none"> Receiving Water Monitoring 	Commence approximately September 2015
<ul style="list-style-type: none"> Outfall Monitoring 	Beginning no later than October 2015
<ul style="list-style-type: none"> Conduct outfall monitoring for stormwater discharges for TMDLs, other water quality standards, MALs, and toxicity three times beginning during 2015-2016 wet season and annually thereafter. 	Beginning no later than October 2015
<ul style="list-style-type: none"> During the dry season, conduct monthly non-stormwater visual observations and grab sampling if flow is detected. 	October 2015
<ul style="list-style-type: none"> If no data exists the City shall contract for the CWH to conduct ambient monitoring once during the term of the permit for Reach 2 of Rio Hondo and Reach 3 of the San Gabriel River 	TBD
<ul style="list-style-type: none"> Review available ambient monitoring data and studies to assess the health of the San Gabriel River (reaches 2 and above) and Reach 2 of the Rio Hondo 	No later than June 28, 2014
<ul style="list-style-type: none"> Submit annual monitoring reports to the Regional Board of any available TMDL or other water quality standards data generated through outfall monitoring. 	Beginning in December 2015



<ul style="list-style-type: none">• Submit new development/redevelopment tracking form	No later than one month following the Regional Board's approval of the IMP
--	--

Revised Draft



Appendix A

Maps

Revised Draft



Appendix A-1


Outfall Location Map

Revised Draft





City of Irwindale Outfalls

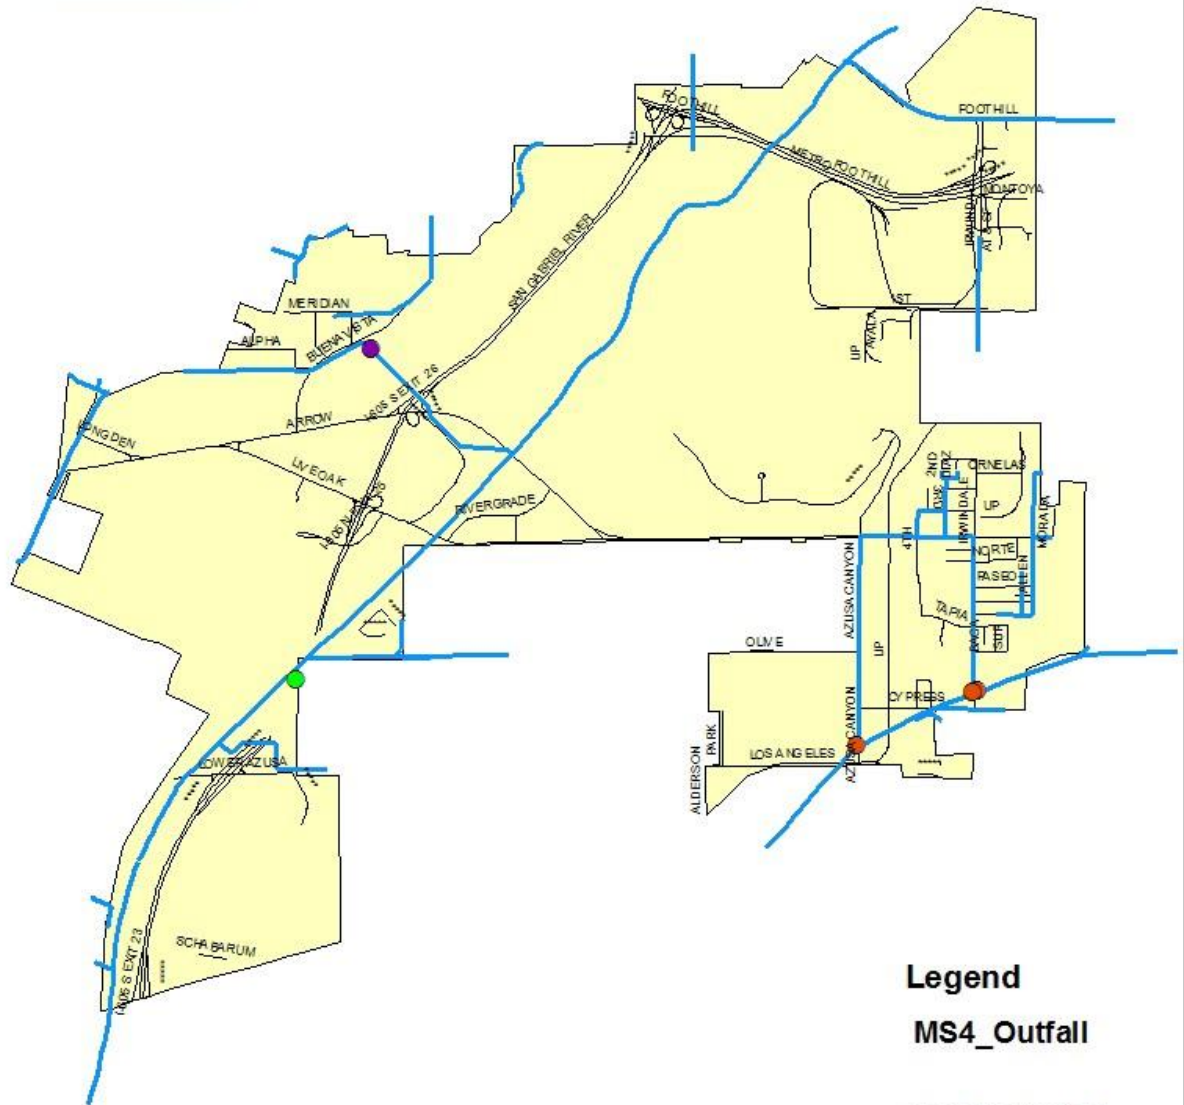

Legend

MS4_Outfall

STREAMCODE

- BDW
- BUENVC
- SGR

— Storm Drains

— Streets

■ City of Irwindale





Appendix A-1.1

Storm Drain, Outfalls, and Open Channels Map

Revised Draft



CITY OF IRWINDALE STORM DRAINS, OUTFALLS, and OPEN CHANNELS

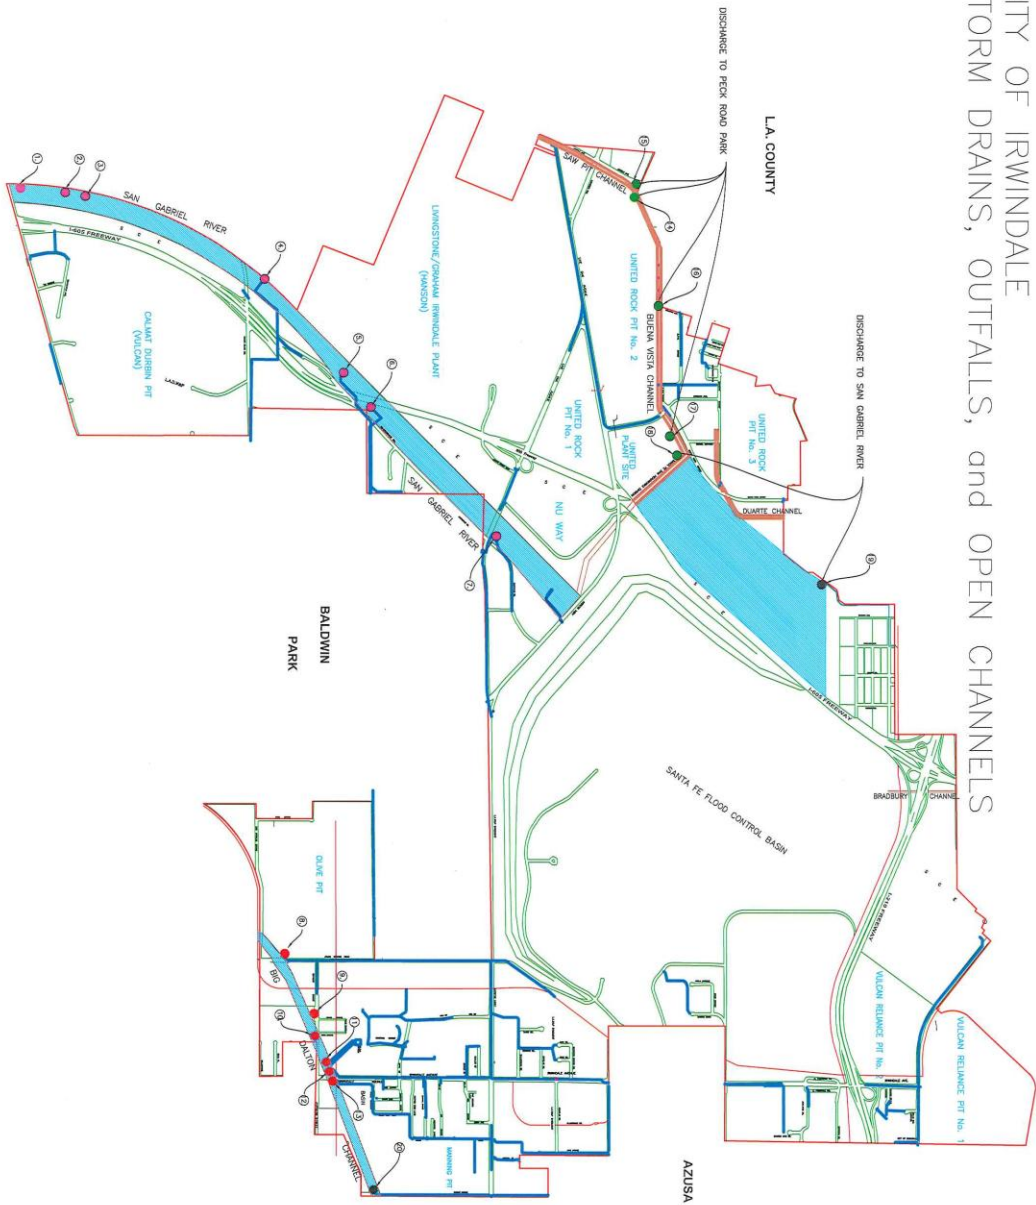

LEGEND

- DISCHARGE LOCATION
- OPEN CHANNEL
- 18" OR GREATER STORM DRAIN
- CITY BOUNDARY
- MS4 OUTFALL : 36" OR GREATER
- EDW
- BUENVC
- SGR
- MS4 OUTFALL ID

- ① SGR-070A
- ② SGR-070B
- ③ SGR-071
- ④ SGR-073
- ⑤ SGR-074A
- ⑥ SGR-074B
- ⑦ SGR-077
- ⑧ BW-023
- ⑨ BW-025
- ⑩ BW-026
- ⑪ BW-027A
- ⑫ BW-028
- ⑬ BW-029
- ⑭ SAMPW-024B
- ⑮ SAMPW-074A
- ⑯ BUENVC-016
- ⑰ BUENVC-048
- ⑱ BUENVC-054
- ⑲ BUENVC-100
- ⑳ LTLDW-001




Appendix A-2
**Receiving Water Monitoring
Locations**

Revised Draft



City of Irwindale Receiving Dam Water Monitoring Locations

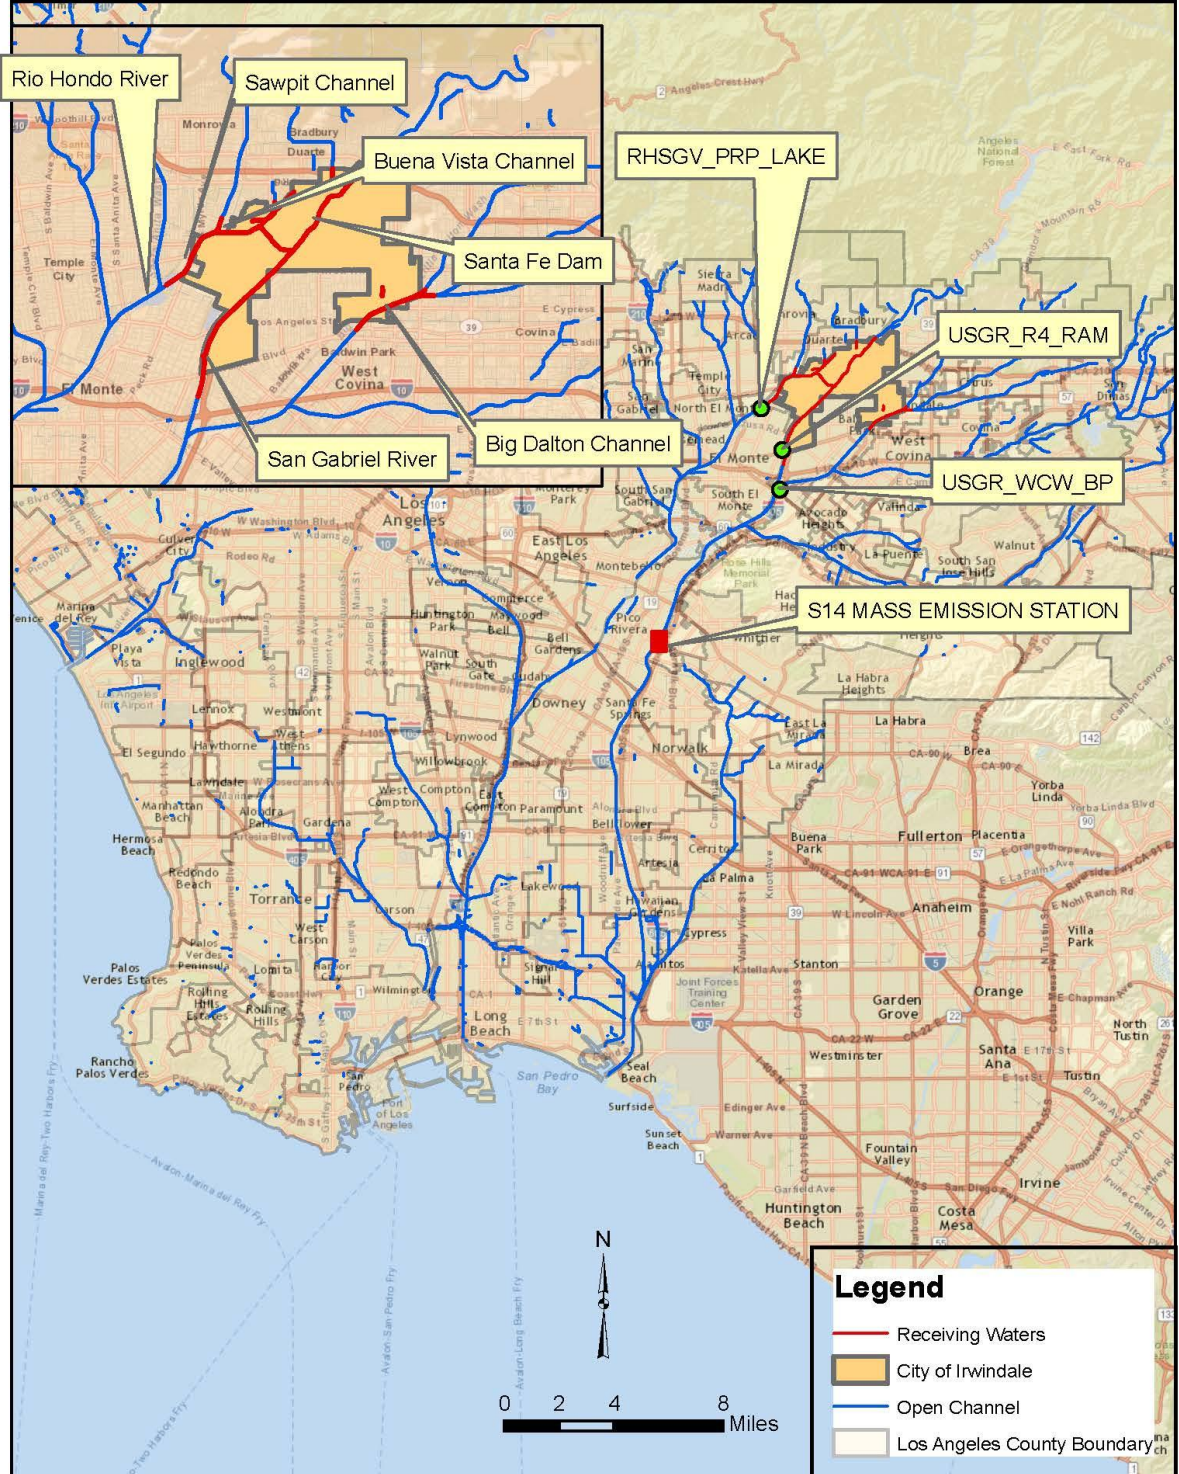


Appendix A-3
Field Screening Point Locations
HUC 12

Revised Draft





Field Screening Points - HUC 12

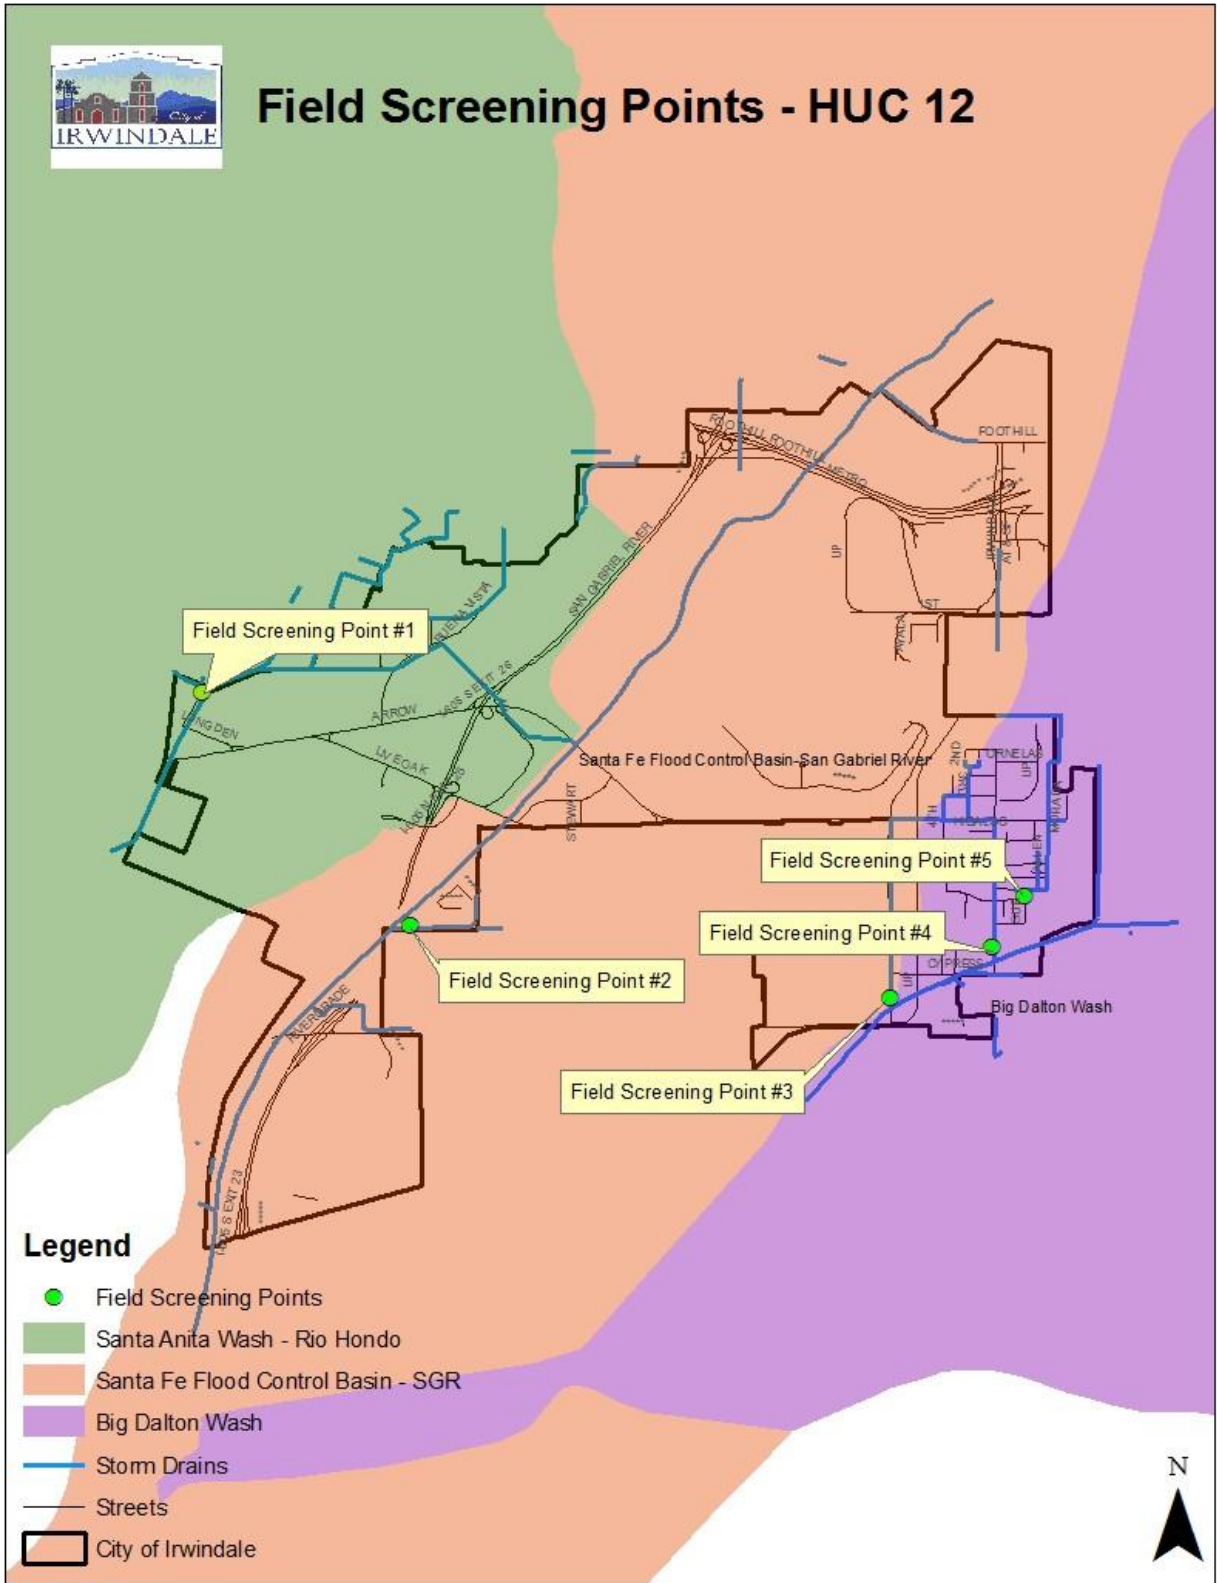

Appendix A-4

Watershed/Subwatershed Map

Revised Draft





Revised




Appendix A-5
Storm Drain/Catch Basin Map

Revised Draft





Catch Basin Map

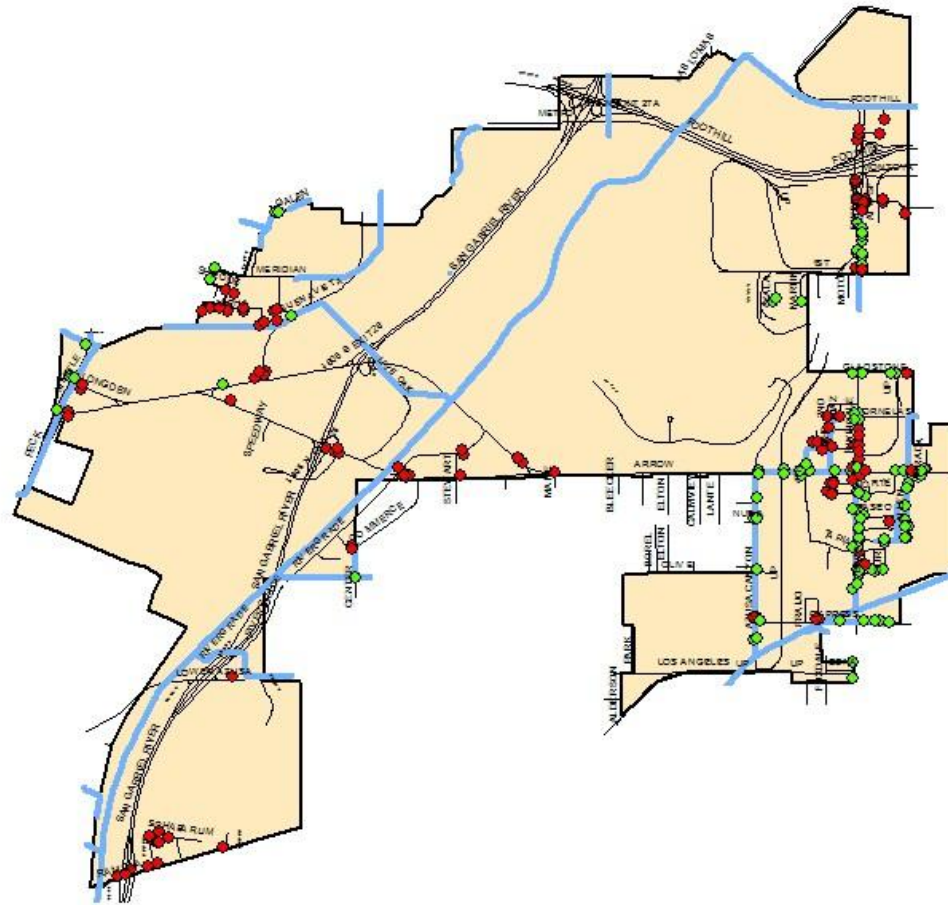

Legend

OWNERSHIP

- CITY
- LACFCD
- Storm Drain
- Street
- Irwindale



Appendix A-6


City Land Use Map

Revised Draft





Land Use Map

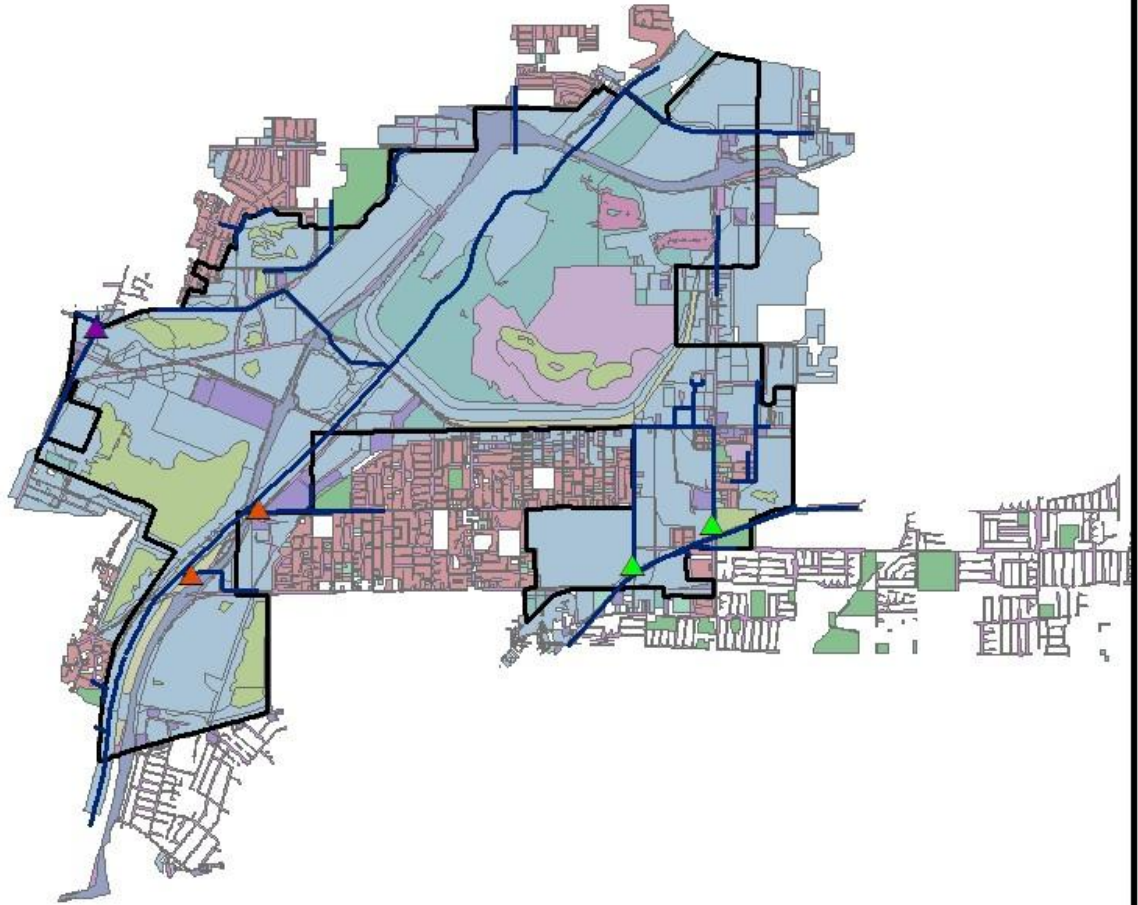

Legend

-  Rio Hondo Channel
-  SGR
-  Big Ditch Wash
-  Storm Drains
-  City of Irwindale

Land Use

-  Agriculture moderate slope D
-  Commercial
-  HD single family residential
-  Industrial
-  Institutional
-  LD single family residential moderate
-  LD single family residential steep S
-  Multifamily residential
-  Secondary Roads
-  Transportation
-  Vacant moderate slope D
-  Vacant steep slope D
-  Water



Appendix A-7


Spreading Grounds Location Map

Revised Draft





Spreading Grounds

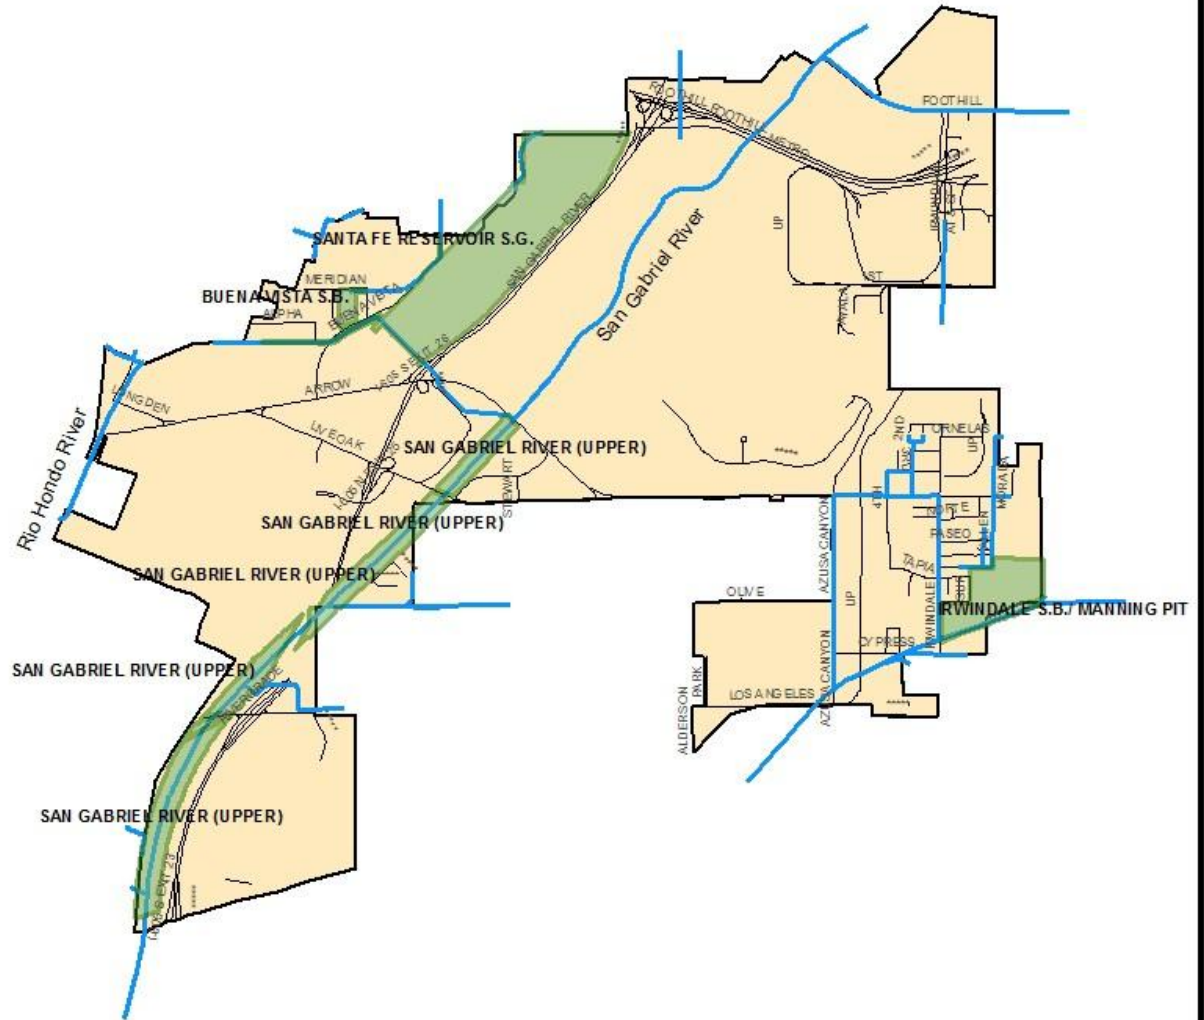

Legend

-  Spreading Grounds
-  Storm Drains
-  Streets
-  City of Irwindale



Appendix B

2010 303(d) List for Los Angeles and San Gabriel Rivers and Tributaries

Revised Draft



Appendix B

Table I – 303(d) List - San Gabriel River and Tributaries

2010 303 (d) List			
Reach	Parameter	TMDL Status Date	Source
SG River Reach 3 Whittier Narrows Dam	Indicator Bacteria	2021	Unknown
Walnut Creek (Drains from Puddingstone Reservoir)	Indicator Bacteria	2021	Unknown
	Benthic-Macro invertebrate Bioassessment	2012	Unknown
	pH	2007	Unknown

Table II – 303(d) List, Reach 2, Rio Hondo

2010 303 (d) List			
Reach	Parameter	TMDL Status Date	Source
Rio Hondo Reach 2 at Spreading Grounds	Coliform Bacteria	2009	Nonpoint/Point Source
	Cyanide	2021	Unknown