

FINAL

TIGER CREEK REGULATOR DAM SPILLWAY REPLACEMENT PROJECT

RECIRCULATED INITIAL STUDY AND MITIGATED NEGATIVE DECLARATION

PREPARED FOR:

State Water Resources Control Board Division of Water Rights P.O. Box 2000 Sacramento, CA 95812-2000



PREPARED BY:

ICF 980 9th Street, Suite 1200 Sacramento, CA 95814



November 2024

Mitigated Negative Declaration Tiger Creek Regulator Dam Spillway Replacement Project

The California State Water Resources Control Board (State Water Board), acting as the California Environmental Quality Act lead agency, has reviewed the Tiger Creek Regulator Dam Spillway Replacement Project (Proposed Project) described in this recirculated Initial Study and Mitigated Negative Declaration (IS/MND) to determine whether substantial evidence supports a finding that project implementation could have a significant effect on the environment. (Cal. Code Regs., tit. 14, § 15063.) "Significant effect on the environment" means a substantial, or potentially substantial, adverse change in any of the physical conditions within the area affected by a project, including land use, air, water, minerals, flora, fauna, ambient noise, and objects of historic or aesthetic significance.

Name of Proposed Project: Tiger Creek Regulator Dam Spillway Replacement Project (Proposed Project)

Project Location: The Proposed Project is located at the Tiger Creek Regulator Reservoir (Reservoir) on Tiger Creek, approximately 24 miles northeast of Jackson in Amador County, California. The Proposed Project also proposes using a developed area located on a ridge approximately one mile south of the Reservoir for a staging and spoils disposal site and a developed lot along State Route 88 in the community of Pioneer, approximately 8.5 miles west-southwest of the Reservoir, for a staging area.

Project Description: The Pacific Gas and Electric Company (PG&E) is proposing to construct the Proposed Project at the Tiger Creek Regulator Reservoir in Amador County. Prompted by the spillway failure at Lake Oroville Dam (a non-PG&E site) in February 2017, the Federal Energy Regulatory Commission (FERC) and the California Department of Water Resources Division of Safety of Dams (DSOD) requested that PG&E perform assessments of the spillways at several PG&E-owned dams (Federal Energy Regulatory Commission 2017 and California Department of Water Resources 2017). PG&E completed the spillway assessment for the Tiger Creek Regulator Dam (Dam) in December 2017 and identified several structural and hydraulic deficiencies of the existing spillway and determined that it does not have the capacity to meet FERC requirements for passing the probable maximum flood

(PMF) without overtopping. The PMF flow of 5,652 cubic feet per second (cfs) is approximately double that of the existing spillway capacity. The purpose of the Proposed Project is to address these known spillway deficiencies through construction of a new spillway and decommissioning of the old spillway infrastructure, allowing the Dam to safely pass a flood event of up to 6,000 cfs (approximately 350 cfs greater than the PMF). The new spillway would be constructed near the Dam's right abutment and would include a spillway intake (crest structure), a notch through the existing Dam, a concrete chute, flip bucket splitter blocks, and plunge pool. Other associated features include a permanent access road, new log boom, new and replacement lighting, and abandonment of the existing spillway. The Project Area consists of three staging areas, the log boom anchor points, and the construction area that is bounded roughly by the Dam to the east, the Spur 10 road to the north, and the intersection of Salt Springs Road (Spur 1) and Tiger Creek Road to the south.

Findings: The Initial Study identifies one or more potentially significant effects on the environment in the resource areas listed in Table 1. After consideration of the analysis contained in the Initial Study, the State Water Board finds that the Proposed Project would not have a significant effect on the environment incorporating mitigation measures described therein and listed in Table 1.

Table 1. Tiger Creek Regulator Dam Spillway Replacement Project Mitigation Measures

Hydrology and Water Quality

Mitigation Measure WQ-MM-1: Implement Water Quality Protection Measures and Erosion and Sediment Control Plans

Mitigation Measure WQ-MM-2: Implement Spur 1 Staging Area Water Quality Protection Measures

Mitigation Measure WQ-MM-3: Implement Sediment Control Measures along Downstream Edge of Existing Plunge Pool prior to Rock Slope Protection Placement

Mitigation Measure WQ-MM-4: Develop and Implement a Water Quality Monitoring and Adaptive Management Plan

Biological Resources

Mitigation Measure BIO-MM-1: Conduct Worker Environmental Awareness Training and Implement General Requirements

Mitigation Measure BIO-MM-2: Conduct a Preconstruction Survey for Northwestern Pond Turtle at the Cedar Mill Staging Area

Mitigation Measure BIO-MM-3: Evaluate Trees for Removal and Implement Protective Measures to Avoid or Minimize Injury or Mortality of Special-status Roosting Bats

Mitigation Measure BIO-MM-4: Minimize the Introduction and Spread of Invasive Plants

Mitigation Measure BIO-MM-5: Avoid and Minimize Disturbance of Waters of the United States/Waters of the State

Mitigation Measure BIO-MM-6: Compensate for the Temporary and Permanent Losses of Waters of the United States/Waters of the State

Mitigation Measure BIO-MM-7: Implement Flow Pumping System and Water Drafting Requirements

Mitigation Measure BIO-MM-8: Rescue and Relocate Fish from Affected Habitat **Mitigation Measure BIO-MM-9**: Conduct a Preconstruction Survey for Nesting Birds and Implement Protective Buffers around Active Nests

Geology and Soils

Mitigation Measure GEO-MM-1: Educate Construction Personnel in Recognizing Fossil Material

Mitigation Measure GEO-MM-2: Stop Work if Substantial Fossil Remains are Encountered during Construction

Air Quality

Mitigation Measure AQ-MM-1: Implement Fugitive Dust Abatement Measures

Greenhouse Gas Emissions

Mitigation Measure GHG-MM-1: Implement Best Management Practices to Mitigate Tree Loss and Reduce Construction Generated Greenhouse Gas Emissions

Hazards and Hazardous Materials

Mitigation Measure HAZ-MM-1: Implement Hazardous Materials Control Measures

Cultural Resources

Mitigation Measure CUL-MM-1: Conduct Mandatory Cultural Resources Awareness Training for All Project Personnel

Mitigation Measure CUL-MM-2: Stop Work if Previously Unidentified Archaeological Resources are Encountered until a Qualified Archaeologist Assesses the Find and Native American Consultation Has Been Conducted

Mitigation Measure CUL-MM-3: Stop Work in Case of Accidental Discovery of Buried Human Remains until Procedures in Public Resources Code Section 5097 have been Completed

Transportation

Mitigation Measure TRAN-MM-1: Implement a Traffic Control Plan

Wildfire

Mitigation Measure FIRE-MM-1: Implement Fire Hazard Prevention Measures

Public Review Period: A draft IS/MND for the Proposed Project was available for public review and comment from January 22 to February 23, 2024. A recirculated draft IS/MND was available for public review and comment from September 27 to October 28, 2024. The recirculated draft IS/MND contained updates and revisions, in accordance with California Code of Regulations, title 14, section 15073.5(b), related to Proposed Project changes that were made after the initial public review period had concluded, as well as revisions made in response to public comments received by the State Water Board on the original draft IS/MND and a conversion of proposed best management practices to mitigation measures. Both draft IS/MNDs were available for public review online at https://ceqanet.opr.ca.gov/Project/2024010525; at the Pioneer Branch Library in Pioneer, California; and via request through the State Water Board.

Public Comment: The State Water Board received four comment letters on the January 2024 draft IS/MND: one each from the California Department of Fish and Wildlife (CDFW), California Department of Transportation, Yocha Dehe Wintun Nation, and Central Valley Regional Water Quality Control Board. These comments, and the State Water Board's responses, are provided in Appendix F, *Public Comments and Responses*, Table F-1. Several changes were made to the IS/MND in response to these comments and were included in the recirculated draft IS/MND.

The State Water Board received one comment letter on the September 2024 recirculated draft IS/MND. This letter was from CDFW. CDFW's comments, and the State Water Board's responses, are provided in Appendix F, *Public Comments and Responses*, Table F-2. No revisions to the IS/MND were necessary in response to these comments.

Mitigation Monitoring and Reporting Program: A Mitigation Monitoring and Reporting Program (MMRP) is included in the Final IS/MND as Appendix G, *Mitigation Monitoring and Reporting Program for the Tiger Creek Regulator Dam Spillway Replacement Project.* The MMRP will be adopted upon approval of the Proposed Project.

Contents

| Chapter 1 Ir | ntroduction | 1-1 |
|--------------|---|------|
| 1.1 | Proposed Project Purpose | 1-1 |
| 1.2 | Document Purpose and Use | 1-1 |
| 1.3 | Proposed Project Setting | 1-2 |
| 1.4 | Proposed Project Background | 1-3 |
| 1.4.1 | Description of Dam and Spillway | 1-3 |
| 1.4.2 | Reservoir Operations | 1-4 |
| 1.4.3 | Spillway Assessment | 1-4 |
| 1.5 | Regulatory Compliance | 1-5 |
| 1.5.1 | Federal Power Act | 1-5 |
| 1.5.2 | Federal Endangered Species Act | 1-5 |
| 1.5.3 | Clean Water Act, Section 404 | 1-5 |
| 1.5.4 | National Historic Preservation Act, Section 106 | 1-6 |
| 1.5.5 | California Water Code | 1-6 |
| 1.5.6 | California Forest Practice Act of 1973 | 1-6 |
| 1.6 | Document Organization | 1-6 |
| Chapter 2 P | roposed Project Description | 2-1 |
| 2.1 | Introduction and Project Area | 2-1 |
| 2.2 | Proposed Project Features, Construction Methods, and | |
| | Activities | 2-1 |
| 2.2.1 | Spillway | 2-1 |
| 2.2.2 | Associated Features | 2-6 |
| 2.2.3 | Vegetation Removal and Timberland Conversion | 2-8 |
| 2.2.4 | Abandonment of Existing Spillway | 2-10 |
| 2.2.5 | Site Cleanup and Demobilization | 2-10 |
| 2.2.6 | Operations and Maintenance | 2-11 |
| 2.3 | Staging Areas, Spoils Disposal, and Construction Access | 2-11 |
| 2.3.1 | Staging, Laydown, and Spoils Sites | 2-11 |
| 2.3.2 | Construction Access | 2-13 |
| 2.4 | Construction Schedule | 2-13 |
| 2.5 | Construction Equipment and Vehicle Use | 2-15 |
| 2.5.1 | Construction Equipment | 2-15 |

| | 2.5.2 | On-Road Vehicle Use | 2-20 |
|----|------------|---|--------|
| CI | napter 3 E | nvironmental Setting and Impacts | 3.1-1 |
| | 3.1 | Introduction | 3.1-1 |
| | 3.2 | Resources Upon Which the Proposed Project Would Have No | |
| | | Impact | 3.2-2 |
| | 3.2.1 | Mineral Resources | 3.2-2 |
| | 3.2.2 | Population and Housing | 3.2-2 |
| | 3.2.3 | Public Services | 3.2-3 |
| | 3.2.4 | Recreation | 3.2-4 |
| | 3.2.5 | Utilities and Service Systems | |
| | 3.3 | Hydrology and Water Quality | 3.3-1 |
| | 3.3.1 | Introduction | |
| | 3.3.2 | , | |
| | 3.3.3 | Existing Conditions | 3.3-1 |
| | 3.3.4 | Regulatory Setting | |
| | 3.3.5 | Environmental Effects | 3.3-13 |
| | 3.4 | Geology, Soils, Seismicity, and Paleontological Resources | 3.4-1 |
| | 3.4.1 | Introduction | 3.4-1 |
| | 3.4.2 | Area of Analysis | 3.4-1 |
| | 3.4.3 | Existing Conditions | 3.4-1 |
| | 3.4.4 | Regulatory Setting | 3.4-9 |
| | 3.4.5 | Environmental Effects | 3.4-14 |
| | 3.5 | Biological Resources | 3.5-1 |
| | 3.5.1 | Introduction | 3.5-1 |
| | 3.5.2 | Area of Analysis | 3.5-1 |
| | 3.5.3 | Methods | 3.5-1 |
| | | Existing Conditions | 3.5-3 |
| | 3.5.5 | Regulatory Setting | 3.5-50 |
| | 3.5.6 | Environmental Effects | 3.5-56 |
| | 3.6 | Air Quality | 3.6-1 |
| | 3.6.1 | Introduction | 3.6-1 |
| | 3.6.2 | Area of Analysis | 3.6-1 |
| | 3.6.3 | Existing Conditions | 3.6-2 |
| | 3.6.4 | Regulatory Setting | 3.6-2 |
| | 3.6.5 | Environmental Effects | 3.6-6 |

| 3. | 7 | Greenhouse Gas Emissions | 3.7-1 |
|-----|--------|---------------------------------|----------|
| | 3.7.1 | Introduction | 3.7-1 |
| | 3.7.2 | Area of Analysis | 3.7-1 |
| | 3.7.3 | Existing Conditions | 3.7-1 |
| | 3.7.4 | Regulatory Setting | 3.7-2 |
| | 3.7.5 | Environmental Effects | 3.7-4 |
| 3.8 | 3 | Energy | 3.8-1 |
| | 3.8.1 | Introduction | 3.8-1 |
| | 3.8.2 | Area of Analysis | 3.8-1 |
| | 3.8.3 | Existing Conditions | 3.8-1 |
| | 3.8.4 | Regulatory Setting | 3.8-2 |
| | 3.8.5 | Environmental Effects | 3.8-5 |
| 3.9 | 9 | Noise | 3.9-1 |
| | 3.9.1 | Introduction | 3.9-1 |
| | 3.9.2 | Area of Analysis | 3.9-8 |
| | 3.9.3 | Existing Conditions | 3.9-9 |
| | 3.9.4 | Regulatory Setting | 3.9-14 |
| | 3.9.5 | Environmental Effects | 3.9-19 |
| 3. | 10 | Hazards and Hazardous Materials | 3.10-1 |
| | 3.10.1 | 1 Introduction | 3.10-1 |
| | 3.10.2 | 2 Area of Analysis | 3.10-1 |
| | 3.10.3 | 3 Existing Conditions | 3.10-1 |
| | 3.10.4 | 4 Regulatory Setting | 3.10-2 |
| | 3.10.5 | 5 Environmental Effects | 3.10-3 |
| 3. | 11 | Cultural Resources | 3.11-1 |
| | 3.11.1 | 1 Introduction | 3.11-1 |
| | 3.11.2 | 2 Area of Analysis | 3.11-1 |
| | 3.11.3 | 3 Existing Conditions | 3.11-1 |
| | 3.11.4 | 4 Regulatory Setting | 3.11-5 |
| | 3.11.5 | 5 Methods and Results | 3.11-9 |
| | 3.11.6 | 6 Environmental Effects | .3.11-25 |
| 3. | 12 | Tribal Cultural Resources | 3.12-1 |
| | 3.12.1 | 1 Introduction | 3.12-1 |
| | 3.12.2 | 2 Area of Analysis | 3.12-1 |
| | 3.12.3 | 3 Existing Conditions | 3.12-1 |

| | 3.12.4 | Regulatory Setting | 3.12-1 |
|-----|--------|------------------------------------|--------|
| | 3.12.5 | Methods | 3.12-3 |
| | 3.12.6 | Environmental Effects | 3.12-4 |
| 3.1 | 3 | Aesthetics | 3.13-1 |
| | 3.13.1 | Introduction | 3.13-1 |
| | 3.13.2 | Area of Analysis | 3.13-1 |
| | | Existing Conditions | |
| | 3.13.4 | Regulatory Setting | 3.13-4 |
| | 3.13.5 | Environmental Effects | 3.13-5 |
| 3.1 | 4 | Transportation | |
| | | Introduction | |
| | | Area of Analysis | |
| | | Existing Conditions | |
| | 3.14.4 | Regulatory Setting | 3.14-3 |
| | 3.14.5 | Environmental Effects | 3.14-6 |
| 3.1 | 5 | Wildfire | 3.15-1 |
| | 3.15.1 | Introduction | 3.15-1 |
| | 3.15.2 | Area of Analysis | 3.15-1 |
| | 3.15.3 | Existing Conditions | 3.15-1 |
| | | Regulatory Setting | |
| | 3.15.5 | Environmental Effects | 3.15-4 |
| 3.1 | 6 | Agriculture and Forestry Resources | 3.16-1 |
| | 3.16.1 | Introduction | 3.16-1 |
| | 3.16.2 | Existing Conditions | 3.16-1 |
| | | Regulatory Setting | |
| | 3.16.4 | Environmental Effects | 3.16-3 |
| 3.1 | 7 | Land Use and Planning | 3.17-1 |
| | | Introduction | |
| | | Area of Analysis | |
| | | Existing Conditions | |
| | | Regulatory Setting | |
| | 2 17 5 | Environmental Effects | 3 17-6 |

| CI | hapter 4 C | Cumulative Impacts | 4-1 |
|----|------------|--|------|
| | 4.1 | Cumulative Projects | 4-1 |
| | 4.2 | Cumulative Impacts by Resource | 4-3 |
| | 4.2.1 | Hydrology and Water Quality | 4-3 |
| | 4.2.2 | Geology and Soils | 4-4 |
| | 4.2.3 | Biological Resources | 4-5 |
| | 4.2.4 | Air Quality | 4-9 |
| | 4.2.5 | Greenhouse Gas Emissions | 4-10 |
| | 4.2.6 | Energy | 4-11 |
| | 4.2.7 | Noise | 4-12 |
| | 4.2.8 | Hazards and Hazardous Materials | 4-14 |
| | 4.2.9 | Cultural Resources | 4-14 |
| | 4.2.10 | Tribal Cultural Resources | 4-15 |
| | 4.2.11 | 1 Aesthetics | 4-15 |
| | 4.2.12 | 2 Transportation | 4-18 |
| | 4.2.13 | 3 Wildfire | 4-18 |
| | 4.2.14 | 4 Agriculture and Forestry Resources | 4-19 |
| | 4.2.15 | 5 Land Use and Planning | 4-19 |
| CI | hapter 5 N | landatory Findings of Significance | 5-1 |
| CI | hapter 6 R | eferences | 6-1 |
| | 6.1 | Proposed Mitigated Negative Declaration | |
| | 6.2 | Chapter 1, Introduction | 6-1 |
| | 6.3 | Chapter 2, Proposed Project Description | 6-2 |
| | 6.3.1 | Published References | 6-2 |
| | 6.4 | Chapter 3, Environmental Setting and Impacts | 6-2 |
| | 6.4.1 | Section 3.1, Introduction | 6-2 |
| | 6.4.2 | Section 3.2, Resources Upon Which the Proposed Project | |
| | | Would Have No Impact | |
| | 6.4.3 | Section 3.3, Hydrology and Water Quality | 6-2 |
| | 6.4.4 | . 37 | |
| | 6.4.5 | , 3 | |
| | 6.4.6 | Section 3.6, Air Quality | 6-12 |
| | 6.4.7 | Section 3.7, Greenhouse Gas Emissions | 6-13 |
| | 6.4.8 | Section 3.8, Energy | 6-14 |

| | 6.4.9 | Section 3.9, Noise | 6-15 |
|-----|--------|--|------|
| | 6.4.10 | Section 3.10, Hazards and Hazardous Materials | 6-16 |
| | 6.4.11 | Section 3.11, Cultural Resources | 6-16 |
| | 6.4.12 | Section 3.12, Tribal Cultural Resources | 6-17 |
| | 6.4.13 | Section 3.13, Aesthetics | 6-17 |
| | 6.4.14 | Section 3.14, Transportation | 6-18 |
| | 6.4.15 | Section 3.15, Wildfire | 6-19 |
| | 6.4.16 | Section 3.16, Agriculture and Forestry Resources | 6-19 |
| | 6.4.17 | Section 3.17, Land Use and Planning | 6-20 |
| 6.5 | | Chapter 4, Cumulative Impacts | 6-20 |
| 6.6 | | Chapter 5, Mandatory Findings of Significance | 6-21 |

Appendix A Environmental Checklist

- **Appendix B Species Lists**
- Appendix C Plants and Animals Observed in the Tiger Creek Regulator Dam Spillway Replacement Project Area of Analysis
- **Appendix D Air Quality Calculations and Assumptions**
- **Appendix E Noise Measurement Data and Modeling Files**
- **Appendix F Public Comments and Responses**
- Appendix G Mitigation Monitoring and Reporting Program for the Tiger Creek Regulator Dam Spillway Replacement Project

Tables

| 2-1 | Tiger Creek Regulator Dam Spillway Replacement Project Estimated Construction Schedule | 2-14 |
|-------|---|--------|
| 2-2 | Construction Phases and Onsite Equipment Use | 2-15 |
| 2-3 | Construction Phases and On-Road Vehicle Use | 2-20 |
| 3.3-1 | Monthly Instream Flow Requirements Downstream of the Tiger Creek Regulator Dam | 3.3-5 |
| 3.3-2 | Designated Beneficial Uses for Surface Waterbodies in the Proposed Project Vicinity | 3.3-6 |
| 3.3-3 | Numeric and Narrative Water Quality Objectives for Surface Waterbodies in the Proposed Project Vicinity | 3.3-6 |
| 3.4-1 | Paleontological Sensitivity Ratings | 3.4-7 |
| 3.4-2 | University of California Museum of Paleontology Vertebrate Fossil Records, by Formation Extent and Study Area Counties, and Paleontological Sensitivity of Geologic Units in the Study Area | 3.4-8 |
| 3.5-1 | Soil Map Units in the Area of Analysis | 3.5-6 |
| 3.5-2 | Special-Status Plants with Potential to Occur in the Vicinity of the Area of Analysis | 3.5-16 |
| 3.5-3 | Special-Status Animal Species with Potential to Occur in the Vicinity of the Tiger Creek Regulator Reservoir Dam Spillway Replacement Area of Analysis | 3.5-30 |
| 3.6-1 | National and State Ambient Air Quality Standards | 3.6-3 |
| 3.6-2 | Sources and Potential Health and Environmental Effects of Criteria Pollutants | 3.6-4 |
| 3.6-3 | Estimated Maximum Daily Uncontrolled Criteria Pollutant Emissions from Proposed Project Construction and Onsite Concrete Batching in Amador County (pounds) | 3.6-8 |
| 3.6-4 | Estimated Maximum Daily Criteria Pollutant Uncontrolled Emissions from Material Hauling in Sacramento County (pounds) | 3.6-8 |

| 3.6-5 | from Proposed Project Construction and Onsite Concrete Batching in Amador County (pounds) | 3.6-10 |
|--------|--|--------|
| 3.6-6 | Estimated Maximum Excess Cancer and Noncancer Health Risks from Construction Hauling on Local Access Roads | 3.6-14 |
| 3.7-1 | Lifetimes and Global Warming Potentials of Principal Greenhouse Gases | 3.7-2 |
| 3.7-2 | Estimated GHG Emissions from Proposed Project Construction and Material Hauling (metric tons) | 3.7-5 |
| 3.7-3 | Consistency of the Proposed Project with Scoping Plan Policies | 3.7-8 |
| 3.8-1 | Construction-Period Energy Consumption Estimates (2025 to 2027) | 3.8-6 |
| 3.9-1 | Noise and Vibration Terminology | 3.9-2 |
| 3.9-2 | Typical A-weighted Sound Levels | 3.9-4 |
| 3.9-3 | Rules for Combining Sound Levels by Decibel Addition | 3.9-6 |
| 3.9-4 | Short-Term Noise Level Measurement Results | 3.9-10 |
| 3.9-5 | Long-Term Noise Level Measurement Results | 3.9-11 |
| 3.9-6 | Vibration Damage Potential Threshold Criteria Guidelines | 3.9-15 |
| 3.9-7 | Vibration Annoyance Potential Criteria Guidelines | 3.9-16 |
| 3.9-8 | Land Use Compatibility for Community Noise Environments | 3.9-17 |
| 3.9-9 | Noise Level Performance Standards for Non-Transportation Noise Sources | 3.9-18 |
| 3.9-10 | Construction Noise Levels by Activity and Construction Area at a Reference Distance of 50 Feet | 3.9-21 |
| 3.9-11 | Construction Noise Levels for Main Work Area Activity at the Nearest Sensitive Receptors | 3.9-22 |
| 3.9-12 | Batch Plant Noise by Distance | 3.9-25 |
| 3.9-13 | Existing (Measured) and Existing plus Haul Truck Noise Levels | 3.9-27 |
| 3.9-14 | Vibration Source Levels for Construction Equipment | 3.9-29 |
| 3.11-1 | Chronology of the West-Central Sierra Nevada | 3.11-2 |

| 3.11-2 | Previous Studies and Reports in the Area of Analysis and Records Search Study Area | 3.11-10 |
|--------|--|---------|
| 3.11-3 | Previously Recorded Cultural Resources in the Area of Analysis | 3.11-10 |
| 3.11-4 | Analysis of Proposed Project Elements' Conformance with Rehabilitation Standards 2, 6, 9, and 10 for the Tiger Creek Subsystem Historic District | 3.11-29 |
| 3.11-5 | Analysis of Proposed Project Elements' Conformance with Rehabilitation Standards 2, 6, 9, and 10 for the Tiger Creek Regulator Dam | 3.11-34 |
| 3.17-1 | Amador County Land Use and Zoning Designations for Permanent Proposed Project Facilities | 3.17-3 |

Figures

| | | Follows Page |
|--------|--|--------------|
| 1-1 | Project Location | 1-2 |
| 1-2 | Existing Spillway Details | 1-4 |
| 2-1 | Project Area | 2-2 |
| 2-2 | Proposed Spillway Details | 2-2 |
| 2-3 | Dam Notch Location | 2-4 |
| 2-4 | Timber Harvest and Timberland Conversion Areas | 2-10 |
| 2-5 | Access Roads | 2-14 |
| 3.5-1 | Biological Resources in the Area of Analysis | 3.5-2 |
| 3.6-1 | Sensitive Receptors within 1,000 Feet of the Proposed Project and Access Roads | |
| 3.9-1 | Noise Measurement Locations | 3.9-10 |
| 3.11-1 | Cultural Resources Area of Analysis | 3.11-2 |
| 3.13-1 | Key View Map | 3.13-2 |
| 3.13-2 | Representative Key Views—Doakes Ridge Staging and Spoils (Key Views 1 and 2) | |
| 3.13-3 | Representative Key Views—Doakes Ridge Staging and Spoils (Key Views 3 and 4) | |
| 3.13-4 | Representative Key Views—Dam Area (Key Views 5 and 6) | 3.13-2 |
| 3.13-5 | Representative Key Views—Dam Area (Key Views 7 and 8) | 3.13-2 |
| 3.13-6 | Representative Key Views—Cedar Mill Staging Area (Key Views | w 9) 3.13-4 |
| 3.13-7 | Representative Key Views—Cedar Mill Staging Area (Key Views | w 10) 3.13-4 |
| 3.15-1 | State Responsibility Areas | 3.15-2 |
| 3.15-2 | Fire Hazard Severity Zones | 3.15-2 |

Acronyms and Abbreviations

| Acronym | Definition |
|----------------------|--|
| 2017 Scoping Plan | California's 2017 Climate Change Scoping Plan |
| 2022 Scoping Plan | 2022 Scoping Plan for Achieving Carbon Neutrality |
| AAD | Amador Air District |
| AB | Assembly Bill |
| ACAPCD | Amador County Air Pollution Control District |
| ACHP | Advisory Council on Historic Preservation |
| ACTC | Amador County Transportation Commission |
| ANAB | ANSI National Accreditation Board |
| Basin Plan | Water Quality Control Plan for the Sacramento River and San Joaquin River Basins |
| BMPs | best management practices |
| ВО | biological opinion |
| CAA | Clean Air Act |
| CAAQS | California ambient air quality standards |
| CalEEMod | California Emissions Estimator Model |
| CAL FIRE | California Department of Forestry and Fire Protection |
| Caltrans | California Department of Transportation |
| CARB | California Air Resources Board |
| CCR | California Code of Regulations |
| CDFW | California Department of Fish and Wildlife's |
| CEC | California Energy Commission |
| CEQA | California Environmental Quality Act |
| CESA | California Endangered Species Act |
| CFR | Code of Federal Regulations |

cfs cubic feet per second

CH₄ methane

CMP congestion management process

CNDDB California Natural Diversity Database

CNEL community noise equivalent level

CNPS's California Native Plant Society's

CO carbon monoxide

CO₂ carbon dioxide

CO₂e carbon dioxide equivalent

CRHR California Register of Historical Resources

CWA Clean Water Act

CY cubic yards

Dam Tiger Creek Regulator Dam

dB decibel

dBA A-Weighted Decibel
dBC C-Weighted Decibel

dbh diameter at 4.5 feet above the ground surface

DPM diesel particulate matter

DSOD California Department of Water Resources Division of Safety of

Dams

DWR Department of Water Resources

EID El Dorado Irrigation District

ERC Ecological Resource Committee

ESA Endangered Species Act

FERC Federal Energy Regulatory Commission

FHSZ fire hazard severity zones

FHWA Federal Highway Administration

FMMP Farmland Mapping and Monitoring Program

Forest Practice California (or Z'berg-Nejedly) Forest Practice Act of 1973

Act

FPRs Forest Practice Rules

FR Federal Register

GHG greenhouse gas

GWP global warming potential

HFC hydrofluorocarbons

HPMP historic properties management plan

Hz Hertz

IEPR Integrated Energy Policy Report

IPCC Intergovernmental Panel on Climate Change

IS/MND initial study/mitigated negative declaration

kWh kilowatt hours

L_{dn} day-night sound level

L_{eq} equivalent sound level

LLO low-level outlet

L_{min} and L_{max} minimum and maximum sound levels

LRA Local Responsibility Areas

LT long-term

LUST leaking underground storage tank

L_{xx} Percentile-Exceeded Sound Level

MCAB Mountain Counties Air Basin

MLD most likely descendant

MPO metropolitan planning organization

MRHPOS Mokelumne River Hydroelectric Project operating system

MSL mean sea level

MTIP metropolitan transportation improvement program

MTP/SCS metropolitan transportation plan/sustainable communities

strategy

NAAQS national ambient air quality standards

NEPA National Environmental Policy Act

NGOs non-governmental organizations

NHPA National Historic Preservation Act

NHTSA National Highway Traffic Safety Administration

NMFS National Marine Fisheries Service

NO_X nitrogen oxides

N₂O nitrous oxides

NPDES National Pollutant Discharge Elimination System

NRHP National Register of Historic Places

OHWM ordinary high water mark

OPR Governor's Office of Planning and Research

PA Programmatic Agreement

PG&E Pacific Gas and Electric Company

PM particulate matter

PMF probable maximum flood

PPV peak particle velocity

PRC Public Resources Code

Proposed Project Tiger Creek Regulator Dam Spillway Replacement Project

RCNM roadway construction noise model

Reservoir Tiger Creek Regulator Reservoir

ROG reactive organic gases

RPS Renewables Portfolio Standard

RTP regional transportation plan

RWQCBs Regional Water Quality Control Boards

SACOG Sacramento Area Council of Governments

SB Senate Bill

SCS sustainable communities strategy

SEL Sound Exposure Level

SEM stream evolution model

SHPO State Historic Preservation Officer

SIP State Implementation Plan

SMAQMD Sacramento Metropolitan Air Quality Management District

SO₂ sulfur dioxide

SPI Sierra Pacific Industries

SR State Route

SRA State Responsibility Areas

SR/SJR Basin Water Quality Control Plan for the Sacramento River and San

Plan Joaquin River Basins

ST short-term

Standards Secretary of the Interior's Standards for the Treatment of

Historic Properties

State Water

Board

State Water Resources Control Board

SVAB Sacramento Valley Air Basin

SWPPP stormwater pollution prevention program

TAC toxic air contaminants

TCEAP Temporary Construction Emergency Action Plan

TCP timberland conversion permit

Technical Technical Advisory on Evaluating Transportation Impacts in

Advisory CEQA

THP timber harvest plan

TPZ timberland production zone

UBC Uniform Building Code

USACE United States Army Corps of Engineers

State Water Resources Control Board

Table of Contents

USEPA United States Environmental Protection Agency

USFS United States Forest Service

USFWS United States Fish and Wildlife Service

USGS United States Geological Survey

VMT vehicle miles traveled

WUI wildland urban interface

1.1 Proposed Project Purpose

Pacific Gas and Electric Company (PG&E) is proposing to construct the Tiger Creek Regulator Dam Spillway Replacement Project (Proposed Project) at the Tiger Creek Regulator Reservoir (Reservoir) in Amador County (Figure 1-1, *Project Location*). Prompted by the spillway failure at Lake Oroville Dam (a non-PG&E site) in February 2017, the Federal Energy Regulatory Commission (FERC) and the California Department of Water Resources Division of Safety of Dams (DSOD requested that PG&E perform assessments of the spillways at several PG&E-owned dams (Federal Energy Regulatory Commission 2017 and California Department of Water Resources 2017). PG&E completed the spillway assessment for the Tiger Creek Regulator Dam (Dam) in December 2017 and identified several structural and hydraulic deficiencies of the existing spillway, and determined that it does not have the capacity to meet FERC requirements for passing the probable maximum flood (PMF) without overtopping the Dam. The PMF flow of 5,652 cubic feet per second (cfs) is approximately double that of the existing spillway capacity. The purpose of the Proposed Project is to address these known spillway deficiencies through construction of a new spillway and decommissioning of the old spillway infrastructure, allowing the Dam to safely pass a flood event of up to 6,000 cfs.

1.2 Document Purpose and Use

This IS/MND was prepared in accordance with Article 5, section 15060 et seq. of the California Environmental Quality Act (CEQA) Guidelines (California Code of Regulations [CCR], Title 14, Division 6, Chapter 3). This IS/MND describes the existing environmental resources in the Project Area, evaluates the environmental impacts of the Proposed Project on these resources, and identifies mitigation measures to avoid or reduce any potentially significant impacts to a less-than-significant level. The CEQA *Environmental Checklist Form* for the Proposed Project is provided in Appendix A, *Environmental Checklist*.

The California State Water Resources Control Board (State Water Board) is the CEQA lead agency and is considering discretionary action under section 401 of the federal Clean Water Act (CWA).

1.3 Proposed Project Setting

The Dam is located on Tiger Creek, a tributary to the North Fork of the Mokelumne River, approximately 24 miles northeast of Jackson in Amador County, California. The elevation of the Dam is approximately 3,500 feet above mean sea level. The Dam and Reservoir are situated in a narrow valley in the foothills of the Sierra Nevada range, and the valley slopes rise steeply to approximately 300 feet above the water surface of the Reservoir. The dominant vegetation type is Sierra Nevada mixed conifer forest. The lands surrounding the Reservoir are zoned as "Timberland Preserve (Timber Production Zone)" and have been logged in the past with periodic entries for commercial timber harvesting.

The Reservoir is accessible from State Route (SR) 88 by traveling east on Tiger Creek Road for three miles, then keeping left at the split in the road to continue on Tiger Creek Road for another 3.6 miles, and turning left after the bridge over Tiger Creek to stay on Tiger Creek Road for 0.2 mile, where the road ends at the Dam. The Dam and Reservoir are within the Devils Nose United States Geological Survey (USGS) 7.5-minute quadrangle in Township 7 North, Range 14 East, Section 8 (latitude 38.4778, longitude -120.4522).

The Dam is on land owned by PG&E and under a conservation easement held by the Mother Lode Land Trust. The conservation easement restricts development of the land to protect and preserve beneficial public values but includes an express reservation of PG&E's right for continued operation, maintenance, and improvements of existing and future hydroelectric facilities and associated water delivery facilities located on, above, or under the property. PG&E also owns or has use agreements for the nearby proposed staging and laydown areas. Surrounding lands are owned by the California Department of Forestry and Fire Protection (CAL FIRE). Elements of the Proposed Project would be constructed on CAL FIRE land; however, this property was donated to CAL FIRE by PG&E and includes utility easements that allow PG&E to operate and maintain existing and future hydroelectric facilities and to construct improvements necessary to meet water delivery requirements for power generation. Some of the access roads to and around the Dam area pass through lands owned by Sierra Pacific Industries (SPI). PG&E has access rights and road use agreements with SPI for use of these roads and would ensure that these agreements are current prior to construction of the Proposed Project.

Access to the Dam and Reservoir area is controlled by locked gates on Tiger Creek Road and Salt Springs Road. PG&E has no license requirement to provide public access or recreational opportunities along these roads or at the Reservoir. The public is allowed to fish from the Dam and Reservoir shoreline when public safety is

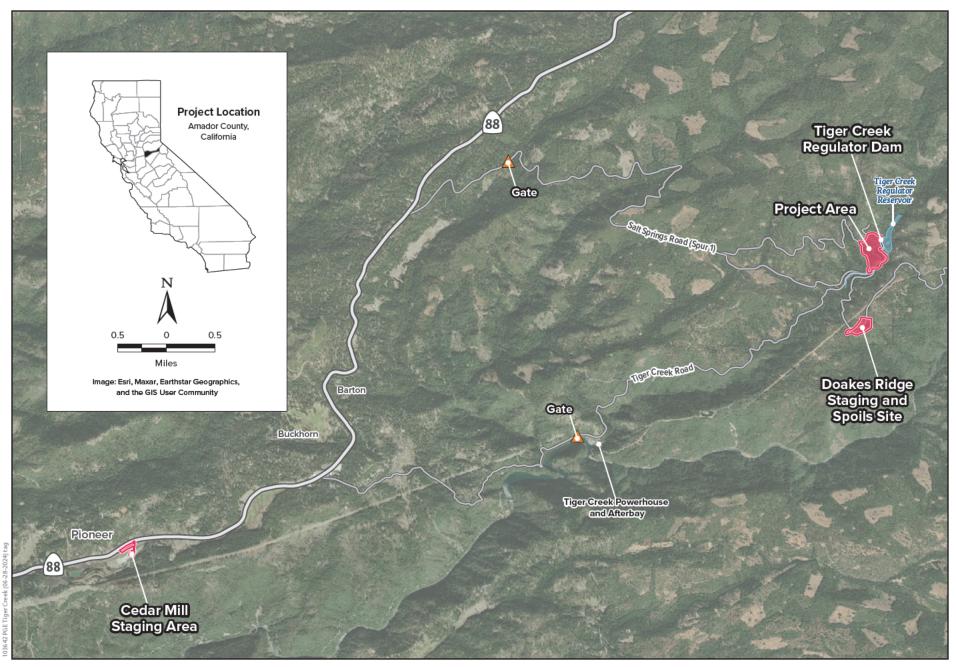




Figure 1-1 Project Location

not compromised due to weather, wildfire precautions, or operational necessities. There are no formal recreation facilities and no swimming, boating, or float tubes are allowed in the Reservoir. Camping and fires are also prohibited. PG&E has the authority to lock the gates to the public when needed (e.g., for public safety, during road repair/maintenance activities, or during construction within the watershed). When PG&E locks the gates, notification is provided to the United States Forest Service (USFS) and the Mokelumne Ecological Resource Committee, which is composed of local stakeholders and non-governmental organizations.

1.4 Proposed Project Background

1.4.1 Description of Dam and Spillway

PG&E operates the Dam as part of the Mokelumne River Project (FERC Project No. 137; State Dam No. 97-104), which is licensed by FERC. The Dam, which impounds Tiger Creek, is a 110-foot-high, 486-foot-long concrete slab-and-buttress structure with a crest width of five feet. The upstream slab has a 45-degree slope. There are 23 buttresses with a typical center-to-center spacing of 18 feet and a maximum upstream/downstream foundation base width of 125 feet. The buttresses are founded on phyllite with some sandstone. The Dam has an existing spillway structure at its left abutment that includes the following reinforced concrete features, listed upstream to downstream and shown on Figure 1-2, *Existing Spillway Details*:

- 150-foot-long outlet approach channel;
- Bathtub inlet;
- Three self-priming siphons;
- Gate house with 8-foot-wide by 10.5-foot-tall canal intake wheel gate;
- Side channel spillway for the Lower Tiger Creek Conduit (also referred to as the Tiger Creek Canal); and
- Rectangular chute with flip bucket discharging into a plunge pool in Tiger Creek.

Construction of the Dam was completed in 1931 and no major modifications to the structure have been made since construction. The Dam is operated per requirements of the Mokelumne River Project. The FERC license for the Mokelumne River Project expires on October 11, 2031.

1.4.2 Reservoir Operations

In addition to inflow from the Tiger Creek watershed, the Reservoir is fed by diversion from the Mokelumne River at the Salt Springs Powerhouse tailrace via the Upper Tiger Creek Conduit, which discharges into the Reservoir approximately 500 feet upstream of the Dam along the left shoreline (facing downstream).

PG&E releases water from the Reservoir into Tiger Creek through a low-level outlet (LLO) at the base of the Dam, which consists of a 30-inch-diameter pipe with a manually operated slide gate at the upstream end of the pipe and a manually-operated gate valve at the downstream end of the pipe. The LLO pipe has a 16-inch-diameter bypass line for instream flow releases that is controlled by a remotely operated knife-gate valve. The instream flow release valve is adjusted automatically based on flows measured at the M-76 weir that is approximately 140 feet downstream of the Dam. Tiger Creek joins the Mokelumne River approximately four miles downstream of the Dam near the Tiger Creek Powerhouse where it flows into the Tiger Creek Afterbay. PG&E also releases water from the Reservoir into the Lower Tiger Creek Conduit, which feeds into the Tiger Creek Forebay approximately three miles downstream of the Dam and provides water for power generation at the Tiger Creek Powerhouse.

The Reservoir has a design storage capacity of approximately 360 acre-feet at current normal maximum reservoir level. PG&E typically operates the Reservoir within the upper 10 feet of storage capacity, and controls inflow and outflow for power generation downstream at the Tiger Creek Powerhouse. The Dam is classified as a "High Hazard Potential" dam under FERC and DSOD guidelines based on the potential for adverse downstream consequences in the event of dam failure.

1.4.3 Spillway Assessment

The spillway assessment conducted in 2017 identified three key deficiencies of the existing spillway that could lead to damage and overtopping of the Dam during large storm events up to the PMF:

- 1. Deterioration in the concrete spillway chute:
- 2. Potential for siphon spillways not to activate at the expected water surface elevation; and
- Potential for inadequate hydraulic capacity and structural stability of the spillway chute.

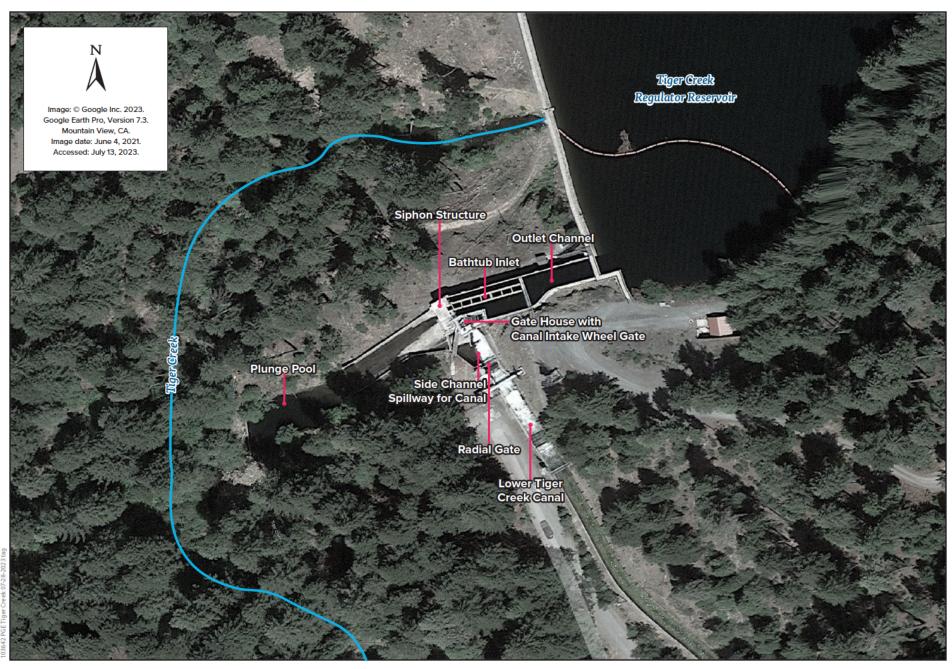




Figure 1-2 Existing Spillway Details

In 2019, physical modeling was performed and showed that the existing spillway has a hydraulic capacity of 2,750 cfs. The PMF flow is 5,652 cfs, approximately double that of the spillway's existing capacity. Flood flows above the capacity of the existing spillway would overtop the Dam, endangering the Dam structure and safety.

1.5 Regulatory Compliance

In addition to compliance with section 401 of the CWA, PG&E will seek all necessary permissions, authorizations, concurrences, and permits to comply with the following regulations for implementation of the Proposed Project.

1.5.1 Federal Power Act

As described above, the Proposed Project is part of the Mokelumne River Project, which is licensed under the Federal Power Act by FERC. The existing Dam and spillway are on PG&E property and within the FERC license boundary. A portion of the proposed new spillway chute would extend beyond the FERC license boundary, and adjusting the FERC license boundary to include the entire spillway, as well as a new permanent access road, requires a FERC non-capacity amendment to the license. The PG&E License Coordinator submitted a license amendment application and appropriate exhibits to FERC's Division of Hydropower Administration and Compliance for review and approval on November 14, 2023.

1.5.2 Federal Endangered Species Act

As the licensor of the Mokelumne River Project, FERC is required to consult with the United States Fish and Wildlife Service (USFWS) to ensure that the Proposed Project is not likely to jeopardize the continued existence of federally listed species or result in the destruction or adverse modification of designated critical habitat pursuant to section 7(a)(2) of the federal Endangered Species Act (ESA). However, FERC is not required to consult with USFWS if FERC determines that the Proposed Project will not affect federally listed species or designated critical habitat.

1.5.3 Clean Water Act, Section 404

Section 404 of the CWA (33 USC 1344) requires that a permit be obtained from the United States Army Corps of Engineers (USACE) for the discharge of dredged or fill material into waters of the United States.

1.5.4 National Historic Preservation Act, Section 106

PG&E's application to USACE for a CWA section 404 permit for the Proposed Project prompts compliance with section 106 of the National Historic Preservation Act (NHPA), which requires federal agencies to evaluate the effects of their undertakings on historic properties. Other federal regulations applicable to the Proposed Project could also require compliance with section 106 of the NHPA, including CWA 401 permits and FERC license amendments. FERC has designated PG&E as their non-federal representative for informal consultation with the California State Historic Preservation Officer (SHPO) to ensure compliance with section 106 of the NHPA.

1.5.5 California Water Code

The California Water Code entrusts dam safety regulatory power to DSOD. DSOD provides oversight to the design, construction, and maintenance of over 1,200 dams in California including the Dam (State Dam No. 97-104). The Proposed Project therefore requires review and approval from DSOD.

1.5.6 California Forest Practice Act of 1973

Tree removals required for the construction of the Proposed Project trigger compliance with the California (or Z'berg-Nejedly) Forest Practice Act of 1973 (Forest Practice Act), which requires a timber harvest plan (THP) to be submitted to CAL FIRE for commercial timber harvesting on all nonfederal timberlands. THPs ensure that timber harvesting activities comply with California's Forest Practice Rules (FPRs) and must be approved by CAL FIRE prior to the start of those activities. The Forest Practice Act also requires that a timberland conversion permit (TCP) be sought from CAL FIRE for any property that would be taken out of timber production or that would be converted from timberland (defined as non-federal land which is available for, and capable of, growing a crop of trees of a commercial species used to produce lumber and other forest products) to non-timber growing use.

1.6 Document Organization

This IS/MND is organized as follows:

- Chapter 1, *Introduction*, describes the purpose of the Proposed Project, Project Area and setting, project background, and regulatory compliance requirements;
- Chapter 2, Project Description, describes construction of the Proposed Project;

- Chapter 3, Environmental Setting and Impacts, describes the environmental resources present in the Project Area, and analyzes the Proposed Project's potential to affect such resources;
- Chapter 4, *Cumulative Impacts*, discusses the potential for the Proposed Project's incremental effect to be cumulatively considerable when combined with other projects causing related impacts;
- Chapter 5, *Mandatory Findings of Significance*, discloses whether the Proposed Project would result in any significant effects on the environment and subsequently, whether an environmental impact report needs to be prepared:
- Chapter 6, References, provides a list of all printed references and personal communications used to prepare this IS/MND;
- Appendix A, *Environmental Checklist*, contains the Environmental Checklist Form from CEQA Guidelines Appendix G;
- Appendix B, Species Lists, contains the results of database searches for specialstatus plant and wildlife species that occur in the project vicinity and the USFWS species list for the Project Area;
- Appendix C, Plants and Animals Observed in the Tiger Creek Regulator Dam Spillway Replacement Project Area of Analysis, lists the species of plants and animals observed during surveys;
- Appendix D, Air Quality Calculations and Assumptions, contains air quality modeling assumptions and outputs; and
- Appendix E, Noise Measurement Data and Modeling Files, contains the complete dataset of noise measurement data from the field survey and contains noise modeling files.
- Appendix F, Public Comments and Responses, contain the comments received by the State Water Board on the January 2024 draft IS/MND and the September 2024 recirculated draft IS/MND, and the State Water Board's responses to those comments.
- Appendix G, Mitigation Monitoring and Reporting Program for the Tiger Creek Regulator Dam Spillway Replacement Project, identifies the mitigation measures that shall be implemented for the Proposed Project, the individual or entity responsible for implementation, the schedule for mitigation measure implementation, and relevant mitigation and monitoring details.

2.1 Introduction and Project Area

The Proposed Project comprises construction of a new spillway near the Dam's right abutment, which includes a spillway intake (crest structure), a notch through the existing Dam, a concrete chute, flip bucket splitter blocks, and plunge pool. Other associated features include a permanent access road, cofferdam, new log boom, lighting, and abandonment of the existing spillway. The Project Area consists of three staging areas, the log boom anchor points, and the construction area that is bounded roughly by the Dam to the east, Spur 10 to the north, and the Spur 1 staging area to the south. The Project Area and primary project features are shown in Figure 2-1, *Project Area*.

2.2 Proposed Project Features, Construction Methods, and Activities

2.2.1 Spillway

The primary feature of the Proposed Project is the new spillway structure. The spillway structure would consist of a crest structure, spillway chute and flip bucket, and plunge pool. These spillway elements and their construction methods are described below. This section also includes descriptions of the cofferdam that would be erected to keep the crest structure area dry during construction and the notch that would need to be cut through the existing Dam to accommodate the new spillway. The proposed spillway layout is shown in Figure 2-2, *Proposed Spillway Details*.

2.2.1.1 Crest Structure

The crest structure is the upper part of the proposed spillway that would extend into the Reservoir and allow flow into the spillway chute under high-water conditions. The crest structure would consist of a 145-foot-long concrete ogee weir with a crest elevation of 3,587.05 feet¹, upstream and downstream training walls, an invert slab, and a sloped right wall that would be cast against the excavated rock slope at the right abutment. The crest structure would be constructed using rock anchors and

¹ All vertical elevations are per North American Vertical Datum of 1988.

reinforced concrete, as well as a cutoff trench on the Reservoir side of the structure. The entire crest structure would require the placement of approximately 1,200 cubic yards (CY) of concrete. Excavation for the crest structure foundation would generate approximately 3,000 CY of spoils, which would be permanently disposed of at the Doakes Ridge staging and spoils site.

2.2.1.2 Spillway Chute and Flip Bucket

Flows from the crest structure would be directed into the 40-foot-wide, 240-foot-long spillway chute, which would be constructed using reinforced concrete. The chute would control flow from the crest structure down 25 percent and 60 percent slopes to a horizontal section (flip bucket). The chute slab would be anchored into the bedrock using steel rock dowels and the right wall of the chute would be backfilled to support the uphill slope. Transverse joints with shear keys and drains would be spaced at regular intervals along the length of the chute. The transverse drains would connect to longitudinal drains that travel along the chute wall and daylight to the interior of the chute.

The chute would terminate at a flip bucket area containing splitter blocks that would aerate the flow and dissipate the energy of water entering the plunge pool. The flip bucket would be constructed similarly to the chute but with a flat slope and the addition of four splitter blocks. The splitter blocks would be independent reinforced concrete ramps secured with additional rock anchors.

Excavation for the spillway chute and flip bucket would generate approximately 12,000 CY of soil and rock spoils, which would be permanently disposed of at the Doakes laydown area. Approximately 2,000 CY of backfill would be placed behind the right chute wall and at the base of the left chute wall. Combined, the chute and flip bucket structure would require the placement of approximately 2,500 CY of concrete.

2.2.1.3 Plunge Pool

Spillway flows exiting the flip bucket would terminate in a plunge pool where the spillway meets Tiger Creek. The pool would be excavated into the rock of the streambed to allow standing water to cushion the impact of spillway flows and to prevent rock scour in the streambed. The plunge pool would be 50 feet wide and would extend 185 feet downstream of the flip bucket, including a 60-foot-long sloped transition from the flip bucket to the plunge pool bottom elevation (3,470 feet above mean sea level). Approximately 250 CY of concrete would be required for construction of the concrete-lined transition in the streambed of Tiger Creek. A large existing fill pad dating from the Dam's original construction would need to be removed in order to construct the plunge pool. Plunge pool excavation would


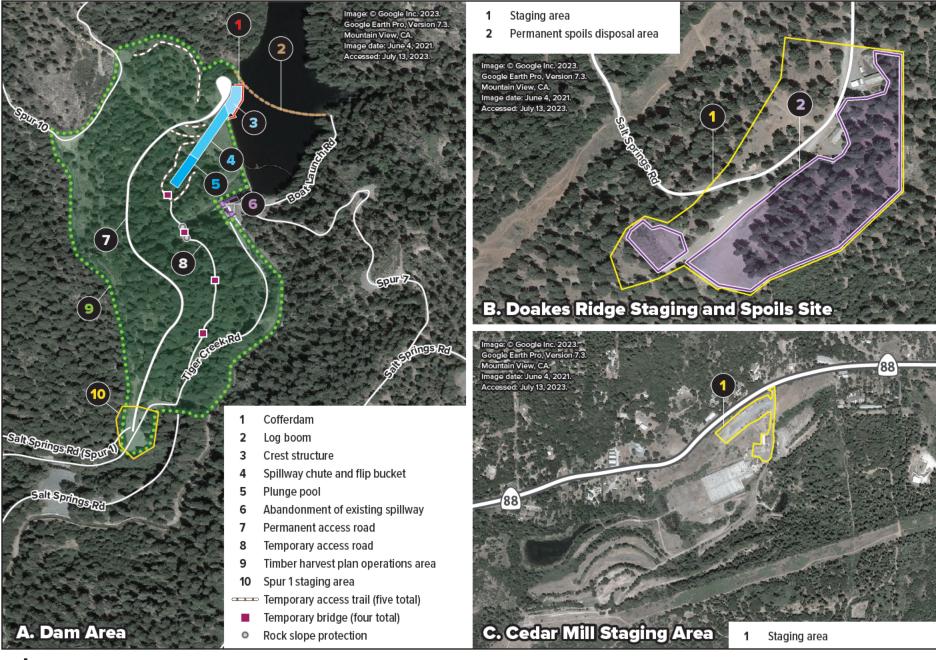




Figure 2-1 Project Area



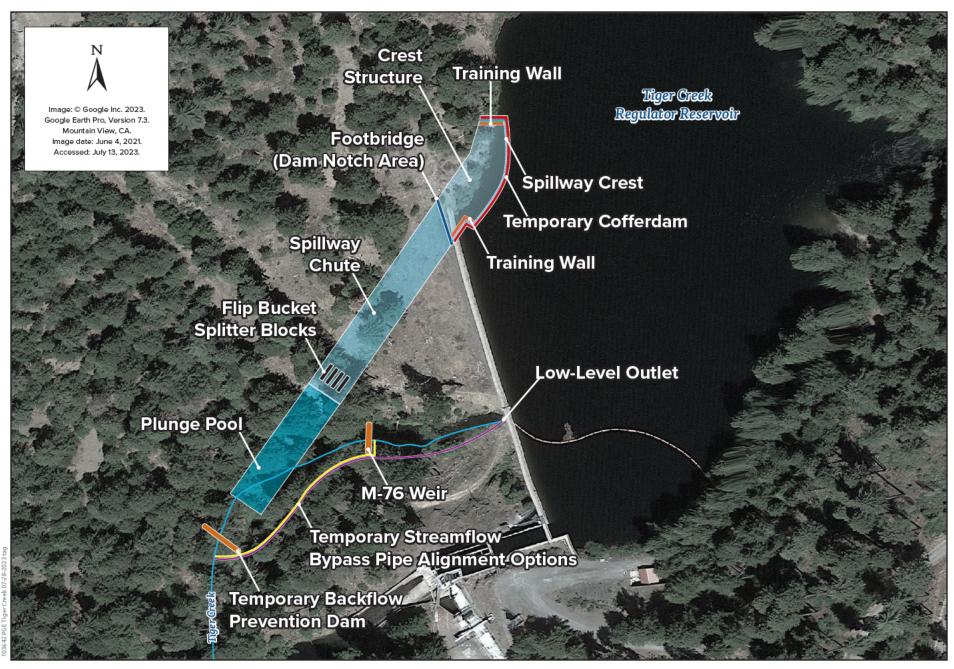

generate approximately 9,000 CY of soil and rock spoils, which would be permanently disposed of at the Doakes staging and spoils site.

To excavate the portion of the plunge pool located in Tiger Creek, stream flows would need to be diverted around the work area. PG&E would select one of two options for bypassing stream flows. Option one would use the existing M-76 stream gage weir upstream of the plunge pool to dam the stream. The M-76 weir is conveniently located at a higher elevation than the work site and could be dammed up using a simple plywood or steel sheet to cover the small opening in the weir. Streamflows would be routed via pump or gravity flow from the weir through a bypass pipe to a discharge location in Tiger Creek downstream of the plunge pool work area. The bypass pipe would be approximately 16 inches in diameter and 250 feet long, with a total volume of 350 cubic feet. Under option two, PG&E would connect a 16-inch, 400-foot-long bypass pipe directly to the LLO pipe so that flows could be controlled by the LLO valve. Under both options, the bypass pipes would run parallel to Tiger Creek to the discharge location downstream of the plunge pool. Temporary sandbags or bladder dams would be needed downstream of the plunge pool work area to prevent the bypassed water from backflowing into the work area. Additional dewatering pumps may be required within the excavation area to keep the site dry.

PG&E would maintain all Tiger Creek instream flow requirements downstream of the Dam throughout construction. Information about the instream flow requirements can be found in Section 3.3 *Hydrology and Water Quality.*

2.2.1.4 Dam Notch

In order to accommodate the new 40-foot-wide spillway chute, a notch must be cut into the existing Dam at its right abutment. Within the notch area (see Figure 2-3, *Dam Notch Location*), the Dam and right abutment would be demolished down to approximately 20 feet below the existing Dam crest by using concrete saws and excavators with hydraulic hammers. No blasting would be permitted on the Dam structure. Approximately 100 CY of demolished concrete from the Dam notch would be hauled to an off-site concrete recycling facility. A permanent pedestrian footbridge would be installed over the notch area to provide access between the Dam and the right abutment. A crane would be required to set the footbridge in place.

2.2.1.5 Cofferdam

To avoid disruptions to Reservoir operations during construction of the new spillway, a cofferdam would be installed just upstream of the proposed spillway crest structure prior to commencement of crest structure construction. This would allow spillway

construction activities to occur in the dry while the Reservoir is operated at normal water levels. The cofferdam would be approximately 240 feet long and consist of approximately 35 vertical steel piles connected by waterproof sheets of steel (known as a king pile wall) that would be grouted into a cutoff trench along the upstream boundary of the proposed crest structure. The approximate location of the cofferdam is shown on Figure 2-2, *Proposed Spillway Details*. The concrete backfilled trench would also serve as the cutoff trench for the new crest structure. Cofferdam construction would occur in the dry while the Reservoir water level is lowered during planned outage in 2026.

PG&E plans outages at all power generation facilities to perform routine maintenance and capital improvement projects. An outage is when PG&E stops generating power by shutting down the flow of water to stop spinning the generator. This allows maintenance and construction teams to safely work on the generators while they are de-energized. At Tiger Creek Powerhouse, PG&E typically carries out a four-week outage every spring. During those outages there is no flow down the Lower Tiger Creek Conduit to the powerhouse. For the 2026 outage, PG&E would stop controlled inflow to the Reservoir via the Upper Tiger Creek Conduit and would lower the water surface elevation of the Reservoir through the Lower Tiger Creek Conduit to just below the invert of the existing spillway intake channel. The Reservoir would be maintained at this elevation during cofferdam construction by balancing the difference between natural inflow and instream flow releases through the LLO with controlled inflow through the Upper Tiger Creek Conduit.

The king pile wall would be constructed by excavating a trench along the cofferdam alignment, placing vertical piles and sheets inside the trench, then backfilling the trench with reinforced concrete to create a waterproof wall. Approximately 1,500 CY of soil and rock would be excavated from the Reservoir to create the cutoff trench, and those spoils would be permanently disposed of at the Doakes Ridge staging and spoils site. The king pile wall would extend vertically from the trench to match the elevation of the top of the Dam and the downstream side of the wall would be used to form the new concrete spillway crest structure. At the cofferdam's interface with the Dam, a short section of waterproofed steel sheets, supported by steel bracing, would run along the upstream Dam face to close the cofferdam.

Prior to installing the cofferdam, the bay on the downstream side of the Dam between the two Dam buttresses where the cofferdam would abut the Dam would be filled with approximately 25 CY of mass concrete to allow for cofferdam anchorage and support without affecting the existing Dam buttresses or slab. The concrete-backfilled trench and embedded portions of the king pile wall would be permanent and would amount to approximately 600 CY of concrete and steel.





Once construction of the spillway is complete, the top of the cofferdam would be cut below the new spillway crest to allow use of the new spillway. During the planned outage in 2027, the Reservoir water surface would be lowered to an elevation that would allow access to remove the remaining portions of the cofferdam. The cofferdam would be removed by using hand tools to cut the piles and sheets to just above the top of the concrete-backfilled trench. The pieces would be removed using a crane and hauled offsite for recycling. After the cofferdam is removed, approximately 350 CY of backfill soil would be placed above the grouted trench to transition back to natural grade.

2.2.1.6 Common Construction Methods

Excavation

All concrete structures for the Proposed Project would be founded on bedrock, which would require excavation to achieve the designed alignment of the foundation structures. Excavation equipment, blasting, or a combination of both would be utilized (unless otherwise previously noted) to achieve the target foundation depths. Hydraulic hammer attachments may also be used on excavators to dig through rock material. Large excavators and dump trucks would be used to collect the excavated material and off-haul it to the Doakes Ridge staging and spoils site. All excavation would occur in the dry and no discharge of excavated material into the Reservoir, Tiger Creek, or any other waterbody or wetland would occur.

Concrete Work

The Proposed Project design requires a total of approximately 4,000 CY of structural concrete to construct the spillway. Additional leveling, or "dental," concrete may be required to create a flat working surface following excavation of foundations. Concrete work would require use of timber forms, steel reinforcement, expansion joint material, and drains. Cranes may be used to move materials. Mixer trucks would deliver concrete to the site and into pump trucks that would be used to place concrete in the forms. Rock anchors would be installed with drilling equipment that can create holes in the exposed rock to fit grouted anchors.

Concrete would come from a mobile batch plant that would be sited at the Spur 1 staging area (described in further detail in Section 2.3.1.3 *Spur 1 Staging Area*). Some concrete for the abandonment of the existing spillway (described in Section 2.2.4 *Abandonment of Existing Spillway*) and non-structural features such as the dental concrete, up to 500 CY, may come from a commercial batch plant in the Sacramento area.

2.2.2 Associated Features

2.2.2.1 Permanent Access Road

A new permanent access road would be constructed to connect Tiger Creek Road to the right abutment of the Dam just above the new spillway crest structure. The road would be 15 feet wide and would include a combination of cut slopes and retaining walls throughout most of the alignment. The road surface would consist of 6 inches of aggregate base rock. Turnouts and grade breaks would provide areas for cross traffic to pass. A turnaround and parking area would be constructed at the terminus of the road near the right abutment of the Dam. The locations of the road and turnaround/parking area are shown on Figure 2-1, *Project Area*.

The road would be sloped inboard to collect runoff in a drainage ditch that would discharge downslope through culverts. The outfall of the culverts would be armored to protect against erosion. Road excavation would involve mostly soils and would require typical road construction equipment. Articulating forklifts or excavators would be used to place retaining wall materials. The road design facilitates balancing cut-and-fill quantities; however, it is anticipated that excavation of the access road, including necessary cut and fill, would generate a net of approximately 11,000 CY of soil and rock spoils. These spoils would be permanently disposed of at the Doakes Ridge staging and spoils site.

2.2.2.2 Temporary Access Road, Bridges, and Access Trails

A temporary access road would be required to reach the plunge pool and the lower end of the spillway chute. This proposed road follows a previously used alignment that was abandoned in the early 2000s, though remnants of the road remain. The alignment is shown in Figure 2-1, *Project Area*. This road would be temporarily rehabilitated for use during construction of the Proposed Project, and four temporary bridges would be installed where the alignment crosses Tiger Creek and the existing plunge pool. Some tree removal, grading, and road base installation would be required to make the temporary access road passable. Fill material or a combination of fill and pre-cast concrete blocks would be used at each abutment of the temporary bridges to support the bridges and keep them out of the stream. Excavation equipment would be used to prepare the abutments and lift the bridges into place. The temporary bridges would be designed to pass the expected maximum flow during construction. After the Proposed Project is completed, the crossings would be removed and the road would be abandoned in place in its current state. No spoils are expected to be generated from the temporary access road.

Prior to installing the temporary bridge across the existing plunge pool, approximately 500 CY of clean rock slope protection would be installed at the downstream end of the plunge pool to repair previous bank erosion. Rock slope protection would be placed and tamped in (pressed down firmly) with an excavator to stabilize the bank slopes. Placement of rock slope protection would occur when the existing spillway is not in operation (e.g., not spilling) and water is not flowing from the spillway through the existing plunge pool into Tiger Creek. The dimensions of the areas of rock slope protection placed on each bank would be approximately 30 feet in length, 20 feet in width, and 10 feet in depth. After completion of the Proposed Project, the rock slope protection would remain in place.

Additional temporary access trails would be required to allow construction equipment to reach different areas along the spillway chute. These would spur off the new permanent access road and the temporary access road. The approximate locations of the temporary access trails are shown in Figure 2-1, *Project Area*.

2.2.2.3 Log Boom

A new single-span log boom would span approximately 450 feet across the Reservoir just upstream of the new crest structure. The log boom would be designed to withstand debris buildup from upstream and prevent debris from entering and blocking the new spillway during flood events. The log boom would include features that would allow PG&E personnel to remove debris in a controlled manner after flood flows have ceased. The log boom location is shown on Figure 2-1, *Project Area*.

Cast-in-place reinforced blocks with rock anchors would be installed on either end of the log boom to hold it in place. The right anchor construction site, located just upstream of the new crest structure, would be accessed by the new permanent access road. The left anchor construction site, located just downstream from the Upper Tiger Creek Conduit, would be accessed along the boat launch road connected to Spur 7. The log boom itself would be connected and attached to the anchor blocks using a small crew boat or service boat.

Casting of the anchor blocks would require approximately 4 CY of concrete. Excavation for the log boom anchors would generate approximately 2 CY of spoils, which would be permanently disposed of at the Doakes Ridge staging and spoils site.

2.2.2.4 Lighting

Lighting at the Dam presently consists of seven outdoor lights around the left abutment. These lights are controlled by photocells; they come on at dusk and stay

on until sunrise. As part of the Proposed Project, the existing light fixtures would be replaced and new lighting would be provided along the existing Dam crest, across the new spillway pedestrian footbridge, down to the Dam LLO, and adjacent to the new access road turnaround and parking area to improve safety conditions.

Most of the new and replacement lights would be controlled by a switch and would only be turned on when deemed necessary by an operator. Minimal lights would remain on all night in key areas that provide access to the facility. These lights are needed for safe access and would be controlled by photocells similar to the existing lights. The lights that would remain on all night would be motion-controlled such that they would be dimmed until the motion detectors are activated. Motion sensors would be calibrated to provide enough sensitivity to detect the presence of personnel, but not so sensitive to be activated by small animals under normal conditions.

Area-specific lighting configurations are as follows:

- Existing lighting located at the control building above the Lower Tiger Creek Conduit head gate would be replaced with new lighting but would function the same. These lights would be photocell activated at night.
- Lighting would be added across the crest of the Dam to the new access road turnaround and parking area. These lights would be switch-operated from both ends. Lighting near the switches would be photocell-activated at night in a dimmed condition that would be motion-activated to full strength.
- Additional lighting from the Dam crest to the LLO would be included and would be operated by a switch near the top of the access stairs.

New and replacement lights would have shielding to focus lighting only on the areas that require illumination for safety purposes and would be designed to meet the intent of dark-sky requirements. LED lighting would avoid the use of blue-rich white light lamps and use a correlated color temperature that is no higher than 3,000 Kelvin. The lighting would utilize existing electrical infrastructure and power would be provided from the distribution line feed. In the case of power failure at the site, electricity would be supplied by the existing backup generator.

2.2.3 Vegetation Removal and Timberland Conversion

Most of the proposed improvements, as well as the permanent spoils disposal area, would require the removal of trees, shrubs, and herbaceous vegetation. Trees within 20 to 50 feet of the proposed improvements would be cut down to stumps, while trees and other vegetation within the excavation limits would be completely removed, including roots. A 20- to 30-foot-wide swath of vegetation removal would

also be needed along the temporary access road and temporary trails. Additional trees would be removed in the area between the proposed spillway, Dam, and existing spillway. The areas where tree removals would occur are shown on Figure 2-4. *Timber Harvest and Timberland Conversion Areas*.

Tree removal (logging) activities would be conducted in a manner consistent with a THP (described in Section 1.5.6 *California Forest Practice Act of 1973*), which would ensure that logging activities are in compliance with California's FPRs and which must be approved by CAL FIRE. In general, trees may be cut down (or "felled") by hand (using chainsaws) or by machine (feller-bunchers). It is anticipated that for the Proposed Project, trees would be felled by hand. Trees are typically felled away from environmental resources (e.g., waterbodies or other protected biological resources, cultural resources) to comply with the THP and FPRs.

Once the trees are felled, they are typically moved (or "yarded") to landing areas where they are processed by chainsaws or by log processors (a piece of equipment mounted on a piece of equipment, like an excavator) to remove limbs and cut trees into merchantable lengths accepted at commercial log mills. Under the Proposed Project, felled trees would likely be moved by ground-based equipment called yarders and skidders that utilize cables and pullies to move the trees along "skid trails" to the landings. The tree processing for the Proposed Project is anticipated to be done by hand with chainsaws. Once processed, the logs would be loaded onto log trucks using a wheel or tracked log loader and sent offsite to a wood mill. Log trucks would use Salt Springs Road (Spur 1), Tiger Creek Road, and Spur 10, which are described in Section 2.3.2 Construction Access, as well as the temporary access road and trails described in Section 2.2.2.2 Temporary Access Road, Bridges, and Access Trails.

Trees would only be felled in the tree removal areas shown on Figure 2-4, *Timber Harvest and Timberland Conversion Areas*; however, yarding, skidding, and processing activities could occur anywhere within the THP operations areas, which are also shown on Figure 2-4. Debris associated with the landings or where the trees are felled would be treated as per the THP. The FPRs outline the necessity for treatments based on location and timing. Some common treatments would be piling and burning, lopping, and chipping or grinding. If chipping or grinding occur, the chips may remain onsite and spread or broadcast within the THP operations area, or they may be hauled offsite in chip trucks or vans to a biofuels facility or other permitted waste collection site.

Most of the tree removal areas would be permanently converted to non-timberland use because project features would be constructed in their place, or because trees would not be allowed to regrow around the project features for safety and

maintenance purposes. PG&E has a long-term management objective of preventing trees from falling on PG&E infrastructure. These permanent conversion areas, which total approximately 15 acres, are shown in Figure 2-4. As described in Section 2.2.2.2 *Temporary Access Road, Bridges, and Access Trails*, the temporary access road would be abandoned after construction and trees would be allowed to regrow in its footprint; the temporary access road is therefore not included in the permanent conversion areas. A total of 747 trees, primarily Douglas-fir (*Pseudotsuga menziesii*) and ponderosa pine (*Pinus ponderosa*), would be removed as part of the Proposed Project (718 in the permanent conversion areas and 29 in the temporary access road alignment).

2.2.4 Abandonment of Existing Spillway

The three parts of the existing spillway (bathtub inlet, siphon structure, and chute) would be permanently abandoned once the new spillway is operational. The bathtub inlet would be capped with a steel plate or reinforced concrete slab. Bulkheads would be installed on the upstream side of the three siphon intakes and vent pipes. The existing spillway chute would be abandoned in place, and the concrete canal wall would be extended across the side channel spillway weir and the radial gate would be removed. Abandonment activities would occur during the planned spring 2027 annual outage to allow full access to the spillway approach channel (outlet channel) and to the Lower Tiger Creek Conduit.

2.2.5 Site Cleanup and Demobilization

Following completion of construction activities, the temporarily affected portions of the Project Area would be returned, as much as is reasonably practicable, to its original condition. The temporary access road and trails would be abandoned in place and allowed to recolonize with vegetation, and the entrance to the temporary access road would be gated off as it currently is. The temporary bridges and abutments for the stream crossings on the temporary access road would be removed, although the rock slope protection placed on the banks of the existing plunge pool would be left in place. All equipment and surplus materials would be removed from the Project Area and associated laydown areas. All construction debris and environmentally deleterious material would be removed from the construction area (including staging/parking areas) and disposed of at a permitted waste collection site. Development at the staging areas would remain for future use by PG&E.

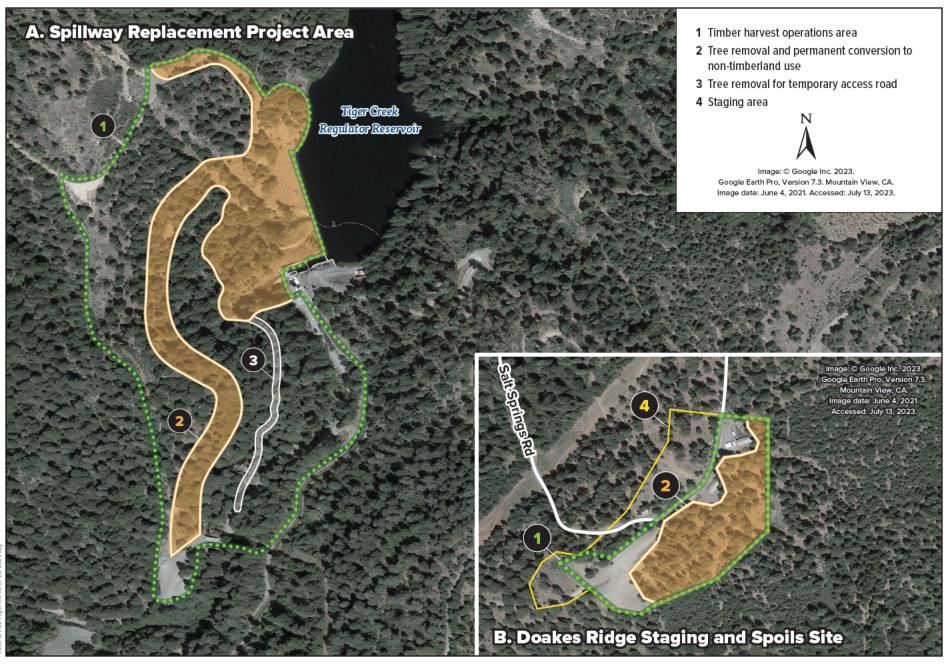




Figure 2-4
Timber Harvest and Timberland Conversion Areas

2.2.6 Operations and Maintenance

Once the Proposed Project is complete, PG&E would continue to operate the Reservoir as was done prior to construction of the Proposed Project. Some minor differences would include:

- Maintenance access for the Dam, spillway, and log boom could occur from either the existing access roads at the south side of the Dam, or the new permanent access road at the north side of the Dam;
- The use of the canal side channel spillway and radial gate would no longer be available; and
- The spill crest elevation would be two feet lower than the old spill crest, which would slightly reduce the operating range of the Reservoir.

No other changes to operations or maintenance are anticipated.

2.3 Staging Areas, Spoils Disposal, and Construction Access

2.3.1 Staging, Laydown, and Spoils Sites

Three areas have been identified for laydown, staging, and/or spoils disposal: Cedar Mill, Doakes Ridge, and Spur 1. These areas would allow for field office staging, crew parking, craft vehicle staging, equipment and material staging, and excavated spoils disposal. Each site is described in more detail in the following sections.

2.3.1.1 Cedar Mill Staging Area

The Cedar Mill property is 8.5 miles from the Dam site and is a privately owned parcel immediately adjacent to SR 88. PG&E is in the process of purchasing this property or leasing it for use for the Proposed Project. The portion of the site planned for use contains approximately 4 acres of previously developed space at the front of the property, most of which is flat. The Cedar Mill property has cover structures and multiple concrete pads from previous enterprises. The Cedar Mill property has distribution power, but no utilities are anticipated for use at this site for project purposes. The property is mostly fenced and includes a lockable gate at the highway entrance and a substantial amount of pavement in the driveway and building areas. No additional development would be required to use this site for project staging. The Cedar Mill property could be used for staging activities including material staging, crew and craft vehicle parking, and equipment parts dropoff and maintenance.

2.3.1.2 Doakes Ridge Staging and Spoils Site

The Doakes Ridge staging and spoils site is located one mile past the Dam site on Salt Springs Road. Existing PG&E buildings and laydown areas for local maintenance crews are located at this site. The total area of the Doakes Ridge staging and spoils site is approximately 10 acres, and the site is gently sloping and heavily vegetated except in select areas. Distribution power is available at the site from a pole transformer near one of the buildings. The buildings have open and lockable shelter, and one building is surrounded by high-security fencing and a lockable gate. This area would be used for staging, laydown, spoils disposal, and temporary construction facilities such as field offices and storage containers.

The area south of Salt Springs Road (approximately 6 acres) would be the designated location for the permanent disposal of approximately 35,000 CY of spoils generated by construction of the Proposed Project. The extent of the spoils disposal area is shown on Figure 2-1, *Project Area*. Trees would be removed in this area as part of vegetation removal activities, and the ground surface would be graded to receive spoils. The spoils would be transported to Doakes Ridge from the construction areas for the spillway and associated features in off-road and/or highway dump trucks. The spoils would be spread out, compacted, and graded in a manner that would allow the area to be useable in the future.

2.3.1.3 Spur 1 Staging Area

The Spur 1 staging area is located at the intersection of Tiger Creek Road and Salt Springs Road (also called Spur 1), and at the south end of the proposed permanent access road (see Figure 2-1, *Project Area*). This staging area is also close to the entrance to the temporary access road. The Spur 1 staging area is small, relatively flat, and previously developed but some grading may be required to fully use the area. The Spur 1 staging area would be used as the location for a mobile batch plant (described below) and could also be used for additional laydown and staging activities.

Batch Plant

A mobile batch plant would be located at the Spur 1 staging area to mix concrete for spillway construction activities. Raw materials (cement, aggregate, admixtures, and water) would be imported and stored at the site. Hoppers, conveyors, and mixers would proportion these materials into batches of concrete that would be dumped into mixer trucks and delivered to the spillway construction site. A laboratory for testing the materials and batched concrete would also be established on site.

The mobile batch plant would require most of the Spur 1 staging area for batch plant equipment and material stockpiles approximately 12 feet high. The batch plant is expected to operate approximately three days per week for up to six hours per day from November 2025 to February 2027. During this period, there may be some standby days or weeks when the batch plant does not operate due to weather restrictions or when no concrete placement is occurring at the spillway construction site. Batch plant operations would typically begin at 8:00 a.m. but could start as early as 7:00 a.m. Peak production would result in approximately 200 CY of concrete per day. All-terrain mixer vehicles would travel from the batch plant to the construction site as needed.

2.3.2 Construction Access

The two main access roads lead to the construction and staging areas near the Reservoir are Tiger Creek Road and Salt Springs Road (also called Spur 1). One or both roads would be used for primary access to the spillway construction site, though the condition of Spur 1 makes it a more preferable access route for haul trucks. Some additional local roads would be used to access different areas around the Dam site, including Spur 7, Spur 10, and the boat launch road. These access roads are shown in Figure 2-5, *Access Roads*. No road improvements are proposed for any of the existing access roads; however, minor grading and brushing (trimming of encroaching vegetation) within the existing road limits of Spur 10 may be required.

Both on- and off-road vehicles would be used during construction to import and export materials. Due to terrain conditions in the Project Area and the winding and narrow access roads, off-road vehicles may be used for moving materials around the site and to/from the Doakes Ridge staging and spoils site and Spur 1 staging area. Highway vehicles would be required to import materials from suppliers and would be delivered to the staging areas for stockpiling.

2.4 Construction Schedule

It is anticipated that construction work would begin in July 2025, and the proposed construction schedule is presented in Table 2-1. The dates shown in Table 2-1 are approximate and may change due to permit approvals, weather, or other circumstances. Due to the amount of work and remoteness of the site, it is anticipated that construction activities would take place six days per week (Monday through Saturday) from 7:00 a.m. to 5:30 p.m. During winter months (from approximately December 1 through March 31), it is anticipated that work would slow to a five-day-per-week schedule.

Table 2-1. Tiger Creek Regulator Dam Spillway Replacement Project Estimated Construction Schedule

| | Approximate | Approximate |
|---|-------------|-------------|
| Project Element/Phase | Start Date | End Date |
| Mobilization and Access Development | 7/8/2025 | 11/16/2025 |
| Vegetation Removal | 7/8/2025 | 8/17/2025 |
| Mobilization | 8/5/2025 | 8/21/2025 |
| Laydown Area Development | 8/22/2025 | 8/28/2025 |
| Permanent and Temporary Access Road | 8/22/2025 | 11/16/2025 |
| Construction, Temporary Bridge Installation, and Temporary Trail Construction | | |
| Spillway Chute and Flip Bucket | 9/7/2025 | 5/19/2026 |
| Excavation, Subgrade Preparation, and Rock Anchor Installation | 9/7/2025 | 11/9/2025 |
| Form and Pour Concrete | 11/16/2025 | 4/25/2026 |
| Drains, Cleanouts, and Backfill | 4/28/2026 | 5/19/2026 |
| Cofferdam | 11/16/2025 | 4/18/2026 |
| Mass Concrete Placement | 11/16/2025 | 12/20/2025 |
| Excavate Cofferdam | 3/18/2026 | 3/26/2026 |
| Place Piles, Sheets, and Concrete | 3/27/2026 | 4/18/2026 |
| Place Trench Cutoff Concrete 1 | 3/31/2026 | 3/31/2026 |
| Place Trench Cutoff Concrete 2 | 4/7/2026 | 4/7/2026 |
| Place Trench Cutoff Concrete 3 | 4/14/2026 | 4/14/2026 |
| Crest Structure | 4/21/2026 | 10/24/2026 |
| Excavation, Subgrade Preparation, and Rock Anchor Installation | 4/21/2026 | 5/29/2026 |
| Form and Pour Concrete | 5/30/2026 | 10/24/2026 |
| Dam Notch and Tie-In Chute | 10/25/2026 | 1/19/2027 |
| Demolition | 10/25/2026 | 11/5/2026 |
| Excavation, Subgrade Preparation, and Rock Anchor Installation | 11/6/2026 | 11/20/2026 |
| Form and pour concrete | 11/21/2026 | 12/29/2026 |
| Install footbridge | 12/30/2026 | 1/19/2027 |
| Plunge Pool | 8/5/2026 | 9/15/2026 |
| Flow Bypass | 8/5/2026 | 8/11/2026 |
| Excavation | 8/12/2026 | 9/9/2026 |
| Slope Protection | 9/10/2026 | 9/15/2026 |
| • | | |

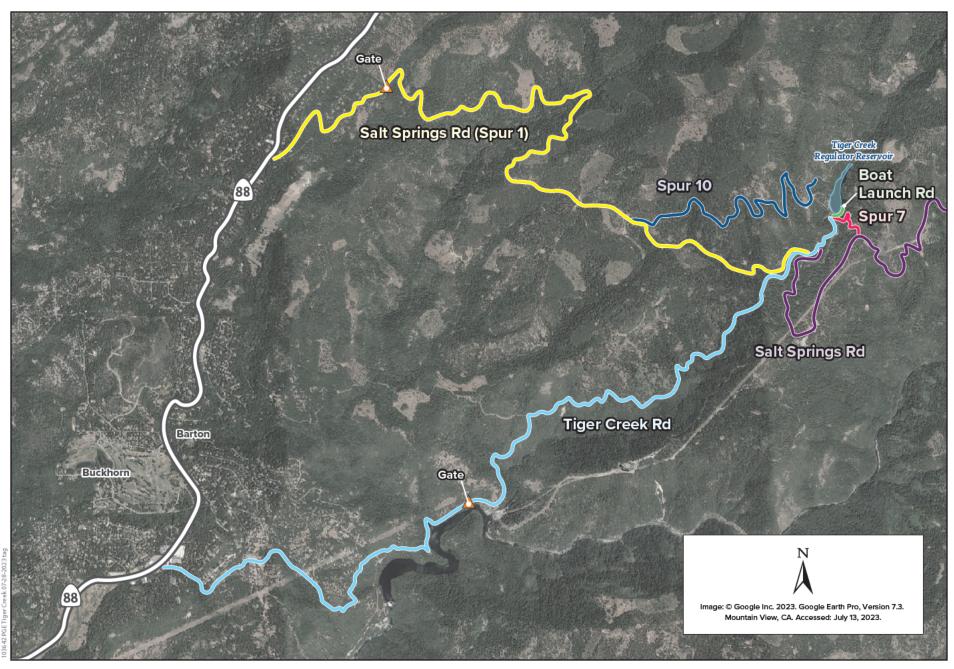




Figure 2-5 Access Roads

| Project Element/Phase | Approximate Start Date | Approximate End Date |
|---|---------------------------|-------------------------|
| Remaining Work Scope | 12/29/2026 | 2/24/2027 |
| Cofferdam Removal (trimmed down to crest elevation) | 1/9/2027 | 1/16/2027 |
| Lighting (electrical) | 1/19/2027 | 2/10/2027 |
| Log Boom Installation | 12/29/2026 | 1/9/2027 |
| Site Restoration | 1/16/2027 | 2/3/2027 |
| Demobilization | 2/11/2027 | 2/24/2027 |
| Spillway Abandonment and Cofferdam Removal | 4/9/2027 | 5/6/2027 |
| Remove cofferdam | 4/9/2027 | 4/20/2027 |
| Canal side channel | 4/9/2027 | 4/22/2027 |
| Cover bathtub inlet and siphons | 4/23/2027 | 5/6/2027 |

2.5 Construction Equipment and Vehicle Use

2.5.1 Construction Equipment

Table 2-2 lists the type and estimated quantities of equipment expected to be used onsite during construction of the Proposed Project.

Table 2-2. Construction Phases and Onsite Equipment Use

| - | | | | | |
|-----------------|---------------------------------------|--------|----------|--------|-----------|
| | | Fuel | Quantity | Hours/ | Onsite |
| Project Phase | Equipment Type | Type | per Day | Day | Miles/Day |
| Mobilization an | d Access Development | | | | |
| Tree Removal | CAT 325DFM Tracked Log Loader | Diesel | 1 | 8 | - |
| | CAT 950H Rubber Tire Loader | Diesel | 1 | 6 | - |
| | CAT 545C Rubber Tire Skid w/ Winch | Diesel | 1 | 8 | - |
| | Timbco 425 Feller- Buncher | Diesel | 1 | 8 | - |
| | John Deere 2654G Log Processor | Diesel | 1 | 8 | - |
| | CAT 527 Tracked Skidder | Diesel | 1 | 6 | - |

| Project Phase | Equipment Type | Fuel Type | Quantity per Day | Hours/ Day | Onsite Miles/Day |
|--------------------------|-----------------------------------|--------------|------------------|---------------|---------------------|
| | Peterson Pacific 4310B Chipper | Diesel | 1 | 6 | - |
| | Chainsaw | Gas | 3 | 8 | - |
| | 4,000 Gallon Water Truck | Diesel | 1 | 6 | 30 |
| | Ford F-250 | Gas | 3 | 1.5 | 22.5 |
| Laydown Area | CAT D6 Dozer | Diesel | 1 | 8 | - |
| Development | CAT TL 1255 Telehandler | Diesel | 1 | 6 | - |
| | CAT 950 Loader | Diesel | 1 | 6 | - |
| | 4,000 Gallon Water Truck | Diesel | 1 | 8 | 40 |
| | Ford F250 | Gas | 1 | 1.5 | 7.5 |
| Access Road | CAT D6 Dozer | Diesel | 1 | 8 | - |
| Construction | CAT 735 Off-Highway Truck | Diesel | 4 | 9 | - |
| | CAT 349 Excavator | Diesel | 1 | 9 | - |
| | CAT CP86 Roller Compactor | Diesel | 1 | 10 | - |
| | 4,000 Gallon Water Truck | Diesel | 1 | 10 | 50 |
| | Ford F250 | Gas | 1 | 2 | 10 |
| Spillway Chute | and Flip Bucket | | | | |
| Excavation, | CAT D6 Dozer | Diesel | 1 | 8 | - |
| Subgrade Preparation, | CAT 735 Off-Highway Truck | Diesel | 4 | 9 | - |
| and Rock Anchor | CAT 349 Excavator | Diesel | 1 | 9 | - |
| Installation | CAT 297/299 Skid Steer | Diesel | 1 | 5 | - |
| | Sandvick Ranger 600R Drill | Diesel | 1 | 5 | - |
| | 4,000 Gallon Water Truck | Diesel | 1 | 10 | 50 |
| | Ford F250 | Gas | 1 | 2 | 10 |
| | Concrete Pump | Diesel | 1 | 5 | - |

| Duningt Division | Environment T | Fuel | Quantity | Hours/ | Onsite |
|-------------------------------|--------------------------------------|--------|----------|--------|-----------|
| Project Phase | Equipment Type | Туре | per Day | Day | Miles/Day |
| Form and Pour Concrete | Model 375 Portable Air Compressor | Diesel | 1 | 5 | - |
| | Crane Crawler 150 Ton | Diesel | 1 | 6 | - |
| | Generator 45-55 kW (for light tower) | Diesel | 1 | 10 | - |
| | CAT 297/299 Skid Steer | Diesel | 1 | 5 | - |
| | Ford F250 | Gas | 1 | 2 | 10 |
| | Ford F450 Flat Bed | Diesel | 1 | 8 | 40 |
| Cofferdam | | | | | |
| Mass Concrete Placement, | CAT TL 1255 Telehandler | Diesel | 1 | 6 | - |
| Excavate | CAT 336 Excavator | Diesel | 1 | 5 | - |
| Cofferdam, Place Piles and | Crane Crawler 150 Ton | Diesel | 1 | 6 | - |
| Sheets | Ford F250 | Gas | 1 | 2 | 10 |
| Chloolo | Ford F550 | Diesel | 1 | 2 | 10 |
| Trench Cutoff | Concrete Pump | Diesel | 1 | 8 | - |
| Concrete Placement | CAT 297/299 Skid Steer | Diesel | 1 | 5 | - |
| (Limited to 3 | Generator 45-55 kW | Diesel | 1 | 10 | - |
| Days) | CAT TL 1255 Telehandler | Diesel | 1 | 6 | - |
| | Ford F250 | Gas | 1 | 2 | 10 |
| Crest Structure | | | | | |
| Excavation, | CAT D6 Dozer | Diesel | 1 | 8 | - |
| Subgrade Preparation, | CAT 735 Off-Highway Truck | Diesel | 4 | 9 | - |
| and Rock Anchor | CAT 349 Excavator | Diesel | 1 | 9 | - |
| Installation | Sandvick Ranger 600R Drill | Diesel | 1 | 5 | - |
| | 4,000 Gallon Water Truck | Diesel | 1 | 10 | 50 |
| | Ford F250 | Gas | 1 | 2 | 10 |
| Form and Pour | Concrete Pump | Diesel | 1 | 5 | - |
| Concrete | Model 375 Portable Air Compressor | Diesel | 1 | 5 | - |

| | | | 0 | 11 | O := -11 : |
|-------------------------|--------------------------------------|--------------|------------------|---------------|---------------------|
| Project Phase | Equipment Type | Fuel Type | Quantity per Day | Hours/ Day | Onsite Miles/Day |
| 1 Toject i Hase | Crane Crawler 150 Ton | Diesel | 1 | 6 | - |
| | Generator 45-55 kW | Diesel | 1 | 10 | _ |
| | (for light tower) | Diosci | ' | 10 | |
| | CAT 297/299 Skid Steer | Diesel | 1 | 5 | - |
| | Ford F250 | Gas | 1 | 2 | 10 |
| | Ford F450 Flat Bed | Diesel | 1 | 2 | 10 |
| Dam Notch and | Tie-In Chute | | | | |
| Demolition, | CAT 336 Excavator | Diesel | 1 | 10 | - |
| Excavation, | CAT 349 Excavator | Diesel | 1 | 10 | - |
| Subgrade Prep., and | Hydraulic Breaker for Excavator | N/A | 1 | 10 | - |
| Rock Anchors | Concrete Saw | Gas | 2 | 8 | - |
| | CAT 735 Off-Highway Truck | Diesel | 1 | 3 | - |
| | Ford F250 | Gas | 1 | 2 | 10 |
| Form and Pour | Concrete Pump | Diesel | 1 | 2 | - |
| Concrete; Footbridge | Model 375 Portable Air Compressor | Diesel | 1 | 5 | - |
| Installation | Crane Crawler 150 Ton | Diesel | 1 | 6 | - |
| | Generator 45-55 kW (for light tower) | Diesel | 1 | 10 | - |
| | CAT 297/299 Skid Steer | Diesel | 1 | 5 | - |
| | Ford F250 | Gas | 1 | 2 | 10 |
| | Ford F450 Flat Bed | Diesel | 1 | 2 | 10 |
| Plunge Pool | | | | | |
| Flow Bypass | Generator 45-55 kW | Diesel | 1 | 24 | - |
| Excavation | 55KW generator (for bypass pumps) | Diesel | 1 | 10 | - |
| | CAT D6 Dozer | Diesel | 1 | 8 | - |
| | CAT 735 Off-Highway Truck | Diesel | 2 | 9 | - |
| | CAT 349 Excavator | Diesel | 1 | 9 | - |
| | 4,000 Gallon Water Truck | Diesel | 1 | 10 | 50 |

| | | Fuel | Ougntity | Hours/ | Onsite |
|---------------------------------|-------------------------------------|--------------|------------------|--------|-----------|
| Project Phase | Equipment Type | Fuel Type | Quantity per Day | Day | Miles/Day |
| Slope Protection | Sandvick Ranger 600R Drill | Diesel | 1 | 5 | - |
| | Putzmeister TK 20 Shotcrete Pump | Diesel | 1 | 5 | - |
| | Ford F250 | Gas | 1 | 2 | 10 |
| Remaining Wor | k Scope | | | | |
| Cofferdam Removal (to | CAT TL 1255 Telehandler | Diesel | 1 | 6 | - |
| crest elevation) | Crane Crawler 150 Ton | Diesel | 1 | 6 | - |
| Lighting | CAT TL 1255 Telehandler | Diesel | 1 | 6 | - |
| | Ford F250 | Gas | 1 | 2.5 | 12.5 |
| Log Boom | CAT 336 Excavator | Diesel | 1 | 8 | - |
| | Crew Boat | Gas | 1 | 8 | - |
| Site Restoration | CAT 297/299 Skid Steer | Diesel | 1 | 10 | - |
| and | CAT 336 Excavator | Diesel | 1 | 5 | - |
| Demobilization | CAT TL 1255 Telehandler | Diesel | 1 | 6 | - |
| | Ford F250 | Gas | 1 | 2.5 | 12.5 |
| | 4,000 Gallon Water Truck | Diesel | 1 | 10 | 50 |
| | Ford F450 Flat Bed | Diesel | 1 | 2 | 10 |
| Spillway Aband | onment and Cofferdam | Remova | l | | |
| Remove Cofferdam | CAT TL 1255 Telehandler | Diesel | 1 | 6 | - |
| | Crane Crawler 150 Ton | Diesel | 1 | 6 | - |
| | Ford F250 | Gas | 1 | 2 | 10 |
| Canal Side | Crane RT Hydraulic 90 | Diesel | 1 | 8 | - |
| Channel, Cover Bathtub Inlet | CAT TL 1255 Telehandler | Diesel | 1 | 6 | - |
| and Siphons | Concrete Pump | Diesel | 1 | 5 | - |
| | Ford F250 | Gas | 1 | 2 | 10 |

2.5.2 On-Road Vehicle Use

For the purposes of this IS/MND, it is assumed that all haul truck trips would originate in the greater Sacramento area, traveling east on SR 88. Trucks would enter and exit the Cedar Mill staging area directly from SR 88. Trucks would access the Spur 1 staging area from SR 88 using either Spur 1 or Tiger Creek Road. Worker and vendor trips are assumed to originate from within Amador County. Table 2-3 lists the maximum number of anticipated one-way worker, vendor, and haul truck trips for each phase of the Proposed Project.

Table 2-3. Construction Phases and On-Road Vehicle Use

| | Maxii | mum Daily Vehicl | e Trips |
|---|-------------------|--|---------------------------------|
| | One-Way Worker | One-Way Vendor Trips (Light/Med. | One-Way Haul Trips (Heavy |
| Project Phase | Trips | Trucks) | Trucks) |
| Mobilization and Access Development | 20 | 10 | 6 |
| Tree Removal | - | - | 20 |
| Material Transport to Batch Plant at Spur 1 ¹ | - | - | 12 |
| Spillway Chute and Flip Bucket Construction | 40 | 8 | 4 |
| Cofferdam Construction | 12 | 4 | 4 |
| Crest Structure Construction | 40 | 8 | 4 |
| Dam Notch and Tie-In Chute | 12 | 2 | 4 |
| Plunge Pool Construction | 12 | 8 | 4 |
| Concrete Transport from Batch Plant to Site ^{2, 3} | - | - | 30 |
| Remaining Work Scope | 20 | 6 | 4 |
| Spillway Abandonment and Cofferdam Removal | 12 | 4 | 4 |

¹ 300 total loads of material.

² 450 loads of concrete total, to be hauled during concrete placement activities only.

³ Concrete haul trips are expected to be sporadic (i.e., haul 10 loads one day, none the next 2 days) and to average approximately 6 loads per day (12 one-way trips).

Environmental Setting and Impacts

3.1 Introduction

This chapter provides an overview of the existing physical environment and regulatory requirements for each of the resources that may be affected by the Proposed Project. For each resource, there is a discussion of the environmental setting, followed by an evaluation of the potential environmental impacts on the resource. This chapter is organized by resource topic and corresponds to the Environmental Checklist Form of the CEQA Guidelines. A complete environmental checklist from Appendix G of the CEQA Guidelines is provided in Appendix A, *Environmental Checklist*.

The mitigation measures specified in the impact analysis would either avoid potential adverse impacts completely or reduce the potential impacts to a less-than-significant level. The State Water Board would adopt a mitigation monitoring and reporting program at the time it adopts a mitigated negative declaration. The purpose of the program is to ensure that the mitigation measures adopted as part of the project approval would be implemented when the Proposed Project is constructed.

The following terminology is used to describe the level of significance of potential impacts:

- A finding of no impact is appropriate if the analysis concludes that the Proposed Project would not potentially affect the particular resource area in any adverse way;
- A potential impact is considered less than significant if the analysis concludes that the Proposed Project would cause no substantial adverse change to the environment and requires no mitigation;
- A potential impact is considered less than significant with mitigation incorporated if the analysis concludes that the Proposed Project would cause no substantial adverse change to the environment with the inclusion of mitigation measures; and
- A potential impact is considered significant and unavoidable if the analysis concludes that the Proposed Project could have a substantial adverse effect on the environment, and mitigation to a less-than-significant level of impact is not feasible.

If a potential impact is determined to be significant and unavoidable, an environmental impact report would be prepared pursuant to section 15063 of the CEQA Guidelines.

3.2 Resources Upon Which the Proposed Project Would Have No Impact

This section discusses the resources for which there would be no potential impact and presents the supporting information for that finding.

3.2.1 Mineral Resources

Potential impacts of the Proposed Project related to mineral resources are discussed in the context of the CEQA Guidelines Appendix G checklist. Checklist section XII, *Mineral Resources*, asks whether the Proposed Project would result in any of the following conditions.

- a. Result in the loss of availability of a known mineral resource that would be of value to the region and the residents of the state?
- b. Result in the loss of availability of a locally important mineral resource recovery site delineated on a local general plan, specific plan, or other land use plan?

No Impact. There are several types of mineral resources in Amador County including, but not limited to, clay, limestone, copper, gold, sand, and zinc (Amador County 2016). Refractory sand, clay, lode gold, talc, lignite, and aggregate materials are actively mined in Amador County (Amador County 2016). These mineral resources are located in the western portion of Amador County and lie to the west and south of the Project Area. Therefore, the Proposed Project would not result in loss of or make unavailable state or locally important mineral resources. There would be no impact.

3.2.2 Population and Housing

Potential impacts of the Proposed Project related to population and housing are discussed in the context of the CEQA Guidelines Appendix G checklist. Checklist section XIV, *Population and Housing*, asks whether the Proposed Project would result in any of the following conditions.

a. Induce substantial unplanned population growth in an area, either directly (e.g., by proposing new homes and businesses) or indirectly (e.g., through extension of roads or other infrastructure)?

No Impact. The Proposed Project would not involve construction of any new housing or businesses. The only infrastructure or roads that would be constructed would be the spillway structure and affiliated components and a new access road to service the new spillway. The lands surrounding the Reservoir are zoned as "Timberland Preserve", and the Project Area is under a conservation easement that restricts development of the land. Therefore, no substantial unplanned population growth, either directly or indirectly, would result from Proposed Project implementation. There would be no impact.

b. Displace a substantial number of existing people or housing necessitating the construction of replacement housing elsewhere?

No Impact. The Proposed Project would not displace existing housing or residents because there are no homes within the Project Area; therefore, the construction of replacement housing would not be required. There would be no impact.

3.2.3 Public Services

Potential impacts of the Proposed Project related to public services are discussed in the context of the CEQA Guidelines Appendix G checklist. Checklist section XV, *Public Services*, asks whether the Proposed Project would result in the following condition.

a. Result in substantial adverse physical impacts associated with the provision of new or physically altered governmental facilities or a need for new or physically altered governmental facilities, the construction of which could cause significant environmental impacts, in order to maintain acceptable service ratios, response times, or other performance objectives for any of the following public services: fire protection; police protection; schools; parks; or other public facilities?

No Impact. Public services in and around the Project Area consist of law enforcement, fire protection, and emergency medical assistance. The Reservoir is used by the public when the gates are opened (the Dam and Reservoir shoreline for fishing and the roadways for cycling); however, there are no formal recreation facilities or parks near the Project Area, and no swimming or boating is allowed in the Reservoir. Public access to the Project Area would be closed during construction.

The Proposed Project would construct a new spillway and implement other Dam improvements and would not result in substantial adverse physical impacts associated with the provision of new or physically altered governmental facilities or a need for new or physically altered governmental facilities. Further, the Proposed Project would not result in any increase in the population or an increased demand for public services, including fire or police protection, or public facilities such as schools and parks.

Therefore, the Proposed Project would not affect public services. There would be no impact.

3.2.4 Recreation

Potential impacts of the Proposed Project related to recreation are discussed in the context of the CEQA Guidelines Appendix G checklist. Checklist section XVI, *Recreation*, asks whether the Proposed Project would result in any of the following conditions.

- a. Increase the use of existing neighborhood and regional parks or other recreational facilities such that substantial physical deterioration of the facility would occur or be accelerated?
- b. Include recreational facilities or require the construction or expansion of recreational facilities that might have an adverse physical effect on the environment?

No Impact. The Proposed Project comprises construction of a new spillway near the Dam's right abutment, a permanent access road, new log boom, lighting, and abandonment of the existing spillway. The Proposed Project would not construct or expand any recreational facilities, and as described in Section 2.2.1.3 *Plunge Pool*, PG&E would maintain all Tiger Creek instream flow requirements downstream of the Dam throughout construction. The Proposed Project would therefore not affect any recreational uses downstream of the Project Area. Information about the instream flow requirements can be found in Section 3.3 *Hydrology and Water Quality*.

The Proposed Project would not increase the use of existing neighborhood or regional parks or other recreational facilities. PG&E has no license requirement to provide public access or recreational opportunities at the Reservoir and Dam, and has the authority to control access to the Project Area with locked gates. While the public is allowed to fish from the Dam and Reservoir shoreline when deemed safe by PG&E, there are no formal recreation facilities in the Project Area. No boating or contact with the water is allowed at the Reservoir. Camping and fires are also prohibited. Because there are no formal facilities, no substantial physical

deterioration of any recreational facilities would occur or be accelerated as a result of the Proposed Project. There would be no impact.

3.2.5 Utilities and Service Systems

- a. Require or result in the relocation or construction of new or expanded water, wastewater treatment, stormwater drainage, electric power, natural gas, or telecommunications facilities, the construction or relocation of which could cause significant environmental effects?
- b. Have sufficient water supplies available to serve the project and reasonably foreseeable future development during normal, dry, and multiple dry years?
- c. Result in a determination by the wastewater treatment provider that serves or may serve the project that it has adequate capacity to serve the project's projected demand in addition to the provider's existing commitments?

No Impact. The Proposed Project comprises construction of a new spillway near the Dam's right abutment, a permanent access road, new log boom, lighting, and abandonment of the existing spillway. Neither water nor wastewater treatment would be part of the Proposed Project because it does not involve the development of infrastructure needing water or wastewater treatment. The Proposed Project would require the construction of a drainage ditch along the inboard side of the new permanent access road, and this ditch is analyzed as part of the Proposed Project in this IS/MND. The drainage ditch would not connect to any municipal stormwater drainage networks and no feature of the Proposed Project would require the relocation or expansion of existing stormwater drainage facilities. Although a water supply during construction would be required to implement Mitigation Measure AQ-MM-1: Implement Fugitive Dust Abatement Measures (described in Section 3.6 Air Quality), to control dust on roads, in the laydown areas, and during excavation activities (if excessive dust is created), this water supply requirement would be temporary and sufficient water supplies would be available for this purpose. No natural gas, telecommunications, or electric power facilities would be constructed or relocated as part of implementation of the Proposed Project. Cofferdam construction and removal, as well as the abandonment of the existing spillway, would occur during regularly scheduled power generation outages at the Tiger Creek Powerhouse in 2026 and 2027. The temporary power outages allow maintenance and construction personnel to safely work on the generators at the powerhouse while they are de-energized. These brief disruptions would occur regardless of Proposed Project construction and do not require construction of additional utilities. There would be no impact.

- d. Generate solid waste in excess of state or local standards, or in excess of the capacity of local infrastructure, or otherwise impair the attainment of solid waste reduction goals?
- e. Comply with federal, state, and local management and reduction statutes and regulations related to solid waste?

No Impact. Construction of the Proposed Project would generate soil and rock spoils, which would be permanently disposed of at the Doakes Ridge staging and spoils site. All other construction debris would be removed from the Project Area and disposed of at a permitted waste collection site with sufficient capacity to accept the debris and in accordance with federal, state, and local management and reduction statutes and regulations related to solid waste. There would be no impact.

3.3 Hydrology and Water Quality

3.3.1 Introduction

This section analyzes the Proposed Project's potential impacts related to hydrology and water quality. It describes existing conditions in the Area of Analysis and summarizes the overall regulatory framework for hydrology and water quality, and it analyzes the potential for the Proposed Project to affect these resources.

3.3.2 Area of Analysis

The Area of Analysis for hydrology and water quality is the same as the Project Area, with a focus on the Dam, the spillway, and Tiger Creek downstream of the spillway.

3.3.3 Existing Conditions

This section discusses the existing conditions related to hydrology and water quality in the Area of Analysis. The Dam is at the Reservoir on Tiger Creek, approximately 24 miles northeast of the city of Jackson in Amador County, California (Figure 1-1, *Project Location*). The elevation of the Dam is approximately 3,500 feet above mean sea level (MSL).

3.3.3.1 Regional Setting

The Area of Analysis is within the San Joaquin River Hydrologic Region, which encompasses an area of approximately 9.7 million acres (15,200 square miles) and includes all of Calaveras, Tuolumne, Mariposa, Madera, San Joaquin, and Stanislaus Counties; most of Merced and Amador Counties; and parts of Alpine, Fresno, Alameda, Contra Costa, Sacramento, El Dorado, and San Benito Counties (California Department of Water Resources 2003:169). The Area of Analysis is within the Upper Mokelumne Watershed (United States Geological Survey Hydrologic Unit Code No. 18040012) (United States Geological Survey 2020).

3.3.3.2 Surface Water Hydrology

Reservoir Description

The Dam is located on Tiger Creek, a tributary to the North Fork of the Mokelumne River thence the San Joaquin River. There are no hydroelectric facilities directly related to the Dam; rather, it is operated primarily for seasonal storage and

regulation of water for power generation farther downstream. The Reservoir has a design storage capacity of approximately 360 acre-feet at current normal maximum reservoir level. PG&E typically operates the Reservoir within the upper 10 feet of storage capacity, and controls inflow and outflow for power generation downstream at the Tiger Creek Powerhouse. Elevations in the Area of Analysis range from approximately 3,500 feet above MSL at the Reservoir to 5,700 feet above MSL (at Armstrong Hill near Ham's Station on SR 88) in the surrounding foothills.

The Dam is a 110-foot-high, 486-foot-long concrete slab-and-buttress structure with a crest width of 5 feet. The upstream slab has a 45-degree slope. There are 23 buttresses with a typical center-to-center spacing of 18 feet and a maximum upstream/downstream foundation base width of 125 feet. The buttresses are founded on phyllite with some sandstone. The Dam has an existing spillway structure at its left abutment that includes the reinforced concrete features shown on Figure 1-2, *Existing Spillway Details*.

Reservoir Operations

In addition to inflow from the Tiger Creek watershed (which has a drainage area of approximately 14 square miles and includes the Sweetwater Creek, upper Tiger Creek, and Little Tiger Creek drainages), the Reservoir is fed by diversion from the Mokelumne River at the Salt Springs Powerhouse tailrace via the Upper Tiger Creek Conduit, which discharges into the Reservoir approximately 500 feet upstream of the Dam along the left shoreline (facing downstream).

PG&E releases water from the Reservoir into Tiger Creek through a LLO at the base of the Dam, which consists of a 30-inch-diameter pipe with a manually operated slide gate at the upstream end of the pipe and a manually operated gate valve at the downstream end of the pipe. The LLO pipe has a 16-inch-diameter bypass line for instream flow releases that is controlled by a remotely operated knife-gate valve. The instream flow release valve is adjusted automatically based on flows measured at the M-76 weir downstream of the Dam. Tiger Creek joins the North Fork Mokelumne River approximately four miles downstream of the Dam near the Tiger Creek Powerhouse where it flows into the Tiger Creek Afterbay. PG&E also releases water from the Reservoir into the Lower Tiger Creek Conduit, which feeds into the Tiger Creek Forebay approximately three miles downstream of the Dam and provides water for power generation at the Tiger Creek Powerhouse.

3.3.3.3 Tiger Creek Channel Characteristics

Approximately 1,850 feet of Tiger Creek downstream of the Dam was visually assessed by a geomorphologist with an expertise in hydrology in April 2023. The

purpose of the visual assessment was to classify the channel type(s) (per the methodology of Buffington and Montgomery [2022]) and the degree of channel stability (per the methodology of Cluer and Thorne [2013]) to aid in the analysis of potential impacts.

On the basis of the results of the geomorphic assessment, Tiger Creek downstream of the Dam is considered a "transport segment", composed of morphologically resilient, supply-limited reaches (e.g., bedrock, cascade, step-pool) that rapidly convey increased sediment and water inputs. The channel in the Area of Analysis is dominated by cascade (predominantly bedrock-composed), step-run (a sequence of runs separated by short riffle steps where substrate is usually cobble- and boulder-dominated) step-pool, and plane-bed (smooth channel bed with limited complexity) morphologies. These findings correlate with the initial observations of this segment of Tiger Creek being classified as a transport segment, per the April 2023 visual assessment.

A stream evolution model (SEM) was applied to Tiger Creek downstream of the Dam to provide a template for understanding geomorphic responses and processes (and overall present-day and predicted future channel stability) within the immediate watershed. According to the SEM, the channel in the Area of Analysis is most likely a Stage 1 sinuous single thread channel, where the channel form and close connectivity to the floodplain and groundwater areas generally equate to a high resilience to disturbance such as flooding and introduction of excess sediment.

Streamflows on Tiger Creek downstream of the Dam are measured and recorded at the stream gaging station (the M-76 weir) located approximately 180 feet downstream of the Dam face. Streamflow varies seasonally with low flows occurring during late fall and winter, and high flows occurring during spring and early summer when releases from the Reservoir are made.

3.3.3.4 Doakes Ridge Staging and Spoils Site and Cedar Mill Staging Area

No mapped (or surveyed) drainages occur on the Doakes Ridge staging and spoils site, which is located on a ridge approximately 0.8 mile south of the Dam. In the Cedar Mill staging area, however, the headwater channel of Sutter Creek (mapped as South Branch Sutter Creek) runs in a westerly direction through realigned ditches in and west of the staging area. The creek is considered an intermittent waterbody in this location.

3.3.3.5 Federal Emergency Management Agency or Other Flood Mapping Efforts

The only part of the Area of Analysis within a mapped and/or regulated floodplain and/or flood hazard zone is the Cedar Mill staging area along South Branch Sutter Creek, which is mapped within a 100-year floodplain (Zone A¹) as designated by the Federal Emergency Management Agency (California Department of Water Resources 2024). The rest of the Area of Analysis is not within any mapped flood hazard zones (California Department of Water Resources 2024). Black & Veatch two-dimensional modeling confirms that the Spur 1 staging area is not subject to inundation up to and including the 200-year event (Lecina pers. comm.).

3.3.3.6 Federal Energy Regulatory Commission and United States Forest Service Operating Conditions

On October 11, 2001, FERC issued a new license for the Mokelumne Project No. 137-CA. The FERC license included the following United States Forest Service conditions requiring minimum instream flows downstream of the Dam.

The Licensee shall provide a continuous 48-hour pulse flow event of 35 cfs in Tiger Creek below Tiger Creek Regulator Dam in each of February and March in all water year types.

In addition, Table 3.3-1 lists the required instream flows and ramping rates in Tiger Creek downstream of the Dam at the M-76 weir. The flow requirements are the same for all water year types. There are no water control structures and therefore no flow regulations on Tiger Creek upstream of the Reservoir.

¹ Area subject to 1% annual chance flood; no Base Flood Elevations determined.

Table 3.3-1. Monthly Instream Flow Requirements Downstream of the Tiger Creek Regulator Dam

| Month | Oct | Nov | Dec | Jan | Feb | Mar | Apr | May | Jun | Jul | Aug | Sep |
|---------------------------------------|-------|---------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Required Instream Flow (cfs) | 3 | 5 | 5 | 7 | 7 | 12 | 12 | 9 | 5 | 5 | 3 | 3 |
| Ramping I | Rates | (cfs/hr | ·) | | | | | | | | | |
| Ramp Up | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| Ramp Down | 2 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 2 | 2 | 2 | 2 |

Notes: cfs=cubic feet per second; hr=hour

3.3.3.7 Surface Water Quality

The Water Quality Control Plan for the Sacramento River and San Joaquin River Basins (SR/SJR Basin Plan) describes beneficial uses for various waterbodies in the San Joaquin River Hydrologic Region (Central Valley Regional Water Quality Control Board 2019) and establishes numeric and narrative water quality objectives necessary for the protection of those beneficial uses. The Area of Analysis is considered to be located within the "Sources to Pardee Reservoir" waterbody. Table 3.3-2 shows the beneficial uses for this waterbody as listed in the SR/SJR Basin Plan. Table 3.3-3 identifies the numeric and narrative water quality objectives from the SR/SJR Basin Plan that are applicable to the Proposed Project. Section 303(d) of the CWA established the total maximum daily load process to assist in guiding the application of state water quality standards. Section 303(d) requires states to identify streams in which water quality is impaired (i.e., affected by the presence of pollutants or contaminants) and to establish the total maximum daily load, which is the maximum quantity of a particular contaminant that a waterbody can assimilate without experiencing adverse effects. There are no CWA 303(d) listed impairments for the Reservoir, Tiger Creek, upper Mokelumne River, or Sutter Creek based on the 2020–2022 California Integrated Report (State Water Resources Control Board 2023).

Table 3.3-2. Designated Beneficial Uses for Surface Waterbodies in the Proposed Project Vicinity

| Water Body | Designated Beneficial Uses |
|--------------------------------|--|
| Sources to Pardee Reservoir | Municipal and domestic supply; power; contact recreation; canoeing and rafting; other non-contact water recreation; warm and cold freshwater habitat (resident fish); warmwater fish ^a migration; coldwater fish ^b migration and spawning habitat; wildlife habitat. |

Source: Central Valley Regional Water Quality Control Board 2019 (Table 2-1)

Table 3.3-3. Numeric and Narrative Water Quality Objectives for Surface Waterbodies in the Proposed Project Vicinity

| Numeric Water C | Quality Objectives |
|--------------------------|---|
| Bacteria | For waters designated for contact recreation, the fecal coliform concentration based on a minimum of not less than 5 samples for any 30-day period shall not exceed a geometric mean of 200/100 ml, nor shall more than 10 percent of the total number of samples taken during any 30-day period exceed 400/100 ml. |
| Chemical Constituents | Waters shall not contain chemical constituents in concentrations that adversely affect beneficial uses. For water designated for use as domestic or municipal supply, waters shall not contain concentrations of chemical constituents in excess of the maximum contaminant levels specified in Title 22 of the California Code of Regulations. Additionally, water designated for use as domestic or municipal supply shall not contain lead in excess of 0.015 mg/l. |
| Dissolved Oxygen | For surface waterbodies outside the legal boundaries of the Delta, the monthly median of the mean daily dissolved oxygen (DO) concentration shall not fall below 85 percent of saturation in the main water mass, and the 95 percentile concentration shall not fall below 75 percent of saturation. The dissolved oxygen concentrations shall not be reduced below the following minimum levels at any time: • Waters designated WARM 5.0 mg/l • Waters designated COLD 7.0 mg/l |

^a Striped bass, sturgeon, and shad.

^b Salmon and steelhead.

| рН | The pH shall not be depressed below 6.5 nor raised above 8.5, |
|-------------------|--|
| Pesticides | Waters designated for use as domestic or municipal supply shall not contain concentrations of thiobencarb in excess of 1.0 µg/l. |
| Temperature | The natural receiving water temperature of intrastate waters shall not be altered unless it can be demonstrated to the satisfaction of the Regional Water Board that such alteration in temperature does not adversely affect beneficial uses. At no time or place shall the temperature of COLD or WARM intrastate waters be increased more than five degrees Fahrenheit above natural receiving water temperature. |
| Turbidity | Waters shall be free of changes in turbidity that cause nuisance or adversely affect beneficial uses. Increases in turbidity attributable to controllable water quality factors shall not exceed the following limits: |
| | Where natural turbidity is less than one NTU, controllable factors shall not cause downstream turbidity to exceed two NTU. |
| | Where natural turbidity is between one and five NTUs, increases shall not exceed one NTU. |
| | Where natural turbidity is between 5 and 50 NTUs, increases shall not exceed 20 percent. |
| | Where natural turbidity is between 50 and 100 NTUs, increases shall not exceed 10 NTUs. |
| | Where natural turbidity is greater than 100 NTUs, increases shall not exceed 10 percent. |
| Narrative Water Q | uality Objectives |
| Biostimulatory | Water shall not contain biostimulatory substances which |
| Substances | promote aquatic growths in concentrations that cause nuisance or adversely affect beneficial uses. |
| Color | Water shall be free of discoloration that causes nuisance or adversely affects beneficial uses. |
| Floating Material | Water shall not contain floating material in amounts that cause nuisance or adversely affect beneficial uses. |
| Oil and Grease | Waters shall not contain oils, greases, waxes, or other materials in concentrations that cause nuisance, result in a visible film or coating on the surface of the water or on objects in the water, or otherwise adversely affect beneficial uses. |

Pesticides

- No individual pesticide or combination of pesticides shall be present in concentrations that adversely affect beneficial uses.
- Discharges shall not result in pesticide concentrations in bottom sediments or aquatic life that adversely affect beneficial uses.
- Total identifiable persistent chlorinated hydrocarbon pesticides shall not be present in the water column at concentrations detectable within the accuracy of analytical methods approved by the United States Environmental Protection Agency or the Executive Officer of the Regional Water Board.
- Pesticide concentrations shall not exceed those allowable by applicable antidegradation policies (see State Water Board Resolution No. 68-16 and 40 C.F.R. section 131.12.).
- Pesticide concentrations shall not exceed the lowest levels technically and economically achievable.
- Waters designated for use as domestic or municipal supply shall not contain concentrations of pesticides in excess of the Maximum Contaminant Levels set forth in California Code of Regulations, Title 22, Division 4, Chapter 15.

Radioactivity

Radionuclides shall not be present in concentrations that are harmful to human, plant, animal, or aquatic life nor that result in the accumulation of radionuclides in the food web to an extent that presents a hazard to human, plant, animal, or aquatic life.

Sediment

The suspended sediment load and suspended sediment discharge rate of surface waters shall not be altered in such a manner as to cause nuisance or adversely affect beneficial uses.

Settleable Material

Waters shall not contain substances in concentrations that result in the deposition of material that causes nuisance or adversely affects beneficial uses.

Suspended Material

Waters shall not contain suspended material in concentrations that cause nuisance or adversely affect beneficial uses.

Taste and Odor

Water shall not contain taste- or odor-producing substances in concentrations that impart undesirable tastes or odors to domestic or municipal water supplies or to fish flesh or other edible products of aquatic origin, or that cause nuisance, or otherwise adversely affect beneficial uses.

| Toxicity | All waters shall be maintained free of toxic substances in concentrations that produce detrimental physiological |
|----------|--|
| | responses in human, plant, animal, or aquatic life. |

Source: Central Valley Regional Water Quality Control Board 2019 Notes: ml=milliliter; mg/L=milligrams per liter; µg/l=micrograms per liter; NTU=nephelometric turbidity unit

No spatial and temporal water quality information specific to surface flows for Tiger Creek in the Area of Analysis is available; however, the United States Environmental Protection Agency (USEPA) describes the waterbody condition of Tiger Creek as "Condition Unknown" (United States Environmental Protection Agency 2023). The water draining to and from Tiger Creek is likely to be of high quality because of the remote and undisturbed condition of the landscape. Furthermore, based on field reconnaissance, water quality parameters such as water temperature, water clarity values, and dissolved oxygen all indicate healthy water quality conditions for aquatic organisms throughout Tiger Creek upstream and downstream of the Dam.

3.3.3.8 Groundwater Hydrology and Quality

The California Department of Water Resources delineates groundwater basins throughout California under the State's Groundwater Bulletin 118 (California Department of Water Resources 2003). The entirety of the Proposed Project (including the staging areas) is not located in a groundwater subbasin or basin because it is situated in the foothills of the Sierra Nevada range. The nearest groundwater basins are located to the west, closer to the valley floor. Consequently, limited spatial or temporal water quality information specific to groundwater in the Area of Analysis is available.

However, based on limited piezometer data from the 2020 geotechnical investigations, Cotton, Shires and Associates (2023:10-11) concluded that there is relatively shallow regional groundwater in the vicinity of the spillway and adjacent to the Dam (ranging from 5.2 to 14.9 feet). Cotton, Shires and Associates note that the groundwater surface at piezometer CSA/SD-4, adjacent to the Dam and proposed spillway crest structure, appears to correspond to the Reservoir level, and that the groundwater surface at piezometer CSA/SD-8, located in the fill prism at the end of the proposed spillway, indicates that the fill prism is saturated in this location (Cotton, Shires and Associates 2023:11).

3.3.4 Regulatory Setting

3.3.4.1 Federal

The following federal regulations related to hydrology and water quality would apply to the Proposed Project.

Clean Water Act

The CWA is the primary federal law that protects the quality of the nation's surface waters, including lakes, rivers, and coastal wetlands. It operates on the principle that all discharges into the nation's waters are unlawful unless specifically authorized by a permit. Permit review is the CWA's primary regulatory tool under the following sections.

- Section 404 regulates the discharge of dredged and fill materials into waters of the United States, which include oceans, bays, rivers, streams, lakes, ponds, and wetlands. Project proponents must obtain a permit from USACE for all discharges of dredged or fill material into waters of the United States before proceeding with a proposed activity. The Reservoir and, potentially, other features affected by the Proposed Project are jurisdictional waters of the Unites States and would be subject to section 404 regulation. Additional discussion of the waters of the United States in the Area of Analysis is provided in Section 3.5 Biological Resources.
- Section 402 regulates discharges to surface waters through the NPDES program, administered by USEPA. In California, the State Water Board is authorized by USEPA to oversee the NPDES program through the Regional Water Quality Control Boards (Regional Water Boards). The NPDES program provides for both general permits (those that cover a number of similar or related activities) and individual permits. A SWPPP and pollution prevention and monitoring program would be required for construction of the Proposed Project to comply with the Construction Stormwater General Permit and General Dewatering Permit, respectively, under section 402.
- Section 401, under which applicants for a federal license or permit to conduct activities that may result in the discharge of a pollutant into waters of the United States must obtain certification from the state in which the discharge would originate.

The State Water Board is the state agency with primary responsibility in California for implementing the CWA, which establishes regulations relating to water resources issues. Typically, all regulatory requirements are implemented by the State Water

Board through nine Regional Water Boards established throughout the state. The Central Valley Regional Water Board, discussed in Section 3.3.4.2 *State*, is responsible for regulating discharges to the Mokelumne River and its tributaries.

Federal Energy Regulatory Commission Seismic Safety Policy Standards

The Dam is operated by PG&E as part of the Mokelumne River FERC No. 137 Project, which is licensed by FERC. FERC's seismic safety policy standards are contained within their regulations, guidelines, and manuals pertaining to dam safety and inspections, specifically Chapter 13, Evaluation of Earthquake Ground Motions, of Engineering Guidelines for the Evaluation of Hydropower Projects (Federal Energy Regulatory Commission 2018) and Federal Guidelines for Dam Safety, Earthquake Analyses and Design of Dams (Federal Emergency Management Agency 2005).

The Dam is currently classified as a high hazard potential dam under the FERC guidelines.

3.3.4.2 State

The following state regulations related to hydrology and water quality would apply to the Proposed Project.

Porter-Cologne Water Quality Control Act of 1969

The Porter-Cologne Water Quality Control Act established the State Water Board and nine Regional Water Boards as the primary state agencies with regulatory authority over California water quality and appropriative surface water rights allocations. Under this act and the CWA, the State is required to adopt a water quality control policy and waste discharge requirements to be implemented by the State Water Board and nine Regional Water Boards. The State Water Board also establishes basin plans and statewide plans. The Regional Water Boards carry out State Water Board policies and procedures throughout the state. Basin plans designate beneficial uses for specific surface water and groundwater resources and establish water quality objectives to protect those uses.

Central Valley Regional Water Quality Control Board

The Central Valley Regional Water Board is responsible for implementing its basin plan (2019) for the Sacramento River and its tributaries, which includes the Mokelumne River and its tributaries. The SR/SJR Basin Plan identifies beneficial uses of the river and its tributaries and water quality objectives to protect those uses. Numerical and narrative criteria are contained in the SR/SJR Basin Plan for several

key water quality constituents, including dissolved oxygen, pH, water temperature, trace metals, turbidity, suspended material, pesticides, salinity, and radioactivity.

California Water Code, Division 3, Chapter 5, Article 1

The DSOD has oversight and approval authority for structures considered a dam under the California Water Code. Dams under DSOD jurisdiction are artificial barriers more than 6 feet high impounding more than 50 acre-feet of water or more than 25 feet high impounding more than 15 acre-feet. Additionally, some levees qualify as "dams" (California Water Code section 6002) and are required to meet DSOD standards and design review requirements.

DSOD reviews and approves proposed dam enlargements, repairs, alterations, and removals to ensure that a dam and appurtenant structures are designed to meet minimum requirements. It performs independent analyses to understand dam and appurtenant structure performance, including structural, hydrologic, hydraulic, and geotechnical evaluations. DSOD also oversees construction of dams to ensure that the work is done in accordance with the approved plans and specifications. Dams are inspected by DSOD on an annual basis to ensure their safety.

Under California Water Code, Division 3, Chapter 5, Article 1 (New Dams and Reservoirs or Enlargements of Dams and Reservoirs), applicants must provide DSOD information about the location, type, size, height, storage capacity, and hydrologic conditions related to a dam. DSOD may also require reports on the materials used to construct the dam; exploratory pits, trenches, and adits; drilling, coring, and geophysical surveys; tests to determine leakage rates; and physical test results on the in-situ properties and behavior of the foundation materials at the dam site.

The Dam is currently classified as a high hazard potential under DSOD guidelines.

3.3.4.3 Local

Amador County General Plan

Water Supply and Water Quality

The Amador County General Plan Conservation Element, Section C, addresses hydrology and water quality (Amador County 2016). It includes the following goal related to surface water quality:

 Goal C-4: Minimize negative effects of point and non-point sources on water quality.

3.3.5 Environmental Effects

Potential impacts of the Proposed Project related to hydrology and water quality are discussed in the context of CEQA Guidelines Appendix G checklist. Checklist section X, *Hydrology and Water Quality*, asks whether the Proposed Project would result in any of the following conditions.

a. Violate any water quality standards or waste discharge requirements or otherwise substantially degrade surface or groundwater quality?

Less than Significant with Mitigation Incorporated. Implementation of the Proposed Project has the potential to affect water quality in the Area of Analysis. Sources of bacteria, biostimulatory substances, chemical constituents in excess of maximum contaminant levels, colorants, floating material, pesticides, radioactivity, and taste- and odor-causing compounds would not be associated with the Proposed Project and are not addressed further in this analysis. Dissolved oxygen within the Reservoir and in Tiger Creek would not be affected during construction because nutrients or other constituents that may substantially increase oxygen demand in these surface waterbodies would not be purposefully or inadvertently released. Similarly, water temperature within the Reservoir would not be affected by the Proposed Project. Although construction of the spillway would require construction activities to occur in a small area within the Reservoir footprint isolated by a cofferdam, construction of the cofferdam would occur in the dry while the Reservoir water level is lowered during a routine planned outage. Spillway construction would occur behind the cofferdam while the Reservoir is operated at normal water levels and would not directly affect water temperature or indirectly affect water temperature via a change in Reservoir operations. Excavation of a portion of the plunge pool in Tiger Creek would require diverting stream flow around the work area through either a 250- or 400-foot-long, 16-inch-diameter bypass pipe to a location downstream. Diverting Tiger Creek stream flow in this way would not be expected to substantially alter water temperature downstream because water travel time through the pipe would be relatively short and the bypass pipe would shield the water from the warming effects of solar radiation somewhat relative to the creek bed. PG&E would maintain all Tiger Creek instream flow requirements downstream of the Dam throughout construction (see Table 3.3-1).

Implementation of the Proposed Project could affect water quality and beneficial uses of surface waterbodies during construction primarily through the use of chemicals and materials required for construction and by causing soil erosion resulting from ground-disturbing earthwork. Accordingly, the Proposed Project could affect the following water quality parameters for which there are established water

quality objectives: pH, toxicity, oil and grease, turbidity, settleable material, and suspended sediment, as discussed below.

Construction of the Proposed Project would require the use of concrete and grout, as well as chemicals such as fuels and lubricants for the operation of construction equipment and vehicles. Grout would be used at the cofferdam upstream of the proposed spillway crest and concrete would be used for spillway construction. Concrete would be produced at a mobile batch plant at the Spur 1 staging area within 100 feet of Tiger Creek. Raw materials (cement, aggregate, admixtures, and water) would be imported and stored at the site. Water quality and aquatic organisms can be adversely affected by cement, cementitious materials (e.g., uncured concrete and grout), and associated wastewater from washing out concrete trucks, pumps, and chutes if inadvertently discharged to surface waters because cement contains heavy metals and uncured concrete, grout, and concrete washout water is alkaline (high pH) (California Water Boards 2019; United States Environmental Protection Agency n.d.; and Awuah et al. 2022). As discussed in Section 3.10 Hazards and Hazardous Materials, fuels and lubricants (e.g., oil, grease) from vehicles and construction equipment could potentially be released into the environment at construction sites, including directly or indirectly into nearby surface waters.

Ground-disturbing earthwork associated with the Proposed Project components in the Area of Analysis could increase soil erosion rates and loss of topsoil, thereby potentially violating water quality objectives for turbidity, suspended sediment and settleable material for the Reservoir and Tiger Creek. However, as described in Chapter 2, all excavation and construction activities associated with construction of the crest structure, the notch through the existing Dam, the concrete chute, the flip bucket with splitter blocks, the constructed plunge pool, the cofferdam (king pile wall), as well as construction of the new permanent access road would occur in the dry and no discharge of excavated material into the Reservoir, Tiger Creek, or any other waterbody or wetland would occur. The exception to this, however, is the placement of roughly 500 CY of rock slope protection along the banks of the existing plunge pool to create stable platforms for a temporary bridge crossing.

Spoils that would be generated from the Proposed Project include:

- approximately 3,000 CY from the crest structure foundation excavation;
- approximately 12,000 CY of soil and rock spoils from excavation for the spillway chute and flip bucket;
- approximately 9,000 CY of soil and rock spoils from the plunge pool excavation;

- approximately 1,500 CY of soil and rock from the Reservoir excavation to create the cutoff trench for the cofferdam (king pile wall) installation; and
- the generation of approximately 11,000 CY of soil and rock spoils from the construction of the new access road.

All the associated spoils would be permanently disposed of at the Doakes Ridge staging and spoils site. The spoils would be spread out, compacted, and graded in a manner that would allow the area to be useable in the future.

To excavate the portion of the plunge pool located in Tiger Creek, streamflows would need to be diverted around the work area and PG&E would select one of two options for bypassing streamflows (i.e., 400-foot-long bypass pipe connection to the LLO pipe or to a 250-foot-long bypass pipe originating at the M-76 stream gage weir; described in Chapter 2, *Project Description*). Under both options, the bypass pipes would run parallel to Tiger Creek to the discharge location downstream of the plunge pool. Dewatering pumps may be required within the excavation area to keep the site dry.

To avoid or minimize any potentially significant impacts on water quality related to construction activities, PG&E will implement the following mitigation measures: Mitigation Measure WQ-MM-1: Implement Water Quality Protection Measures and Erosion and Sediment Control Plans; Mitigation Measure WQ-MM-2: Implement Spur 1 Staging Area Water Quality Protection Measures; Mitigation Measure WQ-MM-3: Implement Sediment Control Measures along Downstream Edge of Existing Plunge Pool prior to Rock Slope Protection Placement; Mitigation Measure WQ-MM-4: Develop and Implement a Water Quality Monitoring and Adaptive Management Plan; Mitigation Measure HAZ-MM-1: Implement Hazardous Materials Control Measures (described in Section 3.10 Hazards and Hazardous Materials); and Mitigation Measure AQ-MM-1: Implement Fugitive Dust Abatement Measures (described in Section 3.6 Air Quality).

Implementation of Mitigation Measure WQ-MM-1 will ensure that concrete, fuels, and other chemicals will not be rinsed or washed into the Reservoir, drainages, or wetlands, and that erosion control best management practices (BMPs) will be developed and implemented in accordance with the Proposed Project's SWPPP. Mitigation Measure WQ-MM-1 also includes compliance with the NPDES stormwater permit program and with applicable construction BMPs specified in PG&E's Activity Specific Erosion and Sediment Control Plans, and the installation of barriers at all laydown sites to ensure construction equipment, construction personnel, and runoff do not enter adjacent sensitive areas, including Sutter Creek in or near the Cedar Mill staging area. If pumping is required, either for dewatering or for the M-76 weir

bypass option, and if it has the potential to discharge turbid water to Tiger Creek, a filter shall be installed, as part of implementation of Mitigation Measure WQ-MM-1, to reduce the potential for elevated turbidity in the creek. In addition, as part of Mitigation Measure WQ-MM-1, PG&E shall monitor turbidity levels at multiple locations within Tiger Creek including, but not limited to: (1) immediately upstream of the plunge pool diversion, and (2) up to 300 feet downstream of the plunge pool diversion.

Mitigation Measure WQ-MM-2 will be implemented at the Spur 1 staging area to avoid the introduction of cement, aggregate and other related materials, and concrete and associated washwater to Tiger Creek. To minimize potential instream suspended sediment and associated turbidity, as well as sedimentation effects of placement of roughly 500 CY of rock slope protection along the banks of the existing plunge pool, the strategies described under Mitigation Measure WQ-MM-3 would be implemented. Implementation of monitoring protocols under Mitigation Measure WQ-MM-4 will ensure that implementation of Mitigation Measures WQ-MM-1, WQ-MM-2, and WQ-MM-3 prevent construction activities from violating water quality objectives identified in the SJR/SR Basin Plan. The implementation of Mitigation Measure HAZ-MM-1 will minimize the potential for the inadvertent release of hazardous materials (e.g., fuel), hydraulic oil, motor oil and other lubricants, and cementitious materials. Lastly, implementation of Mitigation Measure AQ-MM-1 will help prevent dust and other particulate matter from entering the Reservoir and other surface waters in the Area of Analysis during construction.

Implementation of Mitigation Measures WQ-MM-1, WQ-MM-2, WQ-MM-3, WQ-MM-4, HAZ-MM-1, and AQ-MM-1 would minimize the introduction of construction-related contaminants and mobilization of sediment into waters in and adjacent to the Area of Analysis and ensure that water quality standards and waste discharge requirements are not violated. With implementation of these mitigation measures, this potential impact would be less than significant.

Mitigation Measure WQ-MM-1: Implement Water Quality Protection Measures and Erosion and Sediment Control Plans

PG&E shall comply with all applicable construction BMPs specified in PG&E's Activity Specific Erosion and Sediment Control Plans², the SWPPP, and any

² The relevant Activity Specific Erosion and Sediment Control Plans are *Good Housekeeping* (Pacific Gas and Electric Company Construction Stormwater Group 2017a), *Laydown/Staging Area Construction* (Pacific Gas and Electric Company Storm Water Program Group 2011), *Dirt and Gravel Access Road Maintenance—Mountainous*

other permit conditions to minimize the introduction of construction-related contaminants and mobilization of sediment into wetlands and other waters in and adjacent to the project area. These BMPs shall address soil stabilization, sediment control, wind erosion control, vehicle tracking control, non-stormwater management, and waste management practices. The BMPs shall be based on the best available technology.

In California, the National Pollution Discharge Elimination System (NPDES) program requires that any construction activity disturbing one or more acres comply with the statewide General Permit for Stormwater Discharges Associated with Construction and Land Disturbance Activities (General Permit), as authorized by the State Water Board. The General Permit requires elimination or minimization of non-stormwater discharges from construction sites and development and implementation of a SWPPP for the site. The SWPPP shall include the following primary elements:

- Description of site characteristics—including runoff and streamflow characteristics and soil erosion hazard—and construction procedures;
- Guidelines for proper application of erosion and sediment control BMPs;
- Description of measures to prevent and control toxic materials spills; and
- Description of construction site housekeeping practices.

In addition to these primary elements, the SWPPP shall specify that the extent of soil and vegetative disturbance shall be minimized by exclusionary fencing, erosion control fencing, or other means; and that the extent of soil disturbed at any given time shall be minimized. The SWPPP shall be retained at the construction site. PG&E shall perform routine inspections of the construction area to verify that the BMPs are properly implemented and maintained.

These BMPs shall include, but are not limited to the following, as well as those listed in Mitigation Measure HAZ-MM-1: *Implement Hazardous Materials Control Measures*:

 At all laydown sites, barriers shall be installed to ensure construction equipment, workers, and runoff do not enter adjacent sensitive resource areas;

Regions (Pacific Gas and Electric Company Water Quality Group 2013), and *Stockpile Management* (Pacific Gas and Electric Company Construction Stormwater Group 2017b).

- A filter shall be installed on the plunge pool excavation dewatering system, as needed, to prevent turbid water from being discharged into Tiger Creek;
- PG&E shall monitor turbidity and pH levels at multiple locations within Tiger Creek. These locations shall include, but are not limited to: (1) immediately upstream of the plunge pool diversion and (2) up to 300 feet downstream of the plunge pool diversion;
- Concrete, solvents, adhesives, fuels, dirt, and gasoline shall not be rinsed or washed into the Reservoir, drainages, or wetlands; and
- Following completion of construction activities, the temporary access road and trails, as well as any other disturbed soils, shall be covered with a combination of temporary cover (mulch) and the means to establish permanent vegetative stabilization (seed, fertilizer, soil amendments, etc.).

Mitigation Measure WQ-MM-2: Implement Spur 1 Staging Area Water Quality Protection Measures

To minimize the potential for water quality impacts on Tiger Creek related to the operation of the mobile batch plant and concrete production at the Spur 1 staging area, a portion of which is located within 100 feet of Tiger Creek, PG&E and/or the construction contractor shall implement the following BMPs:

 All vehicle refueling at the Spur 1 staging area shall occur at least 100 feet from Tiger Creek. This does not include the mobile batch plant.

Mobile Batch Plant Area

- An earthen berm (minimum of 8 feet wide by 3 feet high) and silt fence shall surround the side of the mobile batch plant adjacent to Tiger Creek;
- The mobile batch plant generator shall include secondary containment for the attached fuel tank;
- Bulk fuel for the mobile batch plant shall be stored at Doakes Ridge staging and spoils site and shall be transported to the Spur 1 staging area, as needed, using fuel and lube trucks.
- Material stockpiles shall fully contained within K-rail barriers and, when not in regular use (i.e., when concrete is not being made) and during precipitation events, be covered;
- The height of material stockpiles shall be reduced from approximately 12 feet to 6 feet or lower if heavy precipitation is anticipated;

- A temporary construction entrance/exit shall be installed at the mobile batch plant area to limit off-site tracking of dirt, sand, concrete, and other related materials. Signage identifying the entrance/exit shall be placed in a visible location and all vehicles entering and exiting the area shall use this entrance/exit:
- Cement and fly ash silos shall be fully enclosed and weatherproofed; and
- Any excess wet concrete shall be discarded in an above-grade concrete washout container and then disposed of offsite at an approved facility.

Concrete Washout Area

- Signage identifying the concrete washout area shall be placed in a visible location.
- The concrete washout area shall be located at least 100 feet from Tiger
 Creek and contained within an earthen berm surrounded by a silt fence;
- Washout of all-terrain concrete mixer vehicles and other concrete-coated equipment shall be performed only within the designated concrete washout area;
- To contain washout water and cement waste, all equipment washout shall occur within a roll-off concrete washout container or an above-grade straw bale washout facility. The above-grade washout shall be lined with a minimum of 10-millimeter (0.01-inch) plastic sheeting that is free of holes, tears, and other defects. The sheeting shall be secured via staples to the wire-bound straw bales, which shall be staked in place. If an above-grade washout is used, the lining shall be inspected daily and after each storm event for leaks, and shall be replaced after every cleaning; and
- Washout water and material shall be disposed of offsite at an approved facility. If an above-grade washout is used, washout water shall be allowed to evaporate onsite.

Mitigation Measure WQ-MM-3: Implement Sediment Control Measures along Downstream Edge of Existing Plunge Pool prior to Rock Slope Protection Placement

Prior to rock slope protection (riprap or similar material) placement on either bank of the existing plunge pool, PG&E and/or its contractor shall install a silt curtain or implement other appropriate sediment control measures, such as clean gravel bags or sand bags, around the downstream edges of the plunge pool as a barrier to sediment movement. Lowering the plunge pool's water level by pumping

water into water trucks and using it for dust suppression could also be implemented. The sediment control measures shall be determined by PG&E's Water Quality Specialists based on field conditions at the time of construction. The purpose of the silt curtain or other appropriate measures is to contain any sediment dislodged during the placement of rock slope protection within the existing plunge pool perimeter and not allow it to enter Tiger Creek. The sediment control measures shall not be removed until all associated temporary bridge construction activities are complete (i.e., the rock slope protection is tamped in, and the temporary bridge is in place). If a significant summer storm is forecasted that could reengage the existing spillway during rock slope protection placement activities, then sediment control measures, such as plastic sheeting, fiber roll, or erosion control blanket, shall be installed and all construction activity shall immediately stop until the storm has passed and any associated runoff into the existing plunge pool has ceased.

Mitigation Measure WQ-MM-4: Develop and Implement a Water Quality Monitoring and Adaptive Management Plan

PG&E shall develop a Water Quality Monitoring and Adaptive Management Plan (Water Quality Plan) in consultation with Central Valley Regional Water Quality Control Board and State Water Board staff. The Water Quality Plan shall include monitoring protocols to ensure Mitigation Measures WQ-MM-1, WQ-MM-2, and WQ-MM-3 prevent construction activities from violating water quality objectives identified in the SJR/SR Basin Plan. The Water Quality Plan shall also include adaptive management procedures to develop and implement new water quality protection measures with Central Valley Regional Water Quality Control Board and State Water Board staff if construction violates water quality objectives. PG&E shall not commence construction until the State Water Board Deputy Director of the Division of Water Rights approves the Water Quality Plan.

b. Substantially decrease groundwater supplies or interfere substantially with groundwater recharge such that the project may impede sustainable groundwater management of the basin?

Less than Significant. Most construction activities, including construction of the permanent access road, the crest structure, the notch through the existing Dam, and the cofferdam (king pile wall) are not expected to encounter the local groundwater table because of the surficial nature of the construction activities and the time of year when these activities would occur. Dewatering is not anticipated for any of these construction activities.

However, excavation associated with the constructed plunge pool, spillway chute, and flip bucket may encounter the local groundwater table because of the relatively shallow local groundwater in the vicinity, and dewatering activities may be necessary within the excavation area to keep the site dry. However, dewatering activities would be temporary, there are no mapped groundwater basins in the vicinity (California Department of Water Resources 2003), nor are there local users who rely on the local groundwater.

Furthermore, the Proposed Project activities in these (potential) dewatering areas would not involve groundwater extraction or induce significant lowering of the local groundwater table.

These activities would therefore not substantially decrease groundwater supplies or interfere substantially with groundwater recharge such that the Proposed Project may impede sustainable groundwater management of the basin. This potential impact would be less than significant.

- c. Substantially alter the existing drainage pattern of the site or area, including through the alteration of the course of a stream or river or through the addition of impervious surfaces, in a manner that would:
- 1. Result in substantial erosion or siltation on or off site?
- 2. Substantially increase the rate or amount of surface runoff in a manner that would result in flooding on or off site?

Less than Significant with Mitigation Incorporated. Under the Proposed Project, PG&E proposes construction of the crest structure, the notch through the existing Dam, the spillway chute, the flip bucket with splitter blocks, the constructed plunge pool, and the cofferdam (king pile wall). Following completion of construction activities, the temporarily affected portions of the Area of Analysis would be returned, as much as is reasonably practicable, to their original condition. After Proposed Project construction, the new spillway and the final grading of the spillway construction area would resemble a condition similar to pre-Proposed Project condition, except for the presence of the new spillway and its associated features. Drainage patterns upstream of the Dam would remain unchanged. Downstream, the new spillway would function similarly to the existing spillway and discharge water during high flow events, while the former spillway would be abandoned³. It is

³ As described in Chapter 2, the three parts of the existing spillway (bathtub inlet, siphon structure, and chute) would be permanently abandoned once the new spillway is operational. The bathtub inlet would be capped with a steel plate or reinforced concrete

expected that the existing drainage patterns (i.e., channel planform and stability) of Tiger Creek downstream of the new plunge pool (which would act to dissipate a substantial amount of stream energy before the water spills into the natural channel) would remain relatively unchanged and intact after spillway and plunge pool construction due to the local bedrock control, its morphologically resilient nature, its presumed high resilience to disturbance, and because the same river processes that have been ongoing since the original spillway was constructed would continue in a similar fashion (albeit in a different spillway location).

Construction of the Proposed Project would require the removal of trees, shrubs, and herbaceous vegetation. As described in Section 2.2.3 *Vegetation Removal and Timberland Conversion*, trees within 20 to 50 feet of the proposed improvements, and in the area between the proposed spillway, Dam, and existing spillway, would be cut down to stumps; trees and other vegetation within the excavation limits would be completely removed, including root systems within the construction footprint. Vegetation removal can leave soils prone to disturbance via rain, stormwater runoff, wind, etc., and therefore susceptible to erosion. In the areas where trees would be removed but the stumps would remain, there would be no risk of erosion because the soils would remain undisturbed. However, in the areas where full vegetation removal would be required, erosion could occur. Implementation of Mitigation Measure WQ-MM-1: *Implement Water Quality Protection Measures and Erosion and Sediment Control Plans* will ensure that erosion potential is minimized both during and after construction.

For the temporary access road along Tiger Creek, fill material or a combination of fill and pre-cast concrete blocks would be used at each abutment of the three temporary bridges crossing Tiger Creek to support them and keep them out of the stream, thereby not compromising the existing channel planform or stability of the creek. The temporary bridges would be designed to pass the expected maximum flow during construction. The temporary access road would be allowed to revegetate and return to its pre-Proposed Project condition once construction is complete. In addition, the proposed road follows a previously used alignment that was abandoned in the early 2000s, though remnants of the road remain.

Accordingly, improvement (e.g., tree removal, grading, and road base installation) of

slab. Bulkheads would be installed on the upstream side of the three siphon intakes and vent pipes. The existing spillway chute would be abandoned in place, and the concrete canal wall would be extended across the side channel spillway weir and the radial gate would be removed. Abandonment activities would occur during the planned spring 2027 annual outage to allow full access to the spillway approach channel (outlet channel) and to the Lower Tiger Creek Conduit.

the temporary road is expected to be minimal. Additional temporary access trails would be required to allow construction equipment to reach different areas along the spillway chute. These trails would spur off the new permanent access road (discussed in more detail below) and the temporary access road. These other temporary routes would also be returned, as much as is reasonably practicable, to their original condition. However, abandonment of the temporary access road and trails could lead to erosion after completion of the Proposed Project as abandonment could result in exposed soils. Implementation of Mitigation Measure WQ-MM-1, which requires that disturbed soils be covered with a combination of temporary cover and the means to establish permanent vegetative stabilization, would ensure that abandonment of the temporary access road and trails would not cause substantial erosion.

A temporary bridge over the existing plunge pool downstream of the existing spillway would also be required. Installation of this temporary bridge would require permanent placement of roughly 500 CY of rock slope protection along the banks of the existing plunge pool to create stable platforms (approximately 250 CY on each bank). While the rock slope protection would be tamped down into the banks, it could nonetheless present a new flow obstruction within the plunge pool and have the potential to alter the local hydraulics and associated geomorphic processes immediately downstream towards the existing plunge pool's confluence with Tiger Creek. However, there would still be ample room in the plunge pool to dissipate the energy of spillway flows. Any associated geomorphic changes to the channel downstream of the rock slope protection placement areas are expected to be minimal and in line with the ongoing geomorphic processes that take place in this area during high flow events.

For the permanent access road, the existing drainage pattern of the area (i.e., hillslope and ridge environs) would be altered from the existing conditions; however, alteration of the course of a stream or river would not occur as a result of this new road as it would be located well upslope of Tiger Creek. Furthermore, the permanent access road would not be impervious; rather, it would consist of six inches of aggregate base rock. In addition, the permanent access road would be sloped inboard to collect runoff in a drainage ditch that would discharge downslope through culverts, and the outfall of the culverts would be armored to protect against erosion.

To ensure erosion-related impacts are minimized, PG&E shall comply with all applicable erosion control requirements as specified in Mitigation Measure WQ-MM-1: *Implement Water Quality Protection Measures and Erosion and Sediment Control Plans*. The requirements include compliance with the NPDES stormwater permit

program and preparation and implementation of a SWPPP, which includes a description of site characteristics (e.g., runoff, streamflow characteristics, and soil erosion hazard) and construction procedures and techniques to minimize alterations to the landscape and local natural drainages). Implementation of Mitigation Measure WQ-MM-1 will minimize the alteration of existing drainage patterns within the Area of Analysis and ensure that the Proposed Project would not increase the rate or amount of surface runoff in a manner that would result in flooding or substantial erosion or siltation on or off site. With implementation of Mitigation Measure WQ-MM-1, and on the basis of the previous discussion regarding post-Proposed Project conditions being similar in topography and bathymetry to pre-Proposed Project conditions, this potential impact would be less than significant.

3. Create or contribute runoff water that would exceed the capacity of existing or planned stormwater drainage systems or provide substantial additional sources of polluted runoff?

Less than Significant. The Proposed Project would not alter the capacity of existing or planned stormwater drainage systems. In addition, the Proposed Project would not provide substantial additional sources of polluted runoff, and most areas would return to their original, pre-Proposed Project condition, as described under checklist item c. The new permanent access road would be constructed to connect Tiger Creek Road to the right abutment of the Dam just above the new spillway crest structure. The road would be 15 feet wide and would include a combination of cut slopes and retaining walls throughout most of the alignment. The road surface would consist of six inches of aggregate base rock, it would be sloped inboard to collect runoff in a drainage ditch that would discharge downslope through culverts, and the outfall of the culverts would be armored to protect against erosion. The design of the new access road is therefore not expected to provide substantial additional sources of polluted runoff or sediment via drainage or landscape alteration. This potential impact would be less than significant.

4. Impede or redirect flood flows?

Less than Significant. The principal purpose of the Proposed Project is to improve the stability of the Dam by constructing a new spillway to successfully pass design flood flows. After the Proposed Project is constructed, most areas would return to their original, pre-Proposed Project condition, as described under checklist item *c*. Thus, the Proposed Project would not represent an impediment to the existing flood potential nor redirect any flood flows beyond redistributing then from the old spillway to the new spillway. For the placement of roughly 500 CY of rock slope protection along the banks of the existing plunge pool, these flow obstructions would not cause

any significant changes to downstream flows (McGuckin pers. comm). This potential impact would be less than significant.

d. In flood hazard, tsunami, or seiche zones, risk release of pollutants due to project inundation?

Less than Significant with Mitigation Incorporated. As the Proposed Project, upon completion, would not alter the extent or depth of the lake, it would not cause an increase in the pre-existing seiche inundation hazard nor the pre-existing mudflow hazard. The Area of Analysis is far from the coastline of the Pacific Ocean, and so there is no tsunami hazard.

Various Proposed Project elements (including the cofferdam, the temporary streamflow bypass, and, if needed, the dewatering pumps) would be implemented to avoid inundation of the Area of Analysis. Furthermore, all excavation and construction activities associated with construction of the crest structure, the notch through the existing Dam, the spillway chute, the flip bucket with splitter blocks, the constructed plunge pool, the cofferdam (king pile wall), as well as construction of the new permanent access road would occur in the dry. As such, inundation itself would be avoided. Lastly, after construction (during operation) there would not be any more potential pollutants present in the Area of Analysis compared to baseline (existing) conditions.

As discussed for checklist item *a*, PG&E will comply with all applicable construction site BMPs as specified in Mitigation Measure WQ-MM-1: *Implement Water Quality Protection Measures and Erosion and Sediment Control Plans*, and Mitigation Measure AQ-MM-1: *Implement Fugitive Dust Abatement Measures* (described in Section 3.6 *Air Quality*). Implementation of these mitigation measures would substantially reduce the potential for construction-related erosion, sedimentation, and turbidity to adversely affect water quality in the Area of Analysis.

The Proposed Project would involve the storage and use of hazardous materials near the Dam, at the Spur 1 staging area (or in areas that drain to the Reservoir or Tiger Creek), and the Cedar Mill staging area, which could result in discharge of these substances into the associated waterbodies. Construction activities would involve the use of cement and concrete, as well as heavy machinery, excavators, compactors, and other construction equipment that use petroleum products such as fuels, lubricants, hydraulic fluids, and coolants, all of which can impair water quality and be toxic to fish and other aquatic organisms. Contamination of lakebed and channel bed and banks could result from construction activities, spills, or equipment malfunction. Spills of petroleum products and other pollutants related to machinery could occur during vehicle operation, refueling, parking, and maintenance. Improper

handling, storage, or disposal of these materials, as well as cementitious materials at the Spur 1 staging area could cause degradation of surface water quality if they are eventually washed into downstream waterbodies. To ensure that the potential effects of hazardous materials or potential spills are minimized, PG&E will comply with all applicable construction site hazardous materials control measures as specified in Mitigation Measure WQ-MM-2: *Implement Spur 1 Staging Area Water Quality Protection Measures* and Mitigation Measure HAZ-MM-1: *Implement Hazardous Materials Control Measures* (described in Section 3.10 *Hazards and Hazardous Materials*). With implementation of mitigation measures WQ-MM-1, WQ-MM-2, AQ-MM-1, and HAZ-MM-1, this potential impact would be less than significant.

e. Conflict with or obstruct implementation of a water quality control plan or sustainable groundwater management plan?

Less Than Significant with Mitigation Incorporated. The Proposed Project is in the foothills of the Sierra Nevada range and thus is not located in a groundwater subbasin or basin. As previously described, implementation of the Proposed Project would not substantially decrease groundwater supplies or interfere substantially with groundwater recharge such that the Proposed Project may impede sustainable groundwater management of the basin. Once the Proposed Project is constructed, PG&E would operate the Reservoir as under existing conditions with the exception of minor differences related primarily to maintenance access and a slight reduction in the Reservoir operating range due to a minor reduction in spill crest elevation, Accordingly, the Proposed Project would not conflict with or obstruct implementation of a sustainable groundwater management plan.

As previously discussed, the placement of rock slope protection along the banks of the existing plunge pool may result in an increase in suspended sediment and associated turbidity in Tiger Creek such that there is an exceedance of SR/SJR Basin Plan water quality objectives for turbidity and suspended sediment. Furthermore, the inadvertent introduction of raw materials associated with concrete production, concrete, concrete washwater, and/or chemicals such as fuels, oil, and lubricants for the operation of construction equipment and vehicles to surface waters in the Area of Analysis would also adversely affect water quality and beneficial uses. This would conflict with the SR/SJR Basin Plan. However, as discussed for checklist item a (Violate any water quality standards or waste discharge requirements or otherwise substantially degrade surface or groundwater quality), to avoid or minimize any potentially significant impacts on water quality related to construction activities, PG&E will implement the following mitigation measures: Mitigation Measure WQ-MM-1: Implement Water Quality Protection Measures and Erosion and

Sediment Control Plans; Mitigation Measure WQ-MM-2: Implement Spur 1 Staging Area Water Quality Protection Measures; Mitigation Measure WQ-MM-3: Implement Sediment Control Measures along Downstream Edge of Existing Plunge Pool prior to Rock Slope Protection Placement; Mitigation Measure WQ-MM-4: Develop and Implement a Water Quality Monitoring and Adaptive Management Plan; Mitigation Measure HAZ-MM-1: Implement Hazardous Materials Control; and Mitigation Measure AQ-MM-1: Implement Fugitive Dust Abatement Measures. Implementation of these mitigation measures will ensure that SR/SJR Basin Plan water quality objectives are not violated and that this impact would be less than significant.

3.4 Geology, Soils, Seismicity, and Paleontological Resources

3.4.1 Introduction

This section analyzes the Proposed Project's potential impacts related to geology, soils, seismicity, and paleontological resources. It describes existing conditions in the Area of Analysis and summarizes the overall regulatory framework for geology, soils, seismicity, and paleontological resources, and it analyzes the potential for the Proposed Project to affect these resources.

3.4.2 Area of Analysis

The Area of Analysis for geology, soils, and seismicity is the entire Project Area, including the three staging areas. The Area of Analysis for paleontological resources is the Proposed Project footprint (i.e., the area of potential ground disturbance).

3.4.3 Existing Conditions

This section discusses the existing conditions related to geology, soils, seismicity, and paleontological resources in the Area of Analysis.

3.4.3.1 Geology

This section presents a summary of geology in the surrounding region and within the local area of the Dam.

Regional Geologic Setting

The Dam is located on Tiger Creek, a tributary to the North Fork of the Mokelumne River, approximately 24 miles northeast of Jackson in Amador County, California (Figure 1-1). The Project Area is located at an elevation of approximately 3,500 feet above mean sea level on the western slope of the Sierra Nevada mountain range within the western foothills metamorphic belt of the Sierra Nevada geomorphic province. The Sierra Nevada geomorphic province is a linear, tilted fault block almost 400 miles long that extends from northern Butte County to the Mojave Desert. In stark contrast to its steep eastern slope, its western slope is gentle. This western slope is deeply incised by rivers, and bedrock disappears beneath the sediments of the Central Valley. The upper elevation Sierra Nevada is composed of massive granites shaped by glaciation, such as is seen in Yosemite National Park.

Lower in the Sierra Nevada is the northwest-trending Mother Lode, which is made up of metamorphic rock containing gold-bearing veins. The Sierra Nevada disappears to the north beneath the Cenozoic volcanic rock of the Cascade Ranges (California Geological Survey 2002).

Physiography

The Reservoir and the Dam are located in a narrow, southwest trending valley on the Devils Nose 7.5-minute USGS topographic quadrangle (U.S. Geological Survey 2018; Cotton, Shires and Associates 2023:Figure 2). The valley walls are moderately steep to very steep. Elevations in the area range from approximately 3,400 feet near Tiger Creek and the temporary access road to 4,000 feet in the mountains to the east. The slope varies in inclination from 20 to 25 degrees in the vicinity of the proposed cofferdam. Downstream of the Dam, the south to southeast facing slope inclines approximately 30 degrees. The route of the proposed permanent access road inclines from 30 to 37 degrees.

Geology of the Project Area

The geology in the vicinity of the Dam consists of several northwest trending terranes, belts, and complexes of sedimentary and igneous rocks. These terranes have been incised by drainages flowing from the highlands of the Sierra Nevada in the east towards the lowlands of the Central Valley. The bedrock in the vicinity of the Dam has been assigned to different terranes and complexes by various authors and includes the Calaveras Complex, the Calaveras Terrane, and the Merced River Terrane (Cotton, Shires and Associates 2023:5). Published maps of the Project Area identify undifferentiated Paleozoic rock in the incised drainages with Tertiary volcanic rocks of the Mehrten Formation capping the adjacent ridges (Cotton, Shires and Associates 2023:5).

3.4.3.2 Soils

Tiger Creek Regulator Dam Area

As part of geotechnical investigations for the Proposed Project, five test pits were excavated to depths of 5.7 to 8.7 feet along on the cofferdam alignment. Samples uncovered 1.0 to 3.8 feet of lacustrine deposits consisting of silty clayey sand with gravels which became deeper toward the Dam, along with 0.7 foot and 1.0 foot of colluvium. Test pits identified four different soil materials (fracture fill, colluvium, decomposed bedrock, and lacustrine deposit) which were classified as Sandy Silt (ML), Gravelly Silty Sand (SM), and Sandy Clay (CL). Subsurface investigations were not performed in the area of the permanent access road.

Expansive Soils

Expansive soils are not known to occur in the Project Area due to the low clay content of the mapped and field-sampled soils. Expansive soils are those determined to have a plasticity index (PI) of 15 or greater, determined in accordance with ASTM D4318. Test pits identified four different soil materials (fracture fill, colluvium, decomposed bedrock, and lacustrine deposit) which were classified as Sandy Silt (ML), Gravelly Silty Sand (SM), and Sandy Clay (CL), and were determined based on testing to be suitable to be used as structural backfill provided they are free of organic material. As shown in Table B-1, Appendix B (Laboratory Testing Results) of the *Geotechnical Investigation*, the PI for each sampled geologic unit was 10 or below (Cotton Shires and Associates 2023), demonstrating little risk of expansivity.

Spur 1 Staging Area

The Spur 1 Staging Area site is underlain by Musick very rocky sandy loam (MwF), which is moderately deep (the depth to a restrictive feature [i.e., paralithic bedrock] is 30 to 50 inches) and well drained. Parent material is colluvium derived from granite and/or colluvium derived from granodiorite. The surface layers are sandy loam about 11 inches thick. The subsoil between 11 and 40 inches is composed of sandy clay loam. Bedrock occurs at depths between 40 and 50 inches. (Natural Resources Conservation Service 2024.)

Spur 1 Staging Area Site Erosion Potential Summary

Based on the K factor for the soils,¹ the erosion hazard for the Musick very rocky sandy loam, 51 to 71 percent slopes is 0.15, which is considered low; the wind erodibility group for the Musick very rocky sandy loam² 51 to 71 percent slopes is 3, which is considered a high risk of wind erosion (Natural Resources Conservation Service 2024).

¹ Erosion factor K indicates the susceptibility of a soil to sheet and rill erosion by water. Factor K is one of six factors used in the Universal Soil Loss Equation and the Revised Universal Soil Loss Equation to predict the average annual rate of soil loss by sheet and rill erosion in tons per acre per year. The estimates are based primarily on percentage of silt, sand, and organic matter and on soil structure and saturated hydraulic conductivity (Ksat). Values of K range from 0.02 to 0.69. Other factors being equal, the higher the value, the more susceptible the soil is to sheet and rill erosion by water.

² Wind erodibility groups are made up of soils that have similar properties affecting their susceptibility to wind erosion in cultivated areas. The soils assigned to group 1 are the most susceptible to wind erosion, and those assigned to group 8 are the least susceptible (Natural Resources Conservation Service 2024).

Doakes Ridge Staging and Spoils Site

The Doakes Ridge staging and spoils site is underlain by Sites very rocky loam (SrC), which is deep (the depth to a restrictive feature [i.e., paralithic bedrock] is up to 80 inches) and well drained. Parent material is metabasic residuum weathered from metasedimentary rock. The surface layers are gravelly loam about 15 inches thick. The subsoil between 15 and 67 inches is composed of gravelly clay loam and gravelly clay. Bedrock occurs at a depth below 72 inches. (Natural Resources Conservation Service 2023.)

Doakes Ridge Staging and Spoils Site Erosion Potential Summary

Based on the K factor for the soils,¹ the erosion hazard for the Sites very rocky loam, 3 to 16 percent slopes is 0.10, which is considered low; the wind erodibility group for the Sites very rocky loam,² 3 to 16 percent slopes is 7, which is considered a low risk of wind erosion (Natural Resources Conservation Service 2023).

Cedar Mill Staging Area

The Cedar Mill staging area is underlain by Mixed alluvial land (Mo) and Musick very rocky sandy loam (MyE). The Mixed alluvial land (Mo) consists of surface layers of sand 0 to 10 inches thick, with 10 to 60 inches of stratified very gravelly coarse sand to sand beneath. The Musick very rocky sandy loam (MyE) is deep (the depth to a restrictive feature is more than 80 inches) and well drained. Parent material is colluvium derived from granite and/or colluvium derived from granodiorite. The surface layers are sandy loam about 14 inches thick. The subsoil between 14 and 97 inches consists of loam and sandy clay loam. (Natural Resources Conservation Service 2024.)

Cedar Mill Staging Area Erosion Potential Summary

Overall, the soils at the Cedar Mill staging area are at low risk for erosion by water or wind, with approximately six percent of the site (located at the southeastern portion of the site) at high risk for wind erosion. Based on the K factor for the soils, the erosion hazard for Mixed alluvial land is 0.5, which is considered very low; the wind erodibility group for Mixed alluvial land is one, which is considered a low risk of wind erosion. The erosion hazard for Musick very rocky sandy loam, 16 to 51 percent slopes is 0.15, which is considered low; the wind erodibility group for Musick very rocky sandy loam, 16 to 51 percent slopes is 3, which is considered a high risk of wind erosion (Natural Resources Conservation Service 2024.)

3.4.3.3 Seismicity

The Area of Analysis is in a region of California characterized by low to moderate seismicity (Cotton, Shires and Associates 2023:15). The area is located in the Sierra Nevada and is potentially affected by seismic sources in the Sierra Nevada, the West Tahoe fault, Genoa fault, and Antelope Valley fault to the east, and the Foothills fault system to the west. Most of the seismicity in the region is concentrated in the east, with the controlling faults being the North Fork fault and the Post Corral fault. All of the earthquakes with moment magnitudes of M4 or above within 100 kilometers of the Project Area originated from faults on the eastern Sierra front (Cotton, Shires and Associates 2023:5).

Primary Seismic Hazards

The state considers two aspects of earthquake events as primary seismic hazards: surface fault rupture (disruption at the ground surface as a result of fault activity) and seismic ground shaking.

Surface Fault Rupture

The Project Area is not located in an Alquist-Priolo Earthquake Fault Zone (Bryant and Hart 2007). Faults nearest to the Project Area include the Genoa fault (approximately 36.5 miles east), the Foothill fault system (approximately 20 miles southwest), and the West Tahoe fault (approximately 31.9 miles northeast). No active faults have been identified in the vicinity of the Project Area on published maps, ³ and no evidence of faulting was observed during the geotechnical investigation (Cotton, Shires and Associates 2023:15); therefore, the risk of surface fault rupture in the Project Area is considered low. Refer to Figure 4 of Cotton, Shires and Associates (2023) for a map of faults and their recency of movement.

Strong Ground Shaking

Unlike surface rupture, ground shaking is not confined to the trace of a fault, but rather propagates into the surrounding area during an earthquake. The intensity of ground shaking typically diminishes with distance from the fault, but ground shaking may be locally amplified or prolonged by some types of substrate materials. While ground shaking has been experienced in Amador County from earthquakes with

³ As defined under the Alquist-Priolo Act, an *active fault* is one that has had surface displacement within the Holocene epoch (the last 11,000 years); a late *Quaternary fault* is a fault that has undergone displacement during the past 700,000 years; a *Quaternary fault (age undifferentiated)* is one that has had surface displacement at some point during Quaternary time (the last 1.6 million years); and a *pre-Quaternary fault* is one that has had surface displacement before the Quaternary period.

epicenters elsewhere (Amador County 2016a), the Project Area is situated in an area where the ground shaking hazard is considered low (California Geological Survey 2016; Cotton, Shires and Associates 2023:15).

Secondary Seismic Hazards

Secondary seismic hazards refer to seismically induced landsliding, liquefaction, and related types of ground failure. As discussed in Section 3.4.4 Regulatory Setting, the state maps areas that are subject to secondary seismic hazards pursuant to the Seismic Hazards Mapping Act of 1990. The state has not published seismic hazard mapping in the vicinity of the Project Area under the Seismic Hazards Mapping Program (California Geological Survey 2015).

Landslide Hazards

Landslides result in the downward and outward movement of rock, soil, and vegetation and are primarily associated with slopes greater than 15 percent but can also occur in other areas as well. As shown in Figure S-1, *Flood, Landslide, and Mine Hazards*, of the *Amador County General Plan*, the Project Area (including the Spur 1 staging area, the Doakes Ridge staging and spoils site, and the Cedar Mill staging area) are not located within or near areas of historic landslides or debris flow events (Amador County 2016a). The *Geotechnical Investigation* prepared for the Proposed Project also reported that the geomorphology in the vicinity does not indicate the existence of older landslide events (Cotton, Shires and Associates 2023:14).

Liquefaction

Liquefaction is the process in which soils and sediments lose shear strength and fail during seismic ground shaking. The vibration caused by an earthquake can increase pore pressure in saturated materials. If the pore pressure is raised to be equivalent to the load pressure, a temporary loss of shear strength results, allowing the material to flow as a fluid. This temporary condition can result in severe settlement of foundations and slope failure. The susceptibility of an area to liquefaction is determined largely by the depth to groundwater and the properties (e.g., grain size, density) of the soil and sediment within and above the groundwater. The sediments most susceptible to liquefaction are saturated, unconsolidated sand and silt within 50 feet of the ground surface (California Geological Survey 2008).

Areas of potential liquefaction in the county are not identified on state hazard maps (Amador County 2016a). However, as all surficial soils will be removed from the spillway foundation area during construction, Cotton, Shires and Associates

determined that the potential for liquefaction to affect the structure would be negligible (Cotton, Shires and Associates 2023:15).

3.4.3.4 Paleontological Resources

This section describes the paleontological sensitivity of the geologic units in the Area of Analysis.

The determination of paleontological sensitivity is a qualitative assessment based on the paleontological resource potential of the stratigraphic units present, the local geology and geomorphology, and other factors relevant to fossil preservation and potential yield. According to the Society of Vertebrate Paleontology (SVP) (2010:2), standard considerations for determining sensitivity are: (1) the potential for a geological unit to yield abundant or significant vertebrate fossils or to yield a few significant fossils, large or small, vertebrate, invertebrate, or paleobotanical remains; and (2) the importance of recovered evidence for new and significant taxonomic, phylogenetic, paleoecological, or stratigraphic data (Table 3.4-1).

Table 3.4-1. Paleontological Sensitivity Ratings

| Potential | Definition |
|--------------|--|
| High | Rock units from which vertebrate or significant invertebrate, plant, or trace fossils have been recovered are considered to have a high potential for containing additional significant paleontological resources. Paleontological potential consists of both (a) the potential for yielding abundant or significant vertebrate fossils or for yielding a few significant fossils, large or small, vertebrate, invertebrate, plant, or trace fossils and (b) the importance of recovered evidence for new and significant taxonomic, phylogenetic, paleoecologic, taphonomic, biochronologic, or stratigraphic data. |
| Undetermined | Rock units for which little information is available concerning their paleontological content, geologic age, and depositional environment are considered to have undetermined potential. Further study is necessary to determine if these rock units have high or low potential to contain significant paleontological resources. |

| Potential | Definition |
|-----------|--|
| Low | Reports in the paleontological literature or field surveys by a qualified professional paleontologist may allow determination that some rock units have low potential for yielding significant fossils. Such rock units will be poorly represented by fossil specimens in institutional collections, or based on general scientific consensus, will only preserve fossils in rare circumstances and the presence of fossils is the exception not the rule. |
| None | Some rock units, such as high-grade metamorphic rocks (e.g., gneisses and schists) and plutonic igneous rocks (e.g., granites and diorites), have no potential to contain significant paleontological resources. Rock units with no potential require neither protection nor mitigation measures relative to paleontological resources. |

Source: Society of Vertebrate Paleontology 2010:1–2.

See *Geology of the Project Area* in Section 3.4.3.1 *Geology*, for a description of the geologic units present in the Area of Analysis.

The University of California Museum of Paleontology (UCMP) database was searched for records of vertebrate fossils in the geologic units in the Area of Analysis. The results of the search and the sensitivity of the geologic units (University of California Museum of Paleontology 2023) are summarized in Table 3.4-2.

Table 3.4-2. University of California Museum of Paleontology Vertebrate Fossil Records, by Formation Extent and Study Area Counties, and Paleontological Sensitivity of Geologic Units in the Study Area

| Unit and Age | Records Throughout Formation's Extent | Records in Study Area Counties | Paleontological Sensitivity |
|---|---------------------------------------|---|--|
| Artificial fill | 0 | 0 | None—not natural deposits |
| Colluvium and alluvium deposits, Quaternary | 0 | 0 | Low a—unit is likely too young to contain fossils (i.e., less than 10,000 years old) |
| Mehrten Formation, Tertiary | 339 | 0 | High—a wide variety of fossils are known from this unit, including several species of early horses and other grazing mammals, fish, and reptiles |

| | Records Throughout | Records in Study | |
|----------------------------------|-----------------------|------------------|-----------------------------|
| | Formation's | Area | |
| Unit and Age | Extent | Counties | Paleontological Sensitivity |
| Plutonic rocks, Mesozoic | 0 | 0 | None |
| Undifferentiated rock, Paleozoic | 0 | 0 | None |

Source: University of California Museum of Paleontology 2023.

3.4.4 Regulatory Setting

3.4.4.1 Federal

Clean Water Act Section 402 (National Pollutant Discharge Elimination System Program)

Section 402 is discussed under *Construction Activities Stormwater General Permit* (2010-0014-DWQ Permit) in the following section on state regulations (Section 3.4.4.2).

Federal Energy Regulatory Commission Seismic Safety Policy Standards

The Dam is operated by PG&E as part of the Mokelumne River FERC No. 137 Project, which is licensed by FERC. FERC's seismic safety policy standards are contained within their regulations, guidelines, and manuals pertaining to dam safety and inspections, specifically Chapter 13, Evaluation of Earthquake Ground Motions, of Engineering Guidelines for the Evaluation of Hydropower Projects (Federal Energy Regulatory Commission 2018) and Federal Guidelines for Dam Safety, Earthquake Analyses and Design of Dams (Federal Emergency Management Agency 2005).

The Dam is currently classified as a high hazard potential dam under the FERC guidelines.

^a In some locations, colluvium and alluvium deposits could be older than 10,000 years and therefore have a high sensitivity for paleontological resources; however, these deposits would likely underlie the younger deposits with a low sensitivity.

3.4.4.2 State

Alquist-Priolo Earthquake Fault Zoning Act

California's Alquist-Priolo Earthquake Fault Zoning Act (Alquist-Priolo Act) (Public Resources Code section 2621 et seq.) is intended to reduce risks to life and property from surface fault rupture during earthquakes. The Alquist-Priolo Act prohibits the location of most types of structures intended for human occupancy across the traces of active faults and strictly regulates construction in the corridors along active faults (earthquake fault zones).⁴ It also defines criteria for identifying active faults, giving legal weight to terms such as *active*, and establishes a process for reviewing building proposals in and adjacent to earthquake fault zones.

Under the Alquist-Priolo Act, faults are zoned, and construction along or across them is strictly regulated if they are "sufficiently active" and "well defined." A fault is considered sufficiently active if one or more of its segments or strands shows evidence of surface displacement during Holocene time (defined for purposes of the act as referring to approximately the last 11,000 years). A fault is considered well-defined if its trace can be identified clearly by a trained geologist at the ground surface, or in the shallow subsurface using standard professional techniques, criteria, and judgment (Bryant and Hart 2007).

Seismic Hazards Mapping Act

Like the Alquist-Priolo Act, the Seismic Hazards Mapping Act of 1990 (Public Resources Code sections 2690–2699.6) is intended to reduce damage resulting from earthquakes. While the Alquist-Priolo Act addresses surface fault rupture, the Seismic Hazards Mapping Act addresses other earthquake-related hazards, including strong ground shaking, liquefaction, and seismically induced landslides. Its provisions are similar in concept to those of the Alquist-Priolo Act: the state is charged with identifying and mapping areas at risk of strong ground shaking, liquefaction, landslides, and other corollary hazards; and cities and counties are required to regulate development within mapped seismic hazard zones.

Under the Seismic Hazards Mapping Act, permit review is the primary mechanism for local regulation of development. Specifically, cities and counties are prohibited from issuing development permits for sites within seismic hazard zones until appropriate site-specific geologic or geotechnical investigations have been carried

⁴ With reference to the Alquist-Priolo Act, a *structure for human occupancy* is defined as one "used or intended for supporting or sheltering any use or occupancy, which is expected to have a human occupancy rate of more than 2,000 person-hours per year" (14 CCR section 3601(e)).

out and measures to reduce potential damage have been incorporated into the development plans.

Construction Activities Stormwater General Permit (2010-0014-DWQ Permit)

Section 402 of the CWA mandates that certain types of construction activity comply with the requirements of USEPA's NPDES program. The USEPA has delegated to the State Water Board the authority for the NPDES program in California, where it is implemented by the state's nine Regional Water Boards. Construction activity disturbing one acre or more must obtain coverage under the NPDES General Permit for Storm Water Discharges Associated with Construction and other Land Disturbance Activities.

The Central Valley Water Board administers the NPDES stormwater permit program in the Project Area portion of Amador County. Obtaining coverage under the Construction Activities General Permit requires that the project applicant take the following steps:

- File a Notice of Intent and other permit registration documents to obtain coverage under the General Permit before construction begins;
- Prepare and implement a SWPPP;
- Conduct inspections, prepare monitoring reports, and conduct pollution prevention and monitoring; and
- File a notice of termination with the State Water Board when construction is complete and the construction area has been permanently stabilized.

The SWPPP describes proposed construction activities, receiving waters, stormwater discharge locations, and BMPs that will be used to reduce project construction effects on receiving water quality. The components of the SWPPP most relevant to geology and soils are erosion and sediment control measures.

Dischargers whose projects disturb one or more acres of soil, or whose projects disturb less than one acre but are part of a larger common plan of development that in total disturbs one or more acres, are required to obtain coverage under the General Permit Order 2010-0014-DWQ. Construction activity subject to this permit includes clearing, grading, and disturbances to the ground such as stockpiling or excavation but does not include regular maintenance activities performed to restore the original line, grade, or capacity of the facility.

Coverage under the General Permit is obtained by submitting permit registration documents to the State Water Board that include a risk level assessment and a site-

specific SWPPP identifying an effective combination of erosion control, sediment control, and non-stormwater BMPs. The General Permit requires that the SWPPP define a program of regular inspections of the BMPs and, in some cases, sampling of water quality parameters.

2010 California Building Standards Code

The California Building Standards Code (Title 24 CCR) provides the minimum standards for structural design and construction. The Building Standards Code is based on the International Building Code, which is used widely throughout the United States and has been modified for California conditions with numerous more detailed or more stringent regulations. The Building Standards Code requires that "classification of the soil at each building site will be determined when required by the building official" and that "the classification will be based on observation and any necessary test of the materials disclosed by borings or excavations." In addition, the Building Standards Code states that "the soil classification and design-bearing capacity will be shown on the (building) plans, unless the foundation conforms to specified requirements." The code provides standards for various aspects of construction, including excavation, grading, and earthwork; fills and embankments; expansive soils; foundation investigations; and liquefaction potential and soil strength loss. The Building Standards Code requires extensive geotechnical analysis and engineering for grading, foundations, retaining walls, and other structures, including criteria for seismic design.

California Water Code, Division 3, Chapter 5, Article 1

The DSOD has oversight and approval authority for structures considered a dam under the California Water Code. Dams under DSOD jurisdiction are artificial barriers more than 6 feet high impounding more than 50 acre-feet of water or more than 25 feet high impounding more than 15 acre-feet. Additionally, some levees qualify as "dams" (California Water Code section 6002) and are required to meet DSOD standards and design review requirements.

DSOD reviews and approves proposed dam enlargements, repairs, alterations, and removals to ensure that the dam and appurtenant structures are designed to meet minimum requirements. It performs independent analyses to understand dam and appurtenant structure performance, including structural, hydrologic, hydraulic, and geotechnical evaluations. DSOD also oversees construction of dams to ensure that the work is done in accordance with the approved plans and specifications. Dams are inspected by DSOD on an annual basis to ensure dam safety.

Under California Water Code, Division 3, Chapter 5, Article 1 (New Dams and Reservoirs or Enlargements of Dams and Reservoirs), applicants must provide

DSOD information about the location, type, size, height, storage capacity, and hydrologic conditions related to the dam. DSOD may also require reports on the materials used to construct the dam; exploratory pits, trenches, and adits; drilling, coring, and geophysical surveys; tests to determine leakage rates; and physical test results on the in-situ properties and behavior of the foundation materials at the dam site; as well as other information.

The Dam is currently classified as a high hazard potential under DSOD guidelines.

California Public Resources Code

Several sections of the California Public Resources Code protect paleontological resources. Section 5097.5 prohibits "knowing and willful" excavation, removal, destruction, injury, and defacement of any paleontological feature on lands owned by or under the jurisdiction of the state or any county, city, district, or public corporation, except where the agency with jurisdiction has granted express permission. Section 30244 requires reasonable mitigation for impacts on paleontological resources that occur as a result of development on public lands.

3.4.4.3 Local

Amador County General Plan 2016

Soils

The *Amador County General Plan* Safety Element addresses soils and geological resources. It includes the following implementation program related to soils (Amador County 2016a).

Program D-8: Soil and Geotechnical Evaluation

- a) The County will require geotechnical evaluation and recommendations in compliance with California Building Code requirements before construction of buildings meant for occupancy.
- b) The County will provide any available soil shrink-swell information upon request, and ensure appropriate foundation elements are included on all projects proposed in areas prone to expansive soils.
- c) New structures and improvements shall incorporate project features avoiding or minimizing the hazards identified through geotechnical evaluation to the satisfaction of the County.

Paleontological Resources

The Amador County General Plan does not include policies to protect paleontological resources; however, the adopted Amador County General Plan FEIR

requires implementation of Mitigation Measure 4.6-9, Paleontological Resource Assessment, if damage could occur to sensitive paleontological resources. The mitigation measure lists the geologic units considered to be sensitive for paleontological resources in Amador County and the requirements to be followed when a project will disturb ones of those units, such as a site-specific analysis and implementation of feasible mitigation measures. These measures include education of worker personnel, consultation with a qualified paleontologist, and avoidance or recovery of paleontological resources (Amador County 2016b:4.6-26).

3.4.5 Environmental Effects

Potential impacts of the Proposed Project related to geology, soils, seismicity, and paleontological resources are discussed in the context of the CEQA Guidelines Appendix G checklist. Checklist section VII *Geology, Soils, Seismicity, and Paleontological Resources*, asks whether the Proposed Project would result in any of the following conditions.

- a. Directly or indirectly cause potential substantial adverse effects, including the risk of loss, injury, or death involving:
- 1. Rupture of a known earthquake fault, as delineated on the most recent Alquist-Priolo Earthquake Fault Zoning Map issued by the State Geologist for the area or based on other substantial evidence of a known fault? Refer to Division of Mines and Geology Special Publication 42.

No Impact. The Project Area is not identified as being within an Alquist-Priolo Fault Zone (Bryant and Hart 2007) and is located in an area of low to moderate seismicity. No active faults have been identified in the vicinity on published maps and no evidence of faulting was observed during the geotechnical investigation (Cotton, Shires and Associates 2023:15). Accordingly, the Project Area is not subject to surface fault rupture hazard. There would be no potential impact.

- 2. Strong seismic ground shaking?
- 3. Seismic-related ground failure, including liquefaction?

Less than Significant. As described in Section 3.4.3 *Existing Conditions*, the ground-shaking hazard in the Project Area is generally low to moderate and with the removal of all surficial soils from the spillway foundation area during construction (as described in Chapter 2, *Project Description*) the potential for liquefaction is considered negligible (Cotton, Shires and Associates 2023:15). The Proposed Project would be unmanned during operation and would therefore present no risk of injury or death as a result of ground shaking or ground failure. The Proposed Project would include temporary construction facilities such as field offices at the Doakes

Ridge Staging and Spoils site which would be staffed; however, potential impacts associated with ground shaking would be minimized because PG&E would be required to incorporate FERC seismic safety policy standards into the design for applicable features to minimize the ground-shaking hazards on associated Proposed Project features. Structures must be designed to meet the regulations and associated standards. The geotechnical studies, a requirement of the Building Standards Code, have been developed prior to construction activities and have served to inform the seismic design parameters. The potential impact would be less than significant.

4. Landslides?

Less than Significant. A large earthquake on a nearby fault could cause minor to moderate ground shaking in the vicinity of the Project Area, potentially resulting in an increased risk of structural loss, injury, or death from the triggering of a landslide. Landslide hazards are generally associated with slopes greater than 15 percent. As described above under *Physiography* in Section 3.4.3.1 *Geology*, slopes in the Area of Analysis are greater than 15 percent. However, no landslides were observed in the vicinity of the Proposed Project's permanent features (e.g. the spillway and permanent access road) or the Cedar Mill, Doakes, or Spur 1 staging areas, and the geomorphology in the vicinity does not indicate the existence of older landslide events (Cotton, Shires and Associates 2023:8).

Furthermore, the Project Area is underlain by shallow bedrock and, therefore, the potential for landslides to impact the Proposed Project's permanent features is considered low. Landslide risk at the proposed spillway chute and plunge pool are also considered to be low. Therefore, as no evidence of past or present landslides was observed at the Proposed Project site, the underlying layers are not conducive to landsliding and the risk of landslide is considered low. The potential impact would be less than significant.

b. Result in substantial soil erosion or the loss of topsoil?

Less than Significant with Mitigation Incorporated. As discussed in Chapter 2, *Project Description*, ground-disturbing activities associated with the Proposed Project would disturb more than one acre and could increase soil erosion rates and loss to topsoil. Construction activities also could result in soil compaction and wind erosion effects that could adversely affect soils and reduce the revegetation potential at the staging areas and spoils sites. The Proposed Project would generate approximately 35,000 CY of spoils as a result of the excavation required for the crest structure foundation, spillway chute and flip bucket, plunge pool, cutoff trench, log boom anchors, and the permanent access road. The improper transportation and storage of spoils materials can also result in erosion.

However, PG&E would comply with all applicable construction site BMPs as specified in Mitigation Measure WQ-MM-1: *Implement Water Quality Protection Measures and Erosion and Sediment Control Plans* (including compliance with the NPDES stormwater permit program and preparation and implementation of a SWPPP) (described in Section 3.3 *Hydrology and Water Quality*), and Mitigation Measure AQ-MM-1: *Implement Fugitive Dust Abatement Measures* (described in Section 3.6 *Air Quality*). Mitigation Measures WQ-MM-1 and AQ-MM-1 include soil stabilization, sediment control, and wind erosion control BMPs to ensure soil erosion is minimized. With the implementation of these mitigation measures, the potential impact would be less than significant.

c. Be located on a geologic unit or soil that is unstable or that would become unstable as a result of the project and potentially result in an onsite or offsite landslide, lateral spreading, subsidence, liquefaction, or collapse?

Less than Significant. Improper grading or construction associated with the Proposed Project could put people at risk as a result of ground failure. Improvement activities would involve excavation, concrete placement, and construction of a permanent access road. If these activities are not performed or engineered correctly, they could result in slope instability and ensuing ground failure. The Geotechnical Investigation identified the potential for shallow ground failure associated with deep colluvial swale in a portion of the access road alignment; however, this has been mitigated through design changes, such as a reduction in the inclination of the proposed cuts or by supporting the cuts with concrete modular block. Furthermore, Proposed Project construction would be implemented in accordance with DSOD and FERC seismic safety policy standards. While staffed structures such as field offices would be located at the Doakes Ridge Staging and Spoils area, these would be temporary structures and would be designed to meet requirements of the Building Standards Code as well as DSOD and FERC safety policy standards. With adherence to safety policy standards and recommendations of the geotechnical investigation, potential impacts would be less than significant.

d. Be located on expansive soil, as defined in Table 18-1-B of the Uniform Building Code (1994), creating substantial direct or indirect risks to life or property?

No Impact. As discussed above under *Expansive Soils* in Section 3.4.3.2 *Soils*, expansive soils are not known to occur in the Project Area due to the low clay content of the mapped and field-sampled soils. The *Geotechnical Investigation* for the Proposed Project also determined there was little risk of expansivity in the collected samples. In addition, the Proposed Project design would conform to the

DSOD and FERC seismic safety policy standards. Therefore, there would be no potential impact.

e. Have soils incapable of adequately supporting the use of septic tanks or alternative wastewater disposal systems in areas where sewers are not available for the disposal of wastewater?

No Impact. The Proposed Project would not include a septic system. There would be no potential impact.

f. Directly or indirectly destroy a unique paleontological resource or site or unique geologic feature?

Less than Significant with Mitigation Incorporated. Activities that could damage paleontological resources are those involving ground disturbance in geologic units sensitive for paleontological resources.

In the area of the new spillway, the geologic unit sensitive for paleontological resources is the Mehrten Formation. This formation is well known for its diverse vertebrate fossils. The colluvium and alluvium deposits in the new spillway area generally have a low sensitivity for paleontological resources because they are likely less than 10,000 years old (i.e., Holocene and therefore too young to contain fossils), but deposits older than 10,000 years that might be present could contain fossils). If fossils are present in the area of the new spillway, they could be damaged during ground-disturbing activities, such as blasting and excavation. Although, most ground-disturbing activities would occur in Paleozoic and Mesozoic bedrock, which have no sensitivity for paleontological resources, the colluvial and alluvial deposits have the potential (albeit low) to contain fossils. Substantial damage to or destruction of significant paleontological resources, as defined by the SVP (2010), would be a potentially significant impact. Implementation of Mitigation Measures GEO-MM-1 and GEO-MM-2, which require training construction workers to recognize paleontological resources and stopping work if paleontological resources are encountered, would reduce this potential impact to a less-thansignificant level.

In the staging areas and new or improved access roads, the ground-disturbing activities would be limited to grading. Although grading in the Mehrten Formation and the colluvial and alluvial deposits could occur, the grading would shallow and likely in already disturbed area. However, should paleontological resources be present, implementation of Mitigation Measures GEO-MM-1 and GEO-MM-2 would reduce the potential impact to a less-than-significant level.

Mitigation Measure GEO-MM-1: Educate Construction Personnel in Recognizing Fossil Material

Prior to construction, PG&E shall ensure that all construction personnel receive training provided by a qualified professional paleontologist who is experienced in teaching non-specialists. This training shall ensure that construction personnel can recognize fossil materials in the event any are discovered during construction.

Mitigation Measure GEO-MM-2: Stop Work if Substantial Fossil Remains are Encountered during Construction

If substantial fossil remains (particularly vertebrate remains) are discovered during earth-disturbing activities, the construction contractor shall immediately stop activities and wait until a state-registered professional geologist or qualified professional paleontologist can assess the nature and importance of the find and a qualified professional paleontologist can recommend appropriate treatment. Treatment may include preparation and recovery of fossil materials so that they can be housed in an appropriate museum or university collection and may also include preparation of a report for publication describing the finds. PG&E shall be responsible for ensuring that recommendations regarding treatment and reporting are implemented.

3.5 Biological Resources

3.5.1 Introduction

This section describes the biological resources in the Project Area and the Proposed Project's potential impacts on these resources. This section discusses the existing conditions in the Project Area; federal, state, and local regulatory framework for biological resources; and the potential for the Proposed Project to affect biological resources.

3.5.2 Area of Analysis

The Project Area encompasses the Dam area for construction of the proposed spillway, including the crest structure, spillway chute, flip bucket, plunge pool, Dam notch, and temporary cofferdam; the existing spillway; permanent access road; temporary access road, bridges, and trails; log boom; lighting; staging; tree removal operations area; the Doakes Ridge staging and spoils site; and the Cedar Mill staging area (Figure 2-1, *Project Area*). The biological resources Area of Analysis encompasses the Project Area and a 10-foot buffer along each side of the existing Spur 10 access road (Figure 3.5-1, *Biological Resources in the Area of Analysis*).

3.5.3 Methods

Biologists reviewed existing information and conducted field surveys to gather information to prepare the biological resources effects analysis and support the impact conclusions. The methods of the pre-field review and field surveys are described in the following sections.

3.5.3.1 Review of Existing Information

The sources below were used to develop lists of special-status plant and animal species and to identify other sensitive biological resources (e.g., sensitive natural communities) that could be affected by the Proposed Project:

- California Native Plant Society's (CNPS's) online Inventory of Rare and Endangered Plants of California records search of the Devil's Nose, Omo Ranch, Caldor, Peddler Hill, West Point, Garnet Hill, Rail Road Flat, Fort Mountain, Dorrington, Mokelumne Hill, Pine Grove, and Aukum USGS 7.5-minute quadrangles (California Native Plant Society 2024);
- California Natural Diversity Database (CNDDB) records search of the Devil's Nose, Omo Ranch, Caldor, Peddler Hill, West Point, Garnet Hill, Rail Road Flat,


Fort Mountain, Dorrington, Mokelumne Hill, Pine Grove, and Aukum USGS 7.5-minute quadrangles (California Department of Fish and Wildlife 2024a);

- United States Fish and Wildlife Service (USFWS) list of threatened and endangered species that may occur in the Proposed Project location or be affected by the Proposed Project (United States Fish and Wildlife Service 2024);
- National Marine Fisheries Service (NMFS) list of endangered and threatened species to confirm that listed species, critical habitat, and essential fish habitat do not occur in the Project Area or would not be affected by the Proposed Project (National Marine Fisheries Service 2022);
- Fish population monitoring information from Stream Ecology Monitoring Program Reports for the Mokelumne River Project (Pacific Gas and Electric Company 2017a, 2017b, 2020, 2021, 2022a);
- Amphibian monitoring information from the Stream Ecology Monitoring Program for the Mokelumne River Project (Pacific Gas and Electric Company 2022b); and
- California Essential Habitat Connectivity Project (Spencer et al. 2010) and California Department of Fish and Wildlife's (CDFW) online Habitat Connectivity Viewer (California Department of Fish and Wildlife 2021).

The USFWS, NMFS, CNDDB, and CNPS lists can be found in Appendix B, *Species Lists*.

3.5.3.2 Field Surveys

ICF botanists/wetland ecologists conducted aquatic resources delineation, land cover mapping, and botanical surveys of the Area of Analysis on May 25, 2022; June 1, 2, and 7, 2022; August 9, 17, and 25, 2022; May 26, 2023; and August 1, 2023. The surveys were conducted on foot and consisted of walking meandering transects throughout the Area of Analysis, identifying and recording plants observed, and delineating aquatic resources (wetlands and non-wetland waters). Botanical surveys were conducted according to CDFW protocol (California Department of Fish and Wildlife 2018). Aquatic resources were mapped using guidance provided in A Guide to the Ordinary High Water Mark (OHWM) Delineation for Non-Perennial Streams in the Western Mountains, Valleys, and Coast Region of the United States (United States Army Corps of Engineers 2014), Regulatory Guidance Letter 05-05 (United States Army Corps of Engineers 2005), Corps of Engineers Wetland Delineation Manual (Environmental Laboratory 1987), and the 2010 Regional Supplement to the Corps of Engineers Wetland Delineation Manual: Western Mountains, Valleys, and Coast Region (United States Army Corps of Engineers 2010). A sub-meter accuracy global positioning system unit was used to record the

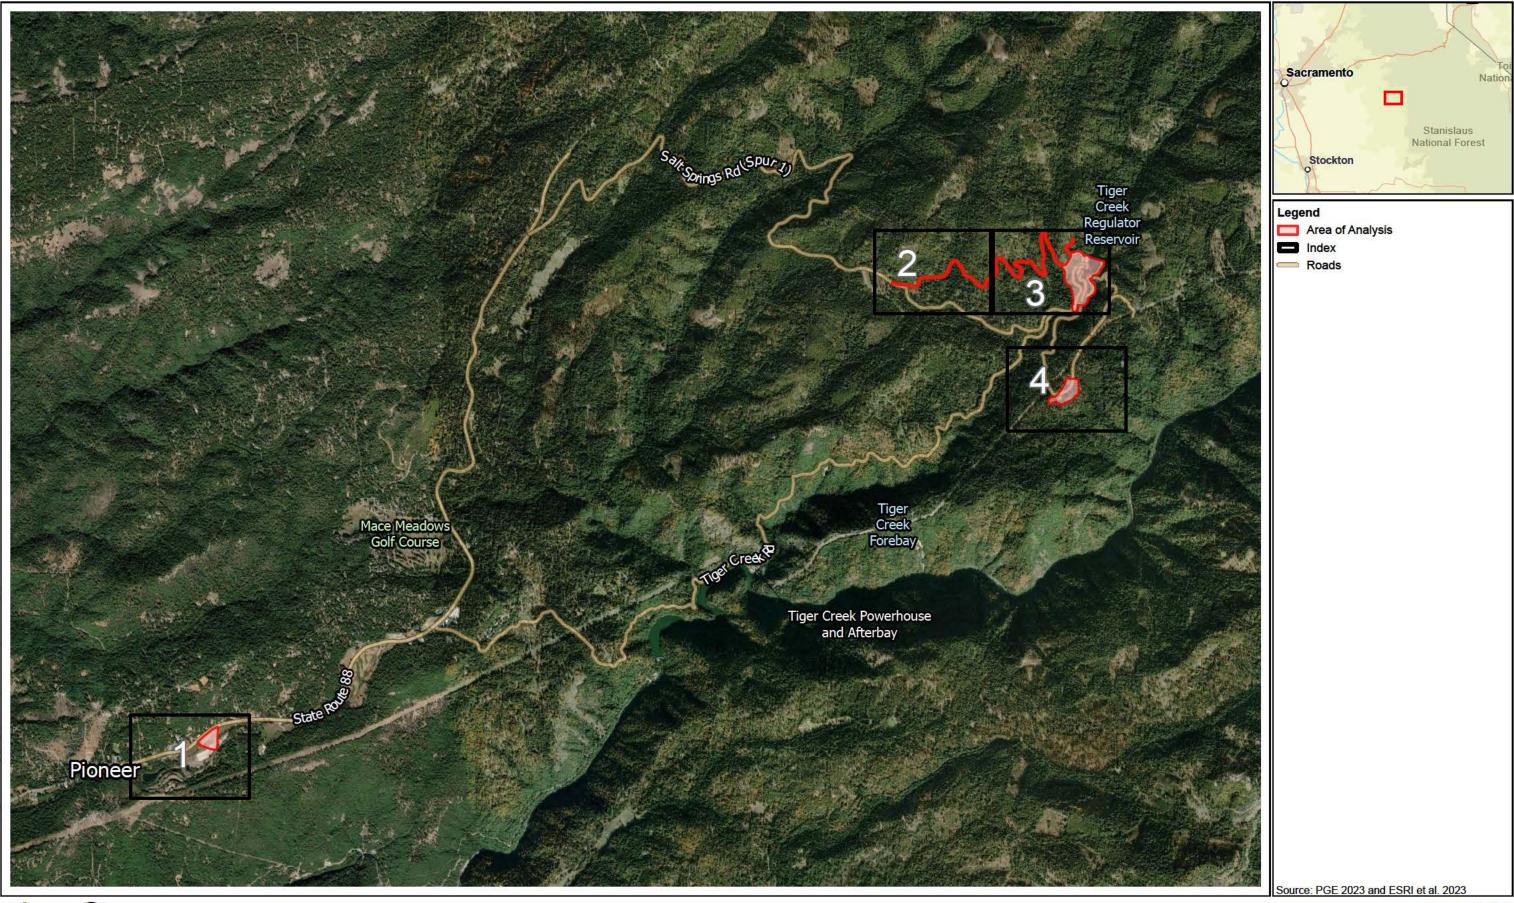



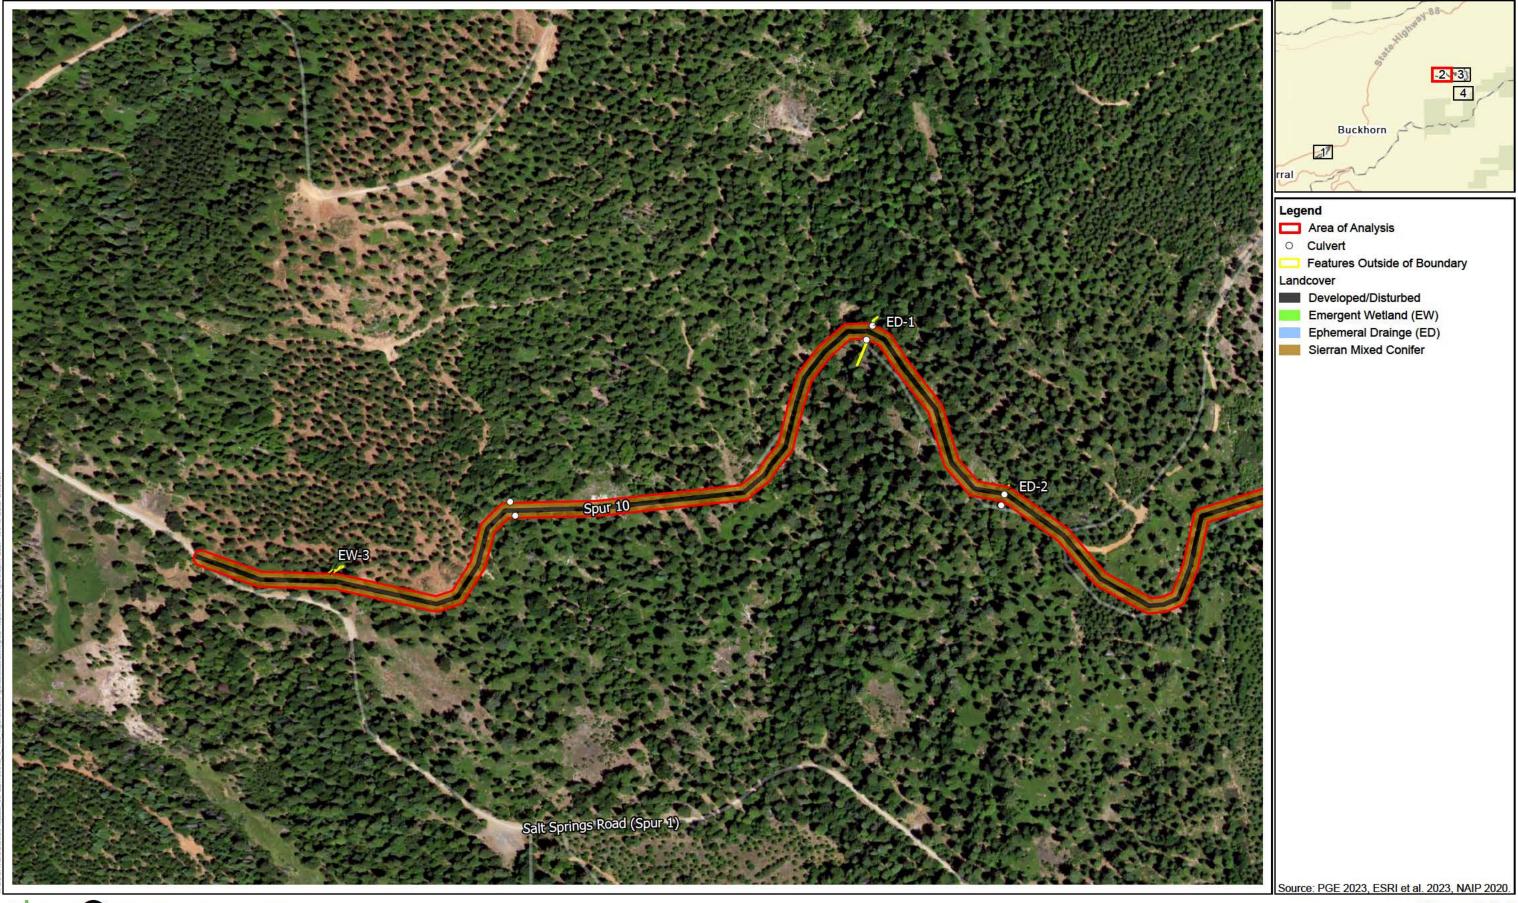


Figure 3.5-1
Biological Resources in the Area of Analysis
Index








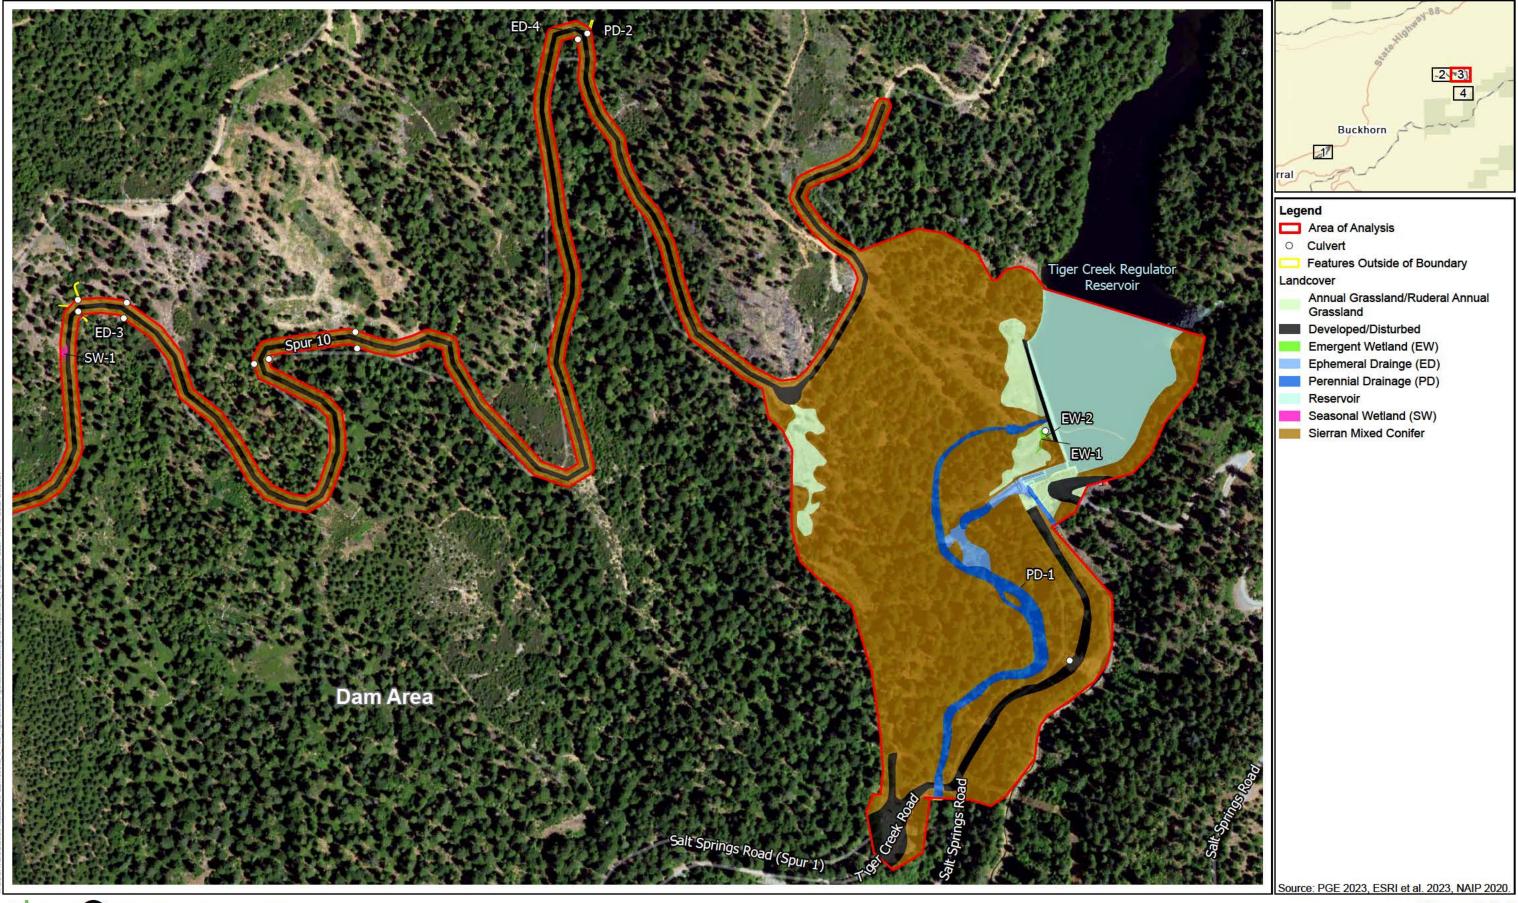



Figure 3.5-1 Biological Resources in the Area of Analysis Page 2 of 4










Figure 3.5-1 Biological Resources in the Area of Analysis Page 4 of 4

locations of the wetland and OHWM sample points and map the boundaries of aquatic resources.

ICF wildlife biologists conducted a general habitat assessment for special-status animals and focused surveys for northern goshawk (*Accipiter gentilis*). The habitat assessment at the Dam area and Doakes Ridge staging and spoils site was conducted on April 19 and August 17, 2022. The habitat assessment at the Cedar Mill staging area was conducted on August 18, 2022, and August 1, 2023. An ICF wildlife biologist walked meandering transects throughout the area for the analysis and used binoculars to view areas on steep terrain. The biologist recorded information about the habitats present, wildlife species observed during the surveys, and took representative photographs of the Project Area. During the August 1, 2023, survey at the Cedar Mill staging area, the biologist assessed ponds adjacent to the staging area for their suitability for California red-legged frog (*Rana draytonii*).

Surveys for northern goshawk were conducted in the Dam area and Doakes Ridge staging and spoils site on June 22, 23, and 24, 2022; and July 12 and 13, 2022. The "Broadcast Acoustical Survey Method" protocol in the *Northern Goshawk Inventory and Monitoring Technical Guide* (Woodbridge and Hargis 2006), was followed during the surveys. This protocol is designed to assess the presence/absence of northern goshawk nesting activity. Broadcast acoustical surveys were performed within a 0.25-mile buffer around the Project Area and in suitable habitat along portions of the existing access roads.

An ICF fish biologist, accompanied by an ICF geomorphologist, conducted a reconnaissance-level survey along Tiger Creek in the Area of Analysis and the northern shoreline of the Reservoir on April 14, 2023. The fish biologist walked Tiger Creek from the Tiger Creek Road bridge to the Dam, the north shoreline of the Reservoir, and Tiger Creek upstream of the Reservoir from the Reservoir to the stream gaging (M-37) weir to assess fish habitat and fish passage conditions, and to visually survey for fish from the bank and with underwater video. In addition, representative photographs of Tiger Creek in the Area of Analysis were taken.

3.5.4 Existing Conditions

3.5.4.1 Physical Conditions

The approximately 71.6-acre Area of Analysis is in the northern Sierra Nevada Foothills geographic subdivision of the California Floristic Province (Baldwin et al. 2012). The topography of the Dam area and Doakes Ridge staging and spoils site is generally mountainous, and elevations range from approximately 3,435 to 3,940 feet above MSL. The Cedar Mill staging area is mostly level with slopes on the north and south edges, and elevations from approximately 3,020 to 3,040 feet above MSL.

Land use in the Area of Analysis includes PG&E hydropower facilities and open space at the Dam area and Doakes Ridge staging and spoils site and parking/storage areas at the Cedar Mill staging area.

Soils

The nine soil map units in the Area of Analysis based on the SSURGO database are listed in Table 3.5-1 (United States Department of Agriculture, Natural Resources Conservation Service 2022).

Hydrology

The Dam area and Doakes Ridge staging and spoils site are located within the Tiger Creek-North Fork Mokelumne River (Hydrologic Unit Code [HUC] No. 180400120404) HUC 12 watershed (United States Geological Survey 2021a). The Reservoir is fed by inflow from the Tiger Creek watershed (which has a drainage area of approximately 14 square miles and includes the Sweetwater Creek, upper Tiger Creek, and Little Tiger Creek drainages) and a diversion from the Mokelumne River at the Salt Springs Powerhouse that discharges into the Reservoir approximately 500 feet upstream of the Dam. PG&E releases water from the Reservoir into Tiger Creek through an outlet at the base of the Dam. Within the Area of Analysis, Tiger Creek has perennial flow. Downstream of the Dam, Tiger Creek flows to the North Fork Mokelumne River, which ultimately flows to the San Joaquin River in the Sacramento—San Joaquin Delta.

The Cedar Mill staging area is located within the Upper Sutter Creek (Hydrologic Unit Code No. 180400120501) HUC 12 watershed (United States Geological Survey 2021b). The headwater channel of Sutter Creek (mapped as South Branch Sutter Creek) runs in a westerly direction through realigned ditches in and west of the staging area. Hydrology at the Cedar Mill staging area has been highly modified and disturbed. South Branch Sutter Creek channel appears to have been piped and buried and/or channelized and diverted from the natural channel into excavated ditches. Downstream of the Area of Analysis, South Branch Sutter Creek appears to be a perennial stream and is a tributary of Sutter Creek, which flows to Dry Creek and ultimately to the Mokelumne River.

Climate

The regional climate is characterized by hot, dry summers with relatively cool, wet winters. Data from the Tiger Creek weather station, located approximately 2.75 miles southwest of the Dam area, were reviewed for temperature and precipitation averages (United States Department of Agriculture, Natural Resources Conservation Service 2023). The average high temperatures range from 90.4 degrees Fahrenheit in July to 49.3 degrees Fahrenheit in December, and the average low temperatures

range from 32.6 degrees Fahrenheit in December to 55.6 degrees Fahrenheit in July. The total average annual precipitation is 45.98 inches, with precipitation falling as rain or snow and with a total average of 15.4 inches of snow between November and April (United States Department of Agriculture, Natural Resources Conservation Service 2023).

Table 3.5-1. Soil Map Units in the Area of Analysis

| Map Symbol | Map Unit Name | Drainage Class | Landform | Typical Profile | Hydric Component | Hydric Criteria ^a |
|---------------|---|----------------|-----------------|--|---------------------|---------------------------------|
| Dam Are | • | Drainage Class | Landionni | Typical i Tollie | Component | Ontena |
| MwF | Musick very rocky sand loam, moderately deep, 51 to 71 percent slopes | Well drained | Mountain slopes | Sandy loam over sandy clay loam over weathered bedrock | _ | _ |
| W | Water | _ | _ | _ | _ | _ |
| Spur 10 | Area | | | | | |
| AkC | Aiken cobbly loam, 3 to 16 to 51 percent slopes | Well drained | Ridges | Cobbly loam over cobbly clay loam over cobbly clay | _ | _ |
| CbE | Cohasset very cobbly loam, 16 to 51 percent slopes | Well drained | Lahars | Very cobbly loam over cobbly clay loam over weathered bedrock | _ | _ |
| CoE | Cohasset very cobbly sandy loam, 16 to 51 percent slopes | Well drained | Lahars | Very cobbly sandy loam over cobbly clay loam over weathered bedrock | _ | |
| MvE | Musick very rocky sandy loam, 16 to 51 percent slopes | Well drained | Mountain slopes | Sandy loam over loam over sandy clay loam | _ | _ |
| MwF | Musick very rocky sand loam, moderately deep, | Well drained | Mountain slopes | Sandy loam over sandy clay loam over weathered bedrock | _ | _ |

| Мар | | | | | Hydric | Hydric |
|---------|---|----------------|----------------------------|---|----------------------------|-----------|
| Symbol | Map Unit Name | Drainage Class | Landform | Typical Profile | Component | Criteriaa |
| | 51 to 71 percent slopes | | | | | |
| Doakes | Ridge Staging and S | poils Site | | | | |
| SrC | Sites very rocky loam, 3 to 16 percent slopes | Well drained | Hills, ridges | Gravelly loam over gravelly clay loam over gravelly clay over clay loam over weathered bedrock | _ | - |
| SrE | Sites very rocky loam, 16 to 51 percent slopes | Well drained | Mountain slopes, ridges | Gravelly loam over gravelly clay loam over gravelly clay over gravelly clay loam over weathered bedrock | _ | - |
| Cedar M | lill Staging Area | | | | | |
| CbE | Cohasset very cobbly loam, 16 to 51 percent slopes | Well drained | Lahars | Very cobbly loam over cobbly clay loam over weathered bedrock | _ | _ |
| Мо | Mixed alluvial land | unspecified | Flood plains | Sand over stratified very gravelly coarse sand to sand | Riverwash, in drainageways | 4 |
| MvE | Musick very rocky sandy loam, 16 to 51 percent slopes | Well drained | Mountain slopes | Sandy loam over loam over sandy clay loam | _ | _ |

Sources: United States Department of Agriculture, Natural Resources Conservation Service 2022

3.5-7

^a Hydric criteria definition: 4 - frequently flooded for long duration or very long duration during the growing season

3.5.4.2 Land Cover Types in the Area of Analysis

Land cover types in the Area of Analysis were designated during surveys on May 25, 2022; June 1, 2, and 7, 2022; August 9, 17, and 25, 2022; May 26, 2023; and August 1, 2023 (as described in Section 3.5.3.2 *Field Surveys*). Figure 3.5-1, *Biological Resources in the Area of Analysis*, shows the locations of the mapped land cover types.

The Area of Analysis supports both common and sensitive land cover types. Common land cover types are widespread vegetation communities with low plant species diversity. These types may reestablish naturally after disturbance, support primarily non-native plant species, or be highly managed. They are not generally protected by resource agencies unless they provide habitat for special-status species (e.g., raptor foraging or nesting habitat, upland habitat in a wetland watershed). Common land cover types in the Area of Analysis are Sierran mixed conifer forest and annual grassland/ruderal annual grassland. The developed/disturbed cover type is not considered a vegetation community and is not sensitive.

Sensitive land cover types are rare vegetation communities with limited distribution. They may have high species diversity, high productivity, distinctive characteristics, or a declining status. Local, state, and federal agencies that regulate biological resources consider these types to be important, and compensation for loss of sensitive land cover types is generally required by these agencies. USFWS considers certain types, such as wetlands and riparian communities, important to wildlife, and USACE and the USEPA consider wetlands important for water quality and wildlife. Waters of the United States and waters of the State are regulated by USACE and the Regional Water Boards, respectively. The CDFW maintains a database (the CNDDB) of rare habitat types throughout the state. The land cover types in the Area of Analysis that are considered sensitive are emergent wetland, seasonal wetland, ditch, ephemeral drainage, perennial drainage, and reservoir.

Locations of land cover types and the dominant plant species observed in land cover types in the Area of Analysis are described below. A list of the plants and animals observed in each part of the Area of Analysis is provided in Appendix C, *Plants and Animals Observed in the Tiger Creek Regulator Dam Spillway Replacement Project Area of Analysis*.

Sierran Mixed Conifer Forest

Sierran mixed conifer forest is the dominant vegetation community in the Area of Analysis. The overstory is a mix of incense cedar (*Calocedrus decurrens*), ponderosa pine (*Pinus ponderosa*), and Douglas-fir (*Pseudotsuga menziesii* var.

menziesii) with associated species including sugar pine (*Pinus lambertiana*), big-leaf maple (*Acer macrophyllum*), canyon live oak (*Quercus chrysolepis*), and California black oak (*Q. kelloggii*). Understory tree and shrub species include Pacific madrone (*Arbutus menziesii*), deer brush (*Ceanothus integerrimus*), mountain dogwood (*Cornus nuttallii*), American dogwood (*C. sericea*), toyon (*Heteromeles arbutifolia*), Himalayan and cut leaved blackberry (*Rubus armeniacus* and *R. lacinatus*), whitebark raspberry (*R. leucodermis*), western thimbleberry (*R. parviflorus*), and red huckleberry (*Vaccinium parviflolium*). Native and non-native forbs and annual grasses are in the herbaceous layer.

Annual Grassland/Ruderal Annual Grassland

The Area of Analysis at the Dam area and Doakes Ridge staging and spoils site supports patches of annual grassland in openings of the Sierran mixed conifer forest. Dominant grass species include slim oat (*Avena barbata*), common silverhair grass (*Aira caryophyllea*), bristly dogtail grass (*Cynosurus echinatus*), and blue wild rye (*Elymus glaucus* ssp. *glaucus*). Bullthistle (*Cirsium vulgare*), deer brush, and Himalayan blackberry are associated with the annual grassland. In the Dam area, cut logs and fallen tree limbs are densely scattered in the annual grassland.

Ruderal annual grassland is the dominant vegetated land cover type at the Cedar Mill staging area. Developed/disturbed areas are interspersed in the grassland. The ruderal areas are dominated by nonnative annual grasses and herbs, including dense areas of invasive species, with few natives present. Dominant species include annual grasses, such as spike bent grass (*Agrostis exarata*), California brome (*Bromus carinatus*), ripgut brome (*B. diandrus*), soft chess (*B. hordeaceus*), Medusa head (*Elymus caput-medusae*), and seaside barley (*Hordeum marinum* ssp. *gussoneanum*); and forbs, such as yellow star thistle (*Centaurea solstitialis*), big heron bill (*Erodium botrys*), telegraph weed (*Heterotheca grandiflora*), common tarweed (*Madia elegans*), field hedge parsley (*Torilis arvensis*), and rose clover (*Trifolium hirtum*).

Emergent Wetland

There are three emergent wetlands in the Area of Analysis. Two of the emergent wetlands (EW-1 and EW-2) are near Tiger Creek and the Dam, and one emergent wetland (EW-3) is located north of the Spur 10 road on the road shoulder. These features support species such as lamp rush, velvet grass (*Holcus lanatus*), bristly dogtail grass, and smaller duckweed (*Lemna minor*). All three of the emergent wetlands obtain water from seeps and are perennially wet.

Seasonal Wetland

One seasonal wetland (SW-1) is in the Area of Analysis. SW-1 is west of the Spur 10 road on the road shoulder. The wetland supports herbaceous wetland species with dominant species including wire rush (*Juncus balticus*), lamp rush (*J. effusus*), and/or annual beard grass (*Polypogon monspeliensis*). SW-1 exhibited indicators of hydric soils and wetland hydrology but did not meet the hydrophytic vegetation criterion for a federal wetland (discussed further in Section 3.5.4.3 *Waters of the United States and Waters of the State*).

Ditch

One ditch (D-1) is in the Area of Analysis at the Cedar Mill staging area. Ditch D-1 is earth-lined and contains ruderal annual grassland. The ditch drains primarily following storm events and is most closely aligned with the blue line stream for the creek mapped on the USGS topographic quadrangle. Ditch D-1 connects to South Branch Sutter Creek downstream of the Area of Analysis.

Ephemeral Drainage

Four ephemeral drainages, ED-1; ED-2; ED-3; and ED-4, are within the Area of Analysis in the Spur 10 road area. ED-1, ED-2, and ED-4 cross under the Spur 10 road in culverts and ED-3 is located north of the Spur 10 road on the road shoulder. Four other ephemeral drainages are entirely within culverts within the Area of Analysis. The ephemeral drainages vary from two to five feet wide and most support sparse vegetation, primarily grasses, or are unvegetated. There is no riparian habitat associated with the ephemeral drainages.

Other Ephemeral Drainage Features

Plunge Pool Channel

The plunge pool channel is composed of cobble and exposed bedrock and drains surface water from the plunge pool (described below in the *Perennial Drainage* subsection) to Tiger Creek. The northern section of the channel generally lacks vegetation and serves as the low-flow portion of the channel. Surface water was flowing into Tiger Creek from this section of the channel during the August 17, 2022, field survey. The remainder of the channel south of the low-flow section was dry during the field survey and supports small trees and drift (organic debris, larger than twigs) piled against the base of some trunks. Based on the presence of drift and the break in bank slope, this section of the channel appears to carry high flows from the spillway and plunge pool.

Spillway Bathtub Drop Inlet/Concrete Spillway

When water elevations rise above the Reservoir's OHWM (typically from natural inflows from the Tiger Creek watershed upstream of the Reservoir), water flows into the bathtub drop inlet and down the concrete spillway. The water becomes airborne before entering the plunge pool. The bathtub drop inlet is roughly 90 feet long, 6 feet wide, and 22 feet deep. The concrete spillway is irregularly shaped and ranges from 30 feet wide to roughly 75 feet wide and is approximately 110 feet long. The spillway has vertical training walls that are roughly 8 feet tall. All components of the bathtub drop inlet and concrete spillway are considered ephemeral drainage.

Perennial Drainage

Tiger Creek (PS-1) and an unnamed stream (PS-2) that crosses Spur 10 are naturally occurring perennial drainages in the Area of Analysis. Tiger Creek is a tributary of the North Fork of the Mokelumne River. Tiger Creek ranges from approximately 5 to 10 feet wide immediately downstream of the Dam to approximately 15 to 30 feet wide below the confluence with the existing plunge pool and spillway channel. Bedrock, boulder, cobble, and gravel compose the channel bottom. The banks of Tiger Creek are forested, and the forest canopy provides a relatively high degree of stream shading, with the exception of the area immediately downstream of the Dam which has been cleared of most vegetation. Understory vegetation is generally lacking along most of the length of the creek banks. Cut logs and fallen tree limbs are scattered within much of the forest surrounding the creek.

Based on fish community sampling conducted by PG&E and their consultants in Tiger Creek downstream of the Area of Analysis, the fish community in Tiger Creek comprises rainbow trout (*Oncorhynchus mykiss*), brown trout (*Salmo trutta*), and green sunfish (*Lepomis cyanellus*), although trout appear to be the dominant species in Tiger Creek (Pacific Gas and Electric Company 2017a, 2017b, 2020, 2021, 2022a). No fish were observed in the Area of Analysis during visual surveys conducted on April 14, 2023 (as described in Section 3.5.3.2 *Field Surveys*).

A segment of an unnamed creek (PS-2) crosses under Spur 10 through a five-foot diameter culvert. This creek is an average of seven feet wide within the Area of Analysis and flow was observed in the creek at the time of the August 25, 2022, survey. Banks of the creek are mapped within the Sierran mixed conifer forest but support Himalayan blackberry and dogwood near the creek edge.

Other Perennial Drainage Features

Plunge Pool

The plunge pool is an earthen-lined structure located at the base of the spillway chute. The feature appears to support year-round water with seasonal fluctuations in the water level and surface area. When the Reservoir is actively spilling and fills the plunge pool, water flows directly from the plunge pool into Tiger Creek. The plunge pool is unvegetated open water.

Lower Tiger Creek Canal

Lower Tiger Creek Canal is a concrete structure with a flat bottom and vertical sides that conveys water from the Reservoir to the Tiger Creek Forebay. Water from the forebay flows into the penstock and down to the Tiger Creek Powerhouse before being discharged into the North Fork Mokelumne River. The canal is roughly 15 feet wide and ranges from 10 feet tall to 17 feet tall within the Area of Analysis. The canal is unvegetated open water.

Reservoir

The Dam was built in 1931 to impound Tiger Creek and create the Reservoir. The Reservoir is fed naturally by Tiger Creek upstream of the Dam and artificially by the Tiger Creek Conduit, which conveys water from the Mokelumne River through a PG&E-regulated diversion at the Salt Springs Powerhouse over 12 miles east of the Dam. The Reservoir's water surface level fluctuates throughout the year for multiple reasons; however, PG&E Power Generation operates the Reservoir with a normal maximum water surface elevation of 3,589.05 feet (North American Vertical Datum of 1988), or 21.25 feet on the staff gage at the Reservoir's existing intake structure. The reservoir land cover type is entirely open water. This is an inundated, unvegetated cover type. The Reservoir is known to support rainbow trout, brown trout, and green sunfish. PG&E regularly conducts fish rescues at the Tiger Creek Forebay, and several hundred brown trout and smaller number of rainbow trout and green sunfish are relocated to the Reservoir during these rescue events. Unidentified minnows (presumably of the Cyprinidae [carp or minnow] family) have also been relocated to the Reservoir as part of these rescue events. The Reservoir provides habitat for benthic macroinvertebrates, an important food item for fish in the Reservoir.

Developed/Disturbed

The developed/disturbed portions of the Area of Analysis are unvegetated or very sparsely vegetated areas, including paved and gravel roads, parking areas, the Dam and associated structures not mapped as drainages, and maintenance buildings.

3.5.4.3 Waters of the United States and Waters of the State

The Area of Analysis contains 4 features that are wetlands (emergent wetland and seasonal wetland) and 12 that are non-wetland waters (ditch, ephemeral drainage features, perennial drainage features, canal, and the Reservoir) which are described in Section 3.5.4.2 Land Cover Types in the Area of Analysis. All features are at least preliminarily considered waters of the United States, under USACE jurisdiction, and waters of the State, under State Water Board jurisdiction. Waters of the United States that are wetlands meet the three criteria of supporting a dominance of wetland plants, hydric soils, and wetland hydrology. Waters of the State must meet at least two of those three criteria. For non-wetland water features, such as rivers, streams, channels, and lakes, the extent of potential USACE jurisdiction is determined by identification of the OHWM, which is defined as "that line on shore established by the fluctuations of water and indicated by physical character of the soil, destruction of terrestrial vegetation, the presence of litter and debris, or other appropriate means that consider the characteristics of the surrounding areas" (33) Code of Federal Regulations [CFR] 328.3[e]). The OHWM also represents the extent of waters of the State.

A delineation of waters of the United States was conducted within the Area of Analysis. The boundaries of the potential waters of the United States in the Area of Analysis, as shown on Figure 3.5-1, *Biological Resources in the Area of Analysis*, are pending submittal and subsequent verification by the USACE Sacramento District.

3.5.4.4 Special-Status Species

Special-status species are plants and animals that are legally protected under the federal Endangered Species Act (ESA), the California Endangered Species Act (CESA), or other regulations, and species considered sufficiently rare by the scientific community to qualify for such listing. For the purposes of this document, special-status species fall into the following categories:

- Species listed or proposed for listing as threatened or endangered under ESA (50 CFR 17.11 [listed animals] and 17.12 [listed plants], and various notices in the Federal Register [FR] [proposed species]);
- Species that are candidates for possible future listing as threatened or endangered under the ESA (88 FR 41560, June 27, 2023);
- Species listed or proposed for listing by the State of California as threatened or endangered under the CESA (14 CCR 670.5);

- Species that meet the definitions of rare or endangered under CEQA (CEQA Guidelines 15380);
- Animals listed as California species of special concern on CDFW's Special Animals List (California Department of Fish and Wildlife 2024b);
- Animals that are fully protected in California under the California Fish and Game Code (sections 3511 [birds], 4700 [mammals], and 5050 [reptiles and amphibians]);
- Bats identified as medium or high priority on the Western Bat Working Group regional priority species matrix (Western Bat Working Group 2017a);
- Plants listed as rare under the California Native Plant Protection Act (California Fish and Game Code 1900 et seq.);
- Plants considered by CDFW and CNPS to be "rare, threatened, or endangered in California" (Rare Plant Ranks 1B and 2) (California Department of Fish and Wildlife 2024a; California Native Plant Society 2024); and
- Plants identified by CDFW and CNPS about which more information is needed to determine their status, and plants of limited distribution (Rare Plant Ranks 3 and 4), (California Department of Fish and Wildlife 2024a; California Native Plant Society 2024), which may be included as special-status species based on local significance or recent biological information.

Special-Status Plants

Based on CNDDB (California Department of Fish and Wildlife 2024a) records and the CNPS inventory search (California Native Plant Society 2024), 38 special-status plant species were identified as having potential to occur in the Area of Analysis. There were no special-status plants included on the USFWS (2024) species list for the Area of Analysis. The 38 special-status plants documented on the CNDDB and CNPS lists are listed in Table 3.5-2, including the scientific name, common name, status, distribution, habitat requirements, and potential for occurrence of each species in the Area of Analysis.

Nine of the 38 special-status plants were identified as having no potential to occur in the Area of Analysis because the species does not occur in the elevational range of the Area of Analysis and/or suitable habitat for the species is not present in the Area of Analysis (i.e., riparian habitat, pine/blue oak woodland, chaparral, cismontane woodland).

Twenty-two of the 38 special-status plants were identified as having low potential to occur in the Area of Analysis because suitable habitat is present, and species are recorded more than five miles from the Area of Analysis. Three species were

identified as having moderate potential to occur, because suitable habitat is present and species are recorded within two to five miles of the Area of Analysis. Four species were considered to have high potential to occur (Pleasant Valley mariposalily [Calochortus clavatus var. avius], Brandegee's clarkia [Clarkia biloba ssp. brandegeeae], Sierra clarkia [Clarkia virgata], and Jepson's dodder [Cuscuta jepsonii]), because suitable habitat is present and there are recorded occurrences within approximately two miles of the Area of Analysis.

Botanical surveys during the reported blooming periods for all of the special-status plant species were conducted in the Area of Analysis (as described in Section 3.5.3.2 *Field Surveys*), and none were observed. Therefore, it is assumed that no special-status plants are present in the Area of Analysis.

Table 3.5-2. Special-Status Plants with Potential to Occur in the Vicinity of the Area of Analysis

| Common and Scientific Names | Status— Federal/ State/ CRPR ^a | Distribution and Habitat Requirements | Blooming Period | Potential for Occurrence |
|---|--|---|------------------------|---|
| Sanborn's onion Allium sanbornii var. sanbornii | -/-/4.2 | Cascade Range foothills and Sierra Nevada Foothills, from Shasta County to Calaveras County; Oregon Gravelly or usually serpentine soils in chaparral, cismontane woodland, and lower montane coniferous forest; 855–4,955 feet | May-September | Low potential; potential for suitable soils in Sierran mixed conifer forest; nearest recorded occurrence is more than five miles from the Area of Analysis. |
| Three-bracted onion Allium tribracteatum | _/_/1B.2 | Central high Sierra Nevada: Calaveras and Tuolumne Counties Volcanic soils in chaparral, lower and upper montane coniferous forest; 3,610–9,845 feet | April–August | Low potential; suitable habitat in Sierran mixed conifer forest; nearest recorded occurrence is more than five miles from the Area of Analysis. |
| Ione manzanita Arctostaphylos myrtifolia | _/ <u>_</u> /1B.2 | Central Sierra Nevada Foothills, Amador and Calaveras Counties Chaparral, cismontane woodland; 195–1,905 feet | November– March | No potential; species range is below the Area of Analysis elevations. |
| Upswept moonwort Botrychium ascendens | -/-/2B.3 | Southern high Cascade Range, and scattered occurrences elsewhere: Butte, | June (July)– August | Low potential; suitable habitat in seasonal and emergent wetlands; |

3.5-16

| Common and Scientific Names | Status— Federal/ State/ CRPR ^a | Distribution and Habitat Requirements | Blooming Period | Potential for Occurrence |
|---|--|--|-----------------------------|---|
| | | El Dorado, Lassen, Mono, Modoc, Plumas, Shasta, Tehama, and Tulare Counties; Idaho, Oregon, Nevada, Washington, and elsewhere Wet areas in lower montane coniferous forest; 3,660–9,990 feet | | recorded more than five miles from the Area of Analysis. |
| Scalloped moonwort Botrychium crenulatum | -/-/2B.2 | Scattered occurrences in mountains of California; Nevada, Oregon, and elsewhere Bogs and fens, lower montane coniferous forest, meadows and seeps, freshwater marshes and swamp; 4,160–10,760 feet | June– September | Low potential; suitable habitat in seasonal and emergent wetlands; recorded more than five miles from the Area of Analysis. |
| Mingan moonwort Botrychium minganense | <i>-</i> /-/4.2 | High Cascade Range, southern High Sierra Nevada with occurrences in Butte, Fresno, Lassen, Modoc, Nevada?, Placer, Plumas, San Bernardino, Shasta, Sierra, Tehama, and Tulare Counties; Arizona, Idaho, Nevada, | July-September (October) | No potential; species range is above the Area of Analysis elevations. |

November 2024

| Common and Scientific Names | Status— Federal/ State/ CRPR ^a | Distribution and Habitat Requirements | Blooming Period | Potential for Occurrence |
|--|--|--|--------------------|---|
| | | Oregon, Utah, Washington, and elsewhere Wet areas in lower montane coniferous forest; 4,770–6,900 feet | | |
| Watershield Brasenia schreberi | -/-/2B.3 | Scattered occurrences in north and central California; widespread across the U.S. Freshwater marshes; 0–7,220 feet | June– September | Low potential; suitable habitat in emergent wetlands; recorded more than five miles from the Area of Analysis. |
| Pleasant Valley mariposa-lily Calochortus clavatus var. avius | -/-/1B.2 | Northern and central Sierra Nevada Foothills: Amador, Calaveras, El Dorado, and Mariposa* Counties Lower montane coniferous forest on Josephine silt loam and volcanic soils; 1,000– 5,905 feet | May–July | High potential; suitable soils unlikely in Sierran mixed conifer forest; nearest known occurrences are 1.4 miles north of the Spur 10 road, 1.6 miles northwest of the Dam area, and 2.6–3.4 miles northeast of the Dam area. |
| Fresno ceanothus Ceanothus fresnensis | -/-/4.3 | Central Sierra Nevada, Calaveras, El Dorado, Fresno, Madera, Mariposa, Placer, Tulare, and Tuolumne Counties Openings in cismontane woodland, lower montane | April (May)–July | Low potential; suitable habitat in Sierran mixed conifer forest; nearest recorded occurrence is more than five miles from the Area of Analysis. |

| Common and Scientific Names | Status— Federal/ State/ CRPR ^a | Distribution and Habitat Requirements coniferous forest; 2,955–7,250 | Blooming Period | Potential for Occurrence |
|---|--|---|------------------------|--|
| Red Hills soaproot Chorogalum grandiflorum | -/-/1B.2 | feet North and central Sierra Nevada Foothills: Amador, Butte, Calaveras, El Dorado, Placer, and Tuolumne Counties Serpentine or gabbro soils in chaparral, lower montane coniferous forest, and cismontane woodland; 805– 5,545 feet | (April) May– June | Moderate; potential; may be serpentine at Cedar Mill staging area; nearest known occurrences are 1 mile north, 3.8 miles west, 4.3 miles west, and 4.5 miles west of the Cedar Mill staging area, but nearest recorded occurrence to other parts of the Area of Analysis is five miles west. |
| Brandegee's clarkia Clarkia biloba ssp. brandegeeae | -/-/4.2 | Northern Sierra Nevada Foothills from Butte to El Dorado Counties Chaparral, cismontane woodland, lower montane coniferous forest, often on roadsides; 245–3,000 feet | (March) May– August | High potential; suitable habitat in Sierran mixed conifer forest; recorded 1.3 miles southeast of the Cedar Mill staging area. |
| Sierra clarkia Clarkia virgata | -/-/4.3 | Northern and central Sierra Nevada, including portions of Amador, Calaveras, El Dorado, Mariposa, and Tuolumne Counties | May–August | High potential; suitable habitat in Sierran mixed conifer forest; recorded 1.9 miles northwest of the Area of Analysis. |

| Common and Scientific Names | Status— Federal/ State/ CRPR ^a | Distribution and Habitat Requirements | Blooming Period | Potential for Occurrence |
|---|--|--|-----------------|--|
| Tido | <u> </u> | Cismontane woodland, lower montane coniferous forest; 1,310–5,510 feet | | r otornia i or occarrono |
| Streambank spring beauty <i>Claytonia parviflora</i> ssp. <i>grandiflora</i> | -/-/4.2 | Known only from pine/blue oak woodlands in the Sierra Nevada foothills: Amador, Butte, Calaveras, El Dorado, Fresno, Kern, Placer, Tulare, Tuolumne Counties Rocky sites in cismontane woodland; 820–3,935 feet | February–May | No potential; no suitable pine/blue oak woodland habitat in the Area of Analysis. |
| Bisbee Peak rush-rose Crocanthemum suffrutescens | -/-/3.2 | Amador, Calaveras, and El Dorado Counties Chaparral, often in burned or disturbed areas on gabbroic soils; 245–2,220 feet | April–August | No potential; species range is below the Area of Analysis elevations. |
| Jepson's dodder Cuscuta jepsonii | -/-/1B.2 | Last collected on Mt. Shasta in 1954, occurrences in Lake, Mariposa, Siskiyou, Trinity, and Tulare Counties Streambanks in North Coast coniferous forest, parasitic on Ceanothus; 3,935–7,545 feet | July–September | High potential; suitable habitat along Tiger Creek and PS-2; nearest known occurrences are 0.25–0.44 mile north of the Spur 10 road. |
| Mountain lady slipper Cypripedium montanum | -/-/4.2 | Del Norte, Glenn, Humboldt, Madera, Mendocino, Modoc, Mariposa, Plumas, Shasta, | March-August | Low potential; suitable habitat in Sierran mixed conifer forest; nearest |

Tiger Creek Regulator Dam Spillway Replacement Project Recirculated IS/MND

Final 3.5-20

| Common and Scientific Names | Status— Federal/ State/ CRPR ^a | Distribution and Habitat Requirements | Blooming Period | Potential for Occurrence |
|--|--|--|----------------------------|---|
| | | Sierra, Siskiyou, Sonoma, Tehama, Trinity, Tuolumne, and possibly San Mateo and Santa Cruz Counties; Idaho, Oregon, Washington, Wyoming Broadleaved upland forest, cismontane woodland, lower montane coniferous forest, North Coast coniferous forest; 605–7,515 feet | | known recorded occurrence is more than five miles from the Area of Analysis. |
| Yellow-lip pansy monkeyflower <i>Diplacus pulchellus</i> | -/-/1B.2 | Calaveras, El Dorado, Mariposa, and Tuolumne Counties; lower montane coniferous forest, meadows and seeps, vernally mesic, often disturbed areas; clay soils; 1,970–6,650 feet | April–July | Low potential; suitable habitat in seasonal wetlands and emergent wetlands; recorded more than five miles from the Area of Analysis. |
| Obtuse starwort Engellaria [Stellaria] obtusa | -/-/4.3 | North Coast Ranges, Cascade Range, northern and central Sierra Nevada, and Modoc Plateau: in Butte, Glenn, Humboldt, Lassen, Nevada, Plumas, Shasta, Sierra, Tehama, and Tuolumne | May–September (October) | Low potential; suitable habitat in Sierran mixed conifer forest; nearest known recorded occurrence is more than five miles from the Area of Analysis. |

| Common and Scientific Names | Federal/ State/ CRPR ^a | Distribution and Habitat Requirements | Blooming Period | Potential for Occurrence |
|---|---|--|-----------------|---|
| | | Counties; Idaho, Oregon, Washington and elsewhere Lower montane coniferous forest, riparian woodland, upper montane coniferous forest; 490–7,515 feet | | |
| Tripod buckwheat Eriogonum tripodum | -/-/4.2 | Amador, Colusa, El Dorado, Glenn, Lake, Mariposa, Napa, Placer, Tehama, and Tuolumne Counties Chaparral, cismontane woodland, often on serpentinite; 655–5,250 feet | May–July | No potential; no suitable chaparral or cismontane woodland in the Area of Analysis. |
| Slender cottongrass Eriophorum gracile | -/-/4.3 | Butte, El Dorado, Lassen, Madera, Mariposa, Nevada, Plumas, San Francisco*, Shasta, Sierra, Siskiyou?, Sonoma, and Tuolumne Counties; Idaho, Oregon, Washington, and Wyoming Acidic soils in bogs and fens, meadows and seeps, upper montane coniferous forest; 4,200–9,515 feet | May-September | No potential; no suitable acidic wetland habitats in the Area of Analysis. |
| Tansy-flowered woolly sunflower | -/-/4.3 | Calaveras and Mariposa Counties | May-July | Low potential; suitable habitat in Sierran mixed |

Tiger Creek Regulator Dam Spillway Replacement Project Recirculated IS/MND

Final 3.5-22

| Common and Scientific Names | Status— Federal/ State/ CRPR ^a | Distribution and Habitat Requirements | Blooming Period | Potential for Occurrence |
|--|--|---|-----------------|---|
| Eriophyllum confertiflorum var. tanacetiflorum | | Cismontane woodland, lower montane coniferous forest; 1,000–4,395 feet | | conifer forest; nearest known recorded occurrence is more than five miles from the Area of Analysis. |
| Tuolumne button- celery <i>Eryngium</i> <i>pinnatisectum</i> | -/-/1B.2 | Amador, Calaveras, Sacramento, and Tuolumne Counties Vernal pools and moist areas in cismontane woodland and lower montane coniferous forest; 230–3,000 feet | May-August | Moderate potential; suitable habitat in seasonal and emergent wetlands; nearest known recorded occurrence is 4.5 miles west of the Cedar Mill staging area. |
| Small-flowered monkeyflower <i>Erythranthe</i> <i>inconspicua</i> | -/-/4.3 | Amador, Calaveras, Mariposa, Fresno, and Tuolumne Counties Chaparral, cismontane woodland, lower montane coniferous forest; 900–2,495 feet | May–June | Low potential; suitable habitat in Sierran mixed conifer forest; nearest known recorded occurrence is more than five miles from the Area of Analysis. |
| Cut-leaved monkeyflower <i>Erythranthe laciniata</i> | -/-/4.3 | Alameda, Amador, Calaveras, El Dorado, Fresno, Madera, Mariposa, Tulare, and Tuolumne Counties Chaparral, lower and upper montane coniferous forest, mesic areas; on granitic | April–July | Low potential; suitable habitat in Sierran mixed conifer forest; nearest known recorded occurrence is more than five miles from the Area of Analysis. |

| Common and Scientific Names | Status— Federal/ State/ CRPR ^a | Distribution and Habitat Requirements | Blooming Period | Potential for Occurrence |
|--|--|--|---------------------|--|
| | | substrates; from 1,610–8,695 feet | | |
| Stanislaus monkeyflower <i>Erythranthe marmorata</i> | _/_/1B.1 | Amador, Calaveras, Fresno, Stanislaus, and Tuolumne Counties Cismontane woodland, lower montane coniferous forest; 330–2,955 feet | March–May | Low potential; suitable habitat in Sierran mixed conifer forest; nearest known occurrence is more than five miles from the Area of Analysis. |
| Sierra starwort Hartmaniella sierrae | -/-/4.2 | High Sierra Nevada from Plumas to Tuolumne Counties Chaparral, cismontane woodland, lower montane coniferous forest, upper montane coniferous forest; 4,020–7,200 feet | March–May | Low potential; suitable habitat in Sierran mixed conifer forest; recorded more than five miles from the Area of Analysis. |
| Parry's horkelia Horkelia parryi | _/_/1B.2 | Amador, Calaveras, El Dorado, and Mariposa Counties Chaparral, or cismontane woodland openings, especially lone formation, dry slopes; 260–3,510 feet | April– September | No potential; no lone formation or suitable habitats in the Area of Analysis. |
| Yosemite tarplant Jensia yosemitana | -/-/3.2 | Amador, Fresno, Madera, Mariposa, Tulare, and Tuolumne Counties | April (May)-July | Low potential; suitable habitat in Sierran mixed conifer forest and wetlands; nearest recorded |

Tiger Creek Regulator Dam Spillway Replacement Project Recirculated IS/MND

Final 3.5-24

| Common and Scientific Names | Status— Federal/ State/ CRPR ^a | Distribution and Habitat Requirements | Blooming Period | Potential for Occurrence |
|--|--|--|------------------------|---|
| | | Lower montane coniferous forest, meadows, and seeps; 3,935–7,545 feet | | occurrence is more than five miles from the Area of Analysis. |
| Foothill jepsonia Jepsonia heterandra | -/-/4.3 | Amador, Calaveras, El Dorado, Mariposa, Stanislaus, and Tuolumne Counties Cismontane woodland, lower montane coniferous forest; 165–1,640 feet | August– December | No potential; species range is below the Area of Analysis elevations. |
| Dubious pea Lathyrus sulphureus var. argillaceus | -/-/3 | Klamath Ranges, North Coast Ranges, Sierra Nevada in Calaveras, El Dorado, Nevada [?] , Placer, Shasta, and Tehama Counties Cismontane woodlands, lower and upper coniferous forests; 490–3,050 feet | April–May | Low potential; suitable habitat in Sierran mixed conifer forest; nearest recorded occurrence is more than five miles from the Area of Analysis. |
| Hutchison's lewisia Lewisia kelloggii ssp. hutchisonii | -/-/3.2 | Northern Sierra Nevada and Cascades; many counties uncertain Openings and ridgetops in upper montane coniferous forest, often on slate, sometimes on rhyolite tuff; 2,510–7,760 feet | April (May)– August | Low potential; unlikely suitable substrates, suitable habitat in Sierran mixed conifer forest; nearest recorded occurrence is more than five miles from the Area of Analysis. |

| Common and Scientific Names | Status— Federal/ State/ CRPR ^a | Distribution and Habitat Requirements | Blooming Period | Potential for Occurrence |
|--|--|---|------------------------|---|
| Kellogg's lewisia Lewisia kelloggii ssp. kelloggii | -/-/3.2 | Alpine?, Amador?, El Dorado?, Humboldt?, Madera?, Mariposa, Placer, Shasta?, Sierra?, Siskiyou?, Trinity?, Tuolumne Counties Openings, ridgetops, often slate, sometimes rhyolite tuff in upper montane coniferous forest; 4,805–7,760 feet | April (May)– August | Low potential; unlikely suitable substrates, suitable habitat in Sierran mixed conifer forest; nearest recorded occurrence is more than five miles from the Area of Analysis. |
| Humboldt lily Lilium humboldtii ssp. humboldtii | -/-/4.2 | Southern Cascade Range, high Sierra Nevada: Amador, Butte, Calaveras, El Dorado, Fresno, Madera, Mariposa, Nevada, Placer, Tehama, Tuolumne, and Yuba Counties Openings in chaparral, cismontane woodland, lower montane coniferous forest; 295–4,200 feet | May–July (August) | Low potential; suitable habitat in Sierran mixed conifer forest; nearest recorded occurrence is more than five miles from the Area of Analysis. |
| Stebbins' lomatium Lomatium stebbinsii | -/-/1B.1 | Calaveras and Tuolumne Counties On thin gravelly, volcanic clay soils in open ponderosa pine forest or chaparral in absence of other vegetation; 4,085– 7,790 feet | March-May | Low potential; unlikely suitable substrates, suitable and open habitat in Sierran mixed conifer forest; nearest recorded occurrence is more than five |

| Common and Scientific Names | Status— Federal/ State/ CRPR ^a | Distribution and Habitat Requirements | Blooming Period | Potential for Occurrence |
|--|--|--|---------------------|---|
| | | | | miles from the Area of Analysis. |
| Sierra sweet bay Myrica hartwegii | -/-/4.3 | El Dorado, Madera, Mariposa, Nevada, Tuolumne, and Yuba? Counties Cismontane woodland, Lower montane coniferous forest, riparian forest; 490–5,740 feet | May–June | Low potential; suitable habitat in Sierran mixed conifer forest; nearest recorded occurrence is more than five miles from the Area of Analysis. |
| Western waterfan lichen Peltigera gowardii | -/-/4.2 | Amador, Butte, Calaveras, El Dorado, Fresno, Madera, Mariposa, Mono, Plumas, Sierra, Siskiyou, Trinity, Tulare, Tuolumne, and Yuba Counties; Georgia, Maine, Massachusetts, Montana, New Hampshire, New Jersey, New York, North Carolina, Oregon, Pennsylvania, Tennessee, Vermont, Virginia, and Washington Riparian forest; 3,495–8,595 feet | - Foliose lichen | No potential; no suitable habitat in Area of Analysis; nearest recorded occurrence is more than five miles from the Area of Analysis. |
| Coleman's rein orchid Piperia colemanii | -/-/4.3 | Scattered distribution along eastern Central Valley and foothills from Siskiyou County to Tulare County | June-August | Low potential; suitable habitat in Sierran mixed conifer forest; recorded |

| Common and Scientific Names | Status— Federal/ State/ CRPR ^a | Distribution and Habitat Requirements | Blooming Period | Potential for Occurrence |
|--|--|---|-----------------|--|
| | | Chaparral and lower montane coniferous forest, often on sandy soils; 3,935–7,545 feet | J | more than five miles from the Area of Analysis. |
| Prairie wedge grass Sphenopholis obtusata | -/-/2B.2 | Amador, Fresno, Inyo, Mono, Riverside, San Bernardino, San Diego [?] , and Tulare Counties Moist areas in meadows and seeps, cismontane woodland; 985–6,560 feet | April–July | Moderate potential; suitable habitat in emergent and seasonal wetlands; nearest recorded occurrence is four miles west of the Cedar Mill staging area. |

Sources: California Department of Fish and Wildlife 2024a; California Native Plant Society 2024; Consortium of California Herbaria 2023.

Federal:

– not listed under the federal Endangered Species Act.

State:

– not listed under the California Endangered Species Act.

CRPR = California Rare Plant Rank:

- 1B = rare, threatened, or endangered in California and elsewhere.
- 2B = rare, threatened, or endangered in California but more common elsewhere.
- 3 = plants about which more information is needed, a review list.
- 4 = plants of limited distribution that are on a watch list.
- .1 = seriously endangered in California.
- .2 = fairly endangered in California.
- .3 = not very endangered in California.

^{? =} Occurrence confirmed, but possibly extirpated.

^a Status Explanations:

Special-Status Animals

Based on the USFWS (2024) and NMFS (2022) species lists, and the CNDDB (California Department of Fish and Wildlife 2024a) records search, 26 special-status animal species were identified as having potential to occur in the Area of Analysis.

Two fish species (California roach [Hesperoleucus symmetricus] and hardhead [Mylopharadon conocephalus]) were identified as potentially occurring in the Area of Analysis. California roach and hardhead are not known to occur in the Area of Analysis (California Department of Fish and Wildlife 2024a). The nearest location to the Area of Analysis where California roach and hardhead are known to occur is the North Fork of the Mokelumne River (Pacific Gas and Electric Company 2017b), which is more than 3 miles downstream from the Dam area. In addition, anadromous species are blocked from accessing the North Fork of the Mokelumne River and Tiger Creek by Camanche Dam, which is located east of Lodi approximately 40 miles downstream of the Dam area on the Mokelumne River.

Of the remaining 24 special-status animal species identified, eight have a moderate or high potential to occur in the Area of Analysis given their known range and presence of suitable habitat. The remaining 16 special-status animals have low to no potential to occur in the Area of Analysis and are not discussed further. One additional special-status animal species, bald eagle (*Haliaeetus leucocephalus*), was not on the CNDDB list but was observed during the August 17, 2022, survey and was included as having the potential to occur in the Area of Analysis. All special-status animals that were considered are listed in Table 3.5-3, which identifies their regulatory status, distribution, habitat requirements, and a rationale for their potential to occur in the Area of Analysis. The nine special-status animal species that have a high or moderate potential to occur in the Area of Analysis are discussed below.

Table 3.5-3. Special-Status Animal Species with Potential to Occur in the Vicinity of the Tiger Creek Regulator Reservoir Dam Spillway Replacement Area of Analysis

| Common and Scientific Name | Legal Status (Federal/State/ Other) ^a | Geographic Distribution and Habitat Requirements | Potential for Occurrence in the Area of Analysis |
|--|--|---|---|
| Grubbs' cave harvestman Banksula grubbsi | -/-/- | Known only from Black Chasm Cave in Volcano, Amador County. Occurs in caves. | No potential; no caves in the Area of Analysis and the Area of Analysis is outside of species' known range. |
| Grady's Cave amphipod Stygobromus gradyi | _/_/_ | Calaveras and Tuolumne Counties. Occurs in caves with springs. | No potential; no caves in the Area of Analysis. |
| Graham's Cave amphipod Stygobromus grahami | -/-/- | Amador Calaveras, and El Dorado Counties. Occurs in caves with small streams and pools. | No potential; no caves in the Area of Analysis. |
| Leech's skyline diving beetle <i>Hydroporus leechi</i> | _/_/_ | Has been found at sporadic locations in norther California in San Mateo, Sonoma, Mendocino, Tehama, Siskiyou, Plumas, Calaveras, Mariposa, and Madera Counties. Found in freshwater ponds, shallow water of stream marshes and lakes; lacustrine habitat | Low potential; no shallow marsh areas in Tiger Creek Regulator Reservoir or along Tiger Creek in the Area of Analysis; one historical (1893) record for an occurrence more than five miles from the Area of Analysis. |
| Monarch butterfly Danaus plexippus | C/-/- | Adults migrate from August–October, and winter along the California coast and in central Mexico. | Low potential; could pass through or forage in Area of Analysis. |

| Common and Scientific Name | Legal Status (Federal/State/ Other) ^a | Geographic Distribution and Habitat Requirements | Potential for Occurrence in the Area of Analysis |
|---------------------------------------|--|---|--|
| | | Open habitats including fields, meadows, weedy areas, marshes, and roadsides. Monarch butterflies roost in wind-protected tree groves (such as eucalyptus) with nectar and water sources nearby. Caterpillar host plants are milkweeds. | |
| Obscure bumble bee Bombus caliginosus | _/_/_ | Occurs along the Pacific Coast, from southern California to southern British Columbia, with scattered records from the east side of California's Central Valley. Uncommon throughout its range. Inhabits coastal prairies and Coast Range meadows. Nesting occurs underground as well as above ground in abandoned bird nests. Food plant genera include Ceanothus, Cirsium, Clarkia, Keckiella, Lathyrus, Lotus, Lupinus, Rhododendron, Rubus, Trifolium, and Vaccinium. | Low potential; several genera of food plants are present at the Dam area and Doakes Ridge; however, these areas are outside the species' known range; Cedar Mill staging area is within the known range, but very low quality grassland is present; one historical (1969) record for an occurrence approximately seven miles from the Cedar Mill staging area. |
| Crotch bumble bee Bombus crotchii | -/CE/- | Pacific Coast, Western Desert, Great Valley, and adjacent foothills throughout most of southwestern California. Occurs in open grassland and scrub; nests underground. Food plants include Asclepias, Chaenactis, Lupinus, Medicago, Phacelia, and Salvia. | Low potential; genera of food plants are present in the grassland areas at the Dam area and Doakes Ridge; however, this species is rare, and the patches of grassland are fragmented in the vicinity of the Area of Analysis and likely too |

| Common and Scientific Name | Legal Status (Federal/State/ Other) ^a | Geographic Distribution and Habitat Requirements | Potential for Occurrence in the Area of Analysis |
|---|--|--|---|
| | | | distant to support diverse bumble bee communities. Low potential to occur at Cedar Mill staging area due to very low quality grassland; one historical (1967) record and one more recent (2020) record for occurrences approximately 15 miles from the Area of Analysis. |
| Central California roach <i>Lavinia symmetricus</i> <i>symmetricus</i> | T/-/- | Occurs in tributaries to the Sacramento and San Joaquin Rivers and tributaries to San Francisco Bay. Central California roach are found in small, high gradient, often intermittent tributaries but appear to be poorly adapted to lakes and reservoirs. They are adaptable fish and tolerate relatively high water temperatures and low oxygen levels (Moyle et al. 2015). Documented population in the North Fork of the Mokelumne River (Pacific Gas and Electric Company 2017b). | Low potential; Tiger Creek is a relatively steep gradient stream (approximately six percent or greater) that likely precludes presence in the Dam area; no CNDDB records for occurrences in Tiger Creek; have not been documented in fish community surveys downstream of the Dam (Pacific Gas and Electric Company 2017a, 2017b, 2020, 2021, 2022a). |
| Hardhead Mylopharodon conocephalus | -/SSC/- | Tributary streams in the San Joaquin River drainage; large tributary streams in the Sacramento River and the mainstem. Resides in low to mid-elevation streams and prefers clear, deep pools and runs with slow velocities; also occurs in | Low potential; Tiger Creek is a relatively steep gradient stream (approximately six percent or greater) that likely precludes presence in the Dam area; no CNDDB records for occurrences in |

| Common and Scientific Name | Legal Status (Federal/State/ Other) ^a | Geographic Distribution and Habitat Requirements | Potential for Occurrence in the Area of Analysis |
|---|--|--|--|
| | | reservoirs. Documented population in the North Fork of the Mokelumne River (Pacific Gas and Electric Company 2017b). | Tiger Creek; have not been documented in fish community surveys downstream of the Dam (Pacific Gas and Electric Company 2017a, 2017b, 2020, 2021, 2022a). |
| Southern long-toed salamander Ambystoma macrodactylum sigillatum | -/SSC/- | High elevation meadows, ponds, and lakes in the Sierra Nevada, Cascade, and Klamath mountains. Breeds in high mountain ponds and lakes. Adults utilize small mammal burrows and moist areas under logs and rocks. | No potential; presence of brown trout (<i>Salmo trutta</i>) in Tiger Creek Regulator Reservoir precludes presence. |
| Western spadefoot Spea hammondii | PT/SSC/- | Sierra Nevada foothills, Central Valley, Coast Ranges, coastal counties in southern California; west of Sierrandesert range axis Shallow streams with riffles and seasonal wetlands, such as vernal and seasonal pools in annual grasslands and oak woodlands. Spends most of life in burrows. | Low to no potential; seasonal and emergent wetlands in the Dam area and along Spur 10 are very shallow and unlikely to support western spadefoot larval development to metamorphosis; the Dam area, at an elevation of 3,435 to 3,940 feet, is above the elevation where most western spadefoot individuals are found (3,000 feet); ponds near the Cedar Mill staging area contain large fish and bullfrogs and the surrounding upland is heavily disturbed; no known occurrences within five miles. |

| Common and Scientific Name | Legal Status (Federal/State/ Other) ^a | Geographic Distribution and Habitat Requirements | Potential for Occurrence in the Area of Analysis |
|--|--|---|--|
| California red- legged frog Rana draytonii | T/SSC/- | Found along the coast and coastal mountain ranges of California from Mendocino County to San Diego County and in the Sierra Nevada from Tehama County to Fresno County; elevation near sea level to about 4,900 feet. Permanent and semipermanent aquatic habitats, such as slow-moving streams or creeks and cold-water ponds, with emergent and submergent vegetation (shrubby riparian). May estivate in rodent burrows or cracks during dry periods. | Low to no potential; presence of brown trout in Tiger Creek Regulator Reservoir precludes presence; Tiger Creek has a bedrock and boulder substrate and is generally fast-flowing, and does not constitute suitable breeding, non-breeding, foraging or dispersal habitat for California red-legged frog. Ponds near the Cedar Mill staging area contain large fish and bullfrogs and the surrounding upland is heavily disturbed. |
| Sierra Nevada yellow-legged frog <i>Rana sierrae</i> | T/SSC/- | Found in the Sierra Nevada above 4,500 feet from Plumas County to southern Tulare County. Isolated populations in Butte County and near Mono Lake, Mono County. Associated with streams, lakes, and ponds in montane riparian, lodgepole pine, sub-alpine conifer, and wet meadow habitats; also includes sunny river margins, meadow streams, isolated pools, and lake borders in the Sierra Nevada. | No potential; the Area of Analysis is below the elevation where this species occurs. |
| Foothill yellow- legged frog – south | PE/E/– | Occurs in the Klamath, Cascade, north Coast, south Coast, Transverse, and | Low potential; not observed in the Dam area during 11 focused |

| Common and Scientific Name | Legal Status (Federal/State/ Other) ^a | Geographic Distribution and Habitat Requirements | Potential for Occurrence in the Area of Analysis |
|-------------------------------|--|--|---|
| Sierra DPS Rana boylii | | Sierra Nevada Ranges up to approximately 6,000 feet. Creeks or rivers in woodland, forest, mixed and chaparral, and wet meadow habitats with rocky and gravel substrates and low overhanging vegetation along the edge. Usually found near riffles with rocks and sunny banks nearby. Sometimes found in isolated pools, vegetated backwaters, and deep, shaded, spring-fed pools. | surveys conducted between 2001 and 2020 (Pacific Gas and Electric Company 2022b). May occur downstream of the Dam area or upstream of the Reservoir but is not anticipated to occur in the Dam area. The closest record for an occurrence (from 2007) is approximately 0.2-mile downstream of the Dam. Instream flow releases downstream of the Dam that area required by the FERC license would be maintained throughout construction and downstream flows would not be affected. While minimal changes to the hydrology and geomorphic processes may occur immediately downstream of the plunge pool as a result of the installation of rock slope protection at the downstream end of the pool, the placement of this rock is a minor obstruction and no changes in hydrology or geomorphic processes are expected to occur further downstream where frogs have been observed. |

| Common and Scientific Name | Legal Status (Federal/State/ Other) ^a | Geographic Distribution and Habitat Requirements | Potential for Occurrence in the Area of Analysis |
|--|--|---|--|
| Northwestern pond turtle Actinemys marmorata | PT/SSC/- | Occurs from the Oregon border of Del Norte and Siskiyou Counties south along the coast to San Francisco Bay, inland through the Sacramento Valley, and on the western slope of Sierra Nevada. Occurs in woodlands, grasslands, and open forests. Occupies ponds, marshes, rivers, streams, and irrigation canals with muddy or rocky bottoms and with some watercress, cattails, water lilies, or other aquatic vegetation. Overwintering habitat consists of mud in stream and pond bottoms or a variety of upland habitats including riparian. | Low to moderate potential; could occur in Tiger Creek Regulator Reservoir or ponds near the Cedar Mill staging area. Unlikely to occur in Tiger Creek due to the extensive amount of downed wood debris and shading along the creek. The closest CNDDB occurrence is approximately five miles from the Dam area. |
| Bald eagle Haliaeetus Ieucocephalus | –/E/P | Nests in Siskiyou, Modoc, Trinity, Shasta, Lassen, Plumas, Butte, Tehama, Lake, and Mendocino Counties and in the Lake Tahoe Basin. Reintroduced into central coast. Winter range includes the rest of California, except the southeastern deserts, very high altitudes in the Sierra Nevada, east of the Sierra Nevada south of Mono County, and some rangelands and coastal wetlands. In western North America, nests and roosts in coniferous forests, woodlands, grasslands, and wetland habitats within 1 | High potential; observed flying over and perched near the Area of Analysis; no records for nests within five miles of the Area of Analysis. |

| Common and Scientific Name | Legal Status (Federal/State/ Other) ^a | Geographic Distribution and Habitat Requirements | Potential for Occurrence in the Area of Analysis |
|--|--|---|---|
| | | mile of a lake, reservoir, stream, or the ocean; nests are normally built in upper canopy of large trees, such as conifers. | |
| Northern goshawk Accipiter gentilis | -/SSC/- | Permanent resident in the Klamath and Siskiyou Mountains, across the Cascades, in the north Coast Ranges from Del Norte County to Mendocino County, and in the Sierra Nevada south to Kern County. Winters in Modoc, Lassen, Mono, and northern Inyo Counties. Nests and roosts in older stands of red fir, Jeffrey pine, Ponderosa pine, lodgepole pine, Douglas-fir, and mixed conifer forests. | Moderate potential; suitable foraging habitat present and known to occur in the vicinity but no goshawks were detected during 2022 surveys (as described in Section 3.5.3.2 Field Surveys and Section 3.5.4.4 Special-Status Species, under Special-Status Animals). |
| California spotted owl Strix occidentalis occidentalis | PT/SSC/- | Permanent resident east of the Cascade Range from Placer County north to the Oregon border, east of the Sierra Nevada from Alpine County to Inyo County. Scattered breeding populations along the coast and in southeastern California. Winters throughout the Central Valley and southeastern California. Nests in abandoned crow, hawk, or magpie nests, usually in dense riparian stands of willows, cottonwoods, live oaks, or conifers usually open or adjacent to | Moderate potential; suitable foraging habitat present and known to occur in the vicinity but no spotted owls were detected during 2022 surveys in the Area of Analysis (as described in Section 3.5.3.2 Field Surveys, and in Section 3.5.4.4 Special-Status Species, under Special-Status Animals) or in years prior to 2021 when surveyed by Sierra Pacific |

| Common and Scientific Name | Legal Status (Federal/State/ Other) ^a | Geographic Distribution and Habitat Requirements | Potential for Occurrence in the Area of Analysis |
|----------------------------------|--|---|---|
| | | grasslands, meadows, or shrublands; key habitat components are dense cover, suitable nest platforms, and open foraging areas. | Industries biologists (Wagner pers. comm.). |
| Great gray owl Strix nebulosa | –/E/– | Permanent resident of the Sierra Nevada from Plumas County south to the Yosemite National Park area. Occasionally occurs in northwestern California in the winter and the Warner Mountains in the summer. Found in or near late successional coniferous forests bordering meadows; this habitat provides cover and a cooler sub-canopy microclimate. | Low potential; no meadows in or adjacent to the Area of Analysis. |
| Fringed myotis Myotis thysanodes | –/–/WBWG- high | Found the length of the state, from the coast (including Santa Cruz Island) to over 5,900 feet in the Sierra Nevada. Records exist for the high desert and east of the Sierra Nevada however, the majority of known localities are on the west side of the Sierra Nevada. Found in a wide variety of habitats from low desert scrub to high elevation coniferous forests. Roosts in crevices in buildings, underground mines, rocks, cliff faces, and bridges. Roosts in a variety of trees, particularly large, decadent trees | Moderate potential; could roost in large trees and snags in the Dam area and Doakes Ridge; one CNDDB record for an occurrence that is approximately eight miles from the Dam area/Doakes Ridge. |

| Common and Scientific Name | Legal Status (Federal/State/ Other) ^a | Geographic Distribution and Habitat Requirements | Potential for Occurrence in the Area of Analysis |
|----------------------------------|--|---|--|
| | | and snags. Has been found in mixed deciduous/coniferous forest and in both redwood and giant sequoia habitat. | |
| Long-legged myotis Myotis volans | -/-/WBWG- high | Mountains throughout California, including ranges in the Mojave Desert; found from the coast to high elevation in the Sierra Nevada and White Mountains; central San Diego County, the Coast Range, and the Transverse Ranges between the Los Angeles basin and the Central Valley. Most common in woodlands and forests above 4,000 feet but occurs from sea level to 11,000 feet. Uses abandoned buildings, cracks in the ground, cliff crevices, exfoliating tree bark, and hollows within snags as summer day roosts. Caves and mines are used for hibernation and may be used for night roosts. | Moderate potential; could roost in trees in the Dam area and Doakes Ridge; one CNDDB record for an occurrence that is approximately 11 miles from the Dam area/Doakes Ridge. |

| Common and Scientific Name | Legal Status (Federal/State/ Other) ^a | Geographic Distribution and Habitat Requirements | Potential for Occurrence in the Area of Analysis |
|---|--|--|--|
| Hoary bat Lasiurus cinereus | -/-/WBWG- moderate | Occurs throughout California from sea level to 13,200 feet; winters along the coast and in southern California. Roosts singularly in dense foliage of medium and large trees in forested habitats; also found in riparian areas and in park and garden settings in urban areas. | Moderate potential; could roost in trees in the Dam area and Doakes Ridge; one CNDDB record for an occurrence that is approximately 11 miles from the Dam area/Doakes Ridge. |
| Silver haired bat Lasionycteris noctivagans | -/-/WBWG-moderate | Occurs throughout portions of California, primarily in coastal and montane forests from the Oregon border south along the coast to San Francisco Bay, and along the Sierra Nevada and Great Basin region to Inyo County. Has also been recorded in Monterey, Sacramento, Stanislaus, Ventura, and Yolo Counties and during migration may be found throughout the state. Primarily a forest bat that is associated with conifer and mixed conifer and hardwood forests. Nearly all maternity roosts are in natural hollows and bird excavated cavities of trees or under loose bark of large diameter snags. Roosting sites are generally at least 50 feet above the ground. Uses multiple roosts and change roosts frequently | Moderate potential; could roost in trees in the Dam area and Doakes Ridge; two CNDDB records that are approximately 3 miles from the Cedar Mill staging area and 11 miles from the Dam area. |

| Common and Scientific Name | Legal Status (Federal/State/ Other) ^a | Geographic Distribution and Habitat Requirements | Potential for Occurrence in the Area of Analysis |
|--|--|--|--|
| | | throughout the summer, indicating that clusters of large trees are necessary. Has been found hibernating in hollow trees, under sloughing bark, in rock crevices, and occasionally under wood piles, in leaf litter, under foundations, and in buildings, mines and caves. | |
| Townsend's big- eared Corynorhinus townsendii | - /SSC/WBWG- high | Occurs throughout California, except for the highest elevations in the Sierra Nevada range. Associated with inland deserts; cool, moist coastal redwood forests; oak woodlands of the coastal ranges and Sierra Nevada foothills; and lower to midelevation mixed coniferous-deciduous forests. Roosts primarily in abandoned mines and natural caves, but also roosts in human-made structures and hollow trees. | Moderate potential; could roost in trees in the Dam area or Doakes Ridge; one CNDDB record for an occurrence approximately six miles southwest of the Cedar Mill staging area. |
| Sierra Nevada red fox Vulpes vulpes necator | <i>-</i> /T/− | Occurs in the Cascade Range, in Siskiyou County, and in the Sierra Nevada from Lassen County south to Tulare County. Coniferous forests, generally from 5,000 to 8,400 feet. Often associated with mountain meadows. | Low potential; the Area of Analysis is below the elevation range where this species typically occurs. |

| Common and Scientific Name | Legal Status (Federal/State/ Other) ^a | Geographic Distribution and Habitat Requirements | Potential for Occurrence in the Area of Analysis |
|---|--|---|---|
| Fisher Pekania pennanti | -/SSC/- | Coastal mountains from Del Norte County to Sonoma County, east through the Cascades to Lassen County, and south in the Sierra Nevada to Kern County. Late successional coniferous forests and montane riparian habitats from 1,969 to 8,530 feet. | Low potential; could occasionally occur in the Dam area and at Doakes Ridge but would not den in the Area of Analysis; one historical (1965) CNDDB record for an occurrence more than five miles east of the Dam area. |
| North American porcupine Erethizon dorsatum | -/-/- | Occurs in forests in the Sierra Nevada, Cascade, Coast, and Transverse Ranges. Found in coniferous forest and mixed woodlands. Den in hollow trees or rocky areas. | Low potential; may occasionally occur in the Dam area and at Doakes Ridge but would not den in the Area of Analysis. Two records for occurrences approximately three miles and five miles southwest of the Cedar Mill staging area. |

Sources: California Department of Fish and Wildlife 2024a; U.S. Fish and Wildlife Service 2024; Western Bat Working Group 2017a.

^a Status explanations:

Federal

- = no listing.

C = candidate for listing as endangered or threatened under the federal Endangered Species Act.

T = listed as threatened under the federal Endangered Species Act.

PE = proposed for listing as endangered under the federal Endangered Species Act.

PT = proposed for listing as threatened under the federal Endangered Species Act.

State

- = no listing.

| Tiger Creek Regulator Dam | |
|------------------------------|--|
| Spillway Replacement Project | |
| Recirculated IS/MND | |

CE = candidate for listing as endangered under the California Endangered Species Act.

E = listed as endangered under the California Endangered Species Act.

SSC = species of special concern in California

T = listed as threatened under the California Endangered Species Act.

Other

P = protected under the Bald and Golden Eagle Protection Act.

Western Bat Working Group (WBWG) Priority

High = Species are imperiled or at high risk of imperilment.

Moderate = This designation indicates a level of concern that should warrant closer evaluation, more research, and conservation actions of both the species and possible threats. A lack of meaningful information is a major obstacle in adequately assessing these species' status and should be considered a threat.

Northwestern Pond Turtle

The USFWS proposed listing the northwestern pond turtle (*Actinemys marmorata*) and southwestern pond turtle (Actinemys pallida) as threatened species on October 3, 2023 (88 FR 68370-68399). Additionally, northwestern pond turtle is a California species of special concern (California Department of Fish and Wildlife 2024a). In California, the species' range is discontinuously distributed through the state west of the Cascade–Sierra Nevada crest (Jennings and Hayes 1994:99). Aquatic habitats used by northwestern pond turtle include ponds, lakes, marshes, rivers, streams, and irrigation ditches with a muddy or rocky bottom in grassland, woodland, and open forest areas (Stebbins 2003:250). Northwestern pond turtles move to upland areas adjacent to watercourses to deposit eggs and overwinter (Jennings and Hayes 1994:98). The distance between the nest site and aquatic habitat depends on the availability of suitable nesting habitat adjacent to the occupied aquatic habitat (Jennings and Hayes 1994:101). Females usually select nest sites within 328 feet of aquatic habitat, although nests have been found 1,640 feet from a water body (Thomson et al. 2016:299). Lovich and Meyer (2002:540) reported nesting sites up to 1,919 feet from aquatic habitats, and Holland (1994:2-10) reported nesting sites up to 1,312 feet away from aquatic habitats. Eggs are laid from May to August in an earthen cavity and covered with soil, usually in a sunny area (Stebbins 1954:171). Northwestern pond turtle typically becomes active in March and returns to overwintering sites by October or November (Jennings et al. 1992:11).

Tiger Creek Regulator Reservoir and ponds near the Cedar Mill staging area (Figure 3.5-1, *Biological Resources in the Area of Analysis*) provide suitable aquatic habitat for northwestern pond turtle. Turtles are unlikely to occur in Tiger Creek due to the extensive amount of downed wood debris and shading within and along the creek. The upland habitat in the Dam area near the Reservoir is poor quality due to the steep slope and wood debris covering large portions of the slope. While northwestern pond turtle may occur at ponds near the Cedar Mill staging area, there is low potential for turtles to use the staging area for upland nesting or hibernation due to the highly disturbed nature of the site. There is one CNDDB record for an occurrence of northwestern pond turtle approximately five miles east of the Dam area (California Department of Fish and Wildlife 2024a).

Bald Eagle

Bald eagle is state listed as endangered and is fully protected by the California Fish and Game Code. Bald eagle is also protected under the federal Bald and Golden Eagle Protection Act. Bald eagle is a permanent resident and uncommon winter migrant in California (Zeiner et al. 1990a:122). The species breeds at coastal areas,

rivers, lakes, and reservoirs with forested shorelines or cliffs in northern California. Wintering bald eagles are associated with aquatic areas containing some open water for foraging. Bald eagle nests in trees in mature and old growth forests that have some habitat edge and are somewhat close (within 1.25 miles) to water with suitable foraging opportunities. Bald eagles tend to select nest trees that are more than 1,640 feet from human development and disturbance (Buehler 2000). The species' breeding season is between February 1 and August 1. Bald eagles use snags or other hunting perches adjacent to large bodies of water or rivers to hunt for fish (Zeiner et al. 1990a:122).

A bald eagle was observed perched along the edge and flying over Tiger Creek Regulator Reservoir during the August 17, 2022, field survey. The Reservoir provides suitable foraging habitat. Bald eagles could nest in the vicinity of the Reservoir, although recreation/fishing and maintenance activities at the Reservoir likely discourage bald eagle nesting in the Dam area. There are no records for bald eagle nests within five miles of the Area of Analysis (California Department of Fish and Wildlife 2024a).

Northern Goshawk

Northern goshawk is a California species of special concern (California Department of Fish and Wildlife 2024b). Northern goshawk breeds in the North Coast Ranges, Sierra Nevada, Klamath Mountains, Cascade Range, and Warner Mountains. The species may also breed near Mount Pinos and in the San Jacinto, San Bernardino, and White Mountains (California Department of Fish and Game 2005). Northern goshawk typically nests on north-facing slopes in conifers, including red fir (Abies magnifica), white fir (A. concolor), Douglas-fir, lodgepole pine, ponderosa pine, Jeffrey pine, or aspen in mature and old-growth forests (California Department of Fish and Game 2005; Shuford and Gardali 2008:159; Squires et al. 2020). Nests are generally located in the largest trees of a stand in the lower third of the tree, or directly underneath the forest canopy; in California, nests were observed at heights ranging between 44 to 78 feet (Squires et al. 2020). In southern California, the breeding season for northern goshawk starts in April, while in northern California it can be delayed until mid-June (California Department of Fish and Game 2005). The breeding season is February 15 through September 15, and eggs are typically laid from mid-April to mid-May (United States Department of Agriculture Forest Service 2004:283). In northern California, the breeding season can start as late as mid-June (California Department of Fish and Game 2005).

No northern goshawks were detected during July and August 2022 surveys (as described in Section 3.5.3.2 *Field Surveys*) that were conducted in accordance with the Northern Goshawk Inventory and Monitoring Technical Guide (Woodbridge and

Hargis 2006). Based on an evaluation of habitat during the surveys, the Dam area provides low quality nesting habitat for northern goshawk. The Dam area has an abundance of dense understory, which may reduce the habitat quality for northern goshawk, and much of the Dam area has steep terrain with few benches or flat areas, which have been shown to be used for goshawk nesting (Woodbridge and Hargis 2006:3-1). Additionally, recreation/fishing and maintenance activities at the Reservoir may discourage goshawk nesting in the area. Higher quality northern goshawk habitat is present in the vicinity of Doakes Ridge; however, low quality nesting habitat is present at the Doakes Ridge staging and spoils site because of the amount of human activity associated with the storage facilities in this area. There are five CNDDB records for northern goshawk nests that are six to eight miles south and southeast of the Dam area and Doakes Ridge (California Department of Fish and Wildlife 2024a).

California Spotted Owl

California spotted owl (Strix occidentalis occidentalis) is proposed for listing as threatened under the ESA and is a California species of special concern (California Department of Fish and Wildlife 2024b). California spotted owl occurs throughout its historic range, in the southern Cascade Range and northern Sierra Nevada from Shasta County to Kern County, as well as on the eastern side of the Sierra Nevada. The species also occurs in the coastal ranges from Monterey County to San Diego County and in the Transverse and Peninsular Ranges, excluding the Santa Cruz Mountains and San Luis Obispo County (Gutiérrez et al. 2020; United States Fish and Wildlife Service 2022:6). California spotted owl nests in larger trees and snags within old growth or mature forests primarily composed of conifers at higher elevations, and hardwoods at lower elevations (United States Fish and Wildlife Service 2022:11). In northern areas, the species uses multi-layered mixed conifer, redwood, and Douglas-fir environments up to 7,600 feet in elevation, while in southern areas the species is almost exclusively found in habitats dominated by oaks (Zeiner et al. 1990a:334). Spotted owls nest in tree or snag cavities or in the broken tops of large trees, with nests typically located 30 to 180 feet above the ground (Gutiérrez et al. 2020; Zeiner et al. 1990a:334). The breeding season lasts from mid-February through mid-September, with peak egg-laying in mid-April (United States Fish and Wildlife Service 2022:8).

Sierra Pacific Industries (SPI) conducts annual surveys for California spotted owl in the vicinity of Tiger Creek Regulator Reservoir. Although the survey area did not include the Dam area or Doakes Ridge staging and spoils site in 2021, SPI conducted surveys in these areas in prior years, and no California spotted owls were detected. In 2022, SPI included the Dam area and Doakes Ridge staging and spoils site in their annual survey. No California spotted owl activity centers were found in the Dam area or at Doakes Ridge. Five California spotted owl activity centers were mapped; one each to the northwest, northeast, southwest, and two to the southeast of the Dam area/Doakes Ridge (Wagner pers comm.). These activity centers range from approximately 0.3 to 1.8 miles from the Dam area/Doakes Ridge. Based on these surveys, there are no California spotted owl territories or nests in the Dam area/Doakes Ridge due to the proximity of the surrounding activity centers. In addition, neither area provides high quality nesting habitat for California spotted owl, although owls could forage in either location.

Fringed Myotis, Long-Legged Myotis, Hoary Bat, Silver-Haired Bat, and Townsend's Big-eared Bat

Fringed myotis (*Myotis thysanodes*) is considered a high priority species in California by the Western Bat Working Group (2017a). Fringed myotis occurs throughout much of California from coastal areas to 9,350 feet in the Sierra Nevada, although it is most common at middle elevations (4,000–7,000 feet) (Brown and Pierson 1996; Western Bat Working Group 2005). Fringed myotis can be found in a wide range of habitats including desert scrub, mixed deciduous/conifer forest, and redwood and giant sequoia groves (Brown and Pierson 1996). Fringed myotis day and night roosts in mines, caves, crevices in buildings, bridges, tree hollows, and rock crevices (Brown and Pierson 1996; Western Bat Working Group 2005). Maternal colonies range from 10 to 2,000 individuals but large colonies are extremely rare (Western Bat Working Group 2005).

Large trees and snags at the Dam area and Doakes Ridge staging and spoils site may provide suitable roosting habitat for fringed myotis. There is one record for an occurrence of fringed myotis approximately eight miles northwest of the Dam area (California Department of Fish and Wildlife 2024a).

Long-legged myotis (*Myotis volans*) is considered a high priority species in California by the Western Bat Working Group (2017a). Long-legged myotis occurs throughout California primarily in coniferous forests but is also found seasonally in riparian and desert habitats (Western Bat Working Group 2017b). Day roosts include hollow trees, abandoned buildings, mines, rock crevices, and beneath exfoliating bark. Caves and mines are used for hibernation and may be used for night roosting (Brown and Pierson 1996; Western Bat Working Group 2017b). Maternity colonies consist of 200 to 500 individuals (Brown and Pierson 1996).

Trees at the Dam area and Doakes Ridge staging and spoils site may provide suitable roosting habitat for long-legged myotis. There is one record for an occurrence of long-legged myotis that is approximately 11 miles northwest of the Dam area/Doakes Ridge (California Department of Fish and Wildlife 2024a).

Hoary bat (*Lasiurus cinereus*) is considered a species of moderate concern by the Western Bat Working Group (California Department of Fish and Wildlife 2024b, Western Bat Working Group 2017a). Hoary bats occur throughout California but are thought to have a patchy distribution in the southeastern deserts (Zeiner et al. 1990b:62). They occur primarily in forested habitats, including riparian forests, and may be found in park and garden settings in urban areas. Hoary bats are solitary bats that roost in the foliage of coniferous and deciduous trees (Brown and Pierson 1996) near the ends of branches (Western Bat Working Group 2017b). Woodlands with medium to large trees with dense foliage provide suitable maternity roost sites (Zeiner et al. 1990b:62). Mating occurs in the fall, and after delayed fertilization, young are born from May through July (Western Bat Working Group 2017b).

Trees at the Dam area and Doakes Ridge staging and spoils site may provide suitable roosting habitat for hoary bat. There is one record for an occurrence of hoary bat that is approximately 11 miles north of the Dam area/Doakes Ridge (California Department of Fish and Wildlife 2024a).

Silver-haired bat (*Lasionycteris noctivagans*) is considered a moderate priority species in California by the Western Bat Working Group (2017a). Silver-haired bats occur primarily in the northern portion of California and at higher elevations in the southern and coastal mountain ranges (Brown and Pierson 1996) but may occur anywhere in California during their spring and fall migrations. They are associated with coastal and montane coniferous forests, valley foothill woodlands, pinyon-juniper woodlands, and valley foothill and montane riparian habitats (Zeiner et al. 1990b:54). Silver-haired bats roost in trees almost exclusively in the summer, and maternity roosts typically are located in woodpecker hollows. Maternal colonies range from several to about 75 individuals (Brown and Pierson 1996).

Trees at the Dam area and Doakes Ridge staging and spoils site may provide suitable roosting habitat for silver-haired bat. There are two records for occurrences of silver-haired bat that are 3 miles southeast of the Cedar Mill staging area and 11 miles north of the Dam area/Doakes Ridge (California Department of Fish and Wildlife 2024a).

Townsend's big-eared bat (*Corynorhinus townsendii*) is a California species of special concern (California Department of Fish and Wildlife 2024b) and is considered a species of high concern by the Western Bat Working Group (2017a). The geographic range of Townsend's big eared bat extends throughout California except for the highest elevations in the Sierra Nevada range (California Department of Fish and Wildlife 2016:14; Szewczak et al. 2018:7, 15). The habitat for this species generally includes inland deserts; cool, moist coastal redwood forests; oak woodlands of the Coast Range and Sierra Nevada foothills; and lower to mid-

elevation mixed coniferous-deciduous forests (California Department of Fish and Wildlife 2016:22). Townsend's big-eared bat roosts primarily in abandoned mines and natural caves, but also roosts in human-made structures and hollow trees (Pierson and Rainey 1998:3; California Department of Fish and Wildlife 2016:22–23; Szewczak et al. 2018:12). The species typically forages in forested habitat, in oak canopies, and along heavily vegetated stream corridors and habitat edges (California Department of Fish and Wildlife 2016:23–24; California Department of Fish and Game 2000). Townsend's big-eared bat forms maternity colonies that typically range from a few dozen to several hundred individuals, although colonies of over 1,000 have been documented. Maternity colonies form between March and June and females give birth to a single pup between May and July. Nursery colonies typically begin to disperse in August when the pups are weaned, and the colonies completely disband in September and October (California Department of Fish and Wildlife 2016).

Hollow trees at the Dam area and Doakes Ridge staging and spoils site may provide suitable roosting habitat for Townsend's big-eared bat. There is one record for an occurrence of Townsend's big-eared bat approximately six miles southwest of the Cedar Mill staging area (California Department of Fish and Wildlife 2024a).

3.5.4.5 Migratory Birds

Non-special-status migratory birds could nest in trees, shrubs, or ground vegetation in and adjacent to the Area of Analysis. All land cover types in the Area of Analysis except developed/disturbed could support nesting birds. The breeding season for most birds is generally from February 15 to August 31. The occupied nests and eggs of migratory birds are protected by federal and state laws, including the Migratory Bird Treaty Act and California Fish and Game Code sections 3503 and 3503.5. USFWS is responsible for overseeing compliance with the Migratory Bird Treaty Act, and CDFW is responsible for overseeing compliance with the California Fish and Game Code and making recommendations on nesting bird protection.

3.5.4.6 Invasive Plant Species

Invasive plant species are species designated as federal noxious weeds by the United States Department of Agriculture, species listed by the California Department of Food and Agriculture, and invasive plants identified by the California Invasive Plant Council. Invasive plants displace native species, change ecosystem processes, alter plant community structure, and reduce wildlife habitat quality. The invasive species observed during all botanical surveys (as described in Section 3.5.3.2 Field Surveys) are identified on the plant list in Appendix C, Plants and Animals Observed in the Tiger Creek Regulator Dam Spillway Replacement Project

Area of Analysis (Table C-1). All of these species have a California Invasive Plant Council rating, ranging from Watch (species have been assessed as posing a high risk of becoming invasive in the future in California) to High (species have severe ecological impacts on physical processes, plant and animal communities, and vegetation structure. Their reproductive biology and other attributes are conducive to moderate to high rates of dispersal and establishment. Most are widely distributed ecologically (California Invasive Plant Council 2023). Some of these species also have a California Department of Food and Agriculture rating (California Department of Agriculture 2021). No plant species designated as federal noxious weeds have been identified in the Project Area (United States Department of Agriculture 2010).

The Cedar Mill staging area supports ruderal annual grassland, much of which is dominated by a dense cover of invasive plant species, such as invasive annual grasses, yellow star thistle, French broom (*Genista monspessulana*), Himalayan blackberry, and tamarisk (*Tamarix* sp.). While invasive species occur in other parts of the Project Area (e.g., the Dam area and Doakes Ridge staging and spoils site), they are not the dominant species and co-occur with native species and non-invasive, non-native species.

3.5.5 Regulatory Setting

3.5.5.1 Federal

The following federal regulations related to biological resources may apply to the Proposed Project.

National Environmental Policy Act

The National Environmental Policy Act (NEPA) was enacted to address concerns about environmental quality. NEPA acts to ensure that federal agencies evaluate the potential environmental effects of proposed programs, projects, and actions before decisions are made to implement them, inform the public of federal agency proposed activities that have the potential to significantly affect environmental quality, and encourage and facilitate public involvement in the decision-making process.

Federal Endangered Species Act

The federal ESA of 1973 and subsequent amendments provide for the conservation of listed endangered or threatened species or candidates for listing and the ecosystems on which they depend. USFWS has jurisdiction over federally listed

plants, wildlife, and resident fish. NMFS has jurisdiction over federally listed anadromous fish and marine fish and mammals.

Section 7 of the ESA applies to actions that are conducted, permitted, or funded by a federal agency. Under ESA section 7, the lead federal agency conducting, funding, or permitting an action must consult with USFWS or NMFS to ensure that a proposed action would not jeopardize the continued existence of an endangered or threatened species or destroy or adversely modify designated critical habitat. If a proposed action may affect a listed species or designated critical habitat, the lead agency is required to prepare a BA evaluating the nature and severity of the expected effect. In response, USFWS or NMFS issues a biological opinion (BO), with one of the following determinations about the proposed action:

- May jeopardize the continued existence of one or more listed species (jeopardy finding) or result in the destruction or adverse modification of critical habitat (adverse modification finding); or
- Will not jeopardize the continued existence of any listed species (no jeopardy finding) or result in adverse modification of critical habitat (no adverse modification finding).

The BO issued by USFWS or NMFS may stipulate mandatory reasonable and prudent measures and terms and conditions. If it is determined the Proposed Project would not jeopardize the continued existence of a listed species, USFWS or NMFS would issue an incidental take statement to authorize the proposed activity.

Clean Water Act

The CWA serves as the primary federal law protecting the quality of the nation's surface waters, including lakes, rivers, and coastal wetlands. The CWA empowers USEPA to set national water quality standards and effluent limitations and includes programs addressing both point-source and nonpoint-source pollution. Point-source pollution is pollution that originates or enters surface waters at a single, discrete location, such as an outfall structure or an excavation or construction site. Nonpoint-source pollution originates over a broader area and includes urban contaminants in stormwater runoff and sediment loading from upstream areas. The CWA operates on the principle that all discharges into the nation's waters are unlawful unless specifically authorized by a permit; permit review is the CWA's primary regulatory tool. The following sections provide additional details on specific sections of the CWA.

Permits for Fill Placement in Waters and Wetlands (Section 404)

CWA section 404 regulates the discharge of dredged and fill materials into waters of the United States, which include any or all of the following:

- The territorial seas, and waters which are currently used, or were used in the
 past, or may be susceptible to use in interstate or foreign commerce, including
 waters which are subject to the ebb and flow of the tide (33 CFR 328.3(a)(1));
- Tributaries (33 CFR 328.3(a)(2));
- Lakes and ponds, and impoundments of jurisdictional waters (33 CFR 328.3(a)(3)); and
- Adjacent wetlands (33 CFR 328.3(a)(4)).

Applicants must obtain a permit from USACE for all discharges of dredged or fill material into waters of the United States, including adjacent wetlands, before proceeding with a proposed activity. USACE may issue either an individual permit evaluated on a case-by-case basis, or a general permit evaluated at a program level for a series of related activities. General permits are preauthorized and are issued to cover multiple instances of similar activities expected to cause only minimal adverse environmental effects. The nationwide permits are a type of general permit issued to cover particular fill activities. Each nationwide permit specifies conditions that must be met for the nationwide permit to apply to a particular project.

Compliance with CWA section 404 requires compliance with several other environmental laws and regulations. USACE cannot issue an individual permit or verify the use of a general permit until the requirements of NEPA, ESA, and the NHPA have been met. In addition, USACE cannot issue or verify any permit until a water quality certification, or a waiver of certification has been issued pursuant to CWA section 401.

Permits for Stormwater Discharge (Section 402)

CWA section 402 regulates construction-related stormwater discharges to surface waters through the NPDES program, which is administered by USEPA. In California, the State Water Board is authorized by USEPA to oversee the NPDES program through the Regional Water Boards. The Project Area is located within the jurisdiction of the Central Valley Regional Water Board.

NPDES permits are required for projects that disturb more than one acre of land. The NPDES permitting process requires the applicant to file a public notice of intent to discharge stormwater, and to prepare and implement a SWPPP. The SWPPP includes a site map and a description of proposed construction activities. In

addition, it describes the BMPs that will prevent soil erosion and discharge of other construction-related pollutants (e.g., petroleum products, solvents, paints, cement) that could contaminate nearby water resources. Permittees are required to conduct annual monitoring and reporting to ensure that BMPs are correctly implemented and effective in controlling the discharge of stormwater-related pollutants.

Water Quality Certification (Section 401)

Under CWA section 401, applicants for a federal license or permit to conduct activities that may result in the discharge of a pollutant into waters of the United States must obtain certification from the state in which the discharge would originate or, if appropriate, from the interstate water pollution control agency with jurisdiction over affected waters at the point where the discharge would originate.

Executive Order 11990: Protection of Wetlands

Executive Order (EO) 11990, signed May 24, 1977, requires federal agencies to prepare wetland assessments for proposed actions located in or affecting wetlands. Agencies must avoid undertaking new construction in wetlands unless no practicable alternative is available, and the proposed action includes all practicable measures to minimize harm to wetlands.

Executive Order 13112: Prevention and Control of Invasive Species

EO 13112, signed February 3, 1999, directs all federal agencies to prevent and control the introduction of invasive species in a cost-effective and environmentally sound manner. This EO established the National Invasive Species Council, which is composed of federal agencies and departments, and a supporting Invasive Species Advisory Committee composed of state, local, and private entities. In 2016, the National Invasive Species Council released an updated national invasive species management plan that recommends objectives and measures to implement the EO and prevent the introduction and spread of invasive species (National Invasive Species Council 2016). The EO requires consideration of invasive species in NEPA analyses, including their identification and distribution, their potential effects, and measures to prevent or eradicate them.

3.5.5.2 State

The following state regulations related to biological resources are relevant to the Proposed Project.

California Environmental Quality Act

CEQA (Public Resource Code 21000 et. seq) is the regulatory framework by which California public agencies identify and mitigate significant environmental effects. A project normally has a significant environmental effect on biological resources if it substantially affects a rare or endangered species or the habitat of that species; substantially interferes with the movement of resident or migratory fish or wildlife; or substantially diminishes habitat for fish, wildlife, or plants. The State CEQA Guidelines define rare, threatened, and endangered species as those listed under ESA and CESA and any other species that meet the criteria of the resource agencies or local agencies (e.g., CDFW-designated species of special concern). The guidelines state that the lead agency preparing an environmental impact report must consult with and receive written findings from CDFW concerning project effects on species listed as endangered or threatened. The effects of a proposed project on these resources are important in determining whether the project has significant environmental effects under CEQA.

California Endangered Species Act

CESA (California Fish and Game Code 2050–2098) prohibits the take of listed endangered and threatened species. Take is defined as to hunt, pursue, catch, capture, or kill, or attempt to hunt, pursue, catch, capture, or kill. Section 2090 of CESA requires state agencies to comply with endangered species protection and recovery and to promote conservation of these species. CDFW administers the act and authorizes take through section 2081 agreements (except for species designated as fully protected).

California Native Plant Protection Act

The California Native Plant Protection Act of 1977 (California Fish and Game Code 1900–1913) prohibits importation of rare and endangered plants into California, take of rare and endangered plants, and sale of rare and endangered plants. CESA defers to the plant protection act, which ensures that state-listed plant species are protected when state agencies are involved in projects subject to CEQA. In this case, plants listed as rare under the act are not protected under CESA but rather under CEQA.

Porter-Cologne Water Quality Control Act

The California Water Code addresses the full range of water issues in the state and includes Division 7, known as the Porter-Cologne Water Quality Control Act (California Water Code sections 13000–16104). Section 13260 requires "any person discharging waste, or proposing to discharge waste, in any region that could

affect the waters of the State to file a report of discharge (an application for waste discharge requirements)" with the appropriate Regional Water Board. Under this act, each of the nine Regional Water Boards must prepare and periodically update water quality control basin plans (basin plans). Each basin plan sets forth water quality standards for surface water and groundwater, as well as actions to control nonpoint and point sources of pollution. Projects that affect waters of the State must meet the waste discharge requirements of the applicable Regional Water Board.

Section 13050 of the Porter-Cologne Water Quality Control Act authorizes the State Water Board and the relevant Regional Water Board to regulate biological pollutants. The California Water Code generally regulates more substances contained in discharges and defines discharges to receiving waters more broadly than does the CWA (State Water Resources Control Board 2021).

3.5.5.3 Local

Amador County General Plan

Amador County General Plan (Amador County 2016) Open Space Element includes goals and policies to address sensitive biological resources, including wildlife habitat, aquatic resources, and special-status species:

- **Goal OS-3:** Protect wildlife habitats, including sensitive environments and aquatic habitats, consistent with State and federal law;
 - Policy OS-3.2: Encourage the conservation of corridors for wildlife movement, particularly in oak woodland areas and along rivers and streams;
 - Policy OS-3.5: Protect aquatic habitats from the effects of erosion, siltation, and alteration;
 - Policy OS-3.6: Encourage the use of appropriate native species for reclamation and revegetation components of development projects. Restrict the introduction of invasive exotic species. The County will amend Chapter 15.40 of the County Code (governing grading and erosion control) to include a section addressing the requirement to limit the potential for introduction and spread of invasive species during soil disturbance and construction activities;
- **Goal OS-4:** Protect special status species, including threatened and endangered species, consistent with State and federal law; and
 - Policy OS-4.1: Ensure that new development complies with State and federal laws concerning special status species preservation.

3.5.6 Environmental Effects

The impact analysis for biological resources was conducted by evaluating the potential changes to existing biological communities and the effects on special-status species that could result from Proposed Project implementation. The following activities could cause potential direct and indirect impacts of varying degrees on sensitive biological resources present in and near the Area of Analysis:

- Temporarily lowering the water surface elevation of the Reservoir during the planned outages and cofferdam installation upstream of the proposed spillway structure;
- Construction of the spillway structure (crest structure, spillway chute and flip bucket, and plunge pool), which would require excavation and concrete work;
- Operation of a mobile concrete batch plant at the Spur 1 staging area;
- Permanent vegetation removal and grading for Proposed Project facilities and surrounding areas, the permanent access road, and spoils storage at Doakes Ridge staging and spoils site;
- Temporary vegetation removal for the temporary access road and temporary trails;
- Minor grading and brushing (trimming of encroaching vegetation) within the existing road limits of Spur 10;
- Installation and removal of three temporary bridges across Tiger Creek and one temporary bridge across the existing plunge pool;
- Placement of approximately 500 CY of rock slope protection at the downstream end of the plunge pool to repair previous bank erosion;
- Installation of a log boom;
- Staging of equipment and material for construction;
- Movement of construction equipment within the construction area and between the construction area and staging and spoils disposal areas;
- Placement of excavated material at the Doakes Ridge staging and spoils site;
- Construction of the concrete-lined transition in the streambed of Tiger Creek for the new plunge pool;
- Installing a temporary bypass pipe system to divert flow in Tiger Creek to downstream of the new plunge pool location;
- Additional lighting across the crest of the Dam to the turnaround and parking area and to the LLO; and

Site cleanup and demobilization.

The following assumptions were used in assessing the Proposed Project's potential impacts on biological resources:

- All construction, staging (including vehicle parking and material and equipment offloading), spoils sites, and access areas would be restricted to the Project Area depicted in Figure 2-1, *Project Area*; and
- Use of Tiger Creek Road, Salt Springs Road (Spur 1), Spur 7, and the boat launch road for access would not affect adjacent vegetation communities beyond pre-Proposed Project levels.

•

Potential impacts on land cover types and associated special-status species habitats were determined by overlaying the Proposed Project features onto an aerial photograph of the land cover types in the Project Area. Potential impacts of the Proposed Project related to biological resources are discussed in the context of CEQA Guidelines Appendix G checklist. Checklist section IV, *Biological Resources*, asks whether the Proposed Project would result in any of the following conditions.

a. Have a substantial adverse effect, either directly or through habitat modifications, on any species identified as a candidate, sensitive, or special-status species in local or regional plans, policies, or regulations, or by the California Department of Fish and Wildlife or U.S. Fish and Wildlife Service?

Less than Significant with Mitigation Incorporated. The following discussion provides supporting information for the determination that the potential direct and indirect impacts on special-status species would be less than significant with mitigation incorporated.

Effects on Special-Status Plants

No special-status plants were observed during the 2022 or 2023 botanical surveys (as described in Section 3.5.3.2 *Field Surveys*, and in Section 3.5.4.4 *Special-Status Species*, under *Special-Status Plants*), which were conducted during the appropriate blooming periods for the special-status plants with potential to occur in the Area of Analysis. Therefore, no potential impact on special-status plants is anticipated due to the Proposed Project.

Effects on Special-Status Fish

Construction of the Proposed Project would not result in any potential effects on special-status fish, because no special-status fish are known to occur in the Area of

Analysis (National Marine Fisheries Service 2022; California Department of Fish and Wildlife 2024a). Furthermore, construction of the Proposed Project would be subject to a construction-related stormwater permit and dewatering requirements of the federal CWA and NPDES program. PG&E would obtain required permits before any ground-disturbing construction activity occurs and implement all applicable permit terms. In addition, the distance separating the Dam area construction activities and the North Fork of the Mokelumne River (more than three miles), in combination with the diluting effect of the substantially greater flows in the North Fork of the Mokelumne River, would preclude water quality impacts on fish, including special-status species, and their habitat in the North Fork of the Mokelumne River downstream from Proposed Project construction. Therefore, no potential impacts on special-status fish in the North Fork of the Mokelumne River would occur as a result of the Proposed Project.

Effects on Special-Status Wildlife

Potential Disturbance, Injury, or Mortality of Northwestern Pond Turtle

While there is low potential for northwestern pond turtle to utilize the grassland area of the Cedar Mill staging area for nesting or overwintering due to the existing disturbance of the site, the grassland is within the distance that turtles are known to nest and overwinter. If a turtle was nesting or overwintering in this area, grading of the grassland area prior to equipment or material staging could result in disturbance or loss of nest sites (May to August) or injury or mortality of hibernating turtles (October through February). To avoid and minimize potential injury or mortality of northwestern pond turtle, Mitigation Measures BIO-MM-1: Conduct Worker Environmental Awareness Training and Implement General Requirements and BIO-MM-2: Conduct a Preconstruction Survey for Northwestern Pond Turtle at Cedar Mill Staging Area would be implemented. With these mitigation measures, potential impacts on northwestern pond turtle would be less than significant.

Mitigation Measure BIO-MM-1: Conduct Worker Environmental Awareness Training and Implement General Requirements

PG&E shall retain a qualified biologist to develop and conduct a mandatory worker environmental awareness training about special-status species and other sensitive resources that could be encountered during Proposed Project work (e.g., sensitive natural communities, northwestern pond turtle, special-status bats). In addition, construction employees shall be educated about the importance of controlling and preventing the spread of invasive plant infestations.

The biologist shall prepare a handout that contains information (including photographs) about how to identify pertinent species, their habitat requirements, and the avoidance and minimization measures to be implemented. All personnel shall receive worker environmental awareness training before conducting Proposed Project work and new personnel shall receive the training as they are brought onto the Proposed Project. Proof of personnel environmental training attendance shall be kept on file by PG&E. Each worker shall be provided with a copy of the handout and at least one copy shall remain onsite throughout the duration of the Proposed Project with the construction foreman.

General restrictions and guidelines that shall be in the training and followed by Proposed Project personnel are listed below. The Proposed Project foreman shall be responsible for ensuring that crew members adhere to these guidelines and restrictions:

- Before construction begins, the construction contractor shall work with the Proposed Project engineer and a biologist to identify sensitive locations to be protected with orange construction fencing or other high visibility materials (e.g., stanchions or pilons and flagging) and shall place stakes to indicate these locations. Sensitive locations shall include ditches at the Cedar Mill staging area, seasonal and emergent wetlands, ephemeral drainages, and perennial drainages. Fencing shall be installed with a one-foot gap between the ground and the bottom of the fence so that small animals do not become trapped in the fence. The fencing or other high visibility materials shall be installed before construction activities are initiated, maintained throughout the construction period, and removed when construction is completed. The protected areas shall be designated as environmentally sensitive areas and clearly identified on the construction plans or resource protection exhibit, which shall be prepared after the site review with the contractor and prior to construction;
- Silt fencing shall be installed along the eastern and southeastern edges of the Spur 1 staging area to prevent wildlife species that utilize Tiger Creek from entering the staging area. The fence shall extend 50 feet beyond the southern extent of the staging area and shall be curved or bent back towards the creek on both ends of the fencing to direct any small wildlife back to the creek. A biological monitor shall be present during silt fence installation.
- The biological monitor shall conduct a visual survey for wildlife in the work area prior to the start of work. Wildlife observed during the survey shall be recorded. The results of the survey shall be provided to the State Water Board and CDFW.

- Work crews shall be restricted to designated and clearly defined work areas and access routes. Staging of equipment and material sites shall be restricted to designated areas;
- A biological monitor shall make regular visits to the Project Area to ensure that environmentally sensitive areas continue to remain protected, provide environmental awareness training to new crew members, and determine if general restrictions and guidelines are being followed. After the initial activities of identifying sensitive areas, installing protective fencing and preconstruction surveys a biologist shall visit the Project Area weekly during the first two months of active construction; every other week during the next three months of construction, and once a month for the remainder of the work. The biological monitor shall also check no-work buffers around active bird nests during these visits and shall increase the frequency of the visits if active nests are present in the Project Area. Wildlife observed during the site visits shall be recorded.
- The biological monitor shall have the authority to stop work in the immediate vicinity if a special-status species or other sensitive resources may be harmed by Project activities.
- Prior to mobilization to the Project Area, all equipment shall be pressure washed clean to ensure noxious weeds are not imported into or out of the Project Area. Equipment shall be considered clean when there is no visible soil or plant parts.
- At the end of each workday, an escape ramp shall be placed at each end of any open excavation to allow wildlife that may become trapped to climb out overnight. The ramp may be constructed of either dirt fill or wood planking or other suitable material that is placed at an angle no greater than 30 degrees. The biological monitor or designated construction personnel shall check excavations, open pipes, and other areas prior to filling, moving, or disturbing to ensure that animals are not trapped or harmed by construction activities;
- Vehicles shall not exceed a speed of 10 miles per hour when traveling off paved roads;
- Vehicle access across streams and wetlands shall be limited to existing roads and designated crossings;
- Laydown and staging areas shall be located in previously developed or disturbed areas;

- Any erosion control materials required for the project shall be rice straw or come from certified weed-free sources, as practicable (i.e., certified weed free straw wattles, mulch, etc);
- Maintain gravel and soil spoil piles free of invasive weeds;
- All trash shall be disposed of and removed from the work area daily. Workers shall not feed or otherwise attract fish or wildlife to the work area;
- No pets or firearms shall be allowed in the Project Area;
- Workers shall look underneath vehicles and other heavy equipment for wildlife before moving vehicles or equipment to ensure that no animals are crushed;
- No wildlife species shall be handled and/or removed from the site by anyone except qualified biologists. Wildlife found in work areas shall be allowed to move out of the area on their own. Contact the PG&E biologist if the animal does not move or if further guidance is needed; and
- Any worker who inadvertently injures or kills an animal or finds one dead, injured, or entrapped shall immediately report the incident to the Proposed Project foreman, who shall immediately report the incident to the PG&E biologist. Questions about wetlands, protected species, or mitigation measures should also be directed to the PG&E biologist.

Mitigation Measure BIO-MM-2: Conduct a Preconstruction Survey for Northwestern Pond Turtle at the Cedar Mill Staging Area

To avoid potential injury or mortality of northwestern pond turtles, PG&E shall ensure that the following steps are taken:

- Prior to grading in annual grassland for equipment or materials staging at the Cedar Mill staging area, a qualified biologist (i.e., a biologist familiar with the habitat requirements and biology of northwestern pond turtle) will conduct a preconstruction survey for turtle nests or hibernating turtles; and
- If a northwestern pond turtle is encountered in the work area, work in the immediate area shall stop and the turtle shall be allowed to leave the area on its own. The PG&E biologist shall be contacted immediately, and the biological monitor (or other project personnel) shall continuously monitor the individual's movements until it is safely out of the work area. The PG&E biologist shall report any northwestern pond turtles in the Project Area to the State Water Board, CDFW, and USFWS within one day.

Potential Disturbance of Bald Eagle

There are no records for bald eagle nests in the vicinity of Tiger Creek Regulator Reservoir; however, a bald eagle was observed during the August 17, 2022, wildlife survey. Although there is a low potential for bald eagles to nest at the Reservoir, they could hunt for fish in the lake and perch from trees in and near the Project Area. Tree removal in the Dam area would reduce the number of perching trees, particularly along the west shore of the Reservoir. Ample trees would remain on the east, north, and remainder of the west shore for bald eagles to use for perching. Construction activities and noise could disturb bald eagles if they are foraging or are perched near the lake when these activities occur. Bald eagles may leave Tiger Creek Regulator Reservoir and fly to another lake to forage. While this would result in an eagle expending additional energy to travel to an alternative feeding area, this disturbance would not result in harm to the eagle. Therefore, this potential impact would be less than significant.

Loss of Habitat for and Potential Disturbance of Northern Goshawk and California Spotted Owl

Based on a habitat assessment during surveys for northern goshawk (as described in Section 3.5.3.2 *Field Surveys*, and in Section 3.5.4.4 *Special-Status Species*, under *Special-Status Animals*), low quality nesting habitat is present for northern goshawk in the Dam area and at Doakes Ridge staging and spoils site. No northern goshawks were detected during surveys conducted in July and August 2022. Therefore, northern goshawk is not anticipated to nest in or within 0.25 mile of the Project Area. On the basis of negative survey results (i.e., the species was not detected) from California spotted owl surveys conducted by SPI in 2022 in the Project Area (Sierra Pacific Industries 2022), prior surveys in the Project Area, and prior annual surveys in the surrounding area (Wagner pers comm.), there are no California spotted owl territories or nests in the Dam area/Doakes Ridge. There is no suitable habitat for California spotted owl at the Cedar Mill staging area. Therefore, California spotted owl is not anticipated to nest in the Project Area.

The Proposed Project would result in the permanent removal of approximately 13.53 acres of Sierran mixed conifer forest, temporary loss of 0.55 acre of Sierran mixed conifer (from the temporary access road), and temporary disturbance of 22.03 acres of Sierran mixed conifer forest. A total of 718 trees would be permanently removed from the Dam area and the Doakes Ridge staging and spoils site and 29 trees would be removed from the footprint of the temporary access road alignment. As discussed previously and in Section 3.5.4 *Existing Conditions*, the Sierran mixed conifer forest does not support nesting northern goshawk or California spotted owls. As such, the permanent and temporary removal of 747 trees would not result in the

removal of occupied nesting habitat or the disturbance of nesting northern goshawk or California spotted owl and would not have an adverse effect on these species.

Sierran mixed conifer forest in the Project Area provides suitable foraging habitat for northern goshawk and California spotted owl. Northern goshawks have large home ranges that can extend up to 37 miles per day (Blakey et al. 2020:396). Therefore, it is possible that northern goshawks could forage within the Project Area. For habitat analysis, a California spotted owl territory is commonly represented as a 1.5-mile radius around a nest site or half the average nearest neighbor distance of owls within a population (United States Department of Agriculture Forest Service 2017:294). Three of the five California spotted owl activity centers are within approximately 0.3 to 0.9 mile from the Dam area or Doakes Ridge (the two others are approximately 1.7 and 1.8 miles away). Therefore, California spotted owls from these activity centers could forage in the Project Area. As such, noise and increased human presence in the Dam area and Doakes Ridge staging and spoils site during construction could disturb foraging northern goshawks and California spotted owls or discourage them from foraging in these areas. Due to the ample amount of foraging habitat in the surrounding area, this is not anticipated to have a substantial adverse effect on the foraging activities of these species.

In the Sierra Nevada, California spotted owls prefer edge habitats for foraging (United States Department of Agriculture Forest Service 2017:55). The break in the conifer forest that would be created by the permanent access road would create edge habitat that may be more conducive to spotted owl foraging. The Sierran mixed conifer forest that would be temporarily removed (0.55 acre) would be allowed to grow back; however, it would be many years before the mature forest is replaced. While the Proposed Project would reduce the amount of available foraging habitat for northern goshawk and California spotted owl, there is a substantial amount of Sierran mixed conifer foraging habitat for several miles surrounding the Project Area that would continue to provide foraging habitat for these species. Therefore, the loss of foraging habitat would not have a substantial adverse effect on northern goshawk and California spotted owl. The potential impacts of the Proposed Project on northern goshawk and California spotted owl would be less than significant.

Potential Disturbance of Fringed Myotis, Long-Legged Myotis, Hoary Bat, Silver-Haired Bat, and Townsend's Big-eared Bat

Of the 747 trees to be removed at the Dam area and Doakes Ridge staging and spoils site, 237 are 24 inches in diameter at a height of 4.5 feet above the ground surface (dbh) or larger. These larger trees have a greater potential to have tree hollows that could support roosting bats; however, any trees with exfoliating bark or tree hollows (i.e., woodpecker holes) could be used for roosting by fringed myotis,

long-legged myotis, or silver-haired bat. Hoary bats could roost in the foliage of trees and Townsend's big-eared bat would likely occur only in hollow trees. Removal of trees occupied by roosting bats could result in injury or mortality of bats. This could constitute a significant impact if the local population of the affected bat species was affected. Other construction activities would not prevent or interfere with other bat activities (i.e., drinking and foraging) because these activities occur at night when there would be no construction. To avoid and minimize potential injury or mortality of roosting bats, Mitigation Measure BIO-MM-3 would be implemented.

While conducting emergence surveys (as recommended by CDFW) may result in the identification of bats occurring in the Project Area, they would not be effective in identifying bat roosts in trees because the Project Area contains numerous trees that are spaced closely together, making examination of the entirety of each tree for emerging bats impossible, as trees would obstruct line of sight of the biologist during the surveys. Therefore, emergence surveys are not included in Mitigation Measure BIO-MM-3. This measure requires trees that would be removed to be evaluated for their potential to provide bat roosting habitat by qualified biologists. The purpose of this survey is to identify the trees that have higher potential to support roosting bats, so that they may be removed in a manner that avoids and minimizes potential effects on individual bats. With implementation of Mitigation Measures BIO-MM-3, potential impacts on roosting bats would be less than significant.

Mitigation Measure BIO-MM-3: Evaluate Trees for Removal and Implement Protective Measures to Avoid or Minimize Injury or Mortality of Special-status Roosting Bats

Qualified biologists (i.e., biologists with experience with tree roosting habitats and life histories of special-status bats that may occur in the Project Area) shall examine trees for suitable special-status bat roosting habitat (e.g., large tree cavities, basal hollows, loose or peeling bark, larger snags, medium to large deciduous trees that receive at least six hours of daily sun exposure and a nearby water source less than a quarter-mile away) before tree removal. The biologists shall categorize trees for their suitability to support roosting special-status bats (i.e., high, moderate, and low suitability). Trees providing high or moderate bat roosting habitat shall be marked with flagging and identified as habitat. If possible, trees shall be removed between March 1 and April 15 or between September 1 and October 15 to avoid the bat maternity and hibernation periods. Trees with low-quality or no bat roosting habitat can be removed without restrictions. If a bat roost or a tree roosting bat is discovered during the tree assessment, and it is outside of the maternity and hibernation periods, the qualified biologist shall prepare a bat exclusion and avoidance plan for CDFW

review and approval. Lights are likely the only feasible and effective roosting deterrent.

To avoid or minimize the potential for injury or mortality of tree roosting specialstatus bats, removal of trees with moderate or high quality bat roosting habitat shall be performed by implementing the following measures:

- 1. Tree trimming and/or tree removal shall be scheduled when evening temperatures are above 45 degrees Fahrenheit and there has been less than 0.5 inch of rain in the last 24 hours.
- 2. Trees shall be removed in two steps over a period of two days. On the first day, all branches that do not contain roosting habitat shall be removed. The remaining portion of the tree shall be removed on the second day. All branch removal shall be conducted using chainsaws or similar handheld equipment. If a tree is not safe to remove in two steps over a period of two days, an alternate process shall be used that creates noise and disturbance at the tree base such that roosting bats would experience vibration. This process shall only be implemented in the late afternoon or as close to sunset as possible, unless otherwise determined appropriate by the qualified biologist. Disturbance should be nearly continuous for several minutes. Noise and vibration should be created by performing the following steps:
 - o Running the chain saw and making shallow cuts or pie cuts in the trunk.
 - Striking the tree base with fallen limbs, tools such as hammers, or heavy equipment such as the arm of an excavator.
 - Disturbance should be near-continuous for two minutes, then another five minutes should pass with no disturbance to allow bats time to evacuate the tree. Create disturbance for another minute, then wait another minute before felling the tree

If an active bat roost is found during tree removal during the bat maternity period (April 15 to August 31) or hibernation period (October 15 to March 1), work shall stop in the immediate area and the qualified biologists shall clearly delineate an appropriate no-disturbance buffer around the bat roost using stakes, flags, and/or rope or cord, and posted signs. The roost shall not be disturbed until the end of the maternity period or hibernation period, or until a qualified biologist determines that the roost is no longer occupied.

b. Have a substantial adverse effect on any riparian habitat or other sensitive natural community identified in local or regional plans, policies, or

regulations, or by the California Department of Fish and Wildlife or U.S. Fish and Wildlife Service?

Less than Significant with Mitigation Incorporated. The Project Area contains no riparian habitat. Potential impacts on other sensitive natural communities are discussed under checklist item *c* for wetlands and non-wetland waters.

Proposed Project construction has the potential to introduce and spread invasive plant species within and outside of the Project Area. Of particular concern would be the potential introduction of invasive plant species into natural areas near the Dam area and Doakes Ridge staging and spoils site and spread of invasive plant species offsite from the Cedar Mill staging area. Ruderal annual grassland adjacent to the Cedar Mill staging area supports areas of invasive plant species cover. This would be considered a significant impact. Implementation of Mitigation Measure BIO-MM-4: *Minimize the Introduction and Spread of Invasive Plants* would reduce this potential impact to less than significant.

Mitigation Measure BIO-MM-4: Minimize the Introduction and Spread of Invasive Plants

PG&E or its contractor shall take caution to limit the introduction of new invasive plants and the spread of invasive plants previously documented in the Project Area. Accordingly, the following measures shall be implemented during construction:

- Prior to mobilization to the Project Area, all equipment shall be pressurewashed clean to ensure noxious weeds are not imported into or out of the Project Area. Equipment shall be considered clean when there are no visible soils or plant parts on the equipment;
- Any erosion control measures required for the Proposed Project shall be rice straw or come from certified weed-free sources, as practicable (e.g., certified weed-free straw wattles, mulch);
- Gravel and spoil piles shall be maintained free of noxious weeds;
- Areas known to be weed-free shall be used for staging and laydown areas;
- Prior to use of the Cedar Mill staging area, any vegetated areas proposed for use shall be graded and topsoil shall be removed to minimize the presence and spread of invasive plant material. Existing graded areas at the Cedar Mill staging area shall be prioritized for use to minimize the area needing to be graded;

- Topsoil containing invasive plant material shall be placed in plastic garbage bags or under tarps with no viable plant parts (seed or parts that can sprout) protruding and shall be disposed of at an appropriate offsite disposal facility to avoid the spread of invasive plants into natural areas;
- Tools, equipment, and vehicles used within vegetated areas at the Cedar Mill staging area shall be cleaned before moving to the Dam area or Doakes Ridge staging and spoils site. Approved methods for cleaning without water include using bristle brushes, brooms, scraper, vacuum, high pressure air device, and hand removal. When feasible, clean equipment and vehicles in graded areas with low or no vegetation; and
- Within the Dam area and Doakes Ridge staging and spoils site, minimize surface disturbance to the greatest extent feasible to complete the work.
- c. Have a substantial adverse effect on state or federally protected wetlands (including, but not limited to, marshes, vernal pools, coastal wetlands, etc.) and non-wetland waters through direct removal, filling, hydrological interruption, or other means?

Less than Significant with Mitigation Incorporated. Construction of the Proposed Project could result in potential direct impacts on waters of the United States, including wetlands and non-wetland waters. These features are also considered waters of the State. As the aquatic resources delineation has not been submitted to or verified by USACE as of August 2023, the acreages of potential impacts in this discussion should be considered preliminary. The CWA section 404 permit application (Pre-Construction Notification) and the aquatic resources delineation will be submitted to USACE, and the exact acreages of potential impacts associated with the placement of fill material into waters of the United States will be provided in the final applications or permits.

Potential impacts were considered permanent if the Proposed Project would result in the placement of permanent fill in waters of the United States and waters of the State. Proposed Project construction would have up to 0.14 acre of potential permanent impact on waters of the United States and waters of the State. The Proposed Project would result in potential permanent impacts on approximately 0.03 acre of ephemeral drainage from placement of rock slope protection and existing spillway abandonment; 0.04 acre of perennial drainage from placement of riprap and construction of the proposed plunge pool; and 0.07 acre in the Reservoir from construction of the crest structure. Potential permanent impacts on waters of the United States and waters of the State would be significant.

Potential impacts were considered temporary if any fill would be removed following completion of construction and temporarily disturbed portions of non-wetland waters would be restored. Construction of the Proposed Project could result in potential temporary impacts on waters of the United States and waters of the State. A total of 0.02 acre of temporary impact could result from construction of the temporary streamflow bypass pipe and temporary backflow prevention dam in Tiger Creek, and installation of the cofferdam in the Reservoir. Timber harvest activities downstream of the Dam could also cause temporary hydrological interruption in Tiger Creek and in the adjacent emergent wetlands. The temporary access road and bridges would be constructed above the OHWM of Tiger Creek to avoid placement of fill in the creek. Implementation of Mitigation Measure WQ-MM-1: Implement Water Quality Protection Measures and Erosion and Sediment Control Plans (described in Section 3.3 Hydrology and Water Quality), Mitigation Measure WQ-MM-4: Develop and Implement a Water Quality Monitoring and Adaptive Management Plan (described in Section 3.3), and Mitigation Measure BIO-MM-1: Conduct Worker Environmental Awareness Training and Implement General Requirements will ensure avoidance of temporary impacts not associated with the construction of the temporary streamflow bypass pipe and backflow prevention dam in Tiger Creek and the cofferdam in the Reservoir.

Potential indirect impacts due to adverse effects on water quality, such as increased turbidity and chemical runoff, may also result from Proposed Project construction within the open water area of the Reservoir outside of the construction area and the portion of Tiger Creek within and downstream of the Proposed Project. Raw materials would be stored and concrete would be produced at a mobile batch plant at the Spur 1 staging area within 100 feet of Tiger Creek. Implementation of Mitigation Measure WQ-MM-2: Implement Spur 1 Staging Area Water Quality Protection Measures would ensure that potential effects on water quality in Tiger Creek from concrete production and raw materials storage would be avoided. Discharge from the plunge pool excavation dewatering system could affect water quality in Tiger Creek; however, as required in Mitigation Measure WQ-MM-1, use of filters within the flow bypass system will prevent turbid water from entering the bypass system and affecting the downstream area of Tiger Creek. The Proposed Project could result in erosion and sedimentation into ditch D-1 at the Cedar Mill staging area during construction. Ditch D-1 appears to connect to South Branch Sutter Creek. Implementation of Mitigation Measure WQ-MM-1 will ensure indirect effects on ditch D-1 are avoided. Potential indirect impacts would be less than significant.

No potential direct impacts on seasonal wetlands, ephemeral drainages, or the perennial drainage would occur from minor grading and trimming of encroaching

vegetation along Spur 10. The Doakes Ridge staging and spoils site does not support wetlands or drainages, and there would be no potential impact at that location.

Temporary and permanent losses of wetlands and non-wetland waters would be potentially significant impacts on federally protected waters and waters of the State. Implementation of Mitigation Measure WQ-MM-1: Implement Water Quality Protection Measures and Erosion and Sediment Control Plans, Mitigation Measure WQ-MM-2: Implement Spur 1 Staging Area Water Quality Protection Measures, Mitigation Measure WQ-MM-4: Develop and Implement a Water Quality Monitoring and Adaptive Management Plan, Mitigation Measure BIO-MM-1: Conduct Worker Environmental Awareness Training and Implement General Requirements, Mitigation Measure BIO-MM-5: Avoid and Minimize Disturbance of Waters of the United States/Waters of the State, and Mitigation Measure BIO-MM-6: Compensate for the Temporary and Permanent Losses of Waters of the United States/Waters of the State would reduce these potential impacts to less than significant.

Mitigation Measure BIO-MM-5: Avoid and Minimize Disturbance of Waters of the United States/Waters of the State

To the extent possible, PG&E shall avoid and minimize impacts on waters of the United States and waters of the State by implementing the following measures. These measures shall be incorporated into contract specifications and implemented by the construction contractor:

- Avoid temporary impacts to the maximum extent possible where construction activities can be excluded from wetlands and non-wetland waters;
- Avoid construction activities in saturated or ponded natural wetlands and drainages during the wet season (spring and winter) to the maximum extent possible;
- Stabilize streams/drainages immediately upon completion of construction activities. Non-wetland waters of the United States that were vegetated prior to construction shall be restored in a manner that encourages vegetation to re-establish to pre-Proposed Project condition and reduces the effects of erosion on the drainage system;
- Remove any debris or soils that are inadvertently deposited below the OHWM
 of the Reservoir or perennial drainage in a manner that minimizes disturbance
 of the bed and bank; and
- Complete all activities promptly to minimize their duration and resultant impacts.

Mitigation Measure BIO-MM-6: Compensate for the Temporary and Permanent Losses of Waters of the United States/Waters of the State

To compensate for temporary impacts on waters of the United States and waters of the State in Tiger Creek Regulator Reservoir and Tiger Creek, all temporary fill shall be removed and the Reservoir bed and creek bed shall be restored to pre-Proposed Project contours and conditions within 30 days following completion of construction activities.

To compensate for permanent loss of approximately 0.14 acre of waters of the United States and waters of the State in Tiger Creek Regulator Reservoir, Tiger Creek, and the existing plunge pool, PG&E shall pay into the National Fish and Wildlife Foundation Sacramento District In-lieu Fee Program to ensure no net loss of wetland functions and values. The compensation ratio shall be a minimum of 1:1 (one acre of habitat credit for every one acre of impact). The actual mitigation ratio and associated credit acreage may be modified based on CWA section 404 and section 401 permitting, which shall dictate the ultimate compensation for permanent impacts on waters of the United States and waters of the State.

d. Interfere substantially with the movement of any native resident or migratory fish or wildlife species or with established native resident or migratory wildlife corridors, or impede the use of native wildlife nursery sites?

Less than Significant with Mitigation Incorporated. The following discussion provides supporting information for the determination that the potential impacts on the movement of native resident or migratory fish or wildlife species, established native resident or migratory wildlife corridors, or native wildlife nursery sites would be less than significant with mitigation incorporated.

Potential Effects on Native Resident Fish Movement

Rainbow trout are the only native resident fish species known to occur in the Area of Analysis. The habitat requirements of juvenile and adult rainbow trout related to movement are generally defined by suitable water depth, water velocity, and cover, which are a function of stream flow, channel morphology, stream gradient, and various sources of cover (i.e., instream woody material, substrate, and vegetation) (Bjornn and Reiser 1991).

Habitat preferences of rainbow trout shift with changes in season, body size, and life stage; therefore, adult and juvenile rainbow trout require year-round access to a broad range of habitat types (Raleigh et al. 1984). Proposed Project activities (i.e., movement of personnel or equipment, noise, placement of rock slope protection)

that affect fish behavior or that affect channel morphology and hydraulics can prevent or delay downstream, upstream, or lateral movements, thereby adversely affecting adult spawning and adult and juvenile foraging, and ultimately leading to reductions in the fish population.

Proposed Project components that could affect fish behavior or physical conditions that support movement in Tiger Creek and Tiger Creek Regulator Reservoir include installing three temporary bridges over Tiger Creek for the temporary access road, placing 250 CY of rock slope protection along each bank of the existing plunge pool, installing a temporary silt curtain along the downstream edge of the existing plunge pool during rock slope protection placement, temporarily diverting streamflow around the construction site for the new spillway, temporarily dewatering Tiger Creek immediately downstream of the Dam, installing a temporary cofferdam in the Reservoir, and temporarily lowering the water surface elevation of the Reservoir during the planned outages in 2026 and 2027.

As the temporary bridges would be designed to pass the expected maximum flow during construction, and would completely span the creek, thereby preserving the existing channel geometry and natural stream bottom, installation of three temporary bridges over Tiger Creek is not expected to result in measurable changes to existing channel depths, water velocity, and channel geometry in Tiger Creek at these proposed crossings. Therefore, no potentially significant impacts on fish movement in Tiger Creek are anticipated from installation of these three temporary bridge crossings.

Installation of the 500 CY of rock slope protection along the banks of the existing plunge pool could alter the local hydraulics of the plunge pool's outlet channel due to the flow constricting nature of the rock slope protection. This, in turn, could affect the ability of fish to move between Tiger Creek and the existing plunge pool if altered hydraulics caused water velocities and/or depths in the affected portion of the channel to exceed the swimming capabilities of rainbow trout. However, as described in Section 3.3 *Hydrology and Water Quality*, there would be ample room in the plunge pool to dissipate the energy of spillway flows and altered hydraulic and associated geomorphic processes are expected to be minimal due to placement of the rock slope protection. Furthermore, the potential for altered hydraulics and associated geomorphic processes from placement of the rock slope protection would be limited to the winter and spring during construction as the existing plunge pool would no longer receive spillway flows once the new spillway is constructed.

Installation of the temporary silt curtain or other sediment control measures such as clean gravel bags or sandbags, as required in Mitigation Measure WQ-MM-3, could also affect the ability of rainbow trout to move between Tiger Creek and the existing

plunge pool as it would span the outlet channel of the existing plunge pool and create a barrier to fish. However, this would be a temporary impact as the silt curtain or other sediment control measures would be in place only while rock slope protection is being placed on the banks of the existing plunge pool and the number of fish that would be expected to be potentially affected by the silt curtain or other sediment control measures would be low given that the existing plunge pool is an off-channel pool (i.e., not on the main channel of Tiger Creek).

Lowering the plunge pool's water level by pumping water into water trucks, which could be implemented as a sediment control measure, as described in Mitigation Measure WQ-MM-3, or pumping water from the reservoir to fill water trucks, has the potential to entrain and kill fish if intakes to the pumping system were not screened. Fry and small juveniles would be particularly vulnerable to entrainment because of their smaller size and weaker swimming ability.

Installation of the stream diversion and subsequent dewatering of Tiger Creek to support construction of the new spillway chute, flip bucket, and plunge pool would temporarily prevent fish residing in Tiger Creek from moving upstream or downstream through the affected reach. The number of fish that would be expected to be affected is low given the proximity of the affected reach to the Dam. In addition, this segment of Tiger Creek does not provide any essential connectivity to upstream or downstream habitats given its proximity to the Dam, which already precludes fish movement in Tiger Creek. Damming of the M-76 weir with a plywood or steel sheet to facilitate dewatering of the construction site could interfere with the movement of any fish residing in the stream segment proposed for dewatering. Additionally, these fish would be stranded and would die if they are not relocated to a flowing section of Tiger Creek prior to construction-site dewatering. Interfering with the movement of rainbow trout that would result in mortality of individuals would be a potentially significant impact.

Movement of construction personnel and equipment, and general construction noise could affect the movement of adult and juvenile fish, although these effects would be incidental, limited to localized areas where the activity is occurring, and restricted to daylight hours only, thereby providing fish with extended periods of uninterrupted movement at night when construction activities are not occurring. Therefore, noise and disturbance associated with construction activities are not anticipated to substantially interfere with fish movement in Tiger Creek.

Installation of the cofferdam in Tiger Creek Regulator Reservoir and the temporary lowering of the Reservoir's water surface elevation would not be expected to impede movement of rainbow trout. The potential for fish to be trapped in the cofferdam would be avoided because the Reservoir's water surface would first be lowered and

the cofferdam would be installed in the dry. Although drawing down the Reservoir could also affect the movement of fish between the Reservoir and Tiger Creek upstream of the Reservoir if the lower reservoir level exposed barriers to movement (e.g., vertical drops, critical riffles, shallow delta) in the Reservoir's inundation zone, no such features were observed in the Tiger Creek channel within the inundation zone of the Reservoir during the April 14, 2023, reconnaissance survey. In addition, rainbow trout, which are strong swimmers and leapers, typically can pass obstacles (e.g., bedrock or boulder steps) that appear to be barriers, provided that suitable conditions are present (Bjornn and Reiser 1991). If bedrock or boulder steps in Tiger Creek are exposed while the Reservoir is temporarily drawn down during construction, rainbow trout are expected to be able to navigate past these impediments.

Adult salmonids are adapted to high concentrations of suspended sediment that occur during normal storm and runoff events. However, adults have been reported to cease migration or avoid their natal streams under extremely turbid conditions (Bjornn and Reiser 1991). Proposed Project activities, including construction of temporary and permanent access roads, vegetation clearing, and other grounddisturbing activities, could lead to increases in sediment delivery to streams and elevated turbidity levels. As described above, construction of the Proposed Project would be subject to a construction-related stormwater permit and dewatering requirements of the federal CWA and NPDES program. PG&E would obtain the required permits before any ground-disturbing construction activity occurs and implement all applicable construction site BMPs. Implementation of Mitigation Measure WQ-MM-1: Implement Water Quality Protection Measures and Erosion and Sediment Control Plans (including compliance with the NPDES stormwater permit program and preparation and implementation of a SWPPP), Mitigation Measure WQ-MM-2: Implement Spur 1 Staging Area Water Quality Protection Measures, Mitigation Measure WQ-MM-3: Implement Sediment Control Measures along Downstream Edge of Existing Plunge Pool prior to Rock Slope Protection Placement, Mitigation Measure WQ-MM-4: Develop and Implement a Water Quality Monitoring and Adaptive Management Plan (described in Section 3.3 Hydrology and Water Quality), and Mitigation Measure AQ-MM-1: Implement Fugitive Dust Abatement Measures (described in Section 3.6 Air Quality), will minimize the introduction of construction-related contaminants and mobilization of sediment into waters in and adjacent to the Proposed Project area. With adherence to Mitigation Measures WQ-MM-1, WQ-MM-2, WQ-MM-3, WQ-MM-4 and AQ-MM-14, the potential for degrading water quality, and therefore fish movement, in Tiger Creek would be avoided or minimized.

The Proposed Project would not reduce stream flows, including required minimum flows described in Section 3.3.3.6 *Federal Energy Regulatory Commission and U.S. Forest Service Operating Conditions*, relative to existing (pre-Proposed Project) conditions. Therefore, water depths and water velocities, and therefore fish passage conditions, in Tiger Creek downstream of the Dam would not be affected by the Proposed Project.

Based on the analysis above, the Proposed Project could entrain or substantially interfere with the movement of native resident fish. Implementation of Mitigation Measure BIO-MM-7: *Implement Flow Pumping System and Water Drafting Requirements* and Mitigation Measure BIO-MM-8: *Rescue and Relocate Fish from Affected Habitat* would reduce these potential impacts to less than significant.

Mitigation Measure BIO-MM-7: Implement Flow Pumping System and Water Drafting Requirements

All pump intakes that are placed in Tiger Creek, the Reservoir, existing plunge pool, or any other waterbody to fill water trucks or to lower the plunge pool shall be screened to prevent fish species from being entrained with water being pumped from the creek or reservoir. A round or square screen mesh that is no larger than 2.38 millimeters (0.094 inch) in the narrow dimension, or any other shape that is no larger than 1.75 millimeters (0.069 inch) in the narrow dimension shall be used.

Mitigation Measure BIO-MM-8: Rescue and Relocate Fish from Affected Habitat

A qualified biologist shall develop and implement a fish rescue and relocation plan to capture and relocate any fish out of harm's way prior to installation of the plywood or steel sheet at the M-76 weir and commencement of dewatering in Tiger Creek to facilitate construction of the new spillway, flip bucket, and plunge pool. A qualified biologist is defined as a person who is knowledgeable and experienced in the biology, life stages, natural history, and identification of local fish and wildlife resources present at the Project site. The fish rescue and relocation plan shall be submitted to CDFW for approval at least 60 days before initiating activities to install the cofferdam and a copy of the approved plan shall be available on-site during all Project activities. At a minimum, the plan shall include the following:

 A requirement that fish rescue and relocation activities commence immediately before plywood or steel sheet installation and that fish rescue and relocation in the affected stream reach shall occur immediately before (to the extent feasible) and as dewatering is occurring until no more fish are captured or the site is completely dewatered, whichever occurs first;

- A requirement that all gear and tools (e.g., waders, boots, nets, buckets) be decontaminated to minimize and avoid spreading aquatic invasive species and diseases (e.g., chytrid fungus), as briefly summarized below;
 - Soak equipment and gear for 10 minutes in a 7 percent bleach solution: 9
 liquid ounces of bleach per gallon of water; or
 - Soak equipment and gear for 30 seconds in 0.015 percent Quat 128: 1/8 teaspoon per gallon of water.
- A description of the methods and equipment proposed to collect, transfer, and release all rescued fish. Capture methods may include seining, dip netting, and electrofishing, as approved by CDFW. The precise methods and equipment to be used shall be developed cooperatively by CDFW and PG&E; and
- A requirement that only qualified fish biologists lead the fish rescue and relocation.

After completion of fish relocation activities, PG&E shall prepare a post-relocation report that includes, at a minimum, the date and time of capture and relocation, the method of capture, map of locations in relation to the Project site, and the number and species of fish captured and relocated. The post-relocation report shall be provided to the State Water Board and CDFW within 14 calendar days of completing each fish relocation activity.

Potential Effects on Native Resident Wildlife Movement

Potential Effects of Increased Lighting on Nocturnal Animal Movement

There are existing lights around the left abutment of the Dam that come on at dusk and stay on until sunrise. New lighting would be added across the crest of the Dam to the new access road turnaround and parking area, and from the Dam crest to the LLO. This would result in a larger illuminated area. The additional lighting could cause animals that are active at night to avoid traveling through the lighted area or expose animals to predation. This could result in increased energy expenditure or injury or mortality of individuals. The Proposed Project was designed to minimize potential effects of lighting on nocturnal animals by including the following conditions:

- The existing lighting would be replaced and most of the new and replacement lights would be controlled by a switch and would only be turned on when deemed necessary by an operator;
- Minimal lights would remain on all night in key areas that provide access to the facility. These lights would be motion-controlled such that they would be dimmed until the motion detectors are activated:
- Motion sensors would be calibrated to provide enough sensitivity to detect the presence of personnel, but not so sensitive as to be activated by small animals under normal conditions; and
- New and replacement lights would have shielding to focus lighting only on the areas that require illumination for safety purposes and would be designed to meet the intent of dark-sky requirements.

With these conditions in place, existing lighting would be reduced (i.e., would not remain on all night) and the effects of new lighting would be minimized. Therefore, the potential impact of new lighting on nocturnal animal movement would be less than significant and no mitigation would be required.

Potential Effects of Construction on Wildlife Movement

CDFW and the Caltrans commissioned the California Essential Habitat Connectivity Project because a functional network of connected wildlands is essential to the continued support of California's diverse natural communities in the face of human development and climate change (Spencer et al. 2010:1). The Essential Connectivity Map shows the relatively natural habitat blocks that support native biodiversity (natural landscape blocks) and areas essential for ecological connectivity between them (essential connectivity areas) (Spencer et al. 2010:xii). Mapped natural landscape blocks are large areas of mostly intact and well-conserved natural areas, and essential connectivity areas are connections between these blocks that have been identified as high priority for maintaining and enhancing ecological connectivity (Spencer et al. 2010:xi). According to information in CDFW's online Habitat Connectivity Viewer, the Project Area is not located within any natural landscape blocks or essential connectivity areas (California Department of Fish and Wildlife 2021).

CDFW's Areas of Conservation Emphasis layer for terrestrial connectivity in the online Habitat Connectivity Viewer shows the Cedar Mill staging area within the area categorized as "irreplaceable and essential corridors" and the Dam area and Doakes Ridge within the area categorized as "connections with implementation flexibility" (California Department of Fish and Wildlife 2021). "Irreplaceable and essential corridors" are described as priority species movement corridors based on

channelized areas identified in The Nature Conservancy's Omniscape model. Information on priority wildlife movement corridors is currently very limited and channelized areas are those areas where surrounding land uses and barriers are expected to funnel or concentrate animal movement. Channelized areas may represent the last available connection(s) between two areas, making them a high priority for conservation. Terrestrial connectivity categorized as "connections with implementation flexibility" are described as areas having connectivity importance, but are not currently identified as channelized areas, species corridors, or habitat linkages (California Department of Fish and Wildlife 2019).

Although the Cedar Mill staging area is located within a mapped "irreplaceable and essential corridor", the 4-acre site is highly disturbed by previous uses and is next to SR 88. A portion of the site is currently used for vehicle parking. Activity at the site will increase during construction of the Proposed Project, when materials and equipment are delivered or removed, and when personnel park vehicles there. Due to the current use of the site for parking and proximity to the highway, wildlife are more likely to move through the area to the south of the staging area where there is more vegetative cover and undisturbed habitat. Increased activity at the Cedar Mill staging area is not anticipated to disturb wildlife movement in this adjacent area. Given the disturbed nature of the site and the location next to the highway, no potential impact on terrestrial wildlife movement is expected at the Cedar Mill staging area.

In the Dam area, terrestrial native resident animals (i.e., deer, bobcats, foxes, raccoons, skunks, squirrels, snakes, lizards) are more likely to travel along Tiger Creek and the ridge top and avoid the very steep slopes between these areas. The Dam and the Reservoir are existing barriers to terrestrial wildlife movement in the Project Area. The large amount of downed wood debris may also be an existing barrier to smaller wildlife species. Some animals may avoid moving through the Dam area because of human activity (e.g., fishing, maintenance activities). Terrestrial native resident animals could move throughout the Doakes Ridge staging and spoils site but may avoid the areas around buildings where there is more human activity. Proposed Project construction may cause common wildlife species to temporarily avoid the Dam area and Doakes Ridge staging and spoils site or alter their movement patterns to avoid traveling through these areas. This could result in additional travel and increased energy expenditure. The number of individual animals expected to be affected is low given the existing barriers and conditions previously discussed. In addition, no identified natural landscape blocks or essential connectivity areas would be affected. Therefore, the Proposed Project would not substantially interfere with the movement of native resident wildlife movement and

the potential impact on native resident wildlife movement would be less than significant.

Disturbance of Nesting Migratory Birds

Construction activities would be implemented during the nesting season of migratory birds (generally February 15 through August 31) and could result in the disturbance of birds nesting in or near the Project Area. Operation of the concrete batch plant at the Spur 1 staging area for approximately one year could disturb nesting birds. The ambient noise level measured near the Spur 1 staging area was 47.3 - 54.8 Aweighted decibels (dBA) equivalent sound levels (Leg) (see LT-2 in Table 3.9-5 and Figure 3.9-1, Section 3.9 *Noise*). Based on analysis of noise generated by the batch plant (see Appendix E-7 Batch Plant Noise Data and Modeling), the maximum noise level from all batch plant noise sources is 85 dBA maximum sound level (Lmax) at 50 feet from the batch plant. Based on USFWS (2020) guidance for estimating the disturbance distance from elevated action-generated sound levels on northern spotted owls and marbled murrelets, a noise level of 85 dBA is in the "high" disturbance category. At 100 feet and 200 feet from the batch plant, noise is expected to attenuate to 79 dBA L_{max}, and 73 dBA L_{max}, respectively, levels considered "moderate" in the USFWS guidance. At 280 feet, the noise level is expected to attenuate to 70 dBA Lmax, which is considered a "low" level of disturbance. Therefore, based on the USFWS guidance and batch plant noise analysis, nesting birds within approximately 280 feet of the batch plant could experience moderate or high disturbance; beyond 280 feet, a low level of disturbance is anticipated. High or moderate noise from batch plant operation could disturb nesting birds and result in nest abandonment. In addition, 747 trees would be removed within the Dam area and at Doakes Ridge staging and spoils site. Removal of trees with active nests and construction disturbance close to active nests during the breeding season could result in the incidental loss of fertile eggs or nestlings or otherwise lead to nest abandonment. These potential impacts could be significant if they resulted in the reduction of local populations of migratory birds.

To ensure that active nests are not disturbed by concrete batch plant noise, tree removal, or other construction activities and that the Migratory Bird Treaty Act and California Fish and Game Code are not violated, Mitigation Measure BIO-MM-9 would be implemented. With this mitigation measure, potential impacts on nesting migratory birds would be less than significant.

Mitigation Measure BIO-MM-9: Conduct a Preconstruction Survey for Nesting Birds and Implement Protective Buffers around Active Nests

As work is scheduled to begin in July, which is during the nesting bird season (February 15 to August 31), qualified biologists (i.e., biologists with experience locating and identifying bird nests and nesting behaviors) shall conduct at least one preconstruction survey for nesting birds during the height of the nesting season (March 1 to June 1) to identify potential nest sites in the work area. A follow-up nesting bird survey shall be conducted no more than 5 days before mobilization and the start of vegetation removal. If work does not begin within 14 days of the survey or construction activities stop for 14 days or more during the nesting season, work areas shall be resurveyed for active nests. At the Cedar Mill staging area, the Project Area footprint shall be surveyed. At the Dam area and Doakes Ridge staging and spoils site, the Project Area and a 1,320-foot buffer for raptors and a 75-foot buffer for passerines around the Project Area shall be surveyed, except for at the Spur 1 staging area where a 280-foot buffer shall be surveyed for passerines.

If an active nest is found in a tree or other vegetation to be removed, a nodisturbance buffer area shall be established around the tree, and removal of the tree shall be delayed until the biologist has determined that the young have fledged. If other active nests are found in the survey area, no-disturbance buffers shall be established around active nests to limit disturbance until the nests are no longer active. The qualified biologists and the PG&E biologist shall determine the extent of the no-disturbance buffers, which shall be based on the species present and their sensitivity to disturbance, the level of noise or construction disturbance, line-of-sight between the nest and the disturbance, ambient levels of noise and other disturbances, and other topographical or artificial barriers. Suitable buffer distances may vary between species. Monitoring of active nests by a biologist may be required during high disturbance activities (i.e., vegetation removal). Construction crew members shall review a brochure on identifying and avoiding impacts on nesting birds. Should an active bird nest be found in the Project Area during work activities, all work shall cease within 75 feet of the active nest for non-raptors and 300 feet of the active nest for raptors, and the PG&E biologist shall be contacted to establish an appropriate no-work buffer zone.

e. Conflict with any local policies or ordinances protecting biological resources, such as a tree preservation policy or ordinance?

No Impact. Through compliance with state and federal regulations protecting sensitive biological resources, including waters of the United States and special-

status species, the Proposed Project would not conflict with any of the Amador County General Plan policies. There would be no potential impact.

f. Conflict with the provisions of an adopted habitat conservation plan, natural community conservation plan, or other approved local, regional, or state habitat conservation plan?

No Impact. There are no adopted or approved habitat conservation plans, natural community conservation plans, or other approved conservation plans for the Project Area. There would be no potential impact.

3.6 Air Quality

3.6.1 Introduction

This section analyzes the Proposed Project's potential impacts related to air quality. It describes existing conditions in the Area of Analysis and summarizes the overall regulatory framework for air quality, and it analyzes the potential for the Proposed Project to affect these resources.

The Proposed Project is in Amador County, which is in the Mountain Counties Air Basin (MCAB). Some construction materials may originate from neighboring Sacramento County, which is in the Sacramento Valley Air Basin (SVAB). The analysis focuses on the primary criteria pollutants that would be generated by construction of the Proposed Project, which are carbon monoxide (CO), particulate matter (PM10 and PM2.5), and sulfur dioxide (SO₂), as well as the ozone precursors of reactive organic gases (ROG) and nitrogen oxides (NO_X). Please refer to Section 3.7 *Greenhouse Gas Emissions*, for a discussion of greenhouse gas (GHG) emissions.

As described in Chapter 2, *Project Description*, operations and maintenance at the Reservoir would continue as was done prior to the Proposed Project activities. All equipment and surplus materials would be removed from the Project Area. While there would be some minor differences in the approach to operations and maintenance during and after construction of the Proposed Project, these differences would not materially increase the use or intensity of equipment and vehicles. Accordingly, there would be no change in operational emissions relative to existing conditions. This analysis therefore focuses exclusively on construction-generated emissions because there would be no long-term operational air quality impact.

3.6.2 Area of Analysis

The air quality Area of Analysis encompasses the areas that would be directly and indirectly affected by construction activities. Two geographic scales define the Area of Analysis. The local Area of Analysis is the construction footprint and haul roads plus areas within 1,000 feet, and the regional Area of Analysis is the affected air basins (i.e., MCAB and SVAB).

3.6.3 Existing Conditions

The MCAB lies in the northern Sierra Nevada range, close to or contiguous with the Nevada border, and covers an area of roughly 11,000 square miles. Elevations range from over 10,000 feet at the Sierra Nevada crest down to several hundred feet above sea level at the Sacramento County boundary. The pattern of mountains and hills and overall terrain features of the MCAB cause wide variation in rainfall, temperature, and localized winds. These variations have an important influence on basin wind flow, pollutant dispersion, vertical mixing, and photochemistry. Overall, due to the rural nature of Amador County, low population density, and limited industry, air quality is generally good.

Amador County currently attains all federal air quality standards except for the 2015 8-hour ozone standard (United States Environmental Protection Agency 2023). The county is designated marginal nonattainment for this standard but has received a clean air determination (Federal Register, Vol 87, No 194, 60897). While the determination does not cancel the nonattainment designation, it suspends certain compliance obligations and reporting requirements. Amador County is currently designated a nonattainment area for the state ozone standard and an attainment area for all other state standards (California Air Resources Board 2023).

Sacramento County is currently designated nonattainment for the 2015 8-hour ozone federal standard and 24-hour federal PM2.5 standard. The county is also designated maintenance for the federal PM10 standard (United States Environmental Protection Agency 2023). Sacramento County is currently designated nonattainment for the state ozone and PM10 standards (California Air Resources Board 2023).

3.6.4 Regulatory Setting

The federal Clean Air Act (CAA) was first enacted in 1963 and has been amended numerous times in subsequent years (1965, 1967, 1970, 1977, and 1990). The CAA establishes federal air quality standards, known as national ambient air quality standards (NAAQS), for six criteria pollutants and specifies future dates for achieving compliance. The CAA also mandates that the states submit and implement a state implementation plan (SIP) for local areas not meeting those standards. The plans must include pollution control measures that demonstrate how the standards will be met.

The 1990 amendments to the CAA identify specific emission-reduction goals for areas not meeting the NAAQS. These amendments require both a demonstration of reasonable further progress toward attainment and incorporation of additional

sanctions for failure to attain or meet interim milestones. Table 3.6-1 shows the NAAQS currently in effect for each criteria pollutant, as well as the California ambient air quality standards (CAAQS). Table 3.6-2 provides a brief description of sources and health effects of the six criteria pollutants for which there are NAAQS.

Table 3.6-1. National and State Ambient Air Quality Standards

| | | California | National Standards ^a | |
|----------------------------------|---------------------|-----------------------|---------------------------------|------------------------|
| Criteria Pollutant | Average Time | Standards | Primary | Secondary |
| Ozone | 1-hour | 0.09 ppm | None ^b | Noneb |
| | 8-hour | 0.070 ppm | 0.070 ppm | 0.070 ppm |
| Coarse Particulate Matter | 24-hour | $50 \mu g/m^3$ | 150 μg/m³ | 150 μg/m³ |
| (PM10) | Annual mean | 20 μg/m ³ | None | None |
| Fine Particulate Matter | 24-hour | None | 35 μg/m³ | 35 μg/m³ |
| (PM2.5) | Annual mean | $12 \mu g/m^3$ | $9.0~\mu g/m^3$ | 15 μg/m³ |
| Carbon Monoxide | 8-hour | 9.0 ppm | 9 ppm | None |
| | 1-hour | 20 ppm | 35 ppm | None |
| Nitrogen Dioxide | Annual mean | 0.030 ppm | 0.053 ppm | 0.053 ppm |
| | 1-hour | 0.18 ppm | 0.100 ppm | None |
| Sulfur Dioxide ^c | Annual mean | None | 0.030 ppm | None |
| | 24-hour | 0.04 ppm | 0.014 ppm | None |
| | 3-hour | None | None | 0.5 ppm |
| | 1-hour | 0.25 ppm | 0.075 ppm | None |
| Lead | 30-day average | 1.5 μg/m ³ | None | None |
| | Calendar quarter | None | 1.5 μg/m ³ | 1.5 μg/m³ |
| | 3-month average | None | $0.15 \ \mu g/m^3$ | 0.15 μg/m ³ |
| Sulfates | 24-hour | 25 μg/m³ | None | None |
| Visibility-Reducing Particles | 8-hour | _d | None | None |
| Hydrogen Sulfide | 1-hour | 0.03 ppm | None | None |
| Vinyl Chloride | 24-hour | 0.01 ppm | None | None |

Source: California Air Resources Board 2016; United States Environmental Protection Agency 2024..

ppm= parts per million; $\mu g/m^3$ = micrograms per cubic meter; NAAQS = national ambient air quality standards; SO₂ = sulfur dioxide; CAAQS = California ambient air quality standards.

Table 3.6-2. Sources and Potential Health and Environmental Effects of Criteria Pollutants

| Pollutant | Primary Sources | Potential Effects |
|-----------------------|---|---|
| Ozone | Frimary Sources Formed by a chemical reaction between ROG and NOx in the presence of sunlight. Primary sources of ROG and NOx are vehicle exhaust, industrial combustion, gasoline storage and transport, solvents, paints, and landfills. | Inflammation of the mucous membranes and lung airways; wheezing; coughing and pain when inhaling deeply; decreased lung capacity; aggravation of lung and heart problems. Reduced crop yield and damage to plants, rubber, some textiles, and dyes. |
| Particulate matter | Power plants, steel mills, chemical plants, unpaved roads and parking lots, woodburning stoves and fireplaces, and automobiles. | Irritation of the airways, coughing, or difficulty breathing; aggravated asthma; development of chronic bronchitis; irregular heartbeat; nonfatal heart attacks; and premature death in people with heart or lung disease. Impairs visibility (haze). |
| Carbon monoxide | A component of motor vehicle exhaust that is formed when carbon in fuel is not burned completely. | Reduced ability of blood to deliver oxygen to vital tissues, affecting the cardiovascular and nervous system. Impaired vision and dizziness that can lead to unconsciousness or death. |
| Nitrogen dioxide | Motor vehicles, electric utilities, and other sources that burn fuel. | Aggravation of lung and heart problems. Precursor to ozone and acid rain. Contributes to global warming and nutrient overloading, |

^a National standards are divided into primary and secondary standards. Primary standards are intended to protect public health, whereas secondary standards are intended to protect public welfare and the environment.

^b The federal 1-hour standard of 12 parts per hundred million was in effect from 1979 through June 15, 2005. The revoked standard is referenced because it was employed for such a long period and is a benchmark for state implementation plans.

^c The annual and 24-hour NAAQS for SO₂ only apply for 1 year after designation of the new 1-hour standard to those areas that were previously in nonattainment for 24-hour and annual NAAQS.

^d CAAQS for visibility-reducing particles is defined by an extinction coefficient of 0.23 per kilometer – visibility of 10 miles or more due to particles when relative humidity is less than 70 percent.

| Pollutant | Primary Sources | Potential Effects |
|-------------------|---|--|
| | | which deteriorates water quality. Brown discoloration of the atmosphere. |
| Sulfur dioxide | Petroleum refineries, cement manufacturing, metal processing facilities, locomotives, large ships, and fuel combustion in diesel engines. | Aggravation of lung and heart problems. Converts to sulfuric acid, which can damage marble, iron, and steel. Damage to crops and natural vegetation. Impaired visibility. |
| Lead | Metal refineries, smelters, battery manufacturers, iron and steel producers, use of leaded fuels by racing and aircraft industries. | Anemia; damage to the kidneys, liver, brain, reproductive and nervous systems, and other organs; and neurological problems, including learning deficits and lowered IQ. Affects animals, plants, and aquatic ecosystems. |

Source: California Air Pollution Control Officers Association n.d.

In California, the California Air Resources Board (CARB) delegates air quality management responsibilities to local air quality management districts. The Proposed Project is located within the local jurisdiction of the Amador Air District (AAD). The AAD is responsible for enforcing federal, state, and local air quality regulations and ensuring that the county complies with the federal and state air quality standards. The AAD has established the following district rules that may apply to the Proposed Project:

- Rule 202—Visible Emissions. This rule limits emissions that are darker in shade than No. 1 on the "Ringelmann Chart" or of such opacity as to obscure an observer's view to a degree equal to or greater than smoke;
- Rule 205—Nuisance. This rule prohibits the discharge of air contaminants, from any source, or other materials that cause injury, detriment, nuisance, or annoyance to the public;
- Rule 207—Particulate Matter. This rule regulates the allowable concentration
 of particulate matter discharged per standard dry cubic foot of exhaust gas.
 Concentrations may not exceed 0.1 grain per standard dry cubic foot of exhaust
 gas;
- Rule 218—Fugitive Dust. This rule requires reasonable precaution measures to reduce and control particulate matter; and

• Regulation IV, Authority to Construct, Rule 401—Permit Required. This rule requires an Authority to Construct prior to the start of construction.

The Sacramento Metropolitan Air Quality Management District (SMAQMD) has local air quality management authority in neighboring Sacramento County, which is where some construction materials for the Proposed Project may originate. Proposed Project activities within the SMAQMD would be limited to material hauling that would result in emissions from on-road vehicles. There are no SMAQMD rules specifically and independently applicable to mobile sources of emissions.

The Conservation Element of the *Amador County General Plan* outlines the following policies to protect air quality (Amador County 2016:C/27-C/28):

- Policy C-9.1: Encourage development of commercial or industrial businesses which provide jobs for county residents in order to reduce vehicle miles traveled for residents who must drive elsewhere for employment;
- Policy C-9.2: Encourage infill development, and development near existing activity centers in order to encourage walking or bicycle use in running local errands;
- Policy C-9.3: Promote the separation of emission sources from sensitive receptors such as schools, day care centers, and health care facilities;
- Policy C-9.4: Encourage energy conservation and energy efficient design in new development projects;
- Policy C-9.5: Promote recycling of waste materials and the use of recycled materials;
- Policy C-9.6: Maintain viable public transportation options in Amador County, and provide transit connections such as park-and-ride services to job centers in nearby counties; and
- Policy C-9.7: Work with state and federal agencies to seek recognition of air pollutant movement from valley to mountain counties as a contributor to reduced air quality.

3.6.5 Environmental Effects

Potential impacts of the Proposed Project related to air quality are discussed in the context of CEQA Guidelines Appendix G checklist. Checklist section III, Air Quality, asks whether the Proposed Project would result in any of the following conditions.

a. Conflict with or obstruct implementation of the applicable air quality plan?

Less than Significant. Considering its federal ozone nonattainment status, the AAD (2019) has developed the *Ozone Emergency Episode Plan* to identify control strategies and abatement triggers for reducing ozone levels in Amador County. The simplest test to assess a project's consistency is to determine if the project proposes development that is consistent with the growth anticipated by the relevant land use plans that were used in the formulation of the air quality attainment plans; if so, then the project would be consistent with the attainment plans.

The purpose of the Proposed Project is to mitigate critical near-term and long-term deficiencies of the Dam. The Proposed Project, therefore, would not directly induce long-term growth or development that would conflict with general plan growth forecasts. The Proposed Project would comply with all applicable AAD rules and the *Amador County General Plan* goals. In addition, as shown in Table 3.6-3, construction of the Proposed Project would not exceed any analysis threshold. Accordingly, potential impacts on the air quality plan would be less than significant.

b. Result in a cumulatively considerable net increase of any criteria pollutant for which the project region is a nonattainment area for an applicable federal or state ambient air quality standard?

Less than Significant with Mitigation Incorporated. Project construction has the potential to affect ambient air quality through use of heavy-duty equipment, worker vehicle trips, truck hauling trips, earthmoving, and demolition of existing structures. Criteria pollutant and precursor emissions generated by these sources were quantified using information provided by PG&E and the California Emissions Estimator Model (CalEEMod) (version 2022.1.1.25) (McGuckin pers. comm.). Use of a mobile concrete batch plant at the Spur 1 staging area would also generate fugitive dust emissions. These emissions were quantified using the USEPA's *AP-42 Compilation of Air Pollutant Emission Factors* (AP-42), Section 11.12 (2006:Tables 11.12-2 and 11.12-8). Wind erosion of the aggregate and sand storage piles would also result in fugitive dust. These emissions were quantified using the *WRAP Fugitive Dust Handbook* (Countess Environmental 2006:9-8).

Table 3.6-3 summarizes emissions that would be generated by construction of the Proposed Project and concrete batching in the AAD. Emissions would be generated over multiple phases between July 2025 and May 2027, with several phases occurring concurrently. Table 3.6-3 identifies the maximum daily emissions that would occur during peak construction activity in each year. Material hauling emissions through SMAQMD are presented in Table 3.6-4. Please refer to

Appendix D, Air Quality Calculations and Assumptions, for all modeling assumptions and outputs.

Table 3.6-3. Estimated Maximum Daily Uncontrolled Criteria Pollutant Emissions from Proposed Project Construction and Onsite Concrete Batching in Amador County (pounds) ^a

| Year ^b | ROG | NOx | CO | SO ₂ | PM10 | PM2.5 |
|-------------------|-----|-----|-----|-----------------|-----------------|-----------------|
| 2025 | 95 | 53 | 270 | <1 | <u>174</u> | 22 |
| 2026 | 4 | 32 | 37 | <1 | <u>107</u> | 12 |
| 2027 | 1 | 13 | 14 | <1 | <u>126</u> | 13 |
| Threshold | - | 85 | - | - | 80 ^c | 82 ^c |

Source: See Appendix D, Air Quality Calculations and Assumptions

ROG = reactive organic gases; NOx = nitrogen oxides; CO = carbon monoxide; SO_2 = sulfur dioxide; PM10 = particulate matter less than 10 microns in diameter; PM2.5 = particulate matter less than 2.5 microns in diameter.

Table 3.6-4. Estimated Maximum Daily Criteria Pollutant Uncontrolled Emissions from Material Hauling in Sacramento County (pounds) ^a

| Year ^b | ROG | NOx | CO | SO_2 | PM10 | PM2.5 |
|-------------------|-----|-----|----|--------|-----------------|-----------------|
| 2025 | <1 | 7 | 3 | <1 | 1 | <1 |
| 2026 | <1 | 2 | 1 | <1 | <1 | <1 |
| 2027 | <1 | 1 | 1 | <1 | <1 | <1 |
| Threshold | - | 85 | - | - | 80 ^c | 82 ^c |

Source: See Appendix D, Air Quality Calculations and Assumptions

ROG = reactive organic gases; NOx = nitrogen oxides; CO = carbon monoxide; $SO_2 = sulfur dioxide$; PM10 = particulate matter less than 10 microns in diameter; <math>PM2.5 = particulate matter less than 2.5 microns in diameter.

^a The emissions intensity of vehicles can differ in summer and winter. CalEEMod generates summer and winter period emissions, where summer emission factors are used for activities occurring between April and September and winter emission factors are used for activities occurring between October and March. Where applicable for construction phases occurring in October, the higher of the two estimates are presented above. Exceedances of the analysis thresholds are shown in **bold underline**.

^b Analysis adds emissions among sub-phases occurring on the same day. The reported value for each year represents the highest emissions that would be generated on any one day during the year.

^c Only with compliance with fugitive dust control measures.

^a The emissions intensity of vehicles can differ in summer and winter. CalEEMod generates summer and winter period emissions, where summer emission factors are used for activities occurring between April and September and winter emission

factors are used for activities occurring between October and March. Where applicable for construction phases occurring in October, the higher of the two estimates are presented above.

- ^b Analysis adds emissions among sub-phases occurring on the same day. The reported value for each year represents the highest emissions that would be generated on any one day during the year.
- ^c Only with compliance with fugitive dust control measures.

The AAD does not have adopted thresholds of significance to determine significant increases in levels of criteria air pollutant emissions. In the absence of specific CEQA thresholds, the AAD recommends using applicable guidance from adjacent air districts (Perry pers. comm.). Sacramento County is geographically proximate to Amador County. SMAQMD is responsible for ensuring the CAAQS and NAAQS are not violated in Sacramento County. SMAQMD (2020) has adopted construction thresholds for NOx, PM10, and PM2.5, as shown in Tables 3.6-3 and 3.6-4. SMAQMD also considers uncontrolled construction fugitive dust emissions to be potentially significant. These thresholds represent the level above which projectgenerated emissions could affect SMAQMD's commitment to attain the ozone and particulate matter standards. As previously noted, Sacramento County is currently designated nonattainment for the federal and state ozone standards, the federal PM2.5 standard, and the state PM10 standard. Therefore, SMAQMD's recommended thresholds provide a conservative analysis of the project's potential air quality impacts in Amador County, which attains all standards except the state and federal ozone standards.

As shown in Tables 3.6-3 and 3.6-4, neither construction of the Proposed Project nor material hauling through SMAQMD would generate NO_X emissions in excess of the numeric analysis threshold. However, PM10 emissions from construction of the Proposed Project would exceed the analysis threshold. Also, as noted above, SMAQMD considers uncontrolled construction fugitive dust emissions to be potentially significant. This is a potentially significant impact. PG&E or its construction contractors would implement Mitigation Measure AQ-MM-1: *Implement Fugitive Dust Abatement Measures* to control fugitive dust and minimize PM10 emissions. Table 3.6-5 summarizes emissions that would be generated by construction of the Proposed Project and concrete batching in the AAD with implementation of Mitigation Measure AQ-MM-1: *Implement Fugitive Dust Abatement Measures*.

Table 3.6-5. Estimated Maximum Daily Controlled Criteria Pollutant Emissions from Proposed Project Construction and Onsite Concrete Batching in Amador County (pounds) ^a

| Year ^b | ROG | NOx | СО | SO ₂ | PM10 | PM2.5 |
|-------------------|-----|-----|-----|-----------------|-----------------|-----------------|
| 2025 | 95 | 53 | 270 | <1 | 48 | 8 |
| 2026 | 4 | 32 | 37 | <1 | 30 | 4 |
| 2027 | 1 | 13 | 14 | <1 | 33 | 4 |
| Threshold | - | 85 | - | - | 80 ^c | 82 ^c |

Source: See Appendix D, *Air Quality Calculations and Assumptions*ROG = reactive organic gases: NOx = nitrogen oxides: CO = carbon n

ROG = reactive organic gases; NO_X = nitrogen oxides; CO = carbon monoxide; SO₂ = sulfur dioxide; PM10 = particulate matter less than 10 microns in diameter; PM2.5 = particulate matter less than 2.5 microns in diameter.

As shown in Table 3.6-5, implementation of Mitigation Measure AQ-MM-1: *Implement Fugitive Dust Abatement Measures* would reduce PM10 emissions to below the analysis threshold. Accordingly, construction-related emissions would have a less-than-significant potential impact with implementation of Mitigation Measure AQ-MM-1: *Implement Fugitive Dust Abatement Measures*.

Mitigation Measure AQ-MM-1: Implement Fugitive Dust Abatement Measures

To limit fugitive dust from project activities, PG&E shall implement the following measures:

- Vehicle speeds shall be limited to 15 miles per hour when traveling on unpaved roads;
- A water truck shall be used full time to control dust on roads and in the laydown areas;
- The water truck shall be equipped to provide a focused knockdown spray during excavation activities if excessive dust is created; and

^a The emissions intensity of vehicles can differ in summer and winter. CalEEMod generates summer and winter period emissions, where summer emission factors are used for activities occurring between April and September and winter emission factors are used for activities occurring between October and March. Where applicable for construction phases occurring in October, the higher of the two estimates are presented above.

^b Analysis adds emissions among sub-phases occurring on the same day. The reported value for each year represents the highest emissions that would be generated on any one day during the year.

^c Only with compliance with fugitive dust control measures.

 Other emission controls, such as covering stockpiles, shall be used as needed.

c. Expose sensitive receptors to substantial pollutant concentrations?

Less than Significant with Mitigation Incorporated. Sensitive receptors are facilities that house or attract children, the elderly, and people with illnesses, or others who are especially sensitive to the effects of air pollutants. Hospitals, schools, convalescent facilities, and residential areas are examples of sensitive receptors. The Dam spillway and the Doakes Ridge and Spur 1 staging areas are surrounded by undeveloped land. There are no sensitive receptors within 1,000 feet of these Proposed Project features. There are scattered rural residences within 1,000 feet of the Cedar Mill staging area and access roads (SR 88, Tiger Creek Road, Spur 1). The closest home to the staging area is approximately 150 feet to the north on the other side of SR 88. The nearest residence to an access road is 63 feet east of SR 88. Figure 3.6-1 shows the receptor locations within the localized air quality Area of Analysis.

The primary pollutants of concern with respect to health risks to sensitive receptors are criteria pollutants (regional and local) and toxic air contaminants (TAC). Ozone precursors (ROG and NOx) and particulate matter are considered regional pollutants because they affect air quality on a regional scale. Localized pollutants are deposited and potentially affect populations near the emissions source. As these pollutants dissipate with distance, emissions from individual projects can result in direct and material health impacts on adjacent sensitive receptors (if any). The localized criteria pollutants of concern that would be generated by the Proposed Project are particulate matter (fugitive dust) and CO. The TAC of concern is diesel particulate matter (DPM).¹

Regional Criteria Pollutants

Some individuals exposed to high concentrations of ozone or particulate matter may experience certain health effects, including increased incidence of cardiovascular and respiratory ailments (see Table 3.6-2). The emission thresholds adopted by SMAQMD consider existing air quality concentrations and attainment or nonattainment designations under the NAAQS and CAAQS. As previously noted, based on state and federal attainment designations, the ambient air quality is generally worse in Sacramento County when compared to conditions in Amador County. Accordingly, SMAQMD's thresholds provide a conservative analysis of the Proposed Project's potential air quality impacts in Amador County. Projects that

¹ According to the California Department of Conservation (2000:1-7), naturally occurring asbestos is not found within the local Area of Analysis.

generate emissions that are below the analysis thresholds would not adversely affect air quality or exceed the health protective NAAQS or CAAQS. As shown in Tables 3.6-4 and 3.6-5, neither construction of the Proposed Project nor material hauling through SMAQMD would generate ozone precursors or criteria pollutant emissions above the analysis thresholds with implementation of Mitigation Measure AQ-MM-1: *Implement Fugitive Dust Abatement Measures*. As such, the Proposed Project would not be expected to contribute to a significant level of air pollution that would degrade long-term, regional air quality. Potential impacts would be less than significant with mitigation incorporated.

Localized Fugitive Dust


Exposure to fugitive dust at certain concentrations can irritate the respiratory system, especially for people who are naturally sensitive or susceptible to breathing problems. The primary sources of localized fugitive dust would be earthmoving and vehicle travel over unpaved surfaces at the Dam construction site, as well as concrete mixing operations at the Spur 1 mobile batch plant. These emissions would be controlled through adherence to AAD rules and implementation of Mitigation Measure AQ-MM-1: *Implement Fugitive Dust Abatement Measures*. As shown in Table 3.6-5, construction of the Proposed Project would not generate fugitive dust (PM) emissions above the analysis thresholds with implementation of Mitigation Measure AQ-MM-1. Moreover, as previously indicated, there are no sensitive receptors within 1,000 feet of the Dam spillway or Spur 1 staging area. Thus, construction dust emissions would be reduced at the nearest receptor location and would not substantially affect sensitive receptors. Potential impacts would be less than significant with mitigation.


Localized Carbon Monoxide

Engine exhaust from offsite Proposed Project traffic may elevate CO concentrations at local intersections, resulting in hotspots. Receptors exposed to CO hotspots may have a greater likelihood of developing health effects such as fatigue, headaches, confusion, dizziness, and chest pain. Assuming concurrent activities, construction would require a maximum of 106 one-way employee, vendor, and haul trips in a single day. These few vehicle trips would not substantially worsen intersection congestion such that CO hotspots would occur. Accordingly, the Proposed Project would not expose sensitive receptors to substantial CO concentrations. Potential impacts would be less than significant.

Diesel Particulate Matter

DPM is a TAC generated by diesel-fueled equipment and vehicles operating at the Dam spillway site. Exposure to DPM can increase the risk of developing some

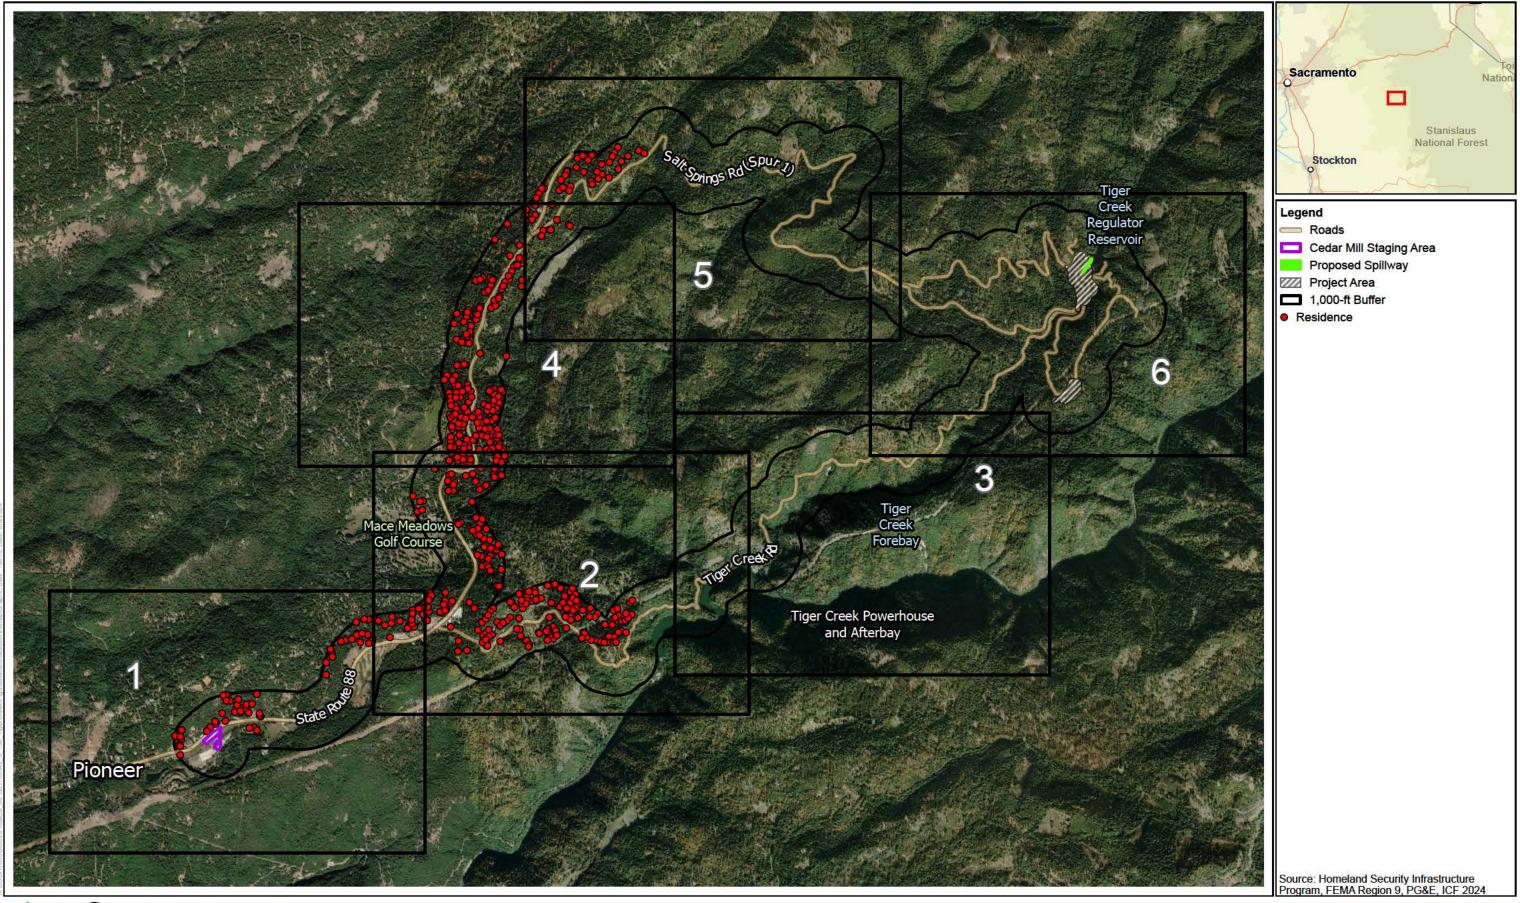






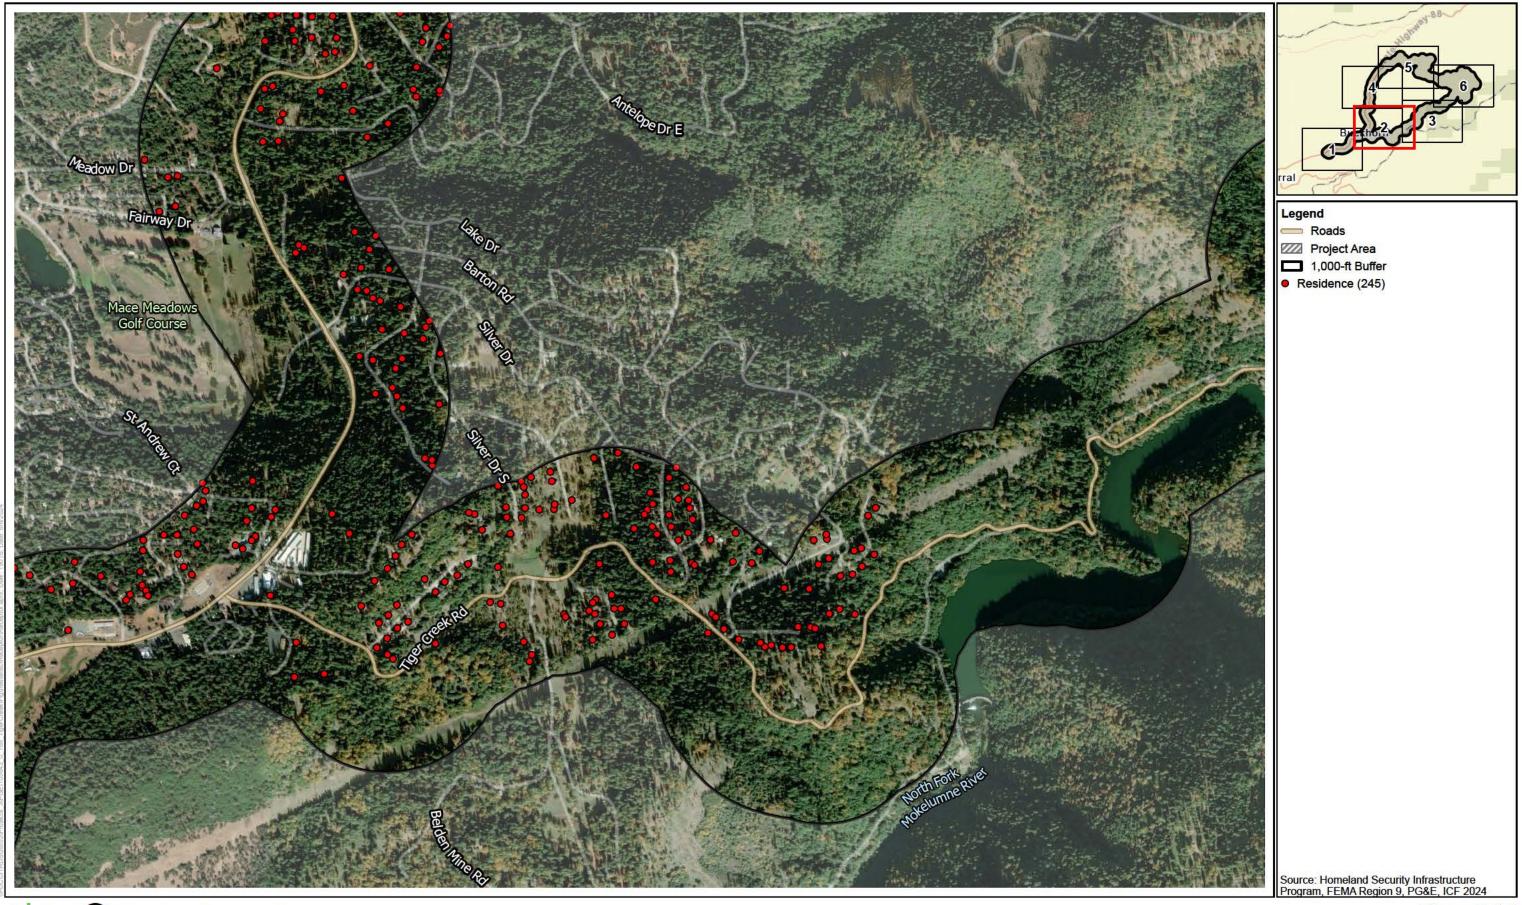




Figure 3.6-1
Sensitive Receptors within 1,000 Feet of the Proposed Project Area and Access Roads
Page 1 of 6

















Figure 3.6-1
Sensitive Receptors within 1,000 Feet of the Proposed Project Area and Access Roads
Page 4 of 6





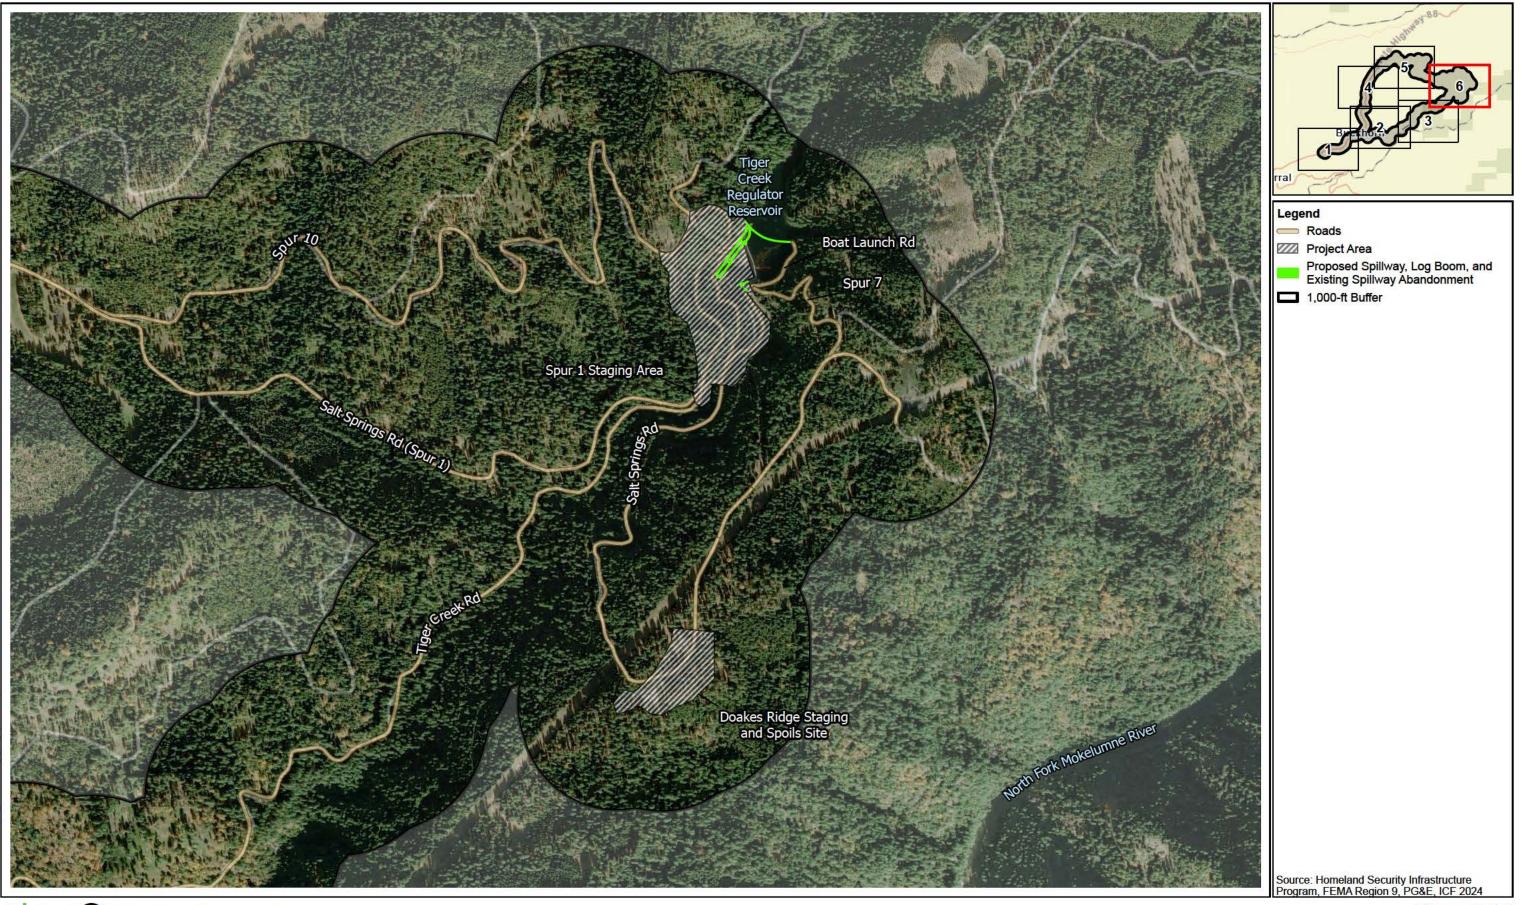



cancers. While construction would involve the use of diesel equipment, diesel combustion would be limited to equipment and vehicle use during the roughly 2-year construction period. This duration is substantially lower than the 30-year exposure period typically associated with chronic cancer health risks (Office of Environmental Health Hazard Assessment 2015). Moreover, as previously noted, there are no sensitive receptors within 1,000 feet of the Dam spillway or the Doakes Ridge and Spur 1 staging areas. The concentration of DPM decreases dramatically as a function of distance from the source (California Air Resources Board 2005:9). Consequently, DPM concentrations, and thus health risks, would be reduced at the nearest receptor locations to these facilities. While there are residences near the Cedar Mill staging area, the property would mainly be used for storage, crew vehicle parking, and equipment and material drop off by heavy-duty truck. Thus, there would be limited to no onsite or stationary DPM emissions at the staging area, and receptor exposure to DPM would be limited to emissions generated by vehicles accessing the site via SR 88, as discussed further below.

Diesel-fueled trucks would be used to transport materials and equipment along access roads. While exposure to DPM from truck trips is transitory (i.e., it only occurs when a vehicle passes by a specific point), there are residential receptors within 1,000 feet of SR 88, Tiger Creek Road, and Spur 1. A quantitative health risk assessment was conducted to assess potential impacts associated with public exposure to DPM from construction haul trucks. The USEPA's AERMOD dispersion model was used to quantify annual average DPM concentrations at receptor locations within 1,000 feet of SR 88, Tiger Creek Road, and Spur 1 where construction hauling would occur. Cancer and noncancer health impacts at these locations were calculated based on the results of the dispersion modeling and the Office of Environmental Health Hazard Assessment's (2015:1-1–9-17) guidance on risk calculations.

Table 3.6-6 presents the estimated maximum health risks from construction hauling. The AAD does not have adopted thresholds of significance to determine significant increases in human health risk from exposure to DPM. Accordingly, risks are compared using the public notification and public meeting thresholds set under the Air Toxics "Hot Spots" Information and Assessment Act (Assembly Bill 2588). These thresholds, which are likewise recommended by SMAQMD (2020), are a probability exceeding 10 in 1 million of contracting cancer from exposure to DPM, and a ground-level noncancer hazard index greater than 1.0 for the maximum exposed individual. As shown in Table 3.6-6, maximum cancer and noncancer health hazards are not modeled to exceed the analysis thresholds. Accordingly, the Proposed Project would not expose sensitive receptors to substantial DPM concentrations. Potential impacts would be less than significant.

Table 3.6-6. Estimated Maximum Excess Cancer and Noncancer Health Risks from Construction Hauling on Local Access Roads

| Location ^a | Maximum Modeled Excess Cancer (potential cases per million) ^b | Maximum Modeled Chronic Hazard Index |
|-----------------------|--|---|
| State Route 88 | <1 | <0.01 |
| Tiger Creek Road | <1 | <0.01 |
| Spur 1 | <1 | <0.01 |
| Threshold | 10 | 1.0 |

^a Only the highest modeled risk is presented for access road. Risks would be lower at all other modeled locations.

d. Result in other emissions (such as those leading to odors) adversely affecting a substantial number of people?

Less than Significant. The generation and severity of odors is dependent on several factors, including the nature, frequency, and intensity of the source; wind direction; and the location of the receptor(s). Odors rarely cause physical harm, but can cause discomfort, leading to complaints to regulatory agencies. CARB (2005:34) identifies sewage treatment plants, landfills, waste transfer stations, recycling facilities, petroleum refineries, biomass and livestock operations, autobody shops, fiberglass manufacturing plants, painting/coating operations, rendering plants, and foundries as potential odor-emitting facilities. The Proposed Project would not result in the addition of such facilities associated with odors.

Potential sources of odor during construction activities include diesel exhaust from equipment. Odors from these sources would be localized and generally confined to the immediate area surrounding the Project Area. These odors would only occur during active equipment and vehicle use. Moreover, because there are no receptors within 1,000 feet of the Dam spillway or Doakes Ridge and Spur 1 staging areas, and diesel combustion at the Cedar Mill staging area would be limited, any odors generated by equipment and vehicles would be localized, and few (if any) people would be exposed to odors. Construction of the Proposed Project is therefore not likely to result in nuisance odors that would violate AAD Rule 205 nuisance standards. This potential impact would be less than significant.

^b Excess cancer risk represents the incremental increase in the number of cancers in a population of one million. Risks are cumulative of inhalation, dermal, soil, mother's milk, and crop pathways.

3.7 Greenhouse Gas Emissions

3.7.1 Introduction

This section analyzes the Proposed Project's potential impacts related to greenhouse gas (GHG) emissions. It describes existing conditions in the Area of Analysis and summarizes the overall regulatory framework for GHGs, and it analyzes the potential for the Proposed Project to affect these resources. The analysis focuses on the primary GHGs that would be generated by construction of the Proposed Project, which are carbon dioxide (CO₂), methane (CH₄), nitrous oxides (N₂O), and hydrofluorocarbons (HFC) (from vehicle air conditioning). Please refer to Section 3.6 *Air Quality* for a discussion of criteria pollutants and potential air quality impacts.

3.7.2 Area of Analysis

Climate change is a global problem, and GHGs are global pollutants. Given the long atmospheric lifetimes of GHGs, the GHGs emitted by many sources worldwide accumulate in the atmosphere. No single emitter of GHGs is large enough to trigger global climate change. Rather, climate change is the result of the individual contributions of countless past, present, and future sources. Thus, GHG impacts are inherently cumulative, and the GHG Area of Analysis includes the entire state and global atmosphere.

3.7.3 Existing Conditions

Unlike emissions of criteria and toxic air pollutants, which have local or regional impacts, emissions of GHGs have a broader, global impact. Global warming associated with the "greenhouse effect" is a process whereby GHGs accumulating in the atmosphere contribute to an increase in the temperature of the earth's atmosphere. The principal GHGs contributing to global warming and associated climate change are CO₂, CH₄, N₂O, and fluorinated compounds. Emissions of GHGs contributing to global climate change are attributable in large part to human activities associated with the transportation, industrial/manufacturing, utility, residential, commercial, and agricultural sectors.

The Intergovernmental Panel on Climate Change (IPCC) was established by the World Meteorological Organization and United Nations Environment Programme to assess scientific, technical, and socioeconomic information relevant to the understanding of climate change, its potential impacts, and options for adaptation

and mitigation. The IPCC estimates that human-induced warming reached approximately one degree Celsius above preindustrial levels in 2017, increasing at 0.2 degree Celsius per decade. Under the current nationally determined contributions of mitigation from each country until 2030, global warming is expected to rise three degrees Celsius by 2100, with warming to continue afterward (Intergovernmental Panel on Climate Change 2018:4). Large increases in global temperatures could have substantial impacts on the natural and human environments worldwide and in California.

Methods have been set forth to describe emissions of GHGs in terms of a single gas to simplify reporting and analysis. The most accepted method to compare GHG emissions is the global warming potential (GWP) methodology. IPCC defines the GWP of various GHG emissions on a normalized scale that recasts all GHG emissions in terms of carbon dioxide equivalent (CO₂e), which compares the gas in question to that of the same mass of CO₂ (CO₂ has a GWP of 1 by definition).

Table 3.7-1 lists the GWPs of CO₂, CH₄, N₂O, and HFC-134a and their lifetimes in the atmosphere. The GWPs are from the IPCC's (2007) fourth assessment report and are consistent with statewide GHG emissions reporting protocol (California Air Resources Board 2023).

Table 3.7-1. Lifetimes and Global Warming Potentials of Principal Greenhouse Gases

| | Global Warming Potential | |
|------------------------|--------------------------|------------------|
| Greenhouse Gas | (100 years) | Lifetime (years) |
| Carbon dioxide | 1 | - |
| Methane | 25 | 12 |
| Nitrous oxide | 298 | 114 |
| Hydrofluorocarbon-134a | 1,430 | 14 |

Source: California Air Resources Board 2023.

3.7.4 Regulatory Setting

3.7.4.1 Federal

Several federal executive orders (EO) have recently been signed by President Joe Biden related to GHG emissions and climate resiliency. EO 13990, signed in January 2021, set a national goal to achieve a 50 to 52 percent reduction from 2005 levels in economy-wide net GHG pollution in 2030. EO 14057, signed in December 2021, requires federal agencies to develop strategic processes for achieving, among other things, carbon-free electricity by 2030 and 100 percent zero-emission vehicle

acquisitions by 2035. President Biden has also signed two bills—the Infrastructure Investment and Jobs Act and the Inflation Reduction Act—that provide funding for infrastructure improvements that will reduce GHG emissions and bolster resilience to climate change. Despite these actions, there is currently no federal law or legislatively mandated national GHG reduction target. However, USEPA and the National Highway Traffic Safety Administration have adopted standards for CO₂ emissions and fuel consumption from heavy- and medium-duty vehicles.

3.7.4.2 State

California has adopted statewide legislation addressing various aspects of climate change and GHG emissions mitigation. Much of this legislation establishes a broad framework for the state's long-term GHG reduction and climate change adaptation program. Of particular importance are Senate Bill (SB) 32 and Assembly Bill (AB) 1279, which outline the state's GHG reduction goals of achieving a 40 percent reduction below 1990 emissions levels by 2030 and net zero GHG emissions (i.e., reach a balance between the GHGs emitted and removed from the atmosphere) no later than 2045. AB 1279 also mandates an 85 percent reduction in statewide GHG emissions (from 1990 levels) by 2045. California's 2017 Climate Change Scoping Plan (2017 Scoping Plan) and the 2022 Scoping Plan for Achieving Carbon Neutrality (2022 Scoping Plan) provide a framework for achieving the 2030 and 2045 reduction targets, respectively, leveraging and enhancing many efforts and programs already adopted by the state (California Air Resources Board 2017, 2022). Many of these programs establish standards or limits to reduce GHG emissions from mobile sources (e.g., Advanced Clean Cars II, Advanced Clean Truck Regulation), energy and water consumption (e.g., Renewables Portfolio Standard, CALGreen Code), waste generation and management (e.g., SB 1383), natural and working lands (e.g., SB 1386), and other sources.

3.7.4.3 Local

At the local level, the AAD has air quality management jurisdiction in Amador County. Some construction materials may originate from neighboring Sacramento County, where the SMAQMD has local air quality management authority. The Conservation Element of the *Amador County General Plan* outlines the following policies to reduce GHG emissions (Amador County 2016:C-29):

- Policy C-10.1: Evaluate the potential effects of climate change on the county's human and natural systems and prepare strategies that allow the County to appropriately respond and adapt;
- Policy C-10.2: Develop and adopt a comprehensive strategy to reduce GHGs within Amador County by at least 15 percent from current levels by 2020;

- Policy C-10.3: Guide new development to areas where pedestrian and bicycle access to existing activity centers is possible, in order to reduce the need for automobile travel and vehicle miles traveled (VMT);
- Policy C-10.4: Work with service providers to ensure that transit offerings in the county are stable or expanding, and that transit is tailored to meet residents' needs;
- **Policy C-10.5:** Require new development projects to incorporate building placement and design features to increase energy efficiency in new structures;
- Policy C-10.6: Support green building through incentives for Leadership in Energy and Environmental Design (LEED) certification of new commercial, industrial, public, and multi-family residential buildings. Promote incentives for compliance with this standard as a way to increase the energy efficiency of new structures. Promote increased energy efficiency and green building practices through the County's use of these practices;
- Policy C-10.7: Support parcel-scale energy generation, including addition of solar panels for residential structures and cogeneration for larger commercial or industrial uses; and
- Policy C-10.8: Expand recycling and waste minimization efforts, including recycling of construction and demolition materials.

3.7.5 Environmental Effects

Potential impacts of the Proposed Project related to greenhouse gas emissions are discussed in the context of State CEQA Guidelines Appendix G checklist. Checklist section VIII, Greenhouse Gas Emissions, asks whether the Proposed Project would result in any of the following conditions.

a. Generate greenhouse gas emissions, either directly or indirectly, that may have a significant impact on the environment?

Less than Significant with Mitigation Incorporated. Proposed Project construction would generate GHG emissions through use of heavy-duty equipment, worker vehicle trips, truck hauling trips, and vegetation removal. GHG emissions generated by these sources were quantified using information provided by PG&E and CalEEMod (version 2022.1.1.25) (McGuckin pers. comm.). Table 3.7-2 summarizes emissions that would be generated by construction of the Proposed Project in Amador County and material hauling through Sacramento County. Emissions would be generated over multiple construction phases between July 2025 and May 2027. Table 3.7-2 also includes emissions from lost annual carbon

sequestration as the result of tree removal. Please refer to Appendix D, *Air Quality Calculations and Assumptions*, for all modeling assumptions and outputs.

Table 3.7-2. Estimated GHG Emissions from Proposed Project Construction and Material Hauling (metric tons)

| Year | CO_2 | CH ₄ | N_2O | HFC | CO ₂ e |
|---------------------------------|--------|-----------------|--------|-----|-------------------|
| 2025 | 883 | <1 | <1 | <1 | 900 |
| 2026 | 679 | <1 | <1 | <1 | 695 |
| 2027 | 93 | <1 | <1 | <1 | 96 |
| Total construction ^a | 1,655 | <1 | <1 | 1 | 1,691 |
| Vegetation removal ^b | 3,733 | 0 | 0 | 0 | 3,733 |
| Total with vegetation removal | 5,388 | <1 | <1 | 1 | 5,424 |

Source: See Appendix D, Air Quality Calculations and Assumptions CO_2 = carbon dioxide; CO_4 = methane; CO_2 = nitrous oxide; CO_4 = hydrofluorocarbon; CO_4 = carbon dioxide equivalent, which includes the relative warming capacity (i.e., global warming potential) of each GHG.

^a The analysis accounts for all emissions directly and indirectly generated by construction activities associated with the Proposed Project. Emissions generated upstream (e.g., material manufacturing) and downstream (e.g., recycling) of construction, otherwise known as "lifecycle emissions," are not included in the analysis, consistent with guidance from the California Natural Resources Agency (2018:41-42). While the origin of most raw materials is not known, and thus an emissions analysis would be speculative, construction of the project would require concrete from on- and off-site batch plants. Lifecycle emissions for cement and aggregate manufacturing, which is upstream of the concrete batching process, have been studied in various literature. Accordingly, for the purposes of disclosure, upstream CO₂ emissions resulting from cement and aggregate manufacturing were quantified using emissions factors from Marceau et al. (2007:Tables E1b and G1b). The analysis indicates that cement and aggregate manufacturing would generate 1,049 metric tons CO₂e. These emissions would be generated upstream of construction and through activities for which the State Water Board has no practical control. Furthermore, CARB directly regulates the industrial emissions associated with cement manufacturing, and thus those emissions would be regulated by CARB consistent with overall meeting of California GHG reduction targets over time. The emissions associated with cement manufacturing are therefore disclosed for informational purposes only.

^b Lost sequestration potential over the design life expectancy of the Dam upgrades (100 years). Annualized, these emissions equate to 38 metric tons CO₂e per year.

Following construction, operations and maintenance at the Reservoir would continue as was done prior to the Proposed Project activities. All equipment and surplus materials would be removed from the Project Area. While there would be some

minor differences in the approach to operations and maintenance, these differences would not materially increase the use or intensity of equipment and vehicles. Accordingly, there would be no change in operational emissions from equipment and vehicles relative to existing conditions. However, the Proposed Project would install additional lighting for enhanced safety in the Project Area, which would increase electricity consumption from existing usage by about 2,608 kilowatt-hours (kWh) per year. Indirect GHG emissions from increased electricity consumption were quantified using emission factors from CalEEMod (version 2022.1.1.25) and equal less than 0.5 metric ton of CO₂e in 2027. These emissions would decline annually and eventually reach zero because of SB 100, which requires that zero-carbon resources comprise 100% of electric retail sales to end-use customers by 2045.

The AAD has not developed quantitative GHG emissions thresholds for CEQA evaluations. In the absence of specific CEQA thresholds, the AAD recommends using applicable guidance from adjacent air districts (Perry pers. comm.). As discussed in Section 3.7.4 Regulatory Setting, SMAQMD has local air quality authority in Sacramento County, which borders Amador County and through which construction materials would be hauled. SMAQMD (2020) recommends a construction and operational screening threshold of 1,100 metric tons CO₂e per year. However, unlike SMAQMD's criteria pollutant thresholds, which were developed based on regional air quality conditions that consider cumulative ambient sources (see Section 3.6 Air Quality), this GHG threshold was developed based on emissions levels generated by land use development projects (i.e., commercial and residential). Recognizing that land use development projects in Sacramento County may differ from construction activities required for a spillway replacement project in Amador County, this IS/MND uses a two-pronged approach for analyzing the significance of Proposed Project-generated GHGs. First, emissions are compared to SMAQMD's threshold to assess their magnitude for informational purposes. Second, the analysis evaluates the extent to which the Proposed Project complies with applicable plans and policies adopted to reduce construction GHG emissions. Compliance with regulatory programs is recognized by the California Supreme Court as a potential pathway for evaluating GHG emissions consistent with CEQA (Center for Biological Diversity v. Department of Fish and Wildlife).

Table 3.7-2 indicates that construction of the Proposed Project would result in an estimated annual maximum of 900 metric tons CO₂e in 2025. Operational lighting emissions would not exceed one metric ton CO₂e per year. These emissions are less than SMAQMD's screening threshold of 1,100 metric tons CO₂e per year.

As discussed in Section 3.7.4 *Regulatory Setting*, the federal government has adopted standards for CO₂ emissions and fuel consumption from heavy- and

medium-duty vehicles. CARB has also adopted the Advanced Clean Cars II and Advanced Clean Truck regulations, which will accelerate the use of zero-emission vehicles and trucks in California. The CALGreen Code contains mandatory requirements aimed at reducing construction waste and reducing environmental impacts during and after construction. For example, nonresidential projects must recycle and/or salvage for reuse a minimum of 65 percent of nonhazardous construction and demolition debris or meet local construction and demolition waste management ordinance requirements, whichever is more stringent (sections 4.408.1.1 and 5.408.1). In addition, 100 percent of trees, stumps, rocks, and associated vegetation and soils resulting primarily from land clearing for nonresidential projects must be reused or recycled (section 5.408.3). The Proposed Project would comply with these mandatory requirements.

The state's near-term (2030, within which the Proposed Project would be constructed) GHG strategy is defined by SB 32. The 2017 Scoping Plan identifies increasing sequestration as crucial to achieving the state's long-term climate change strategy (California Air Resources Board 2017:82). It outlines objectives to maintain natural lands as a resilient carbon sink and sets a goal to reduce GHG emissions from natural and working lands by at least 15 to 20 million metric tons of CO₂e by 2030. SB 1386 also identifies the protection and management of natural and working lands as a key strategy towards meeting the state's 2030 GHG reduction target. As noted above, the Proposed Project construction would involve tree removal that would result in a total lost sequestration potential of 3,733 metric tons CO₂ (see Table 3.7-2). This loss of carbon sequestration potential would conflict with the state's land use and sequestration goals, resulting in a potentially significant impact before mitigation.

With respect to operational lighting electricity, the 2017 Scoping Plan identifies energy efficiency as a key component for meeting the state's energy goals. While the Proposed Project would increase operational electricity use by about 2,608 kWh per year, all new fixtures would be LED and photo activated, which would minimize unnecessary energy usage. The Proposed Project would also modernize existing lighting fixtures to incorporate energy-efficiency features (e.g., LED bulbs, switch-controls, photo- and motion-activation). Accordingly, the proposed lighting changes are consistent with the 2017 Scoping Plan to increase energy efficiency.

Beyond sequestration and energy efficiency, the 2017 Scoping Plan includes broad policy objectives to help meet the state's 2030 target across the California economy. While the 2017 Scoping Plan does not have explicit regulatory requirements related to construction equipment, actions undertaken to achieve some policies will reduce GHG emissions in the construction sector. Table 3.7-3 analyzes

consistency of the Proposed Project with the policy objectives of the 2017 Scoping Plan.

Table 3.7-3. Consistency of the Proposed Project with Scoping Plan Policies

| Policy | Primary Objective | Consistency Analysis |
|--|--|--|
| Senate Bill 350 | Reduce GHG emissions in the electricity sector by implementing the 50% Renewables Portfolio Standard, doubling energy savings, and taking other actions as appropriate to achieve the GHG emissions reductions planning targets in the Integrated Resource Plan process. | This policy is a state program that requires no action at the local or project level. Nonetheless, the Proposed Project new and replacement lighting incorporates energy-efficiency features. |
| Low-Carbon Fuel Standard | Transition to cleaner/less- polluting fuels that have a lower carbon footprint. | This policy is a state program that requires no action at the local or project level. Nonetheless, GHG-MM-1 prioritizes alternatively or renewably fueled vehicles/equipment. |
| Mobile-Source Strategy (Cleaner Technology and Fuels Scenario) | Reduce GHGs and other pollutants from the transportation sector by transitioning to zero-emission and low-emission vehicles, operating cleaner transit systems, and reducing vehicle miles traveled. | This policy is a state program that requires no action at the local or project level. Nonetheless, GHG-MM-1 prioritizes alternatively or renewably fueled vehicles/equipment. |
| Senate Bill 1383 | Approve and implement short-lived climate pollutant strategy to reduce highly potent GHGs. | The Proposed Project does not include any new or expanded sources of high global warming potential GHGs. |
| California Sustainable Freight Action Plan | Improve freight efficiency, transition to zero-emission technologies, and increase competitiveness of California's freight system. | The Proposed Project does not include a freight component. |

| Policy | Primary Objective | Consistency Analysis |
|--|---|--|
| Post-2020 Cap- and-Trade Program | Reduce GHGs across largest GHG emissions sources. | The Proposed Project does not propose any major sources of GHG emissions (i.e., sources with annual emissions greater than 25,000 metric tons of CO ₂ e). |

Source: California Air Resources Board 2017.

Mitigation Measure GHG-MM-1: Implement Best Management Practices to Mitigate Tree Loss and Reduce Construction Generated Greenhouse Gas Emissions is required to replace all removed trees at a 1:1 ratio or compensate for the lost sequestration potential through the purchase of GHG offsets. The measure also requires BMPs recommended by CARB for the reduction of construction-generated GHGs. With implementation of Mitigation Measure GHG-MM-1, this potential impact would be less than significant.

Mitigation Measure GHG-MM-1: Implement Best Management Practices to Mitigate Tree Loss and Reduce Construction Generated Greenhouse Gas Emissions

PG&E shall reduce GHG emissions by implementing the following measures.

Tree Removal

PG&E will employ a two-tiered approach to compensate for the GHG emissions impact resulting from tree removal.

- 1. All trees removed during Proposed Project construction shall be replaced at a 1:1 ratio (for every tree removed, a deepot 40 or similar-sized containerized tree will be planted). Deepot 40 containers generally measure 2.5 inches in diameter and 10 inches deep. Trees may be planted at the construction site, within the Project Area, or throughout PG&E's service territory. PG&E shall prioritize tree plantings of the same species as the trees removed. The final planting location and species shall be selected to maximize tree survivability and growth.
- 2. Given the number of affected trees, if replacement of all individuals is not desired by PG&E or deemed infeasible by PG&E, PG&E will purchase GHG offsets equal to the number of emissions from lost carbon sequestration of the removed trees. Emissions from lost sequestration from removal of all affected trees over the design life expectancy of the Dam upgrades have been quantified as part of this IS/MND and total 3,733 metric tons CO₂ (see

Table 3.7-2). This yields a maximum offset performance standard of 3,733 metric tons CO₂. If trees are replaced according to (1) above, PG&E may recalculate the number of required offsets based on the remaining trees that have been removed and will not be replaced. An updated emissions analysis conducted for the Proposed Project will be performed using approved emissions models and methods available at the time of the reanalysis. Consistent with the methodology used in this IS/MND, lifetime emissions from lost sequestration must be quantified over the design life expectancy of the Dam upgrades (100 years).

All GHG offsets must be created through a CARB-approved registry. These registries are currently the American Carbon Registry, Climate Action Reserve, and Verra, although additional registries may be accredited by CARB in the future. These registries use robust accounting protocols for all GHG offsets created for their exchange, including the six currently approved CARB protocols. This mitigation measure specifically requires GHG offsets created for the Proposed Project to originate from a CARB-approved protocol or a protocol that is equal to or more rigorous than CARB requirements under title 17 of the California Code of Regulations, section 95972. The selected protocol must demonstrate that the reduction of GHG emissions is real, permanent, quantifiable, verifiable, enforceable, and additional, as defined in California Code of Regulations, title 17, section 95802, subdivision (a).

GHG offsets from reduction projects in geographies closest to the Proposed Project (i.e., Northern California) will be prioritized before projects in larger geographies (i.e., Southern California, California, United States, internationally). PG&E will inform brokers of the required geographic prioritization for the procurement of GHG offsets. GHG offsets from reduction projects identified in Northern California that are of equal or lesser cost compared to the settlement price of the latest cap-and-trade auction must be included in the transaction. GHG offsets from reduction projects in larger geographies may be purchased if adequate credits cannot be found in Northern California or they exceed the price maximum identified above.

All GHG offsets will be verified by an independent verifier accredited by the American National Standards Institute's National Accreditation Board or CARB, or an expert with equivalent qualifications to the extent necessary to assist with the verification. All offsets must be retired before December 31 of the year during which tree removal occurs. Copies of the offset retirement verification must be made available to the public no later than June 30 of the following year.

Construction

- Idling times shall be minimized either by shutting equipment off when not in use or reducing the maximum idling time to 5 minutes (as required by the California airborne toxics control measure Title 13, section 2485 of CCR).
 Clear signage shall be provided for construction workers at all access points.
- 2. Encourage construction contractors to operate vehicles with the highest tier engines commercially available.
- 3. Prioritize use of alternative fuel (e.g., biodiesel, electric) or renewable diesel in Proposed Project construction vehicles/equipment.

b. Conflict with an applicable plan, policy, or regulation adopted for the purpose of reducing the emissions of greenhouse gases?

Less than Significant with Mitigation Incorporated. There are no adopted local climate action plans or policies for the reduction of GHG emissions. The 2017 Scoping Plan is the state's plan for reducing GHG emissions to achieve the 2030 GHG reduction target outlined by SB 32. The Proposed Project's consistency with SB 32 (including the 2017 Scoping Plan) and other applicable state regulations is assessed below to determine the significance of this potential impact. Consistency with AB 1279 and the 2022 Scoping Plan is not specifically reviewed because all emissions generated by construction of the Proposed Project are expected to occur between 2025 and 2027, which is well before the AB 1279 target year (2045).

Senate Bill 32

SB 32 codified the state's GHG emissions reduction target for 2030. CARB adopted the 2017 Scoping Plan as a framework for achieving the 2030 GHG emissions target. As discussed under checklist item *a*, removal of existing trees would conflict with the scoping plan's objective to maintain natural lands as a resilient carbon sink. This is a potentially significant impact before mitigation. Mitigation Measure GHG-MM-1 requires 1:1 replacement ratio of all removed trees, or compensation for the lost sequestration potential through the purchase of GHG offsets. This measure also outlines BMPs for the reduction of construction-generated GHG emissions, which is consistent with the broad policy objectives of the 2017 Scoping Plan. With implementation of Mitigation Measure GHG-MM-1, there would not be a conflict with SB 32, and this potential impact would be less than significant.

Other State Regulations

California has adopted statewide legislation addressing various aspects of GHG emissions reduction. Regulations, such as the SB 100/1020-mandated 100 percent

carbon-free electricity by 2045 and new vehicle mandates and emission standards, will be necessary to attain the magnitude of reductions required for the state's 2030 GHG target. The Proposed Project would comply with all regulations applicable to new infrastructure construction or would be directly affected by the outcomes (e.g., vehicle travel would be less carbon intensive due to the increasingly stringent zero-emission standards). Unlike the 2017 Scoping Plan, which explicitly calls for additional emissions reductions from local governments and new projects, none of these state regulations identify specific requirements or commitments for new development beyond what is already required by existing regulations or will be required in forthcoming regulation. Therefore, there is no conflict or inconsistency.

3.8 Energy

3.8.1 Introduction

This section analyzes the Proposed Project's potential impacts related to energy. It describes existing conditions in the Area of Analysis and summarizes the overall regulatory framework for energy, and it analyzes the potential for the Proposed Project to affect these resources.

3.8.2 Area of Analysis

The Area of Analysis for energy includes the Project Area in Amador County and the material haul roads through Amador and Sacramento Counties. This analysis evaluates construction fuel and electricity energy consumption and the potential electricity energy use associated with proposed new and replacement lighting for enhanced safety in the Project Area.

3.8.3 Existing Conditions

The Proposed Project would consume energy in the forms of transportation fuels (i.e., gasoline and diesel) for off-road equipment, trucks, and employee traffic during construction as well as electricity use during construction and operations.

Gasoline is the most used transportation fuel in California, with 13.6 billion gallons sold in 2022 (California Energy Commission 2023a). More than 4 billion gallons of diesel were sold in 2015, making it the second most used transportation fuel in the state (California Energy Commission 2023b). Within Amador and Sacramento Counties, gasoline and diesel are consumed as the primary transportation fuels. Electricity, propane, and natural gas are the most used fuels within the built environment of Amador County (i.e., by buildings) (Sierra Business Council 2016).

Electricity in the Project Area is provided by PG&E and is used for existing electrical infrastructure, including lighting. As described in Chapter 2, *Project Description*, there are seven outdoor lights around the existing left Dam abutment. These lights are controlled by photocells and operate dusk-to-dawn, or approximately 12 hours per day. PG&E estimates that these lights operate at 60 percent power for 11 hours per day and at full power for only 1 hour per day, with an approximate electrical energy use of 1,553 kWh per year.

3.8.4 Regulatory Setting

This section summarizes key federal, state, and local regulations, laws, and policies relevant to energy in the Area of Analysis. This section identifies regulations applicable to renewable energy use and energy efficiency. Please also see Sections 3.6 *Air Quality*, and 3.7 *Greenhouse Gas Emissions*, for more information regarding the regulations controlling and governing emissions. Vehicle fuel economy regulations are included in this section because they are relevant to construction vehicles and equipment that would be required for the Proposed Project.

3.8.4.1 Federal

Energy Policy and Conservation Act of 1975 and Corporate Average Fuel Standards

The Energy Policy and Conservation Act of 1975 established the first fuel economy standards for on-road motor vehicles sold in the United States. The National Highway Traffic Safety Administration (NHTSA) is responsible for establishing vehicle standards and revising existing standards. Its Corporate Average Fuel Economy program was created to determine vehicle manufacturers' compliance with the fuel economy standards. The USEPA administers the testing program that generates the fuel economy data.

Energy Policy Act of 2005

The Energy Policy Act of 2005 establishes a comprehensive, long-term federal energy policy and is implemented by the United States Department of Energy. The act addresses energy production in the United States, including oil, gas, coal, and alternative forms of energy and energy efficiency and tax incentives. Energy efficiency and tax incentive programs include credits for the construction of new energy-efficient homes, production or purchase of energy-efficient appliances, and loan guarantees for entities that develop or use innovative technologies that avoid the production of GHG emissions.

Energy and Independence Security Act of 2007

The Energy Independence and Security Act of 2007 was passed to increase the production of clean renewable fuels; increase the efficiency of products, buildings, and vehicles; improve the energy performance of the federal government; and increase energy security in the United States, develop renewable fuel production, and improve vehicle fuel economy. The act included the first increase in fuel economy standards for passenger cars since 1975, a new energy grant program for

use by local governments in implementing energy-efficiency initiatives, and a variety of green building incentives and programs.

3.8.4.2 State

Senate Bill 1389 (2002) and California Integrated Energy Policy Report

SB 1389 requires the California Energy Commission (CEC) to develop an integrated energy plan for electricity, natural gas, and transportation fuels. The CEC adopts an integrated energy policy report (IEPR) every two years and an update every other year. The IEPR covers a broad range of topics, including environmental performance of the electricity generation system, landscape-scale planning, transportation fuel supply reliability, climate adaptation activities, and climate and sea level rise scenarios intended to support improvements to the California energy system that reduce air pollution, congestion, and wasteful energy use. The 2022 IEPR was adopted in February 2023.

Renewables Portfolio Standard Program—Senate Bills 1078 (2002), 107 (2006), 2 (2011), 100 (2018), and 1020 (2022)

In 2002, California established its Renewables Portfolio Standard (RPS) Program, with the goal of increasing the percentage of renewable energy in the state's electricity mix to 20 percent of retail sales by 2010. The goals of the RPS have been revised overtime by several senate bills. Pursuant to the latest revisions under SBs 100 and 1020, eligible renewable energy resources and zero-carbon resources must supply 60 percent of all retail sales of electricity to California end-use customers by December 31, 2030; 90 percent of all retail sales of electricity by December 31, 2035; 95 percent of all retail sales by December 31, 2040; and 100 percent of all retail sales by December 31, 2045. All electricity procured to serve state agencies must be provided by 100 percent eligible renewable energy resources and zero-carbon resources by December 31, 2035.

Clean Energy and Pollution Reduction Act of 2015—Senate Bill 350 (2015)

SB 350 was approved by the California legislature in September 2015 and signed by Governor Brown in October 2015. While the bill includes provisions for the RPS, these have been superseded by subsequent bills, SB 100 and SB 1020 (described under section 3.8.4.2 State, in the subsection Renewables Portfolio Standard Program—Senate Bills 1078 (2002), 107 (2006), 2 (2011), 100 (2018), and 1020 (2022)). With respect to energy efficiency, SB 350 requires a doubling of energy efficiency (electrical and natural gas) by 2030, as well as improvements to the

efficiency of existing buildings. These mandates will be implemented by future actions of the California Public Utilities Commission and CEC.

3.8.4.3 Local

Local plans with a focus on or policies related to energy resources relevant to the Proposed Project include the *Amador County Energy Action Plan* and the Conservation Element of the *Amador County General Plan*.

Sacramento County does not have an energy action plan. The Energy Element of the *Sacramento County General Plan* contains policies intended to ensure energy conservation is considered in policy-making that guides the growth of the county. Although some construction materials for the Proposed Project may originate in Sacramento County, activities would be limited to material hauling and associated fuel-based energy use; there are no policies or action items specifically related to this short-term activity.

Amador County Energy Action Plan

Amador County adopted the *Amador County Energy Action Plan* on May 26, 2015. The *Amador County Energy Action Plan*, produced by the Sierra Business Council and supported by PG&E, provides a roadmap for expanding existing energy-efficiency and renewable-energy efforts underway in the county. The plan builds on energy-efficiency efforts that began in 2009, including the *Amador County Government Operations Energy Use and Greenhouse Gas Emissions Inventory*, and the 2011 Sierra Business Council GHG inventory of emissions from community activities, which included residential and non-residential sectors.

Amador County General Plan

The Reservoir provides water via the Lower Tiger Creek Conduit for power generation at the Tiger Creek Powerhouse. The Tiger Creek Powerhouse is one of several hydroelectric facilities in Amador County. The Conservation Element of the *Amador County General Plan* contains the following policies that support and encourage further development of hydroelectric facilities and use of renewable and locally sourced energy resources: (Amador County 2016:C-8 to C-9, C-25.)

- **Policy C-6.3:** Promote increased energy efficiency and green building practices through the County's use of these practices and through use of incentives:
- Policy C-6.4: Encourage development of renewable energy generation options;
 and
- Policy C-6.5: Support use of renewable and locally-available sources of energy where feasible.

3.8.5 Environmental Effects

Potential impacts of the Proposed Project related to energy are discussed in the context of the State CEQA Guidelines Appendix G checklist. Checklist section VI, *Energy*, asks whether the Proposed Project would result in any of the following conditions.

a. Result in potentially significant environmental impact due to wasteful, inefficient, or unnecessary consumption of energy resources, during project construction or operation?

Proposed Project Construction

Less than Significant with Mitigation Incorporated. Construction would involve consumption of gasoline and diesel fuels associated with operation of on-road vehicles and off-road equipment. Additionally, electricity would be used for mobile batch plant operations and at the construction office trailers.

Activities that consume gasoline and diesel also contribute to other related impacts. GHG emissions, such as CO₂, are linked to energy consumption. Energy consumption from the combustion of fossil fuels (i.e., gasoline and diesel) can therefore be quantified from predicted CO₂ levels based on the rate of CO₂ emissions emitted per gallon of combusted diesel (22.4 pounds/gallon) and gasoline (19.6 pounds/gallon) (Climate Registry 2023).

This evaluation of fuel consumption uses the same assumptions of construction equipment and vehicle numbers, horsepower ratings, and load factors used to estimate construction CO₂ emissions (see Section 3.7 *Greenhouse Gas Emissions*) to calculate construction-related fuel use. Estimated CO₂ emissions were used to characterize gallons of fuel consumed based on the carbon content of the fuel (Climate Registry 2023). Construction would consume approximately 28,000 kWh of electricity between 2025 and 2027.

Table 3.8-1 summarizes annual and total fuel and electricity consumption for construction of the Proposed Project in Amador County and material hauling through Sacramento County. Refer to Appendix D, *Air Quality Calculations and Assumptions*.

Table 3.8-1. Construction-Period Energy Consumption Estimates (2025 to 2027)

| Year | Gasoline/Diesel (gallons) | Electricity (kWh) |
|-------|---------------------------|-------------------|
| 2025 | 86,475 | 5,750 |
| 2026 | 66,497 | 19,750 |
| 2027 | 9,129 | 2,500 |
| Total | 162,100 | 28,000 |

Sources: Section 3.7 *Greenhouse Gas Emissions*, Section 3.7.5 *Environmental Effects* under checklist item *a*; and Appendix D, *Air Quality Calculations and Assumptions*, Section 5.8, *Construction Electricity Consumption and Emissions Factors*.

kWh = kilowatt hours.

Construction-related fuel and electric energy consumption in the Area of Analysis would be temporary and short-term, lasting only while construction is ongoing. However, if proper measures are not taken, construction activities could result in wasteful, inefficient, or unnecessary consumption of energy resources. In order to minimize energy consumption from construction activities, as well as to reduce emissions and provide stormwater pollution control, PG&E will develop and implement a traffic control plan under Mitigation Measure TRAN-MM-1: *Implement a Traffic Control Plan* (described in Section 3.14 *Transportation*). Mitigation Measure TRAN-MM-1 specifies that the traffic control plan shall include the following measures:

- The construction contractor shall comply with Title 13 of the CCR, which includes idling restrictions on construction vehicles and equipment to no more than five minutes.
- Construction equipment and vehicles shall be properly tuned and maintained.
- To the extent feasible, construction traffic shall be scheduled and routed to reduce congestion and related air quality impacts caused by idling vehicles along local roads during peak travel times.

Implementation of the above measures required in Mitigation Measure TRAN-MM-1 will help conserve energy, consistent with state and local policies to reduce energy consumption. Accordingly, with implementation of Mitigation Measure TRAN-MM-1, the Proposed Project would not result in the inefficient, wasteful, or unnecessary consumption of fuel or electricity and construction-related energy consumption would result in a less-than-significant potential impact.

Proposed Project Operation

Less than Significant. Under the Proposed Project, the existing outdoor light fixtures would be replaced, and new lighting would be added along the existing Dam crest, across the new spillway pedestrian footbridge to the LLO, and adjacent to the permanent access road turnaround and parking area. The electrical energy use estimate for the Proposed Project lighting would be approximately 4,161 kWh per year, an increase of approximately 2,608 kWh per year. This level of electricity use is substantially less than annual levels for an average household.¹ Overall, although the electricity consumption for the Proposed Project would increase over existing conditions, as described in Chapter 2, *Project Description*, the lighting configuration incorporates modern energy-efficiency features (e.g., LED bulbs, switch-controls, photo- and motion-activation). Electricity for the new lighting would use the existing electrical infrastructure and power source. No new infrastructure or distribution lines would be required.

The proposed lighting changes are needed to modernize the lighting fixtures and improve safety conditions in the Project Area and would consume less than the average annual California or United States household energy use. Therefore, although the Proposed Project would result in an increase in electricity consumption compared with existing conditions, the Proposed Project would not result in the inefficient, wasteful, or unnecessary consumption of energy resources during operation. The potential impact would be less than significant.

b. Conflict with or obstruct a state or local plan for renewable energy or energy efficiency?

Less than Significant. Proposed Project construction and operations activities would not require the use of energy in appreciable quantities (see checklist item *a*) and would not directly result in a need to construct new energy generation or supply facilities. There would be only minimal changes to existing operational activities and a small increase in existing operational electrical energy use for additional lighting at the Dam. The Proposed Project would not involve investor-owned utilities or retail sellers of electricity subject to the requirements of the state and local energy plans or regulations. The Proposed Project would not affect PG&E's ability to provide renewable energy resources and would not obstruct implementation of the RPS or

Recirculated IS/MND

¹ The average annual United States household electricity consumption is approximately 11,000 kWh, although use in the western United States, including California, is less with an average annual household electricity consumption of approximately 8,525 kWh and (United States Energy Information Administration 2019).

result in energy consumption that would require installation of more energy production facilities.

The Amador County Energy Action Plan contains measures to increase energy efficiency in existing structures, new buildings, and municipal structures and operations. Additionally, the Amador County Energy Action Plan focuses on renewable energy efforts and reducing energy associated with water and waste. Those measures are associated with the operational aspects of new or existing projects. The Proposed Project would not construct any new buildings and is only modifying the Dam to replace the spillway with minimal changes to existing operational energy use; therefore, these measures and the energy action plan are not applicable to the Proposed Project.

The Proposed Project new and replacement lighting incorporates energy-efficiency features consistent with policies of Conservation Element of the *Amador County General Plan*. The Proposed Project would not conflict with or obstruct a state or local plan for renewable energy or energy efficiency. This potential impact would be less than significant.

3.9 Noise

3.9.1 Introduction

This section analyzes the Proposed Project's potential impacts related to noise. It describes existing conditions in the Area of Analysis and summarizes the overall regulatory framework for noise, and it analyzes the potential for the Proposed Project to affect these resources.

3.9.1.1 Fundamentals of Noise and Sound

Overview of Noise and Sound

Noise is commonly defined as unwanted sound that annoys or disturbs people and potentially causes an adverse psychological or physiological effect on human health. As noise is an environmental pollutant that can interfere with human activities, an evaluation of noise is necessary when considering the environmental impacts of a proposed project.

Sound is mechanical energy (vibration) transmitted by pressure waves over a medium such as air or water. Sound is characterized by various parameters, including the rate of oscillation of sound waves (frequency), the speed of propagation, and the pressure level or energy content (amplitude). In particular, the sound pressure level is the most common descriptor for characterizing the loudness of an ambient (existing) sound level. Although the decibel (dB) scale, a logarithmic scale, is used to quantify sound intensity, it does not accurately describe how sound intensity is perceived by human hearing. The human ear is not equally sensitive to all frequencies in the entire spectrum, so noise measurements are weighted more heavily for frequencies to which humans are sensitive in a process called "A-weighting," written as "dBA" and referred to as "A-weighted decibels." Table 3.9-1 defines sound measurements and other terminology used in this section, and Table 3.9-2 summarizes typical A-weighted sound levels for different noise sources.

In general, human sound perception is such that a change in sound level of 1 dB cannot typically be perceived by the human ear, a change of 3 dB is barely noticeable, a change of 5 dB is clearly noticeable, and a change of 10 dB is perceived as doubling or halving the sound level as it increases or decreases, respectively.

Different types of measurements are used to characterize the time-varying nature of sound. These measurements include the equivalent sound level (Leq), the minimum

and maximum sound levels (L_{min} and L_{max}), percentile-exceeded sound levels (such as L_{10} , L_{20}), the day-night sound level (L_{dn}), and the community noise equivalent level (CNEL). L_{dn} and CNEL values differ by less than one dB. As a matter of practice, L_{dn} and CNEL values are considered to be equivalent and are treated as such. These measurements are defined in Table 3.9-1.

Table 3.9-1. Noise and Vibration Terminology

| Sound Measurements | Definition |
|---|--|
| Decibel (dB) | A unitless measure of sound on a logarithmic scale that indicates the squared ratio of sound pressure amplitude with respect to a reference sound pressure amplitude. The reference pressure is 20 micropascals. |
| A-Weighted Decibel (dBA) | An overall frequency-weighted sound level in decibels that approximates the frequency response of the human ear. |
| C-Weighted Decibel (dBC) | The sound pressure level in decibels as measured using the C-weighting filter network. The C-weighting is very close to an unweighted or "flat" response. C-weighting is used only in special cases (i.e., when low-frequency noise is of particular importance). A comparison of the measured A- and C-weighted level gives an indication of low-frequency content. |
| Maximum Sound Level (L _{max}) | The maximum sound level measured during the measurement period. |
| Minimum Sound Level (L _{min}) | The minimum sound level measured during the measurement period. |
| Equivalent Sound Level (L _{eq}) | The equivalent steady-state sound level that in a stated period of time would contain the same acoustical energy. |
| Percentile-Exceeded Sound Level (Lxx) | The sound level exceeded X% of a specific time period. L ₁₀ is the sound level exceeded 10% of the time, and L ₉₀ is the sound level exceeded 90% of the time. L ₉₀ is often considered to be representative of the background noise level in a given area. |
| Day-Night Level (Ldn) | The energy average of the A-weighted sound levels occurring during a 24-hour period, with 10 dB added to |
| | |

| Sound Measurements | Definition |
|--|--|
| | the A-weighted sound levels occurring during the period from 10:00 p.m. to 7:00 a.m. |
| Community Noise Equivalent Level (CNEL) | The energy average of the A-weighted sound levels occurring during a 24-hour period, with 5 dB added to the A-weighted sound levels occurring during the period from 7:00 p.m. to 10:00 p.m. and 10 dB added to the A-weighted sound levels occurring during the period from 10:00 p.m. to 7:00 a.m. |
| Vibration Velocity Level (or Vibration Decibel Level, VdB) | The root-mean-square velocity amplitude for measured ground motion expressed in dB. |
| Sound Exposure Level (SEL) | Sound Exposure Level is similar to the L_{eq} in that the total sound energy is averaged over the measurement period. The difference is that L_{eq} is averaged over the measurement period, whereas SEL is averaged over a reference duration of one second. For example, a noise level of 90 dBA lasting 1 second would have a SEL of 90 dBA, but if the event lasted 2 seconds the SEL would be 93 dBA. |
| Peak Particle Velocity (Peak Velocity or PPV) | A measurement of ground vibration, defined as the maximum speed (measured in inches per second) at which a particle in the ground is moving relative to its inactive state. PPV is usually expressed in inches per second (in/sec). |
| Frequency: Hertz (Hz) | The number of complete pressure fluctuations per second above and below atmospheric pressure. |

November 2024

Table 3.9-2. Typical A-weighted Sound Levels

| | Noise Level | |
|-------------------------------|----------------------|--------------------------------|
| Common Outdoor Activities | (dBA) | Common Indoor Activities |
| | —110— | Rock band |
| Jet flyover at 1,000 feet | | |
| | —100— | |
| Gas lawnmower at 3 feet | | |
| | —90— | |
| Diesel truck at 50 feet at 50 | | Food blender at 3 feet |
| mph | | |
| | —80— | Garbage disposal at 3 feet |
| Noisy urban area, daytime | 70 | |
| Gas lawnmower at 100 feet | 70 | Vacuum cleaner at 10 feet |
| Commercial area | 60 | Normal speech at 3 feet |
| Heavy traffic at 300 feet | 60 | Large business office |
| Quiet urban daytime | — 50 — | Dishwasher in next room |
| Quiet diban daytime | —30— | Distiwastier in flext footii |
| Quiet urban nighttime | 4 0 | Theater, large conference room |
| Quiot dibail liightaille | 10 | (background) |
| Quiet suburban nighttime | | , |
| G | —30— | Library |
| Quiet rural nighttime | | Bedroom at night, concert hall |
| | | (background) |
| | —20— | |
| | | Broadcast/recording studio |
| | —10— | |
| | | |
| | —0— | |

dBA = A-weighted decibels; mph = miles per hour.

Source: Federal Transit Administration. 2018. Transit Noise and Vibration Impact Assessment. FTA Report 0123. Available:

https://www.transit.dot.gov/sites/fta.dot.gov/files/docs/research-

innovation/118131/transit-noise-and-vibration-impact-assessment-manual-fta-report-no-0123_0.pdf. Accessed: March 15, 2023.

For a point source, such as a stationary compressor or a piece of construction equipment, sound attenuates (lessens in intensity) based on geometry at a rate of six dB per doubling of distance. For a line source, such as free-flowing traffic on a freeway, sound attenuates at a rate of three dB per doubling of distance perpendicular to the source (California Department of Transportation 2013). Atmospheric conditions, including wind, temperature gradients, and humidity, can change how sound propagates over distance and can affect the level of sound received at a given location. The degree to which the ground surface absorbs acoustical energy also affects sound propagation. Sound that travels over an acoustically absorptive surface such as grass attenuates at a greater rate than sound that travels over a hard surface such as pavement. The increased attenuation is typically in the range of one to two dB per doubling of distance. Barriers such as buildings or topographic features that block the line of sight between a source and receiver also increase the attenuation of sound over distance.

Community noise environments are generally perceived as quiet when the 24-hour average noise level is below 45 dBA, moderate in the 45 to 60 dBA CNEL range, and loud above 60 dBA CNEL. Very noisy urban residential areas are usually around 70 dBA CNEL. Along major thoroughfares, roadside noise levels are typically between 65 and 75 dBA CNEL. Incremental changes of three to five dB in the existing one-hour Leq, or the CNEL, are commonly used as thresholds for an adverse community reaction to a noise increase. However, there is evidence that incremental thresholds in this range may not be sufficiently protective in areas where noise-sensitive uses are located and CNEL is already high (i.e., above 60 dBA). In these areas, limiting noise increases to three dB or less is recommended (Federal Transit Administration 2018).

Noise from Multiple Sources

As sound pressure levels in decibels are based on a logarithmic scale, they cannot be added or subtracted in the usual arithmetical way. Adding a new noise source to an existing noise source, with both producing noise at the same level, will not double the noise level. If the difference between two noise sources is 10 dBA or more, the higher noise source will dominate, and the resultant noise level will be equal to the noise level of the higher noise source. In general, if the difference between two noise sources is zero to one dBA, the resultant noise level will be three dBA higher than the higher noise source, or both sources if they are equal. If the difference between two noise sources is two to three dBA, the resultant noise level will be two dBA above the higher noise source. If the difference between two noise sources is 4 to 10 dBA, the resultant noise level will be 1 dBA higher than the higher noise source. Table 3.9-3 demonstrates the result of adding noise from multiple sources.

Table 3.9-3. Rules for Combining Sound Levels by Decibel Addition

| When two decibel values differ by | add the following amount to the higher decibel value | Example |
|-----------------------------------|--|--------------------------|
| 0 to 1 dB | 3 dB | 60 dB + 61 dB = 64 dB |
| 2 to 3 dB | 2 dB | 60 dB + 63 dB = 65 dB |
| 4 to 9 dB | 1 dB | 60 dB + 69 dB = 70 dB |
| 10 dB or more | 0 dB | 60 dB + 75 dB = 75 dB |

Source: California Department of Transportation 2020.

Attenuation of Noise

A receptor's distance from a noise source affects how noise levels attenuate (i.e., how noise levels decrease). Transportation noise sources tend to be arranged linearly such that roadway traffic attenuates at a rate of 3.0 to 4.5 dBA per doubling of distance from the source, depending on the intervening surface (paved or vegetated, respectively). Point sources of noise, such as stationary equipment or construction equipment, typically attenuate at a rate of 6.0 to 7.5 dBA per doubling of distance from the source, depending on the intervening surface.¹ For example, a sound level of 80 dBA at 50 feet from the noise source will be reduced to 74 dBA at 100 feet, 68 dBA at 200 feet, and so on, based on the 6 dB point-source reduction over a non-absorptive surface (e.g., pavement instead of vegetation). Noise levels can also be attenuated by "shielding" or providing a barrier between the source and the receptor. With respect to interior noise levels, noise attenuation effectiveness depends on whether windows are closed or open. Based on the USEPA's national average, closed windows reduce noise levels by approximately 25 dBA, and open windows reduce noise levels by about 15 dBA.²

The 1.5 dBA variation in attenuation rate (six dBA vs. 7.5 dBA) can result from ground-absorption effects, which occur as sound travels over soft surfaces such as soft earth or vegetation (7.5 dBA attenuation rate) versus hard surfaces such as pavement or very hard-packed earth (six dBA rate) (United States Department of Housing and Urban Development. 1985. *The Noise Guidebook*, p. 24. Available: https://www.hudexchange.info/onecpd/assets/File/Noise-Guidebook-Chapter-4.pdf. Accessed: May 20, 2023.)

United States Environmental Protection Agency. 1974. Information on Levels of Environmental Noise Requisite to Protect Public Health and Welfare with an Adequate Margin of Safety. Appendix B, Table B-4, p. B-6. March.

Noise-Sensitive Land Uses

Noise-sensitive land uses are generally defined as locations where people reside or where the presence of unwanted sound could adversely affect the use of the land. Noise-sensitive land uses typically may include but are not limited to single- and multifamily residential areas, health care facilities, churches, lodging facilities, and schools. Noise-sensitive land uses where people typically sleep are typically more sensitive to noise during nighttime hours (when people are typically sleeping). Recreational areas where quiet is an important part of the environment, as well as some commercial areas, such as outdoor restaurant seating areas, can also be considered sensitive to noise, but are generally not as sensitive to noise as places where people typically sleep.

Overview of Ground-borne Vibration

Vibration is an oscillatory motion through a solid medium in which the motion's amplitude can be described in terms of displacement, velocity, or acceleration. Construction-related vibration primarily results from the use of impact equipment such as pile drivers (both impact and vibratory), hoe rams, vibratory compactors, and jack hammers, although heavily loaded vehicles may also result in substantial ground-borne vibration. Operations-related vibration results primarily from the passing of trains, buses, and heavy trucks. Vibration is measured by peak particle velocity (PPV), defined as the maximum instantaneous peak of the vibration signal in inches per second. PPV is the metric typically used to describe vibration from sources that may result in structural stresses in buildings (Federal Transit Administration 2018). Ground-borne vibration can also be quantified by the rootmean-square velocity amplitude, which is useful for assessing human annoyance. The root-mean-square amplitude is expressed in terms of VdB, a metric that is sometimes used in evaluating human annoyance resulting from ground-borne vibration. Vibration traveling through typical soil conditions may be estimated at a given distance by the following formula, where LV_{ref} is the reference VdB vibration level at 25 feet and D is the distance at which the vibration level is being estimated (Federal Transit Administration 2018):

$$LV_{(distance)} = LV_{ref} - 30 \times log (D/25)$$

The operation of heavy construction equipment, particularly pile-drivers and other heavy-duty impact devices (such as pavement breakers), creates seismic waves that radiate along the surface of the ground and downward. These surface waves can be felt as ground vibration and result in effects that range from annoyance for people to damage to structures. Ground-borne vibration generally attenuates rapidly with distance from the source of the vibration. This attenuation is a complex function

of how energy is imparted into the ground as well as the subsurface soil and/or rock conditions through which the vibration is traveling. Variations in geology can result in different vibration levels, with denser soils generally resulting in more rapid attenuation over a given distance. The effects of ground-borne vibration on buildings include movement of building floors, rattling of windows, shaking of items on shelves or hanging on walls, and rumbling sounds. Ground-borne noise is the rumbling sound generated by the vibration of building surfaces such as floors, walls, and ceilings that radiate noise from the motion of the room surfaces. Ground-borne noise can also occur because of the low-frequency components from a specific source of vibration, such as a rail line.

Vibration traveling through typical soil conditions may be estimated at a given distance by the following formula, where PPV_{ref} is the reference PPV at 25 feet (Federal Transit Administration 2018).

$$PPV = PPV_{ref} \times (25/distance)^{1.5}$$

The background vibration velocity level in residential areas is usually 50 VdB or lower. The vibration velocity level of perception for humans is approximately 65 VdB, and human response to vibration is not usually substantial unless the vibration exceeds 70 VdB. Most perceptible indoor vibration is caused by sources within buildings, such as the operation of mechanical equipment, the movement of people, or the slamming of doors. Typical outdoor sources of perceptible ground-borne vibration are heavy construction equipment, steel-wheeled trains, and vehicular traffic on rough roads. Ground-borne noise and vibration are the most significant problems for tunnels that are under residential areas or other noise-sensitive structures.

3.9.2 Area of Analysis

The Area of Analysis for noise and vibration encompasses the areas that would be directly and indirectly affected by construction activities for the Proposed Project. Specifically, it includes portions of the Proposed Project near the Dam area, near the proposed batch plant (to be located at the Spur 1 staging area), near the Cedar Mill staging area, and areas near haul roads that will be used during Proposed Project construction (see Figures 1-2, *Project Location*, and 2-1, *Project Area*). In general, the local Area of Analysis for noise and vibration is the construction footprint and haul roads plus areas within approximately 1,000 feet.

3.9.3 Existing Conditions

3.9.3.1 Existing Uses at the Project Area

The Dam area of the Proposed Project is currently developed with the existing Dam and spillway. The sites for the proposed spillway alignment and plunge pool are located northwest of the existing spillway on the western side of the existing Dam. The batch plant site would be located at the Spur 1 staging area. The Cedar Mill property, located 8.5 miles from the Dam, is the closest project feature to noise-sensitive land uses. It would likely be used for staging activities including material staging, crew and craft vehicle parking, and equipment parts drop-off and maintenance. There are approximately 4 acres of previously developed space at this site, most of which is flat. No additional development would be required to use this site for the Proposed Project with the exception of some possible minor vegetation management.

3.9.3.2 Existing Noise-sensitive Uses in the Vicinity

The Dam area of the Proposed Project, including the proposed location for the concrete batch plant (Spur 1 staging area), is located over two miles from the nearest noise-sensitive land uses. However, some noise-sensitive uses (residences) are located as close as approximately 150 feet from the perimeter of the Cedar Mill staging area. In addition, some noise-sensitive land uses (primarily residences) are located along the expected haul routes (Tiger Creek Road and Spur 1) for Proposed Project construction vehicles.

3.9.3.3 Existing Noise Levels

Existing ambient noise levels in the Area of Analysis for the Proposed Project are characterized primarily by noise sources associated with natural/undeveloped areas, property maintenance, and vehicle noise. Noise sources associated with natural areas include the rustling of leaves, flowing water of a river, and birds. During site visits, noise from property maintenance activities was heard in the general vicinity of the Proposed Project and nearest sensitive land uses, included distant chainsaws for tree trimming and small tractors for moving brush piles and ashes associated with fire prevention activities. Traffic noise was the dominant noise source along major roadways in the Project Area, such as SR 88 and Tiger Creek Road. Additionally, distant aircraft were noted during site visits.

Eight noise measurements were conducted between Tuesday, June 22, 2023, and Friday, June 23, 2023, to document existing noise levels in the Project Area and at nearby sensitive land uses. These included both short-term (ST) measurements,


conducted over a period of 10- to 15-minutes, and long-term (LT) noise measurements which logged hourly data over a period of at least 24 hours. The measurement locations were distributed throughout the Area of Analysis for the Proposed Project, with an emphasis on locations that are representative noise-sensitive receptors in the Area of Analysis (i.e., residential dwellings) or locations near Proposed Project components (i.e., the Dam and batch plant area, the Cedar Mill staging area, and/or haul or access routes for the Proposed Project). The measurement locations are indicated in Figure 3.9-1. The short- and long-term noise measurement results are summarized in Tables 3.9-4 and 3.9-5.


Table 3.9-4. Short-Term Noise Level Measurement Results

| Site | Site Description | Measurement Start Time | dBA L _{eq} | dBA L _{max} | dBA L _{min} | Dominant Noise Source |
|------|---|---------------------------|------------------------|-------------------------|-------------------------|--|
| ST-1 | Tiger Creek Spillway/Regulator (38.476860°, - 120.452430°) | 06/20/2023 1:10 p.m. | 60.3 | 61.6 | 59.5 | Spillway water noise. |
| ST-2 | Tiger Creek Road (38.446078°, - 120.503593°) | 06/23/2023 11:50 a.m. | 52.0 | 74.2 | 36.2 | Occasional vehicle pass- by and propeller planes overhead. |

Note: Refer to Appendix E-1, *Long-Term Measurement Data*; Appendix E-2, *Short-Term Measurement Data*; Appendix E-3, *Field Sheets*; and Appendix E-4, *Field Pictures*, for full noise measurement data, additional noise measurement information, and field photos.

ST = short-term (10- to 15-minute) ambient noise measurement. dBA = A-weighted decibels.

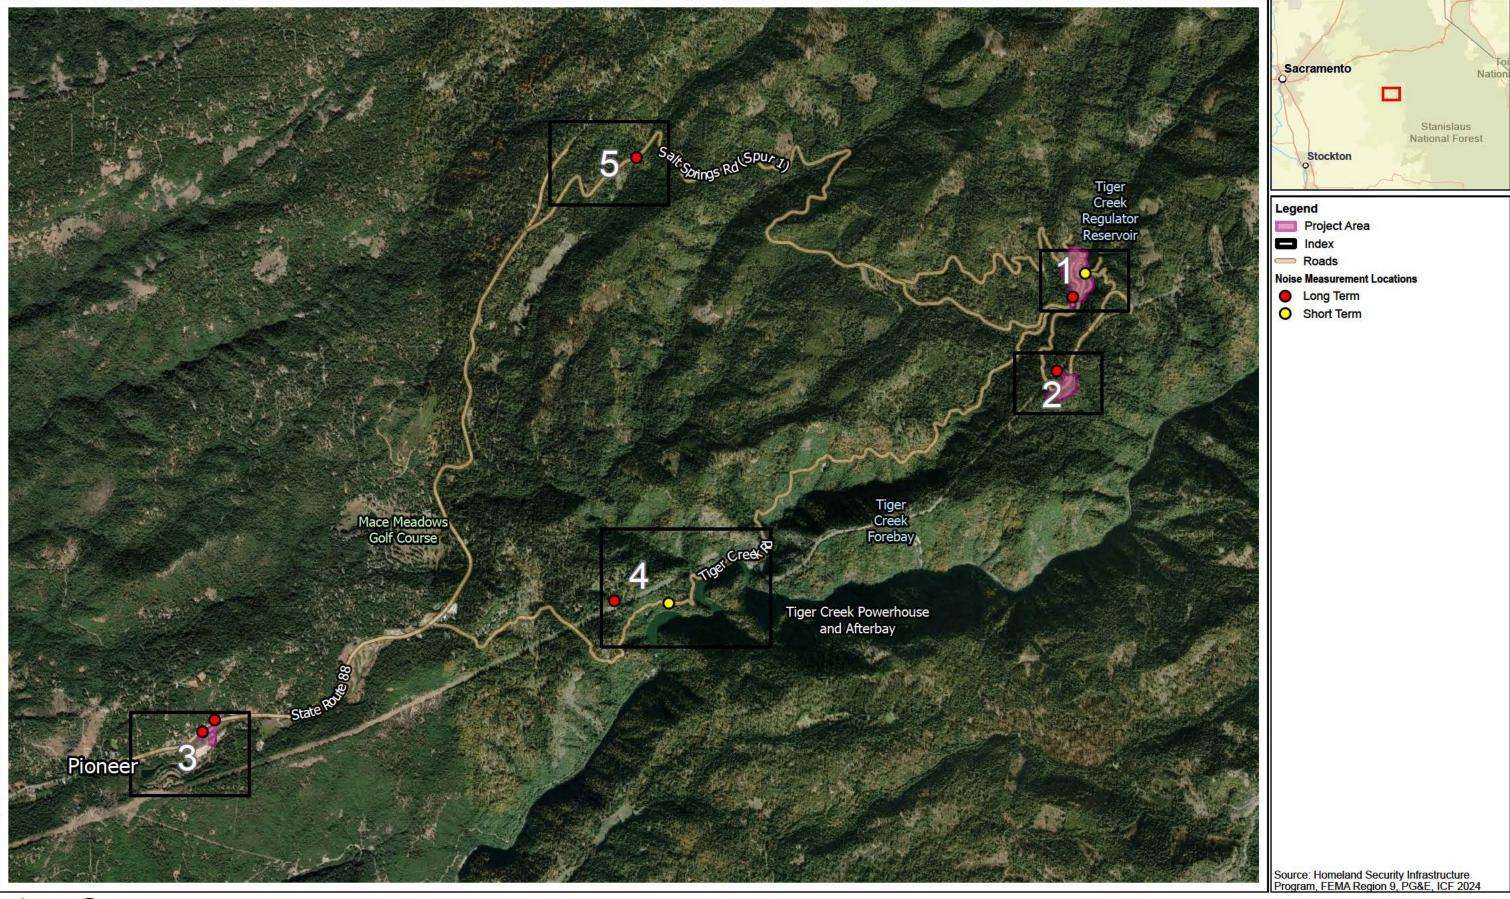








Figure 3.9-1 Noise Measurement Locations Page 1 of 5






Figure 3.9-1 Noise Measurement Locations Page 2 of 5






Figure 3.9-1 Noise Measurement Locations Page 3 of 5






Figure 3.9-1 Noise Measurement Locations Page 4 of 5






Figure 3.9-1 Noise Measurement Locations Page 5 of 5

Table 3.9-5. Long-Term Noise Level Measurement Results

| | | Wednesday (6/21/2023) CNEL | Thursday (6/22/2023) CNEL | Lowest L _{eq} Time of Occurrence | Lowest Daytime ^a L _{eq} Fime of Occurrence | Wednesday Average Daytime ^a L _{eq} | day ige Daytime ^a | Noise |
|------|---|----------------------------------|---------------------------------|--|---|---|--|---|
| Site | Site Description | Wedn (6/21/; CNEL | Thursday (6/22/202 CNEL | Lowe Time | Lowest Time of | Wednesc Daytime | Thursday Average I L _{eq} | Measurement Notes ^b |
| LT-1 | Doakes Ridge, powerline alley. (38.467611°, - 120.456068°) | 45.7 | 46.0 | 30.1 06/22/2023 9:00 p.m. | 34.2 06/22/2023 8:00 a.m. | 43.6 | 43.3 | Natural/backgr ound noises (i.e., wind rustling plants, etc.). Occasional distant firearm sounds |
| LT-2 | Tiger Creek Road, southwest of Spillway/Regulator (38.474622°, - 120.453986°) | 54.8 | 54.5 | 45.8 06/21/2023 12:00 p.m. | 45.8 06/21/2023 12:00 p.m. | 47.3 | 47.3 | Vehicles on Tiger Creek Road, flowing water |
| LT-3 | Approximately 1 mile down Salt Springs Road, from SR 88 | 61.8 | 61.9 | 36.4 06/21/2023 3:00 a.m. | 40.5 06/21/2023 5:00 p.m. | 56.1 | 57.6 | Natural/backgr ound noises and private property fire |

| Site | Site Description | Wednesday (6/21/2023) CNEL | Thursday (6/22/2023) CNEL | Lowest L _{eq} Time of Occurrence | Lowest Daytime ^a L _{eq} Time of Occurrence | Wednesday Average Daytime ^a L _{eq} | Thursday Average Daytime ^a Leq | Noise Measurement Notes ^b |
|------|---|----------------------------------|---------------------------------|--|---|---|---|--|
| | (38.488612°, - 120.506620°) | | | | | | | prevention/ maintenance activities |
| LT-4 | McKenzie Drive, north of Carolyn Way (38.446389°, - 120.510186°) | 54.8 | 54.9 | 36.4 06/22/2023 11:00 p.m. | 47.3 06/22/2023 7:00 a.m. | 56.2 | 54.4 | Natural/backgr ound noises and distant tree work along McKenzie Drive |
| LT-5 | North side of SR 88, across from old Cedar Mill (38.435651°, - 120.558867°) | 73.1 | 73.4 | 57.7 06/22/2023 1:00 a.m. | 70.3 06/21/2023 8:00 a.m. | 71.2 | 71.6 | Vehicular traffic on SR 88, equipment staging at Cedar Mill |
| LT-6 | South side of SR 88, near old Cedar Mill (38.434546°, - 120.560368°) | 76.7 | 77.0 | 61.4 06/21/2023 2:00 a.m. | 74.0 06/2/2023 8:00 a.m. | 74.7 | 75.2 | Vehicular traffic on SR 88, equipment staging at Cedar Mill |

Tiger Creek Regulator Dam Spillway Replacement Project Recirculated IS/MND

Final 3.9-12

Data collected from Wednesday, June 21, 2023, through Thursday, June 22, 2023.

Refer to Appendix E-1, *Long-Term Measurement Data*; Appendix E-2, *Short-Term Measurement Data*; Appendix E-3, *Field Sheets*; and Appendix E-4, *Field Pictures*, for the complete noise measurement data, additional noise measurement information, and field photos.

LT = long-term (48-hour) ambient noise measurement.

CNEL = Community Equivalent Noise Level.

All noise levels are reported in A-weighted decibels (dBA).

- ^a Construction for the Proposed Project would occur between 7:00 a.m. and 5:30 p.m. Average daytime L_{eq} is calculated using the hours of 7:00 a.m. to 6:00 p.m.
- ^b These measurements were not staffed by a field engineer during the duration of the recording period. Observations noted here were made during sound level meter set up and retrieval.

As shown in Tables 3.9-4 and 3.9-5, measured noise levels varied based on the measurement location, and based on the presence of varying surrounding noise sources. For example, noise measurements near the existing spillway were measured to be 47 dBA Leq (average daytime), and 55 dBA CNEL (24-hour). Near Doakes Ridge, noise was measured to be between approximately 43 dBA Leq (average daytime) and 46 dBA CNEL (24-hour). Along access roads, such as Tiger Creek Road and Spur 1, measured noise levels ranged between 54 and 58 dBA Leq (average daytime) and between 55 and 62 dBA CNEL (24-hour). Noise was also measured near the Cedar Mill staging area. In this area the dominant source of noise was vehicular traffic along SR 88; noise was measured to be between 71 and 75 dBA Leq (average daytime), and 73 and 77 dBA CNEL (24-hour). Refer to Appendix E-1, Long-Term Measurement Data; Appendix E-2, Short-Term Measurement Data; Appendix E-3, Field Sheets; and Appendix E-4, Field Pictures for the complete set of noise measurement data, including field sheets and photographs of measurement locations.

3.9.4 Regulatory Setting

This section provides a summary of noise and vibration plans and policies that are relevant to the Proposed Project. Federal, state, and local agencies regulate different aspects of environmental noise.

Generally, the federal government sets noise standards for transportation-related noise sources that are closely linked to interstate commerce. These sources include aircraft, locomotives, and trucks. No federal noise standards are directly applicable to the Proposed Project. The state government sets noise standards for transportation noise sources such as automobiles, light trucks, and motorcycles. No state standards are directly applicable to the Proposed Project either.

Noise sources associated with industrial, commercial, and construction activities are generally subject to local control through noise ordinances and general plan policies. Local general plans provide principles that are intended to guide and influence development plans. The following sections describe policies and regulations that are related to the Proposed Project.

3.9.4.1 State

Caltrans Vibration Guidance

There are no state vibration standards that apply directly to the Proposed Project. As noted in the next section, there are also no quantitative local standards that can be used to assess Proposed Project-related vibration. However, the California

Department of Transportation (Caltrans) has published guidance that provides ground-borne vibration criteria that are useful in establishing thresholds for the analysis of vibration impacts. Specifically, Caltrans' widely referenced *Transportation and Construction Vibration Guidance Manual* (California Department of Transportation 2020) provides guidance for two types of potential impacts: (1) damage to structures and (2) annoyance to people. Guideline criteria for each are provided in Tables 3.9-6 and 3.9-7. Although the Proposed Project would not be subject to Caltrans oversight, these criteria are used for purposes of this analysis, in the absence of other applicable regulatory requirements.

Table 3.9-6. Vibration Damage Potential Threshold Criteria Guidelines

| | Maximum PPV (inches per second) | | |
|--|---------------------------------|--|--|
| Structure and Condition | Transient Sources | Continuous/Frequent Intermittent Sources | |
| Extremely fragile historic buildings, | 0.12 | 0.08 | |
| ruins, ancient monuments | | | |
| Fragile buildings | 0.2 | 0.1 | |
| Historic and some old buildings | 0.5 | 0.25 | |
| Older residential structures | 0.5 | 0.3 | |
| New residential structures | 1.0 | 0.5 | |
| Modern industrial/commercial buildings | 2.0 | 0.5 | |

Source: California Department of Transportation. 2020. *Transportation and Construction Vibration Guidance Manual*. April. Available: https://dot.ca.gov/-/media/dot-media/programs/environmental-analysis/documents/env/tcvgm-apr2020-a11y.pdf. Accessed May 20, 2023.

Note: Transient sources create a single, isolated vibration event (e.g., blasting or the use of drop balls). Continuous/frequent intermittent sources include impact pile drivers, pogo-stick compactors, crack-and-seat equipment, vibratory pile drivers, and vibratory compaction equipment.

Table 3.9-7. Vibration Annoyance Potential Criteria Guidelines

| | Maximum PP\ | / (inches per second) |
|------------------------|-------------------|---|
| Human Response | Transient Sources | Continuous/Frequent Intermittent Sources |
| Barely perceptible | 0.04 | 0.01 |
| Distinctly perceptible | 0.25 | 0.04 |
| Strongly perceptible | 0.9 | 0.10 |
| Severe | 2.0 | 0.4 |

Source: California Department of Transportation. 2020. *Transportation and Construction Vibration Guidance Manual*. April. Available: https://dot.ca.gov/-/media/dot-media/programs/environmental-analysis/documents/env/tcvgm-apr2020-a11y.pdf. Accessed May 20, 2023.

Note: Transient sources create a single, isolated vibration event (e.g., blasting or the use of drop balls). Continuous/frequent intermittent sources include impact pile drivers, pogo-stick compactors, crack-and-seat equipment, vibratory pile drivers, and vibratory compaction equipment.

3.9.4.2 Local

Amador County Code

The Amador County Code does not include ordinances specifically related to noise. However, section 9.44.010, *Public nuisance noise*, of the code does include a discussion of noise sources that are considered to be a nuisance. According to the code, "it shall be unlawful for any person to make, continue, or cause to be made or continued, within the limits of the unincorporated county, any disturbing, excessive, or offensive noise which causes discomfort or annoyance to any reasonable person of normal sensitivity." Note that this only applies to residential uses and does not apply to the operation of commercial or industrial uses. In addition, this does not apply to construction activities.

Amador County General Plan

The Noise Element of the Amador County General Plan, adopted in 2016, includes land use compatibility standards that outline acceptable indoor and outdoor noise levels for various land use categories in the county. In general, the purpose behind land use compatibility standards is to help jurisdictions determine if the existing ambient noise level in a given area would be compatible with a particular developed use. Table 3.9-8 summarizes the compatibility standards in the Amador County General Plan (Table N-3 of the Noise Element).

Table 3.9-8. Land Use Compatibility for Community Noise Environments

| | CNEL | (dBA) |
|--|-------------------------|-----------------------|
| Uses | Interior ^{1,2} | Exterior ³ |
| Active and passive agricultural operations | N/A | 75 |
| Single-family and duplex | 45 | 60 |
| Mobile home park | N/A | 60 |
| Multiple-family | 45 | 65 |
| Mixed-Use | 45 | 70 |
| Transient lodging—motels, hotels | 45 | 65 |
| Sports arenas, outdoor spectator sports | N/A | N/A ⁵ |
| Auditoriums, concert halls, amphitheaters | 45 | N/A ⁵ |
| Office buildings, business, commercial and professional | N/A | 70 |
| Manufacturing, utilities, processing, distribution, storage | N/A | 75 |
| Schools, nursing homes, day care facilities, hospitals, convalescent facilities, dormitories | 45 | 65 |
| Government Facilities—offices, fire stations, community buildings | 45 | N/A |
| Places of Worship, Churches | 45 | N/A |
| Libraries | 45 | N/A |
| Playgrounds, neighborhood parks | N/A | 70 |
| Utilities | N/A | 75 |
| Cemeteries | N/A | 75 |
| Mining, managed forestry | N/A | 75 |
| Passive Recreation | N/A | 75 |
| Golf courses, riding stables, water recreation, cemeteries | N/A | N/A |

Notes: N/A = Not Applicable to specified land use category

¹ Interior habitable environment excludes bathrooms, closets and corridors.

² Interior noise standards shall be satisfied with windows in the closed position. Mechanical ventilation shall be provided per Uniform Building Code (UBC) requirements.

³ Exterior noise level standard to be applied at outdoor activity areas. Where the location of an outdoor activity area is unknown or not applicable, the noise standard shall be applied inside the property plane of the receiving land use.

As shown in Table 3.9-8, exterior noise levels for single-family and multi-family residential uses are considered compatible with an exterior noise level of 60 and 65 dBA CNEL, respectively.

The Amador County General Plan applies a second set of standards to stationary sources of noise (e.g., HVAC, loading dock activities). These hourly and maximum performance standards (expressed in Leq and Lmax) for stationary noise sources are designed to protect noise-sensitive land uses adjacent to stationary sources from excessive and continuous noise. Table 3.9-9 (Table N-4 of the Noise Element) summarizes the stationary source noise standards in the Amador County General Plan. These standards represent the acceptable exterior noise levels at the sensitive receptor's property line.

Table 3.9-9. Noise Level Performance Standards for Non-Transportation Noise Sources

| - | | |
|-------------------------------------|--------------------------------------|--|
| Noise Level Descriptor | Daytime (7:00 a.m. to 10:00 p.m.) | Nighttime (10:00 p.m. to 7:00 a.m.) |
| Hourly Average Level (Leq) | 60 dBA | 45 dBA |
| Maximum equivalent Levels (Lmax) | 75 dBA | 65 dBA |

Note: Each of the noise levels specified shall be lowered by five decibels for simple tone noises, noises consisting primarily of speech, or music, or for recurring impulsive noises. These noise level standards do not apply to residential units established in conjunction with industrial or commercial uses (e.g., caretaker dwellings). The noise standard is to be applied at the property planes of the affected land use.

Note that limits or noise standards pertaining to construction noise are not included in the Amador County General Plan. However, the EIR for the Amador County General Plan evaluated potential impacts of construction noise in the county (County of Amador 2016). For the Amador County General Plan EIR noise analysis, a 10-dB over ambient threshold was applied to evaluate the potential for construction noise to result in a substantial temporary increase in noise (noting that a 10-dB increase is perceived as a doubling of loudness). This threshold can reasonably be applied to evaluate construction noise impacts from other projects in the county.

⁴ Within the Town Center, Regional Service Center, and SPA land use designations, exterior space standards apply only to common outdoor recreational areas.

⁵ Mitigation will be determined on an as-needed basis and to achieve interior noise standards and noise standards of adjacent uses.

3.9.5 Environmental Effects

Potential impacts of the Proposed Project related to noise are discussed in the context of CEQA Guidelines Appendix G checklist. Checklist section XIII, *Noise*, asks whether the Proposed Project would result in any of the following conditions.

a. Generate a substantial temporary or permanent increase in ambient noise levels in the vicinity of the project in excess of standards established in a local general plan or noise ordinance or applicable standards of other agencies?

Less than Significant. The following discussion provides supporting information for the determination that the potential noise impacts from construction and operation of the Proposed Project would be less than significant.

Proposed Project Construction

Construction activities generate temporary noise that can increase overall noise levels in the vicinity of a project. Noise generated by construction is generally short-term and varies depending on the type of equipment used, how many pieces of equipment are operating at any one time, the proximity of the equipment to a noise-sensitive receptor, and the duration of the equipment use. The construction period for the Proposed Project is anticipated to be from July 2025 to May 2027, and is proposed to occur between 7:00 a.m. and 5:30 p.m., Monday through Saturday. During the winter months (December through March), construction would only occur for five days per week.

The analysis of construction noise for the Proposed Project considers the equipment that would be required for demolition and construction as identified by PG&E based on the best available information at the time of preparation of this IS/MND. Estimates of combined construction and demolition noise levels are based on reference noise levels from the Federal Highway Administration (FHWA) roadway construction noise model (RCNM) (Federal Highway Administration 2006), and information provided by PG&E.

To estimate reasonable worst-case construction noise (i.e., combined noise from multiple pieces of equipment at a project site), the Federal Transit Administration recommends calculating a combined construction noise level for a given construction phase by combining noise levels from the two loudest pieces of equipment expected to operate simultaneously in roughly the same location. For this analysis, and to ensure a conservative evaluation, noise from the three loudest pieces of equipment expected to operate for a given work activity at a given location and during a given construction phase was combined (assuming simultaneous operation). This combined noise analysis represents a reasonable worst-case

scenario.³ Estimated combined construction noise levels from the reasonable worst-case scenario are compared to measured ambient noise levels near noise-sensitive receptors to predict if construction noise from the proposed project would be expected to exceed applicable thresholds. The nearest sensitive land uses to the Project Area are single-family and multi-family residences. They are located over 2 miles from the Dam area, proposed batch plant location at the Spur 1 staging area, and the Doakes Ridge staging and spoils area, and over 140 feet from the Cedar Mill staging area. There is also a school (Pioneer Elementary School) located approximately 2,800 feet west of the Cedar Mill staging area.

The FHWA noise source data used in the construction noise analysis include the A-weighted maximum sound levels (L_{max}) measured at a distance of 50 feet from the construction equipment, as well as the usage factors for the equipment. The usage factor is the percentage of time each piece of construction equipment is typically operating at full power and used to estimate L_{eq} values from L_{max} values. For example, the L_{eq} value for a piece of equipment that operates at full power over 50 percent of the time is three decibels (dB) less than the L_{max} value (Federal Highway Administration 2006).

Project Area

The Proposed Project would be constructed in eight phases and is comprised of five primary work activities (excluding the batch plant work, which is discussed separately below). The five primary work activities include tree removal, laydown area development, access road construction, spillway/Dam demolition, and spillway/Dam construction. This construction noise analysis evaluates each activity separately to ensure construction noise impacts to the nearest sensitive use for each area are evaluated. Table 3.9-10 shows a summary of modeled reasonable worst-case construction noise levels by work activity at a reference distance of 50 feet.

³ Overlapping phases occurring within the same area, such as activities that may occur concurrently in the Dam area, were assessed together to determine the worst-case combined equipment noise levels for Proposed Project construction.

Table 3.9-10. Construction Noise Levels by Activity and Construction Area at a Reference Distance of 50 Feet.

| Construction Activity | Three Loudest Equipment | Combined Noise level at 50 feet (dBA L _{eq}) ^{a,b} |
|--|---|---|
| Tree Removal | Chainsaws (2), Woodchipper | 90 |
| Laydown Area Development ^c | Dozer, Telehandler ^d , Front-End Loader | 81 |
| Access Road Construction | Dozer, Excavator, Compactor | 82 |
| Activities for Spillway/Dam Demolition | Concrete Saws (2), Hydraulic Breaker on Excavator | 88 |
| Activities for Spillway/Dam Construction | Drill Rig, Generator, Excavator | 82 |

Source: Federal Highway Administration 2006. Notes:

The five primary construction activities would take place at varying distances from the nearest noise-sensitive receptors, but all would be located over two miles from the nearest receptor. Table 3.9-11 shows the estimated distance from each construction area to the nearest noise-sensitive land use, along with estimated construction noise levels at the nearest sensitive land use from these five areas. More details (including model outputs) of the construction noise modeling for each subphase can be found in Appendix E-5, *Construction Noise Modeling*.

^a Noise levels are rounded to the nearest whole number.

^b Noise levels are based on source noise levels and default utilization rates from the FHWA Roadway Construction Noise Model.

^c Laydown Area Development includes activities for both the Doakes Ridge staging and spoils site, and Spur 1 staging area.

^d Noise levels for a telehandler are based on a front-end loader.

Table 3.9-11. Construction Noise Levels for Main Work Area Activity at the Nearest Sensitive Receptors

| Construction Activity/Area | Distance to the Nearest Receptor (miles) | Combined Noise level at the Nearest Receptor a,b,c | Combined Noise level at the Nearest Receptor ^{a,b,d} |
|----------------------------|---|--|--|
| Tree Removal | 2.3 | 43 | 33 |
| Laydown Area Development | 2.2 | 34 | 24 |
| Access Road Construction | 2.7 | 33 | 23 |
| Spillway/Dam Demolition | 2.9 | 38 | 28 |
| Spillway/Dam Construction | 2.8 | 33 | 23 |

Notes:

The loudest construction activity evaluated for the Proposed Project was tree removal activities, based on the construction details and equipment list provided. Regarding tree removal, the three loudest pieces of equipment that would be required during this work would include two chainsaws and a woodchipper. At a reference distance of 50 feet, combined noise from this equipment would be 90 dBA Leq. At the nearest sensitive receptors to this activity (located over 2 miles away), noise from this equipment would be 43 dBA Leq without accounting for attenuation from intervening topography and dense vegetation. These features would likely reduce noise by at least 10 dB, if not more. When accounting for this estimated attenuation, noise from tree removal could be in the range of 33 dBA at the residences over 2 miles from the proposed tree removal areas.

Other construction activities in the Project Area (i.e., at the various locations where Proposed Project construction would occur) would result in lower noise levels at the nearest sensitive uses. For example, the development of the two laydown areas (the Doakes Ridge staging and spoils site, and Spur 1 staging area) would result in an estimated combined noise at 50 feet of approximately 81 dBA Leq.⁴ At the nearest

^a Noise levels are rounded to the nearest whole number.

^b Geometric attenuation based on a six dB per doubling of distance.

^c This calculation does not include the effects, if any, of local shielding or ground attenuation from walls, topography, dense vegetation or other barriers that may reduce sound levels further.

^d This estimated noise levels assumes 10 decibels of reduction from the presence of substantial topography and vegetation existing in the 2+ miles between construction areas and the nearest sensitive land uses.

⁴ The three loudest pieces of equipment required for the development of these laydown areas include a dozer, telehandler, and front-end loader.

sensitive receptors (located more than 2 miles from the proposed laydown areas), noise from this equipment would be 34 dBA L_{eq} , without accounting for attenuation from intervening topography and dense vegetation. When accounting for the estimated vegetative and topographic attenuation previously described, noise from laydown area development could be in the range of 24 dBA at the residences over 2 miles from the proposed laydown sites.

Construction of access roads (permanent access road to connect Tiger Creek Road and temporary access road to the plunge pool and lower end of the spillway chute) was modeled to result in an estimated noise level of 82 dBA L_{eq}⁵ at a reference distance of 50 feet. This noise level would be reduced to an estimated 33 dBA L_{eq} at the nearest residences located approximately 2.7 miles from these sites without accounting for the attenuation from intervening topography and dense vegetation). When accounting for the estimated vegetative and topographic attenuation previously described, noise from access road construction could be in the range of 23 dBA L_{eq} at the residences over 2 miles from this construction area.

Proposed Project-related demolition (which would take place along the existing Dam and proposed temporary cofferdam) was modeled to result in a combined noise level of 88 dBA L_{eq}⁶ at a reference distance of 50 feet. This noise level would be reduced to approximately 38 dBA L_{eq} at the nearest sensitive receptors located approximately 2.9 miles away (without accounting for the attenuation from intervening topography and dense vegetation). When accounting for the estimated vegetative and topographic attenuation previously described, noise from Proposed Project demolition could be in the range of 28 dBA L_{eq} at the residences over 2 miles from this construction area.

Construction of the Proposed Project would also include the development of the new spillway structure, crest structure, spillway chute and flip bucket, plunge pool, and temporary cofferdam. At a reference distance of 50 feet, combined noise construction of these features was modeled to be approximately 82 dBA L_{eq}⁷. At the nearest sensitive receptors (over 2.8 miles from this construction area), noise from this equipment would be reduced to approximately 33 dBA L_{eq}.

⁵ The three loudest pieces of equipment required for access road construction include a dozer, an excavator, and a compactor.

⁶ The three loudest pieces of equipment required during this work include two concrete saws, and a hydraulic breaker attached to an excavator.

⁷ The three loudest pieces of equipment required for this work, that would operate simultaneously, include a drill rig, a generator, and an excavator.

As previously described, estimated construction noise levels from Proposed Project construction phases and areas were modeled to be in the range of 23 to 33 dBA L_{eq} at the nearest sensitive receptors when accounting for distance attenuation, and when including approximately 10 dB of reduction for dense vegetation and topography over a 2-mile distance. Ambient noise levels near the closest residences were measured to be as low as 47 dBA L_{eq}⁸ with average daytime noise levels in the range of 54 to 56 dBA L_{eq}. As noise from Proposed Project construction activities at the various construction areas would be approximately 14 to 24 dB lower than the lowest daytime hourly L_{eq} measured near these residences, construction noise from the Proposed Project is not expected to result in a 10-dB or greater increase in ambient noise levels at the closest noise-sensitive land uses. Therefore, potential construction noise impacts would be less than significant.

Mobile Batch Plant

Noise associated with the mobile batch plant at the Spur 1 staging area was estimated based on measured source noise levels at other concrete batch plants and standard noise modeling equations. The mobile batch plant would be operational three days per week and up to six hours per day for approximately one year of construction. Batch plant operations would typically begin at 8:00 a.m.; on a worst-case day, the batch plant may begin operations at 7:00 a.m. The batch plant would never operate during nighttime or early morning hours.

Based on source noise data for concrete batch plants, it is assumed that the batch plant equipment would have a sound level of 85 dBA 1-hour L_{eq} at 50 feet⁹ assuming up to 100 percent equipment use during operational hours. The perimeter of the batch plant is located more than two miles from the nearest noise-sensitive land uses (as is the case with the other primary project features). Batch plant noise levels are estimated at varying distances from the proposed batch plant site, including at the estimated distance to the nearest off-site residence.

Daytime batch plant construction noise could be up to approximately 70 dBA L_{eq} at a distance of 300 feet, or approximately 36 dBA at the nearby residential land uses located approximately 14,000 feet from the Spur 1 staging area (without accounting

 $^{^8}$ Lowest daytime ambient noise measurement for LT-4 (47.3 dBA $L_{\rm eq}).$ Construction is proposed to occur between 7:00 a.m. and 5:30 p.m., Daytime $L_{\rm eq}$ noise levels are defined as the hours of 7:00 a.m. to 6:00 p.m.

⁹ Based on reference noise measurement data for a concrete batch plant conducted on August 15, 2006. Measurement conducted at an operational concrete batch plant in the City of Gardena. Refer to Appendix E-7, *Batch Plant Noise Data and Modeling*, for additional details regarding the concrete batch plant source noise level.

for attenuation from intervening features/topography, or for ground absorption). Refer to Table 3.9-12 for estimated batch plant noise levels at varying distances.

Table 3.9-12. Batch Plant Noise by Distance

| Distance | Calculated Leq Sound Level (dBA) |
|---------------------|----------------------------------|
| 50 | 85 |
| 100 | 79 |
| 150 | 76 |
| 200 | 73 |
| 300 | 70 |
| 500 | 65 |
| 1000 | 59 |
| 2000 | 53 |
| 14,000 ^a | 36 |

Note: Estimated noise levels in this table do not account for attenuation from shielding due to intervening buildings or topography, or for ground absorption. ^a The nearest residences are approximately 14,000 feet away from the Spur 1 staging area.

The existing average daytime ambient noise levels near the closest residences were measured to be as low as 47 dBA L_{eq}¹⁰ with average daytime noise levels in the range of 54 to 56 dBA L_{eq}. Therefore, noise from batch plant operation at the Spur 1 staging area would be approximately 11 dB lower than the lowest daytime hourly L_{eq} measured near these residences and almost 20 dB lower than the average daytime L_{eq} noise level without accounting for the additional reduction in noise expected to occur from intervening topography and from ground absorption. Construction noise from operation of the proposed batch plant is not expected to result in a 10-dB or greater increase in ambient noise levels at the closest noise-sensitive land uses. As a 10-dB or greater increase over ambient is not predicted to occur at nearby noise-sensitive land uses due to batch plant activities, and because batch plant activities would only take place for six hours per day on three days per week during daytime hours only, temporary batch plant noise during Proposed Project construction would be less than significant.

 $^{^{10}}$ Lowest daytime ambient noise measurement for LT-4 (47.3 dBA L_{eq}). Construction is proposed to occur between 7:00 a.m. and 5:30 p.m.; daytime L_{eq} noise levels are defined as the hours of 7:00 a.m. to 6:00 p.m.

Haul Truck Noise

Construction heavy truck (haul, tree, or vendor truck) noise was also analyzed for the Proposed Project. The Amador County Code does not include a specific threshold that pertains to construction heavy truck noise. Therefore, heavy truck noise was assessed by modeling haul truck noise along Proposed Project haul routes, adding modeled heavy truck noise to existing baseline (measured) noise levels along haul routes, and comparing the baseline noise to baseline plus heavy truck noise. Heavy truck noise impacts are identified if the addition of Proposed Project haul truck trips on roadway segments with residential uses in the Project Area would result in a three-dB increase (considered to be "barely perceptible") in noise. PG&E provided the anticipated number of worst-case daily heavy truck trips by segment, as well as route information for these trips. All haul truck and heavy truck trips would take place during daytime hours.

Based on provided Proposed Project construction information from PG&E, construction would involve up to 38 one-way heavy truck trips per worst-case day traveling to and from the project site. These would most likely be split between Spur 1 and Tiger Creek Road, with an estimated 28 one-way heavy truck trips per worstcase-day on Spur 1 and up to 10 one-way heavy truck trips per worst-case day on Tiger Creek Road. However, to ensure a conservative analysis, this evaluation assumed up to 38 (or all) one-way heavy truck trips could occur on Spur 1 and 10 could occur on Tiger Creek Road. In addition, note that during many construction days, there would be fewer truck trips. However, the worst-case day is evaluated to provide a conservative analysis. The temporary addition of up to 38 one-way haul trucks per day on Spur 1 and up to 10 one-way heavy truck trips per day on Tiger Creek Road was conservatively evaluated to determine if heavy truck activity would result in substantial increases to the ambient noise levels. Modeling assumed the nearest sensitive use could be within 50 feet of the roadway centerline for proposed haul routes, which is a conservative assumption as most residences are located more than 50 feet from the roadway centerline along proposed haul routes. Refer to Table 3.9-13 for the results of the haul truck noise modeling results.

Table 3.9-13. Existing (Measured) and Existing plus Haul Truck Noise Levels

| Roadway | Segment | Assumed Speed (mph) | Truck Trips on Segment (per day) | Representative Noise Measurement | Approximate Measured Noise levels (dBA CNEL) | Haul Truck Noise Only (dBA Ldn) | Existing plus Haul Truck Trip Noise Level (dBA Ldn) | Haul Truck-Related Increase |
|---------------------|---------------------------|------------------------|----------------------------------|-------------------------------------|---|------------------------------------|---|--------------------------------|
| Tiger Creek Road | West of Power House | 25 | 10 | LT-4 | 55 | 46.6 | 55.6 | 0.6 |
| Tiger Creek Road | East of Power House | 15 | 10 | LT-4 | 55 | 47.9 | 55.8 | 0.8 |
| Spur 1 | West of PG&E Gate | 25 | 38 | LT-3 | 56 | 50.3 | 57.0 | 1.0 |
| Spur 1 | East of PG&E Gate | 15 | 38 | LT-3 | 56 | 51.7 | 57.4 | 1.4 |

Refer to Appendix E-6, *Construction Haul Truck Noise Modeling*, for more details related to heavy truck noise modeling.

As shown in Table 3.9-13, heavy truck noise modeling results demonstrated that truck traffic could result in temporary increases in ambient noise along haul routes in the range of 0.6 to 1.4 dB. As all haul/heavy truck-related noise increase would be below the three-dB "barely perceptible" criteria applied to truck noise, potential impacts related to heavy truck trips during Proposed Project construction would be less than significant.

Proposed Project Operations

After construction of the Proposed Project, PG&E would continue to operate the Reservoir as was done prior to the Proposed Project. In addition, there would be no new noise-generating stationary equipment installed. The only subtle difference in Proposed Project operations and maintenance that could be relevant to noise is that maintenance access for the Dam, spillway, and log boom could occur from either the existing access roads at the south side of the Dam, or the new permanent access road at the north side of the Dam.

However, note that the new permanent access road is over 2.5 miles from the nearest noise-sensitive land use. Therefore, once construction is complete, noise from Proposed Project operations and maintenance at the nearest sensitive land uses would be similar to noise from operations and maintenance prior to Proposed Project implementation, and would likely be inaudible. Potential operational noise impacts from the Proposed Project would be less than significant.

b. Generate excessive groundborne vibration or groundborne noise levels?

Less than Significant. The following discussion provides supporting information for the determination that the potential vibration-related damage and annoyance impacts from implementation of the Proposed Project would be less than significant.

Vibration from construction-related activities at the Dam area and laydown areas along with the proposed batch plant (to be located at the Spur 1 staging area) is evaluated to determine if potential impacts related to structural damage or human annoyance/sleep disturbance would be expected to occur. In addition, an evaluation of potential vibration from the Cedar Mill staging area is included because of the proximity of this project feature to adjacent sensitive land uses.

Vibration levels at nearby receptors from construction activities are calculated using the source vibration levels and attenuation equation of PPV = PPV_{ref} x (25/distance)^{1.5} from the Federal Transit Administration guidance.¹¹ The calculated values are then compared to the Caltrans structural damage criteria, which vary according to structure type, and the Caltrans annoyance criteria. These criteria are shown in Table 3.9-6 and 3.9-7 (presented previously). Typical vibration levels associated with heavy-duty construction equipment that may be used for the Proposed Project are shown in Table 3.9-14 at a reference distance of 25 feet, and other distances.

¹¹ *Ibid*.

Table 3.9-14. Vibration Source Levels for Construction Equipment

| | PPV at | PPV at | PPV at | PPV at | PPV at | PPV at |
|----------------------|---------|---------|----------|----------|----------|----------|
| Equipment | 25 Feet | 50 Feet | 100 Feet | 200 Feet | 500 Feet | 750 Feet |
| Vibratory roller | 0.210 | 0.074 | 0.026 | 0.009 | 0.002 | 0.001 |
| Auger drill | 0.089 | 0.031 | 0.011 | 0.004 | 0.001 | 0.001 |
| Hoe ram ^a | 0.089 | 0.031 | 0.011 | 0.004 | 0.001 | 0.001 |
| Large bulldozer | 0.089 | 0.031 | 0.011 | 0.004 | 0.001 | 0.001 |
| Loaded trucks | 0.076 | 0.027 | 0.010 | 0.003 | 0.001 | 0.000 |
| Jackhammer | 0.035 | 0.012 | 0.004 | 0.002 | 0.000 | 0.000 |
| Small bulldozer | 0.003 | 0.001 | 0.000 | 0.000 | 0.000 | 0.000 |

Source: Federal Transit Administration, Transit Noise and Vibration Impact Assessment, FTA Report No. 0123, 2018,

https://www.transit.dot.gov/sites/fta.dot.gov/files/docs/research-innovation/118131/transit-noise-and-vibration-impact-assessment-manual-fta-report-no-

Tiger Creek Regulator Dam Area, New Access Roads, and Doakes Ridge Staging and Spoils Site

There are no off-site structures located near the Dam area (including the Spur 1 staging area where the batch plant would be located), new access road areas, or Doakes Ridge staging and spoils site. As shown in Table 3.9-14, vibration from all proposed construction equipment would be below the Caltrans damage criteria for all building types shown in Table 3.9-6 at a distance of 200 feet. In addition, it is unlikely that any "extremely fragile historic buildings, ruins, ancient monuments" or "fragile buildings" would be present in the Area of Analysis. Most nearby buildings would be categorized as either "historic and some old buildings," "older residential structures" or "modern industrial/commercial buildings." In addition, the nearest offsite structures are located much farther than 200 feet from the Dam area, new access roads, and laydown areas; the nearest residence is located over 2 miles from these Proposed Project features. Therefore, because vibration would be well below any damage impact criteria at the nearest off-site existing structures, the potential vibration-related damage impacts from construction activities near the Dam area, new access roads, and Doakes Ridge staging and spoils site would be less than significant.

Regarding annoyance impacts, vibration-related annoyance from construction is typically considered significant if it would be "strongly perceptible" (0.1 PPV in/sec, as shown in Table 3.9-7) during nighttime hours, when people generally sleep. All construction activities for the Proposed Project would take place during daytime

<u>0123_0.pdf</u>. Accessed March 15, 2023. a Representative of a hydraulic hammer.

hours. In addition, the nearest residential structure is located over two miles from the Dam area (including the Spur 1 staging area where the batch plant would be located), new access roads, and Doakes Ridge staging and spoils site. As shown in Table 3.9-14, vibration levels from Proposed Project construction equipment would be below the strongly perceptible level at distances of approximately 200 feet and greater. Therefore, because Proposed Project construction would only take place during daytime hours and would result in vibration levels well below the perceptibility criteria in Table 3.9-7, the potential vibration-related annoyance impacts from construction activities near the Dam area (including the Spur 1 staging area where the batch plant would be located), new access roads, and Doakes Ridge staging and spoils site would be less than significant.

In conclusion, construction equipment proposed for use at the Dam area (including the Spur 1 staging area where the batch plant would be located), new access road areas, and Doakes Ridge staging and spoils site would not be expected to result in vibration levels in excess of any damage or annoyance criteria, and the potential impacts for vibration-related annoyance and damage from construction at these areas would be less than significant.

Cedar Mill Staging Area

Regarding the Cedar Mill staging area, this property could be used for staging activities including material staging, crew and craft vehicle parking, and equipment parts drop-off and maintenance. Although vehicles may enter and exit this staging area, no vibration-inducing activities are proposed for this location. A loaded truck can generate short-term vibration when passing nearby sensitive uses. However, it does not impart substantial energy into the ground and generates relatively low vibration levels. In addition, loaded trucks are common on roadways such as SR 88, and Proposed Project-added truck trips would not be expected to result in meaningful increases to the vibration generated by this roadway. Loaded trucks generate relatively transient vibration levels since they do not generally operate in the same place for a substantial period of time.

The closest off-site structure is 150 feet from the Cedar Mill staging area location. At this distance, the vibration level from a loaded truck operating on the closest edge of the Cedar Mill site would be approximately 0.005 PPV in/sec. The estimated vibration level of 0.005 PPV in/sec is well below the damage impact criteria for all building types shown in Table 3.9-6. Therefore, the potential vibration-related damage impacts from the Cedar Mill staging area would be less than significant.

Regarding annoyance impacts, vibration-related annoyance from construction is typically considered significant if it would be "strongly perceptible" (0.1 PPV in/sec,

as shown in Table 3.9-7) during nighttime hours, when people generally sleep. All construction activities for the Proposed Project, including any activities at the Cedar Mill staging area, would take place during daytime hours. In addition, the estimated vibration level from activities at this site previously cited (0.005 PPV in/sec) is well below the strongly perceptible level of 0.1 PPV in/sec. Therefore, because activities at this staging area would only take place during daytime hours and would result in vibration levels well below the perceptibility criteria contained in Table 3.9-7, the potential vibration-related annoyance impacts from the Cedar Mill staging area would be less than significant.

In conclusion, activities at the Cedar Mill staging area would not be expected to result in vibration levels in excess of any damage or annoyance criteria, and would not occur during nighttime hours when people are more sensitive to vibration. The potential vibration-related annoyance and damage impacts from the batch plant would be less than significant.

c. Be located within the vicinity of a private airstrip or an airport land use plan, or, where such a plan has not been adopted, within two miles of a public airport or public use airport and expose people residing or working in the project area to excessive noise levels?

No Impact. There are no private airstrips or public use airports in the vicinity of the Project Area. The nearest airport or airstrip to the Project Area is the Amador County Airport, which is located 12.5 miles east of the Cedar Mill staging area and 19.5 miles east of the Dam area. In addition, the Proposed Project would not result in the development of any new residential land uses, nor would it result in increases in aircraft noise in the area. For these reasons, there would be no potential impact related to the exposure of persons to excessive aircraft noise.

3.10 Hazards and Hazardous Materials

3.10.1 Introduction

This section analyzes the Proposed Project's potential impacts related to hazards and hazardous materials. It describes existing conditions in the Area of Analysis and summarizes the overall regulatory framework for hazards and hazardous materials, and it analyzes the potential for the Proposed Project to affect these resources.

3.10.2 Area of Analysis

The Project Area is characterized as remote and is situated in a narrow valley in the Sierra Nevada foothills surrounded by mixed conifer forest. The Area of Analysis for hazards and hazardous materials is divided into two parts of the Project Area. The spillway construction Area of Analysis encompasses the Dam area (including the Spur 1 staging area) and Doakes Ridge staging and spoils site (Parts A and B, respectively, on Figure 2-1, *Project Area*). The Cedar Mill Area of Analysis consists of the Cedar Mill staging area (Part C in Figure 2-1). The Area of Analysis includes a 0.5-mile-wide buffer zone for potential impacts not associated with airports. To evaluate potential impacts related to airports, the buffer zone width was extended to two miles.

3.10.3 Existing Conditions

This section discusses the existing conditions related to hazards and hazardous materials in the Area of Analysis.

3.10.3.1 Schools

No schools are located within the Area of Analysis. The nearest school, Pioneer Elementary School in the community of Pioneer, is more than 7 miles southwest of the Dam and more than 0.5 mile west of the Cedar Mill staging area. No new schools are planned. On May 24, 2022, the Amador County Unified School District Board of Trustees voted to approve combining two high schools into one consolidated high school and two junior high schools into one consolidated junior high school. (Amador County Unified School District n.d.).

3.10.3.2 Known Sources of Hazardous Materials

The California Department of Toxic Substances Control's EnviroStor database provides access to detailed information on hazardous waste facilities in California, including permitted activities, and corrective actions for site cleanup. According to the EnviroStor database, the nearest potentially hazardous site to the Reservoir is a leaking underground storage tank (LUST) cleanup site at Sierra Trading Post-Buckhorn Station in Pioneer, approximately five miles southwest of the Reservoir (California Department of Toxic Substances Control 2023). Another LUST cleanup site, P&M Cedar, is located on SR 88 adjacent to the Cedar Mill staging area. This site involved a gasoline discharge from a leaking tank in 1992. The spill has since been cleaned up and the case was closed on January 10, 2003 (California Department of Toxic Substances Control 2023).

3.10.3.3 Airports

The nearest public airports are the county-owned, public-use Amador County Airport, which is more than 20 miles west of the Project Area, and the Placerville Airport, located 23 miles northwest of the Project Area. The closest private airport is Howard Airport in the city of lone located approximately 29 miles southwest of the Project Area. The Project Area is not in the plan area for an airport land use plan.

3.10.3.4 Wildland Fires

CAL FIRE identifies fire hazard severity zones (FHSZ) within both State Responsibility Areas (SRA) and Local Responsibility Areas (LRA) and maps these severity zones based on modeling of expected fire behavior over a 30–50 year period. The categories of FHSZs are "very high," "high," and "moderate." The Area of Analysis, including staging areas, falls within an SRA categorized as a very high FHSZ (California Department of Forestry and Fire Protection 2007). Additional information regarding existing conditions for wildland fires is presented in Section 3.15 *Wildfire*.

3.10.4 Regulatory Setting

3.10.4.1 Local

Amador County General Plan

Amador County has adopted goals and policies related to hazards and hazardous materials. The Amador County General Plan Safety Element addresses hazards that are known to have potential for causing injury to people or damaging property,

including fire and hazardous materials (Amador County 2016). The following relevant goals and policies address natural and human-made hazards:

- Goal S-2: Reduce fire risks to current and future structures;
 - Policy S-2.1: Consistent with state regulations and local code requirements, require new buildings to be constructed to provide fire-defensible spaces, separated from property lines and other buildings on the same or adjacent properties by adequate building setbacks clear of brush and fuel. Require new buildings in areas of moderate to high fire risk to be constructed using building materials and designs that increase fire resistance;
 - Policy S-2.3: Incorporate fire safety site planning techniques within new development applications in high- or very-high fire risk areas. Encourage building envelope or cluster development techniques to increase defensible areas;
- Goal S-7: Respond appropriately and efficiently to natural or human-caused emergencies;
 - Policy S-7.2: Continue to coordinate with other local public safety and law enforcement agencies to ensure effective emergency response;
 - Policy S-7.3: Work with other agencies to designate evacuation routes for various natural or human-caused emergencies; and
 - Policy S-7.4: Maintain the operational integrity of essential public facilities during emergencies, including flood emergencies.

Amador County Emergency Operations Plan

The Amador County Emergency Operations Plan is the primary document that discusses how disasters will be managed. This plan is currently under revision (Amador County 2018). The Project Area is outside the designated Amador County Evacuation Routes (Amador County Transportation Commission 2021).

3.10.5 Environmental Effects

Potential impacts of the Proposed Project related to hazards and hazardous materials are discussed in the context of CEQA Guidelines Appendix G checklist. Checklist section IX, Hazards and Hazardous Materials, asks whether the Proposed Project would result in any of the following conditions.

- a. Create a significant hazard to the public or the environment through the routine transport, use, or disposal of hazardous materials?
- b. Create a significant hazard to the public or the environment through reasonably foreseeable upset and accident conditions involving the release of hazardous materials into the environment?

Less than Significant with Mitigation Incorporated. Activities associated with the Proposed Project would involve use of hazardous materials, such as fuels and lubricants, for the operation of equipment and vehicles, and cement and cementitious materials, in concrete batching activities, during construction. These hazardous materials have the potential to be released into the environment at the temporary batch plant location, construction sites, and along haul routes, causing potential environmental and human exposure to these hazards. Although the types and quantities of hazardous materials that would be used during Proposed Project construction are not considered acutely hazardous and would not pose a risk to human health or safety, release of hazardous materials without subsequent containment could create a hazardous condition for the environment, and would constitute a potentially significant impact. Implementation of a SWPPP, included in Mitigation Measure WQ-MM-1: Implement Water Quality Protection Measures and Erosion and Sediment Control Plans (described in Section 3.3 Hydrology and Water Quality), and Mitigation Measures WQ-MM-2: Implement Spur 1 Staging Area Water Quality Protection Measures and HAZ-MM-1: Implement Hazardous Materials Control Measures, will ensure that hazardous materials are properly used and contained and that any spills are promptly cleaned up. This potential impact would be less than significant with mitigation incorporated.

Mitigation Measure HAZ-MM-1: Implement Hazardous Materials Control Measures

Hazardous materials such as fuel (gasoline/diesel), hydraulic oil, motor oil and other lubricants, and cementitious materials would be used during project construction. To ensure the potential effects of hazardous materials or potential spills are minimized, PG&E shall implement the following measures:

- Construction personnel shall be trained in proper hazardous material management and shall be able to access safety data sheets for all substances used on the Project Area by contacting Safetec at 800-704-9215;
- All hazardous materials shall be contained in appropriate spill-proof containers and/or secondary containment areas, and stored in a designated area at least 100 feet away from waterbodies, except at the temporary batch plant location in the Spur 1 staging area, a portion of which is within 100 feet

- of Tiger Creek. For the areas within 100 feet of Tiger Creek, alternative protection measures shall be implemented as part of Mitigation Measure WQ-MM-2: *Implement Spur 1 Staging Area Water Quality Protection Measures*;
- Temporary storage of hazardous materials, equipment staging, and servicing and refueling of equipment shall be conducted at pre-designated locations away from waterbodies and shall only be permitted at designated areas;
- Except for cranes, which are addressed in the next bullet, and the mobile batch plant, which is addressed in Mitigation Measure WQ-MM-2: Implement Spur 1 Staging Area Water Quality Protection Measures, refueling shall only take place in a designated area. Designated refueling areas shall be located greater than 100 feet away from any waterbodies. Drip pans and/or absorbent pads shall be used during equipment fueling. Absorbent spill clean-up materials and spill kits shall be available in fueling areas. Fuels shall be stored in containment basins;
- To the extent feasible, crane refueling shall occur greater than 100 feet away from any waterbody, with a minimum of 20 feet. Fuel trucks used for crane refueling shall be equipped with an automatic shut-off nozzle to aid in fuel spill prevention and overfilling of fuel tanks. Secondary spill containment materials such as absorbent rags and plastic sheeting shall be stored in the fuel truck(s) and shall be used during refueling to prevent fuel from contacting the ground. In addition, a secondary containment pan shall be placed under the crane's fuel cell to capture fuel that may run down the sides of the crane fuel cell.
- Bulk fuel storage tanks shall be double-walled or shall be placed in secondary containment areas. All refueling operations shall be attended by trained personnel and be conducted in accordance with applicable PG&E policies;
- Hazardous waste generated onsite shall be placed in proper containers, labeled appropriately, and transported from the job site to an authorized hazardous waste consolidation site;
- Prior to operation, all equipment shall be inspected for fluid leaks and for signs of worn or damaged parts that may result in a hazardous material release;
- All power equipment and vehicles shall be free of petroleum residue, kept in good working order, and inspected each day for leaks prior to use. Leaks shall be repaired immediately in an area at least 100 feet away from waterbodies, or problem vehicles or equipment shall be removed from the Project Area;

- Small-engine-powered equipment shall be provided with secondary containment areas. Whenever possible, vehicles and equipment with engines supplying motive power shall be parked in designated areas located 200 feet or more from waterbodies. Drip pans or other containment measures shall be placed under vehicles and equipment when not in use and within 200 feet of waterbodies;
- Equipment shall be staged overnight in secondary containment areas or with other suitable barriers to prevent accidental leakage of fuel, oils, or other liquid from soaking into the soil or being carried to waterbodies;
- Appropriate spill containment and clean-up materials shall be available onsite
 at all times. Any spills shall be cleaned up immediately and shall not be
 buried or washed with water. Initial containment would be with absorbent
 material or, if necessary, the construction of berms. Contaminated soil shall
 be excavated, contained, and transported to an approved disposal site; and
- In accordance with PG&E policy, all hazardous substance releases to the
 environment shall be reported internally and to the State Water Board. A spill
 kit shall be maintained onsite to ensure prompt containment in the unlikely
 event of a release to the environment. All media affected by a spill shall be
 cleaned up and disposed of offsite in accordance with applicable regulations.

Hazardous materials permits shall be obtained from Amador County Environmental Health as needed for project support locations that store threshold quantities of hazardous materials for 30 days or more. Hazardous materials business plans and spill prevention control and countermeasure plans shall detail hazardous materials inventories, emergency contacts, spill prevention/response, and contingency plans.

c. Emit hazardous emissions or involve handling hazardous or acutely hazardous materials, substances, or waste within one-quarter mile of an existing or proposed school?

No Impact. As described in Section 3.10.3 *Existing Conditions*, there are no schools within one-quarter mile of the Proposed Project. The nearest school is the Pioneer Elementary School, which is located more than 0.5 mile from the Cedar Mill staging area and more than seven miles from the Dam. There would be no impact.

d. Be located on a site that is included on a list of hazardous materials sites compiled pursuant to Government Code section 65962.5 and, as a result, would it create a significant hazard to the public or the environment?

No Impact. As described in Section 3.10.3 *Existing Conditions*, the nearest known hazardous materials site is approximately five miles from the spillway construction Area of Analysis. One site near the Cedar Mill staging area involved a gasoline spill that was cleaned up, and the case was closed as of 2003. Thus, the Proposed Project would not be on a site included on a list of hazardous materials sites. There would be no potential impact.

e. Be located within an airport land use plan area or, where such a plan has not been adopted, be within two miles of a public airport or public use airport, and result in a safety hazard or excessive noise for people residing or working in the project area?

No Impact. As described in Section 3.10.3 *Existing Conditions*, the Project Area is not in an airport land use plan area or within two miles of a public or public use airport. There would be no potential impact.

f. Impair implementation of or physically interfere with an adopted emergency response plan or emergency evacuation plan?

Less than Significant. As described in Section 3.10.4 *Regulatory Setting*, the Project Area is not covered in Amador County's adopted or proposed community evacuation plans. The two main access roads would be available to construction workers during construction and would not impair implementation of an emergency response plan or emergency evacuation plan. After construction is complete, there would be no change relevant to current operations and maintenance conditions. This potential impact would be less than significant.

g. Expose people or structures, either directly or indirectly, to a significant risk of loss, injury, or death involving wildland fires?

Less than Significant with Mitigation Incorporated. The Project Area is in a very high FHSZ and, therefore, the risk of wildfire does exist. However, public access to the Project Area would be closed during construction of the Proposed Project. There are no residences within or adjacent to the Project Area. The most likely source of wildland fire ignition from the Proposed Project would be associated with operation of construction vehicles or welding equipment in the Project Area under dry conditions. PG&E will implement Mitigation Measure FIRE-MM-1: Implement Fire Hazard Prevention Measures (described in Section 3.15 Wildfire) which would ensure that the potential for wildland fire caused by the project is minimized or

eliminated. With implementation of Mitigation Measure FIRE-MM-1, this potential impact would be less than significant.

For further discussion about the Proposed Project's potential impacts related to wildfire, see Section 3.15 *Wildfire*.

3.11 Cultural Resources

3.11.1 Introduction

This section analyzes the Proposed Project's potential impacts related to cultural resources. It describes existing conditions in the Area of Analysis and summarizes the overall regulatory framework for cultural resources, and it analyzes the potential for the Proposed Project to affect these resources.

3.11.2 Area of Analysis

The Area of Analysis for the Proposed Project was established in consultation with Starla Lane (PG&E Senior Cultural Resources Specialist).

The Area of Analysis for built-environment resources includes only those project construction activities that have the potential to affect built-environment resources shown in Figure 3.11-1. The built-environment Area of Analysis includes the existing spillway and the right abutment spillway construction area, which includes the intake, the Dam notch, the spillway chute, the flip bucket, and plunge pool. The Proposed Project activities in the potential staging areas include temporary staging and parking on already cleared or paved areas. The staging areas have no potential to affect built-environment resources.

The Area of Analysis for archaeology consists of both the horizontal and vertical maximum potential extent of direct impacts resulting from the Proposed Project. The horizontal Area of Analysis encompasses the project footprint and includes those areas of new construction, easements, and construction staging of the Proposed Project as shown in Figure 3.11-1. The vertical Area of Analysis is the maximum extent of ground disturbance within the horizontal Area of Analysis (i.e., ground surface to maximum depth of soil disturbance) and varies by project component.

3.11.3 Existing Conditions

3.11.3.1 Archaeological Context

Five periods of prehistory have been described for the Mokelumne Watershed, each characterized by distinct settlement and subsistence patterns and technological innovation (Table 3.11-1).

Table 3.11-1. Chronology of the West-Central Sierra Nevada


| Period | Age Range (Calendar Years Before Present) |
|-----------------------|---|
| Recent Prehistoric II | 610–100 |
| Recent Prehistoric I | 1,100–610 |
| Late Archaic | 3,000–1,100 |
| Middle Archaic | 7,000–3,000 |
| Early Archaic | 11,500–7,000 |


3.11.3.2 Ethnographic Context

The primary group associated with the region in which the Area of Analysis is located is the Northern Sierra Miwok. The term Sierra Miwok designates a separate linguistic group within the Eastern Miwok that also includes the Bay and Plains Miwok. The Eastern Miwok is one of the two major divisions in the Miwokan subgroup of the Utian language family. According to Levy (1978) the Eastern Miwok originally spoke the same language; however, due to years of separation and expansion, the Plains Miwok language separated from the Bay Miwok language approximately 2,500 years ago, and the Sierra Miwok separated from the Plains Miwok language 500 years ago. It is believed that the Miwok in the eastern end of the Sierra Nevada were some of the more recent occupants and speakers of the Miwok language, speaking the Eastern Miwok language for a span of 800 years (Levy 1978).

The following is summarized from Levy (1978). Broken down into the separate regions, the Northern Sierra Miwok inhabited the area between the Cosumnes and Calaveras Rivers, the Central Sierra Miwok were between the Calaveras and Tuolumne Rivers, and the Southern Sierra Miwok were located just north of the Merced River, down to the Fresno River. All three territories spanned approximately 40 miles from the foothills in the west to the central portion of the Sierra Nevada.

The primary political unit of the Miwok was the tribelet. Composed of several semisedentary settlements and numerous seasonally occupied camps, the tribelet represented an independent, sovereign nation that defined and defended a territory. Lineage was also of political significance, consisting of local groups named for a specific geographic locality, usually a permanent settlement. However, the names and numbers of such lineage settlements remain for the most part unknown, largely because of the depopulation or relocation of the Miwok during the nineteenth century.

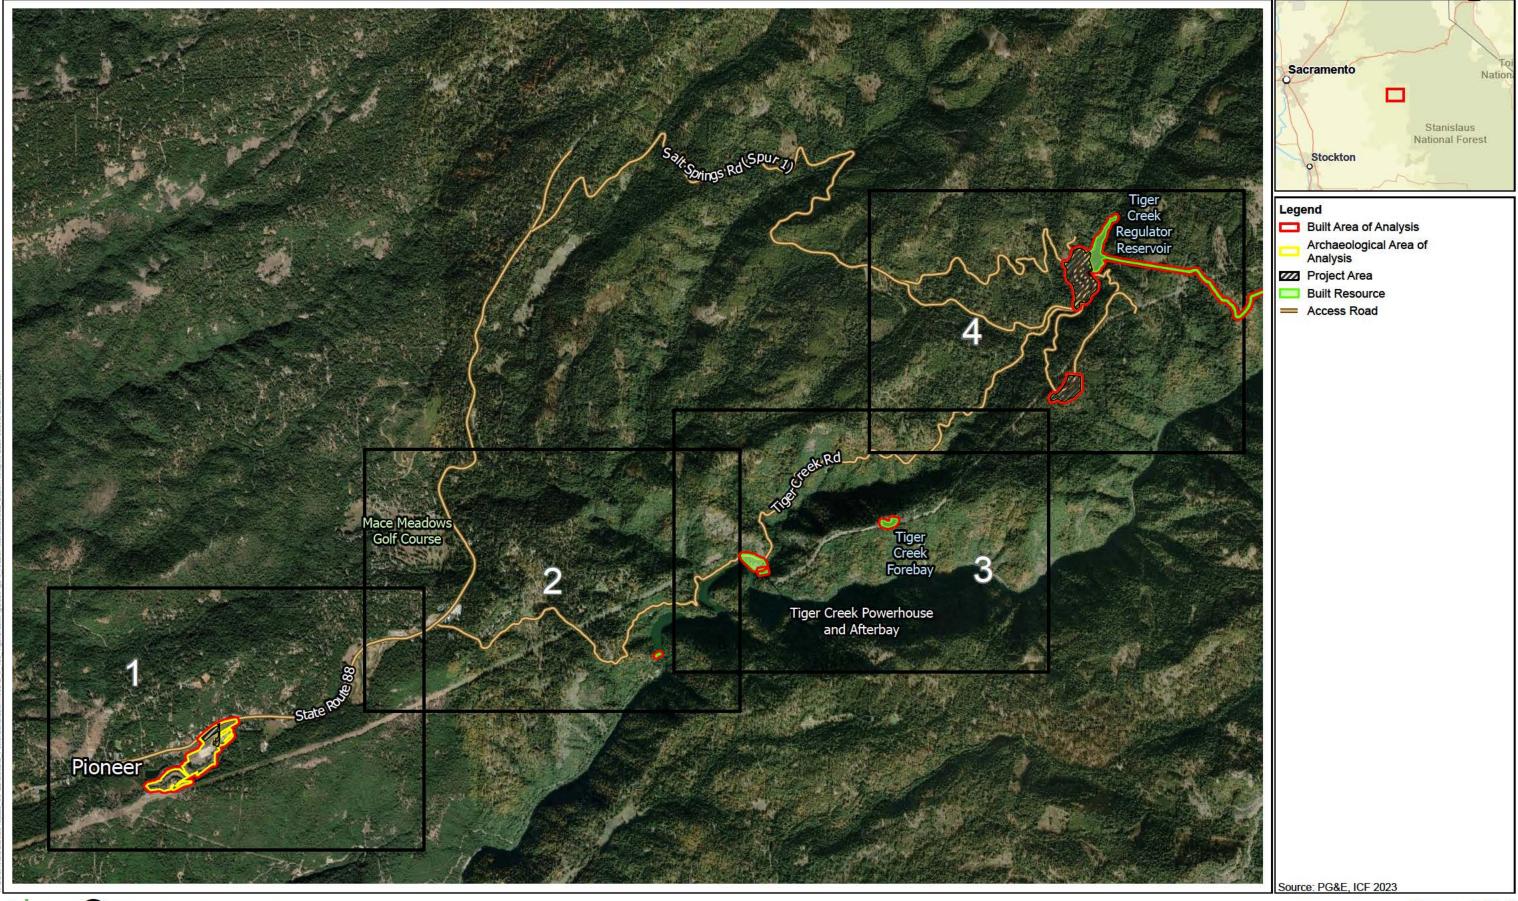






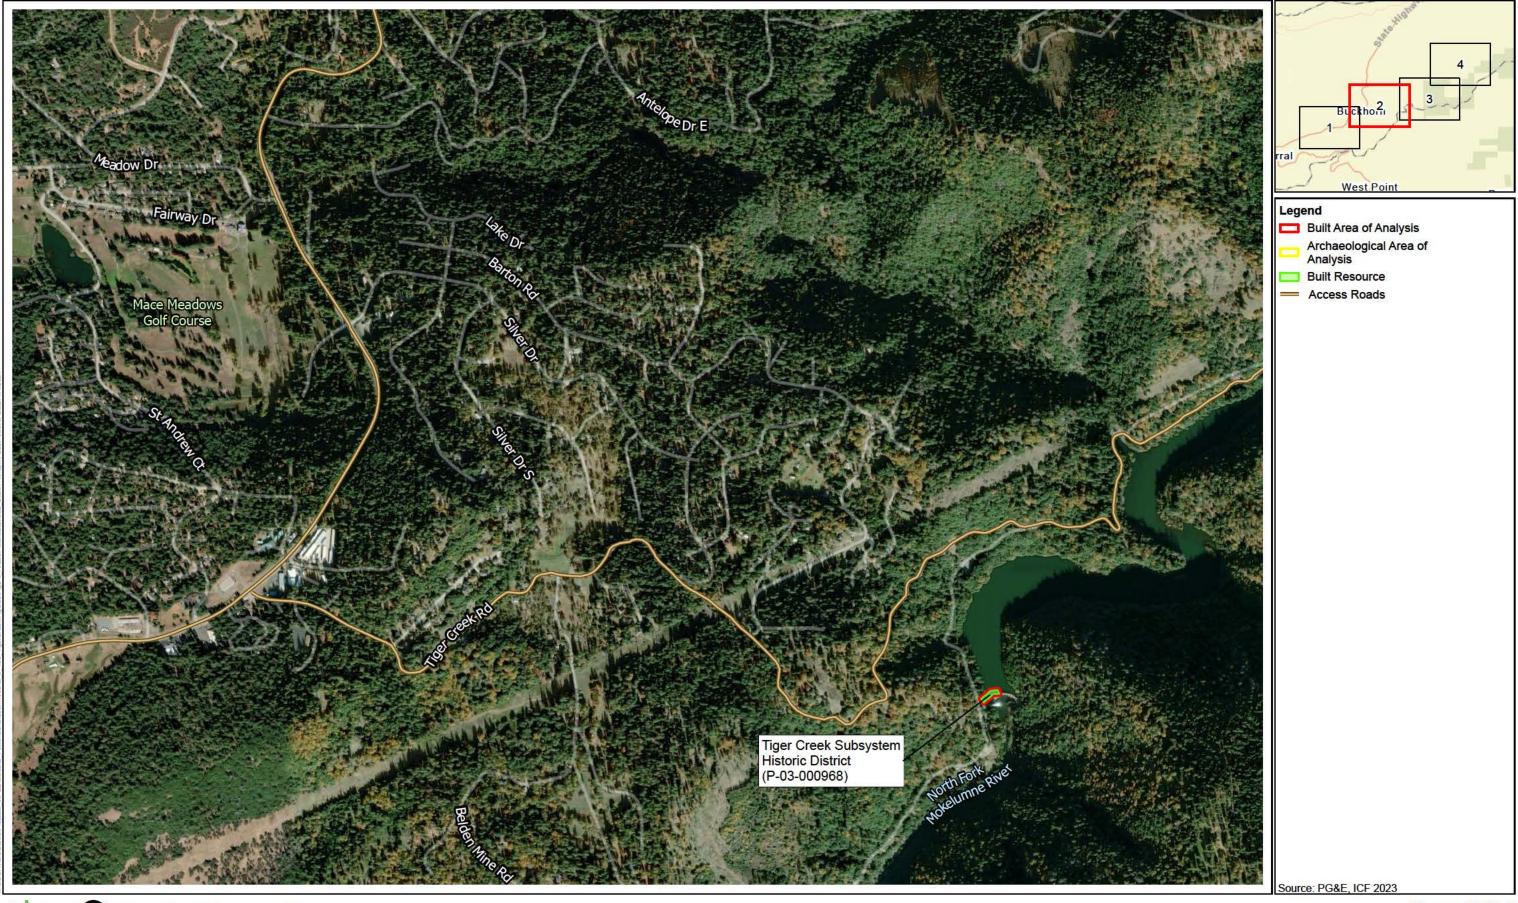


Figure 3.11-1 Cultural Resources Area of Analysis Page 1 of 4




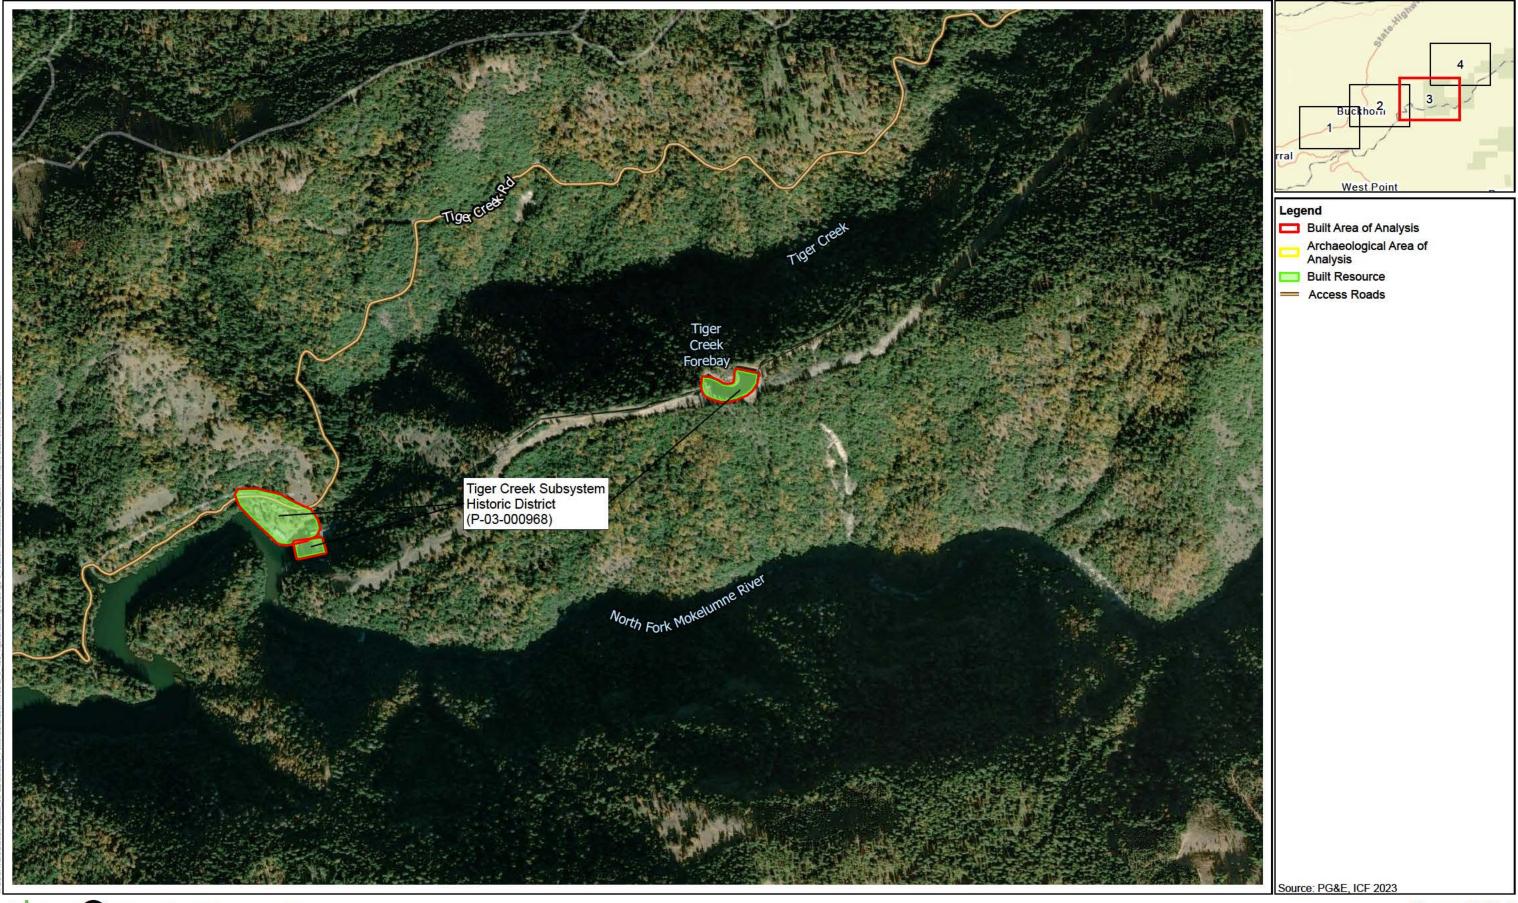


Figure 3.11-1 Cultural Resources Area of Analysis Page 2 of 4




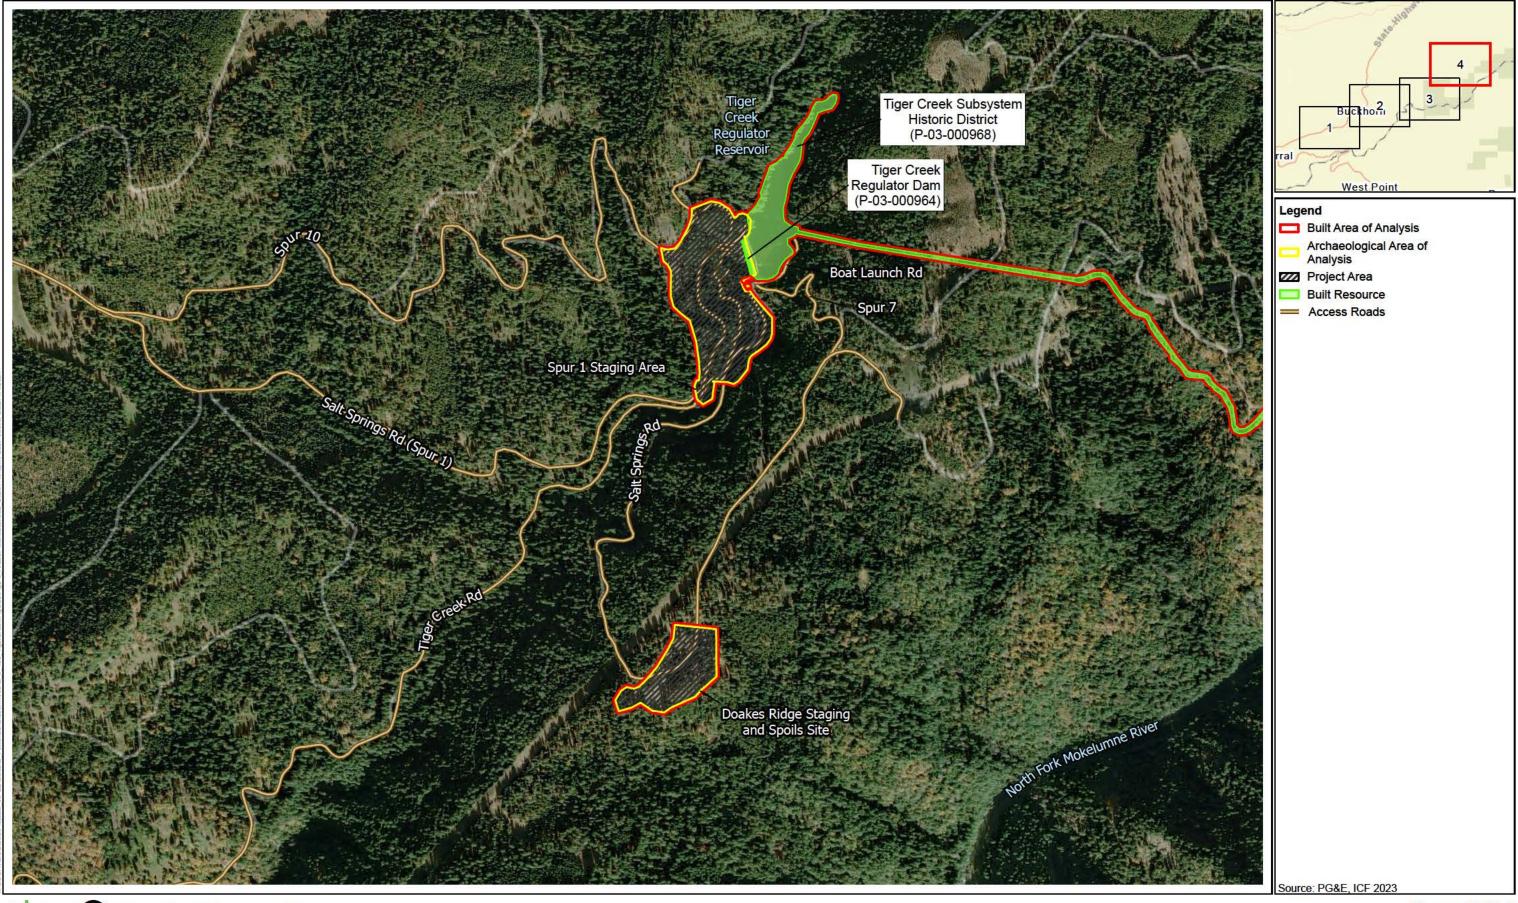


Figure 3.11-1 Cultural Resources Area of Analysis Page 3 of 4






Figure 3.11-1 Cultural Resources Area of Analysis Page 4 of 4

The basic subsistence strategy of the Sierra Miwok was mobile hunting and gathering. This strategy was motivated by seasonal variations in resource availability, which forced the Miwok to exploit resources outside the immediate vicinity of their permanent settlements. Of the vegetal resources gathered, numerous varieties of acorns were highly sought after and widely harvested. Nuts such as buckeye, sugar pine, and foothill pine nuts were collected and stored to augment any unexpected poor acorn harvest. Seeds, roots, and various green plants served to round out the bulk of the vegetal resources exploited by the Miwok.

The Miwok hunted, trapped, and fished for numerous varieties and combinations of resources throughout the mountain regions, foothills, and plains. Because the Miwok tended to live in geographically distinct regions, each group placed higher premiums on more locally obtainable resources. Some of the more prized game animals hunted by the Sierra Nevada groups were bear species and, at lower elevations, deer and elk. The Miwok also hunted and trapped smaller mammals (e.g., rodents) as well as waterfowl and other birds to supplement their diet.

Miwok technology included bone, stone, antler, wood, and textile tools. Hunting was accomplished using the bow and arrow as well as traps and snares. Basketry items included seed beaters; cradles; sifters; rackets used in ball games; and baskets for storing, winnowing, parching, and carrying burdens. Other textiles included mats and cordage.

The Sierra Miwok constructed four types of structures. Conical structures of bark were used in the mountains, whereas those built from tule matting were more common in the lower elevations of the central Sierra Nevada. Semisubterranean earth-covered dwellings served as winter homes. Also located within Miwok settlements were acorn granaries, menstrual huts, sweathouses, conical grinding huts over bedrock mortars, and two types of assembly houses. Large semisubterranean structures were the focal point of ritual and social gatherings. Circular brush structures were used for mourning ceremonies in summer months.

With the arrival of trappers, gold miners, and settlers to the region, the Miwok suffered exposure to new varieties of introduced diseases. Although this early contact with settlers had a destructive impact on the Miwok population, relationships with settlers varied. Although there was some hostility between the Sierra Miwok and miners, some of the Plains Miwok became involved in agricultural operations on the large land grants then being established. After the United States annexed California, some of the Miwok were displaced to Central Valley locations, yet many remained on the rancherias located in the Sierra Nevada foothills. During the final decades of the nineteenth century and the early twentieth century, the Miwok living on the foothill rancherias adapted to a new lifestyle. Subsistence through hunting

and gathering was now augmented by seasonal wage labor on ranches and farms. As the reliance on cash income increased, traditional subsistence practices suffered. Numerous people of Miwok descent still survive and maintain strong communities and action-oriented organizations.

3.11.3.3 History

The history of the Mokelumne River hydroelectric system began in mining, not electric power generation. Water rights acquired during the early gold and silver booms in the Sierra Nevada established the foundation of a system of dams and canals whose purpose evolved from local mining to city water consumption to hydroelectric generation. From the early basic foundation, engineers spent the next 150 years expanding the system to wrest every drop out of their rights to the watershed. The complete engineering plan for the system dates to 1930, when PG&E engineer A. H. Mark Wart set forth the path for future development. His plans for Bear River, Electra, and West Point Powerhouses were subsequently realized by his protégées, I. C. Steele, Walter Dreyer, T. J. Corwin, and G. C. Green. The Mokelumne is somewhat unique among PG&E's projects in California simply for the number of diversions from small tributaries to the Mokelumne River, including diversions from the Bear River, Deer Creek, Tiger Creek, and Cole Creek (PAR Environmental Services, Inc. 2003:17).

The Tiger Creek portion of the Mokelumne River Hydroelectric System stands alone as an independent entity from the system as a whole, possessing its own storage reservoir, dams, conduit, and powerhouses. The Tiger Creek Subsystem extends from the eastern shore of Salt Springs Reservoir in Amador County to the afterbay of the Tiger Creek Powerhouse in Amador and Calaveras Counties. PG&E started planning construction in the late 1920s, with actual groundbreaking beginning in 1930, a time during the Great Depression when most construction in the United States was put on hold. This massive project entailed two powerhouses and camps, four dams, and a complex conduit system. The canal and conduit system diverts water from Cole Creek, Bear River, East Panther Creek, West Panther Creek, and Tiger Creek, including upstream reservoirs. The Tiger Creek Subsystem was an ambitious building project implemented during a time of great economic uncertainty. It employed hundreds of men and numerous subcontractors and materials suppliers, helping relieve the financial stress in the region and exuding confidence in a time of doubt. Electricity from the Salt Springs and Tiger Creek Powerhouses began reaching San Francisco by 1932. Since then, PG&E has performed regular maintenance and upgrades on the subsystem (PAR Environmental Services, Inc. 2002a:1).

The Dam is an Ambursen reinforced concrete slab and buttress dam. Its crest structure is 100 feet high and 470 feet long. The Reservoir provides regulation flows to Tiger Creek Powerhouse approximately 3 miles to the southwest via an open canal (the Lower Tiger Creek Conduit) to Tiger Creek Forebay. The unusual spillway arrangement consists of a 20-foot by 24-foot concrete open channel leading to three siphons and an open weir. In 1987, the three spillway siphons were modified to prevent air from breaking the siphoning effect. A sheet metal hood was added to the siphon breaker air inlet to lower the air inlet elevation and prevent the siphon breaker operation of alternating flows of air and water causing structure vibration and a decrease in the siphon's discharge. A gate valve was also added at the outlet to provide better control of the Dam's discharge (PAR Environmental Services, Inc. 2002b:1–2).

3.11.4 Regulatory Setting

3.11.4.1 Federal

The following federal regulation related to cultural resources would apply to the Proposed Project.

National Historic Preservation Act

Section 106 of the NHPA (16 USC 470f) requires federal agencies to evaluate the effects of their undertakings on historic properties, which are those properties listed or eligible for listing on the National Register of Historic Places (NRHP). Implementing regulations at 36 CFR Part 800 require that federal agencies, in consultation with the SHPO, identify historic properties within the area of potential effect of a proposed project and make an assessment of effects if any are identified. If a project is determined to have an adverse effect on historic properties, the federal agency is required to consult further with SHPO and the Advisory Council on Historic Preservation (ACHP) to develop methods to resolve the adverse effects. USACE's issuance of a CWA section 404 permit for the Proposed Project constitutes an undertaking as defined by 36 CFR 800.16(y) and triggers compliance with section 106 of the NHPA. Other federal regulations applicable to the Proposed Project could also require compliance with section 106 of the NHPA, including CWA section 401 permits and FERC license amendments.

FERC, ACHP, SHPO, USFS, PG&E and other interested parties adopted a programmatic agreement (PA) that requires PG&E to develop and implement a historic properties management plan (HPMP) for operations and maintenance of the Mokelumne River Project. Pursuant to stipulations of the PA, PG&E has developed and implemented an HPMP in accordance with the Secretary of the Interior's

Standards for the Treatment of Historic Properties (Standards) and guidelines to manage historic properties within the area of potential effect established for the Mokelumne River Project. The HPMP guides programmatic compliance with section 106 of the NHPA and directs PG&E to consult with stakeholders on behalf of FERC when activities associated with License 137 have the potential to affect historic properties. As a project subject to FERC approval, the Proposed Project is subject to the provisions of the PA and HPMP.

In a letter dated September 11, 2018, USACE formally designated FERC as the lead federal agency for compliance with section 106 of the NHPA (Fancher pers. comm.). As such, FERC is addressing section 106 compliance for the Proposed Project pursuant to the requirements of the Mokelumne River Project PA and HPMP.

The Proposed Project is a part of the FERC Project No. 137 (Mokelumne River Project). PG&E is in the process of drafting a *Cultural Resources Inventory and Evaluation Report and Finding of Effect for the PG&E Tiger Creek Regulator Dam Spillway Replacement Project* (ICF 2023).

3.11.4.2 State

The following state regulations related to cultural resources would apply to the Proposed Project.

California Environment Quality Act

Two categories of cultural resources are specifically called out in the CEQA Guidelines. The categories are *historical resources* (CEQA Guidelines section 15064.5[b]) and *unique archaeological sites* (CEQA Guidelines section 15064.5[c]; Public Resources Code section 21083.2). Different legal rules apply to the two different categories of cultural resources. However, the two categories sometimes overlap where an archaeological historical resource also qualifies as a unique archaeological resource. In such an instance, the more stringent rules for unique archaeological resources apply, as explained below. In most situations, resources that meet the definition of a unique archaeological resource also meet the definition of a historical resource. As a result, it is current professional practice to evaluate cultural resources for significance based on their eligibility for listing in the California Register of Historical Resources (CRHR).

Historical resources are those meeting the following requirements:

- Resources listed in or determined eligible for listing in the CRHR (CEQA Guidelines section 15064.5[a][1]);
- Resources included in a local register as defined in Public Resources Code section 5020.1(k), "unless the preponderance of evidence demonstrates" that the resource "is not historically or culturally significant" (CEQA Guidelines section 15064.5[a][2]);
- Resources that are identified as significant in surveys that meet the standards provided in Public Resources Code section 5024.1(g) (CEQA Guidelines section 15064.5[a][3]); and
- Resources that the lead agency determines are significant, based on substantial evidence (CEQA Guidelines section 15064.5[a][3]).

Unique archaeological resources, on the other hand, are defined in Public Resources Code section 21083.2 as a resource that meets at least one of the following criteria:

- Contains information needed to answer important scientific research questions and there is a demonstrable public interest in that information;
- Has a special and particular quality such as being the oldest of its type or the best available example of its type; or
- Is directly associated with a scientifically recognized important prehistoric or historic event or person.

The process for identifying historical resources is typically accomplished by applying the criteria for listing in the CRHR (CCR, tit. 14, § 4852). This section states that a historical resource must be significant at the local, state, or national level under one or more of the following four criteria.

- 1. It is associated with events that have made a significant contribution to the broad patterns of California's history and cultural heritage.
- 2. It is associated with the lives of persons important in our past.
- It embodies the distinctive characteristics of a type, period, region, or method of construction, or represents the work of a master or possesses high artistic values.
- 4. It has yielded, or may be likely to yield, information important in prehistory or history.

To be considered a historical resource for the purpose of CEQA, the resource must also have integrity. *Integrity* is the authenticity of a resource's physical identity, evidenced by the survival of characteristics that existed during the resource's period of significance.

Resources, therefore, must retain enough of their historic character or appearance to be recognizable as historical resources and to convey the reasons for their significance. Integrity is evaluated with regard to the retention of location, design, setting, materials, workmanship, feeling and association. It must also be judged with reference to the particular criteria under which a resource is eligible for listing in the CRHR (CCR, tit. 14, section 4852[c]). Integrity assessments made for CEQA purposes typically follow the National Park Service guidance used for integrity assessments for NRHP purposes.

Even if a resource is not listed or eligible for listing in the CRHR, in a local register of historical resources, or identified in an historical resource survey, a lead agency may still determine that the resource is an historical resource as defined in Public Resources Code sections 5020.1j or 5024.1 (CEQA Guidelines section 15064.5[a][4]).

Resources that meet the significance criteria and integrity considerations must be considered in the impacts analysis under CEQA. Notably, a project that causes a substantial adverse change in the significance of an historical resource is a project that may have significant impact under CEQA (CEQA Guidelines section 15064.5[b]). A substantial adverse change in the significance of an historical resource means physical demolition, destruction, relocation, or alteration of the resource or its immediate surroundings such that the significance of an historical resource would be materially impaired. The significance of an historical resource is materially impaired if the project demolishes or materially alters any qualities as follows:

- Qualities that justify the inclusion or eligibility for inclusion of a resource on the CRHR (CEQA Guidelines section 15064.5[b][2][A],[C]); and
- Qualities that justify the inclusion of the resource on a local register (CEQA Guidelines section 15064.5[b][2][B]).

California Health and Safety Code and Public Resources Code

Broad provisions for the protection of Native American cultural resources are contained in California Health and Safety Code, Division 7, Part 2, Chapter 5 (sections 8010 through 8030).

Several provisions of the Public Resources Code also govern archaeological finds of human remains and associated objects. Procedures are detailed under Public Resources Code sections 5097.98 through 5097.996 for actions to be taken whenever Native American remains are discovered. Furthermore, section 7050.5 of the California Health and Safety Code states that any person who knowingly mutilates or disinters, wantonly disturbs, or willfully removes human remains in or from any location other than a dedicated cemetery without authority of law is guilty of a misdemeanor, except as provided in section 5097.99 of the Public Resources Code. Any person removing human remains without authority of law or written permission of the person or persons having the right to control the remains under California Health and Safety Code section 7100 has committed a public offense that is punishable by imprisonment.

Public Resources Code Chapter 1.7, sections 5097.5–5097.9 define any unauthorized disturbance or removal of a fossil site or remains on public land as a misdemeanor and specify that state agencies may undertake surveys, excavations, or other operations as necessary on state lands to preserve or record paleontological resources.

3.11.4.3 Local

No local regulations concerning cultural resources apply to the Proposed Project.

3.11.5 Methods and Results

3.11.5.1 Methods

Research

PG&E conducted a record search from the Information Center for Amador County on September 15, 2019, and ICF received the results of an additional records search of PG&E's combined cultural resources database on June 29, 2023.

ICF received PG&E's research documents from Starla Lane (PG&E Senior Cultural Resources Specialist) for review and incorporation into the current study. A total of two reports and three California Department of Parks and Recreation Form Sets have been completed that address cultural resources in the Area of Analysis; three cultural resources have been documented previously in the Area of Analysis (Table 3.11-2 and Table 3.11-3).

Table 3.11-2. Previous Studies and Reports in the Area of Analysis and Records Search Study Area

| Author | Date | Report Title |
|---|-------------------|---|
| PAR Environmental Services, Inc. | April 2003 | National Register of Historic Places Evaluation, Mokelumne River Hydroelectric System, FERC No. 137 Alpine, Amador, and Calaveras Counties, California |
| Applied EarthWorks, Inc. | September 2007 | Historic Properties Management Plan for the Mokelumne River Project (FERC No. 137) in Alpine, Amador, and Calaveras Counties, California |
| Far Western Anthropological Research Group, Inc. | September 2020 | Archaeological Resources Inventory Report for the PG&E Tiger Creek Regulator Dam Project (Work Order No. 74029542), Amador County, California |

Table 3.11-3. Previously Recorded Cultural Resources in the Area of Analysis

| Resource Name | Resource Attributes | NRHP Status | Concurrence Date |
|--|---|--|---------------------|
| Tiger Creek Hydroelectric Subsystem Historic District (P-3-968-1-1) | HP4. Ancillary building; HP8. Industrial building; HP11. Engineering structure; HP21. Dam; HP22. Reservoir; HP30. Trees/vegetation | Eligible | May 2003 |
| Tiger Creek Regulator Dam (P-3-964-1-1) | HP21. Dam; HP22. Reservoir | Eligible (individually and as a historic district contributor) | May 2003 |

Additional resources were evaluated as part of the Tiger Creek Subsystem Historic District. In addition to the Dam, six other elements/features were determined as contributors to the historic district. The Cole Creek Diversion Dam (1931, 1971) and the Tiger Creek Forebay Dam (1931, modified 1967) were deemed non-contributors to the historic district due to modifications that affected integrity (PAR Environmental Services, Inc. 2002a).

Built Environment Field Investigation

The scope of field investigation for built-environment resources included the pedestrian survey of the entire Area of Analysis, inclusive of areas around the Reservoir as well as the potential staging areas.

Two ICF architectural historians surveyed the Dam and appurtenant structures around the southern end of the Reservoir. The architectural historians conducted a field investigation of the Area of Analysis on June 2, 2022. Field personnel had permission to enter the Area of Analysis at the Dam site and potential staging areas.

ICF's architectural historians conducted a pedestrian survey of accessible areas of the Area of Analysis that had not received a previous adequate survey. The survey included the Dam and appurtenant structures around the southern end of the Reservoir. The survey also covered the landscape and built resources at and surrounding the Cedar Mill staging area and the Doakes Ridge staging and spoils site.

The surveyed area of the Reservoir was approximately 3.5 acres (0.36-mile perimeter) and included the Dam, existing spillway, proposed spillway location, intake structure, chute and flip bucket, plunge pool, and ancillary resources. The southern end of the Reservoir was approached from Tiger Creek Road to the south. The graveled and graded surfaces to the south and east, the bridge across the existing spillway, and the span atop the Dam were traversed by foot. The dense hillside area to the west and north, including the proposed spillway location, were observed from atop the Dam and the immediate, sloped and grassy area at the Dam's northern end.

The architectural historians surveyed two potential staging areas, although the built resources associated with the parcels are outside the Area of Analysis: the Cedar Mill staging area and the Doakes Ridge staging and spoils site.

Although PG&E would only use approximately 4 acres of previously disturbed land for the Cedar Mill staging area as part of the Proposed Project, the majority of the Cedar Mill parcel, which is an approximately 51.7-acre (0.1-square-mile area, 2.8-mile perimeter) area located on SR 88 in Pioneer, California, was included in the Area of Analysis for built-environment resources. A portion of the area is used by PG&E and is accessible through a private gate. The area consists of three storage structures, one greenhouse, two residences, and scattered ancillary buildings and structures which were partially extant by 1962. One storage structure and one residence are older than 50 years and therefore meet the threshold for potential evaluation. Much of the area consists of graveled and graded surfaces along service roads south and west of the greenhouses. Areas that were not accessible

by foot were observed from a vehicle to cover all built resources. The Cedar Mill staging area is approximately 6.5 miles southwest of the Dam.

The Doakes Ridge staging and spoils site is an approximately 14.8-acre (0.7-mile perimeter) area located on an unmarked service road between Tiger Creek Road and Salt Springs Road. The area has limited accessibility within a public recreation area. The Doakes Ridge staging and spoils site consists of two buildings that predate 1962, one of which is partially obscured from the public right-of-way by a surrounding chain link fence. Both buildings are older than 50 years and therefore meet the threshold for potential evaluation. Surrounding areas to the west and south were graveled with graded surfaces and dense tree coverage. Doakes Ridge staging and spoils site is approximately 0.75 mile south of the Dam.

Archaeological Field Investigation

The scope of field investigation for archaeological resources included a pedestrian survey of the entire Area of Analysis, inclusive of areas around the Reservoir, the Cedar Mill staging area, and the Doakes Ridge staging and spoils site. Two ICF archaeologists conducted a pedestrian survey of accessible areas of the Area of Analysis that had not received a previous adequate survey. The archaeological survey of the Area of Analysis was conducted on July 10, 2023. Field personnel had permission to enter the Area of Analysis at the Dam site and at Cedar Mill staging area and Doakes Ridge staging and spoils site. Archaeologists walked 15-meter transects to ensure maximum ground coverage in a timely manner. Areas that were covered by previously adequate surveying (Far Western Anthropological Research Group 2020) and areas deemed unsafe due to extreme slope were not surveyed as part of this effort.

Native American Consultation

Consultation efforts undertaken as part of the Proposed Project are summarized in Section 3.12.5.2 Sacred Lands File Search and Correspondence with Native American Representatives.

3.11.5.2 Results

Archaeological Resources

Based on records search results, no previously recorded archaeological resources were identified in the Area of Analysis. However, three archaeological resources were identified as a result of the pedestrian survey. All three are historic-era resources. Descriptions of these resources are as follows (ICF 2023:4-1, 4-4-4-7):

ICF-CUL-01 is a concrete foundation and an associated stacked rock retaining wall. The resource is approximately 25 feet long by 15 feet wide. No associated artifact deposits were noted. Historic-era map research and PG&E records indicate that the structure was built in or shortly after 1956 and was demolished between 2001 and 2012. According to the PG&E project engineer, the foundation is the remains of a ditch tender's cabin. This resource does not appear to be eligible for listing in the NRHP.

ICF-CUL-02 is a concrete slab in Tiger Creek that may have been a creek crossing for vehicles. The slab is approximately 15 feet long by 8 feet wide and is badly eroded and cracked. No associated artifacts or features were noted. This resource does not appear to be eligible for listing in the NRHP.

ICF-CUL-03 is a stacked rock retaining wall along the east side of the access road to the spillway. The wall is approximately 12 feet long and 4 feet high. No associated artifacts or features were noted. This resource does not appear to be eligible for listing in the NRHP.

Archaeological Sensitivity

PG&E conducted a record search from the Information Center for Amador County on September 15, 2019, and ICF received the results of an additional records search of PG&E's combined cultural resources database on June 29, 2023. No known archeological resources were identified within a 0.25-mile radius of the Area of Analysis; all identified archaeological resources within 0.50 mile date to the historic era. There are no previously identified areas of tribal concern or Native American–affiliated archaeological resources within a 0.50-mile radius. The pedestrian survey identified three historic-era features; however, none of the features appear to have any associated archaeological deposits. As such, the Area of Analysis has a low sensitivity for prehistoric and moderate sensitivity for historic-era archaeological resources.

Built-Environment Resources

This section presents information about what is known about cultural resources within the Area of Analysis for the Proposed Project. For built-environment cultural resources, because the Area of Analysis has been completely surveyed and evaluated for NRHP and CRHR eligibility, only the previously identified built-environment historical resources are identified in this IS/MND.

In 2003, PG&E contracted PAR Environmental Services, Inc. to conduct an NRHP evaluation for the Mokelumne River Hydroelectric Project operating system (MRHPOS). In 2003, PG&E determined that the MRHPOS as a whole was ineligible

for the NRHP, but some features were individually eligible. PG&E identified one historic district and one dam for NRHP eligibility located within the Area of Analysis. The Tiger Creek Subsystem Historic District is eligible under NRHP/CRHR Criteria A/1 and C/3 with a period of significance of 1931. The Dam is individually eligible at the state level under Criterion C/3 with the construction year as the period of significance, 1931. It is also a contributing element to the Tiger Creek Subsystem Historic District (PAR Environmental Services, Inc. 2003). The SHPO concurred with the determinations of NRHP eligibility in May 2003 (Mellon 2003).

After completion of research and field investigation that was conducted for the Proposed Project's Finding of Effect for compliance under section 106 of the NHPA, two historical resources were identified in the built-environment Area of Analysis: the Dam and the Tiger Creek Subsystem Historic District (ICF 2023:5-1). The Dam is also a contributor to the historic district.

Tiger Creek Subsystem Historic District

The following properties are contributors to the Tiger Creek Subsystem Historic District:

- Salt Springs Dam (1931)¹;
- Salt Springs Powerhouse (1931);
- Salt Springs Camp (1927–1962);
- Tiger Creek Conduit (1931);
- Tiger Creek Powerhouse (1931):
- Tiger Creek Camp (1930–1932);
- Tiger Creek Afterbay Dam (1931); and
- Tiger Creek Regulator Dam (1931).

The following properties are non-contributors to the Tiger Creek Subsystem Historic District:

- Cole Creek Diversion Dam (1931, 1971); and
- Tiger Creek Forebay Dam.

Final

3.11-14

¹ In addition to serving as a contributing element to the Tiger Creek Subsystem Historic District, the Salt Springs Dam, outside of the Area of Analysis of the Proposed Project, is also individually eligible at the local level under Criterion C. The construction year, 1931, also considered the period of significance.

National Register of Historic Places Significance

In April 2003, PG&E contracted PAR Environmental Services, Inc. to conduct an NRHP Evaluation for the MRHPOS, which included an evaluation of Tiger Creek Subsystem Historic District features (PAR Environmental Services, Inc. 2003). The Tiger Creek Subsystem Historic District was determined eligible for listing in the NRHP with SHPO concurrence in May 2003. The Tiger Creek Subsystem Historic District was evaluated as significant under Criteria A and C, with a period of significance of 1931. The theme was Hydroelectric Generation. The California Department of Parks and Recreation 523 Form Set is quoted below with light editing (PAR Environmental Services, Inc. 2003:55).

The [Tiger Creek] Subsystem [Historic District] retains a good degree of integrity from its original 1931 construction phase, its period of significance. It retains integrity of location, design, materials, setting, feeling, and association. The subsystem is eligible under Criterion A as an unusual large Depression-era construction project noted at the time as somewhat of a financial gamble for the Company in uncertain economic times and under Criterion C as a unique hydroelectric system with substantial dams and a complex system of tributary development and water conveyance features. Most of its elements lack individual eligibility but still contribute to the system's integrity. The Cole Creek Diversion is completely modern and neither individually eligible nor a district contributor. East and West Panther and Beaver Creek diversion dams divert water from small creeks to the Tiger Creek Conduit, which feeds water to the Tiger Creek Powerhouse. These dams were evaluated in 2000 for this historic significance and found ineligible to the NRHP. When constructed they were considered very modest concrete dams among the numerous similar dams in California and are not unique, nor are they eligible, nor district contributors. Also, the Company's routine maintenance has led to replacement of some equipment at the powerhouses and especially the switchyards to the extent that their integrity of materials have been compromised. As a result, the switchyards, West and East Panther, Beaver Creek, and Cole Creek Diversion dams do not appear to contribute to the Tiger Creek Subsystem Historic District.

Integrity

As a multi-component operating assemblage, the Tiger Creek Subsystem Historic District retains integrity to the period of significance. The district's contributing resources retain key physical characteristics, operational and spatial relationships, and design features that readily illustrate the historic identity and significant themes of 1930s hydroelectric development. In addition, the contributing resources largely continue to operate as designed, with the system continuing to generate

hydroelectricity in the way it was envisioned. In this sense, the Tiger Creek Subsystem Historic District provides a significant portrait of early twentieth-century hydroelectric design and an illustrative model of the enduring engineering and design themes that undergird the continued operational significance of the district. The original evaluation stated that the district retained integrity, but did not complete a detailed analysis of integrity, so this section is extrapolated from the previous documentation.

In general, the integrity of infrastructure resources depends on the continuity of the resources use and its physical presence as an element of the landscape. Moreover, for a district to retain integrity, the majority of the components that make up the district's historic character must possess integrity even if they are individually undistinguished. In addition, the relationships among the district's components must be substantially unchanged since the period of significance.

Within this general framework, discussion of all aspects of the historic district's integrity, including location, design, setting, materials, workmanship, feeling, and association, are as follows.

Location: The placement and location of resources, both individually and as an interconnected system, are vital to the Tiger Creek Hydroelectric Subsystem Historic District. The system's dams, flowlines, and powerhouses were designed and constructed to operate as an interconnected whole, with the location of each mandated by precise environmental and engineering constraints. Within this context, the system retains strong location integrity. The district's contributing resources remain in the same location and largely exhibit the same spatial and operating relationships as developed in the period of significance.

Design: The district retains design integrity, with all contributing resources conveying significant design features through their physical form, structural and operational plan, and engineering design. Many resources have been maintained and modified over time, including repair and replacement of constituent components and upgrade of engineering and operational features, but such ongoing maintenance has exhibited a compatible industrial design and assured operational integrity. Modifications to contributing features have generally been made in-kind. Further, these functional alterations have generally left key historic period design features in place, including massing, plan, and detailing. Contributing resources display integrity through their historic period engineering and aesthetic design features.

Setting: Setting is of particular importance, as the industrial form of the system was developed and defined in relation to the surrounding physical environment.

Hydroelectric resources were placed in accordance with the surrounding terrain, with the development of reservoirs dependent on the surrounding watershed and the flowlines and powerhouse placed in relation to surrounding topography and terrain conditions. In this sense, the human-made resources of the district were developed in constant interplay with the surrounding natural setting, with one informing and defining the other. In general, the contributing resources retain a high integrity of the setting. The setting has remained relatively unchanged since the period of significance, with little development other than the industrial features of the system and a flexible and largely undeveloped environmental context. While the century since development has continued to see an expansion of recreational and residential development in and around the Area of Analysis, this ancillary growth generally does not undermine the ability of the district to convey significance through an integrity of the setting. Most major project features remain geographically and physically isolated. In this sense, the setting remains comparable to that which defined development, and the interrelationship of project features and surrounding environmental constraints is readily discernible.

Materials: The monumental industrial form of the Tiger Creek Subsystem Historic District is comprised of a small number of core materials, all of which retain high integrity to the period of significance. The system's two powerhouses were primarily constructed of concrete and steel; tunnels and steel flowlines, concrete, dry-laid rock, blasted granite; and dams of concrete, rock, and steel. In most senses, the bulk of this original material remains, with only modest alterations to that which was initially developed. In general, material alterations are key to the continued operation of the system. They are generally compatible in form and utilitarian in design and, as such, do not diminish material integrity such that the resources cannot convey significance.

Workmanship: The Tiger Creek Subsystem Historic District's complex integration within the framing natural environment conveys a strong sense of workmanship that retains high integrity. The design and functionality harness natural forces related to hydrology and environmental terrain to generate electricity. This energy transfer was accomplished by strategically placed reservoirs and lower elevation powerhouses, which together continue to convey a sense of industrial workmanship concerning this overall task. The workmanship is evident in several individual features and have remained successful in contributing to the overall subsystem's use.

Feeling: The historic district readily conveys significance through integrity of feeling because the Tiger Creek Subsystem Historic District has continued to

operate in much the same manner as it was designed. The district's significance is derived from its association with 1930s hydroelectric development, a feeling which is conveyed by the contributing resources at present through their integrity of location, design, setting, workmanship, and materials. A strong sense of feeling is conveyed by individual resources themselves and the functional interconnectedness of all features. The subsystem evokes feelings of the period of significance, with the integration of the features readily illuminating a sense of time and place.

Association: As historic components of an operating hydroelectric system, the Tiger Creek Subsystem Historic District retains rich associations with hydroelectric generation in California. The district retains a continuity of function, physical form, and spatial layout devoted to hydroelectric generation and is therefore readily associated with many significant development themes within this context. The layout and function of the interrelated features are largely the same, expressing physical and structural associations to the development period.

Taken collectively, the Tiger Creek Subsystem Historic District and its contributors convey the system's significance.

Character-Defining Features

The Tiger Creek Subsystem Historic District retains key physical features, spatial relationships, and operational linkages that enable the district to convey significance as a significant 1930s hydroelectric generation and development. The character-defining features of the regulator district were not specifically identified in the previous evaluation (PAR Environmental Services, Inc. 2003:26-64). However, based on additional analysis and an extrapolation of the previous documentation, the character-defining features are summarized below. The unified design and interconnectedness of multiple linear features are listed here:

- Cohesive functional and operational linkages between hydroelectric resources comprising five dams, two powerhouses, two camps and a hydraulic conduit;
- Functional use as a systematic generator of hydroelectricity;
- The canal and conduit system to divert water from Cole Creek, Bear River,
 Beaver Creek, East Panther Creek, West Panther Creek, and Tiger Creek to the associated reservoirs;
- A surrounding terrain that is characterized by mountainous exposures, forested steep hillsides, and a generally undeveloped surrounding environment; the historic district features are integrated into that surrounding landscape;

- A sprawling engineering and operational plan that is characterized by substantial distances between resources and a linear operational relationship that extends from the Cole Creek Diversion to the Tiger Creek Afterbay Dam;
- A generally massive industrial scale, with large dams, scattered camps, and powerhouses; and
- A range of industrial property types and engineering designs, including spillways, conduits, reservoirs, and powerhouses that exhibit differing materials, massing, and structures but share a common operating framework.

The following elements and their character-defining features were identified as contributors to the Tiger Creek Subsystem Historic District:

- Salt Springs Dam (1931): the dam's location in an unspoiled area of the Sierra Nevada and the massive size and height of the rockfill structure;
- Salt Springs Powerhouse (1931): the contribution to the greater system and use as an energy generator;
- Salt Springs Camp (1927–1962): the operation camp structures that contribute to the greater system. The general collection of cabins, garages, and outbuildings, void of specific configuration, construction, and style;
- Tiger Creek Conduit (1931): 38 miles of hydraulic conduit, canal, tunnels, siphons, and arches. The operation and design of the two arches carrying the conduit across deep ravines in a "rainbow" arch construction shape common in bridges throughout the Sierran foothills and mountains from the 1910s to the 1940s. The operation and size of the two, large siphon structures;
- Tiger Creek Powerhouse (1931): the generation capability of producing 54 megawatts as part of a larger facility contributing to the greater system;
- Tiger Creek Camp (1930–1932): the contribution to the greater system and use as a generation of energy.; providing housing for the powerhouse and system maintenance personnel, as well as meeting employee spaces for conferences and classes; the size and configuration of interior common rooms for employee use and gathering;
- Tiger Creek Afterbay Dam (1931): the operation of the concrete radial arch design, the common type of dam construction in California at the time, in the greater system; and
- Tiger Creek Regulator Dam (1931): the siting and usage within a unified and interconnected subsystem of multiple linear features; the location and other

features of the subsystem being a critical link to the continued usage of the greater system.

Discussion of the Tiger Creek Regulator Dam as a resource individually eligible for the NRHP can be found later in this section.

The Cole Creek Diversion Dam (1931, rebuilt 1971), and the Tiger Creek Forebay Dam (1931, modified 1967) were determined to be non-contributing features to the Tiger Creek Subsystem Historic District in the 2002 PAR Environmental Services, Inc. evaluation, in part, because they were not yet historic age. The two resources were also noted for affects to integrity due to contemporary modifications. Twenty years later, new assessments could be completed to reevaluate and determine if the now historic-age features, including the modifications, should be considered contributing features to the historic district.

Tiger Creek Regulator Dam

The Tiger Creek Regulator Dam is the second built-environment historic property identified in the Area of Analysis. The Dam is eligible as an individual property as well as a contributor to the Tiger Creek Subsystem Historic District.

National Register of Historic Places Significance

In April 2003, PG&E contracted PAR Environmental Services, Inc. to conduct an NRHP evaluation for the Mokelumne River Hydroelectric System, which included an evaluation of Tiger Creek Subsystem Historic District features (PAR Environmental Services, Inc. 2003). The Tiger Creek Regulator Dam was determined eligible for listing in the NRHP individually and as a contributor to the Tiger Creek Subsystem Historic District, with SHPO concurrence in May 2003.

In addition to contributing to the Tiger Creek Hydroelectric System, the Dam has been determined individually eligible for listing in the NRHP with a period of significance as its construction year, 1931, at the state level of significance. The Dam is individually eligible under Criterion C for its engineering design. The design is the highest and longest patented Ambursen concrete slab and buttress dam in California. As a distinctly extant and superlative engineering design representative of 1930s hydroelectric development in California, the Dam merits individual recognition in the NRHP.

Under Criterion C (CRHR Criterion 3), the Tiger Creek Regulator Dam is a significant material representative of 1930s hydroelectric engineering. Specifically, the Ambursen reinforced concrete slab and buttress dam design was the highest of its kind in the original 1931 construction. Moreover, as an early example within the state of California, the design maintains the longest patent of the Ambursen design.

It is located about three miles northeast of the Tiger Creek Powerhouse. Its crest is 100 feet high and 470 feet long. The Reservoir receives canal water from a tunnel outlet structure on its northeast side. The outlet in the Dam is a slide fate measuring 80 feet by 10.5 feet leading to a concrete flume. The Reservoir provides regulation of flows to the Tiger Creek Powerhouse via an open canal (the lower Tiger Creek Conduit) to Tiger Creek Forebay.

Additionally, the Dam maintains its original exposed downstream face; nearly all other Ambursen dams in the state to have been back-filled (downstream slope) for seismic purposes. This patented dam style was popular during the 1920s and 1930s, although concrete radial arch dams superseded them for their greater seismic reliability. The spillway arrangement consists of a 20-feet by 24-feet concrete open channel leading to three siphons and an open weir. The Reservoir has a 540-acre-foot capacity and covers 14 acres at its maximum level (PAR Environmental Services, Inc. 2003:44). The sheer size, storage, and release capabilities of the features working in tandem are vital qualities of the Dam's design and functionality. In this sense, as an Ambursen concrete slab and buttress dam system, the Tiger Creek Regulator Dam has a distinct design scale, patent, and extant exposed downstream face dating to 1931 that merit recognition under the NRHP.

Integrity

The previous evaluation of NRHP eligibility for the Tiger Creek Regulator Dam by PAR Environmental Services Inc. only noted that the historic property retained integrity but did not include a detailed discussion of the Dam's integrity.

The Tiger Creek Regulator Dam retains integrity to the period of significance. The Dam retains key physical, operational, and design characteristics that readily illustrate the historic identity and significant features of 1931 construction. In addition, the Dam largely continues to operate as designed, playing an integral role within the subsystem to generate hydroelectricity in the way it was planned.

In general, the overall integrity of infrastructure resources heavily depends on the continuity of the resource and its physical presence as an element of the landscape. Infrastructure resource materials, and especially those in water management, require considerable maintenance over time and physical interventions to continue proper use. For example, the three spillway siphons were modified to prevent air from breaking the siphoning effect in 1987. Additionally, a sheet metal hood was added to the siphon breaker air inlet to lower the air inlet elevation and prevent the siphon breaker operation of alternating flows of air and water causing structure vibration and a decrease in the siphon's discharge. A gate valve was also added at

the outlet to provide better control of the Dam's discharge (PAR Environmental Services, Inc. 2002b:1-2). Therefore, modifications to the resource's design to maintain continued use is contextualized when considering integrity of materials and workmanship.

Lastly, an evaluation of a resource under Criterion C for its engineering accomplishment is primarily concerned with the integrity of design. Therefore, the design, and specifically the form, configuration, and dimensions of design qualities determined as character-defining features are the primary focus of this evaluation.

Within this general framework, discussion of all aspects of the Dam's integrity, including location, design, setting, materials, workmanship, feeling, and association, are as follows.

Location: The resource placement and location are vital to the Tiger Creek Regulator Dam within the larger hydroelectric power system. Additionally, the locations and alignment of the individual components, including the Reservoir, tunnel outlet structure, and open canal contribute to the functionality of the Dam and connect to other features like the Tiger Creek Powerhouse and Tiger Creek Forebay. The relationship to the environmental and engineering constraints have remained largely unchanged. Within this context, the Dam retains integrity of location, remaining in the same location in the greater subsystem individually maintaining the same spatial and operating relationships as developed in the period of significance.

Design: The Dam retains high integrity within its significant design features, through its physical form and structural and operational plan within the larger subsystem. The Ambursen reinforced concrete slab and buttress design, a patented construction technique used in the 1920s and 1930s, is critical to the significance of engineering design and has been maintained since 1931. Moreover, retaining the exposed downstream face is distinct among other Ambursen dams in California that have been back-filled on the downstream slope for seismic protection. The retention of the slab and buttress design, a key character-defining feature, is critical to the integrity of the resource. While many components have been maintained and modified or replaced over time, such ongoing maintenance have exhibited a compatible industrial design and served to assure operational integrity. A sheet metal hood was added to the siphon breaker air inlet and a gate valve was also added at the outlet to ease operations and did not significantly impact the historic function dating to the period of significance. The change to three spillway siphons ensured functionality and did not impact the integrity of design. These functional alterations have generally left

key historic period design features in place, including massing, plan, and function, displaying integrity of engineering and aesthetic design features.

Setting: The integrity of the setting is of particular importance, as the Dam was developed and defined in relation to the entire subsystem and the surrounding physical environment. In general, the components of the Dam retain high integrity of setting. While the century since development has continued to see expansion of recreational and residential development in and around the Dam, in general this ancillary growth does not undermine the ability of the district to convey significance through integrity of setting. Most major project features remain geographically and physically. In general, the setting remains comparable to the period of significance, and the interrelationship of Dam components, as well as the entire Dam in relation to the greater subsystem, is readily discernible.

Materials: The Dam is primarily constructed of concrete, rock, and steel. In most senses, the bulk of this original material remains, with only modest alterations to that which was initially developed. In general, materials are reflective of the 1931 construction and associated period of significance, and material alterations have contributed to streamlining and maintaining the functionality of the Dam in the greater subsystem operation; they are generally compatible in form and utilitarian in design and as such do not diminish material integrity such that the resource cannot convey significance.

Workmanship: The Dam's complex integration within the subsystem and surrounding landscape conveys a strong sense of workmanship that retains high integrity. Moreover, the interconnected relationship to other features maintains original functionality. Modifications to components have increased efficiency and have not deterred from character-defining features and pertinent materials or general engineering design.

Feeling: The Dam has continued to operate in much the same manner as it was designed, thus conveying significance through integrity of feeling. The significance of the regulator is derived from its association within 1931 hydroelectric development, a feeling which is consistently conveyed by the contributing resources at present through their integrity of location, design, setting, workmanship, and materials. A strong sense of feeling is conveyed by continued operational use in the design and function originally conceived within the great subsystem during the period of significance.

Association: The resource retains rich associations with hydroelectric generation in California as a continuously utilized regulator dam. Moreover, the

Dam retains a continuity of function, physical form, and spatial layout that is devoted to hydroelectric generation as an Ambursen reinforced concrete slab and buttress dam design with its original exposed downstream face. As one of the last remaining Ambursen dams to maintain an exposed downstream face, the resource retains physical and structural associations to the period of significance period.

Character-Defining Features

The Dam retains distinctive physical features of the notable design that enable it to convey significance as a significant 1931 hydroelectric resource. The character-defining features of the Dam were not specifically identified in the previous documentation (PAR Environmental Services, Inc. 2003:26-64). However, based on additional analysis and an extrapolation of the previous documentation, the character-defining features are summarized here:

- The Ambursen reinforced concrete slab and buttress design, a patented construction technique used in the 1920s and 1930s;
- The massive industrial scale in both size and functionality: its crest is 100 feet high 470 feet long, and at 3,586 feet above mean sea level;
- The siting within the surrounding landscape as well as its placement in the
 unified and interconnectedness of multiple linear features within the subsystem;
 the location, among other features of the subsystem, is vital to the continued
 usage; the Dam is approximately three miles northeast of the Tiger Creek
 Powerhouse;
- The cohesive functional and operational linkages between components: the Reservoir receives canal water from a tunnel outlet structure on its northeast side; the Reservoir provides regulation of flows to the Tiger Creek Powerhouse via an open canal (the lower Tiger Creek Conduit) to Tiger Creek Forebay;
- The functional cohesion with the adjacent Reservoir, which has a 540-acre-foot capacity and covers 14 acres at its maximum level;
- The location and alignment of components to transfer water: the outlet in the Dam is a slide fate measuring 80 feet by 10.5 feet, leading to a concrete flume; and
- The spillway function and arrangement, which consists of a 20 by 24-foot concrete open channel leading to three siphons and an open weir; the siphons can release 2,100 cfs, while the weir can release an additional 1,200 cfs.

3.11.6 Environmental Effects

Potential impacts of the Proposed Project related to cultural resources are discussed in the context of CEQA Guidelines Appendix G checklist. Checklist section V *Cultural Resources* asks whether the Proposed Project would result in any of the following conditions.

a. Cause a substantial adverse change in the significance of a historical resource pursuant to section 15064.5?

Less than Significant. There are two historical resources as defined by CEQA within the Area of Analysis: the Tiger Creek Subsystem Historic District and the Tiger Creek Regulator Dam. As designed, the Proposed Project would have a less-than-significant potential impact on historical resources. The analysis for each historical resource follows.

Tiger Creek Subsystem Historic District

The Proposed Project would potentially affect the Tiger Creek Subsystem Historic District, and specifically one contributing resource to the district—the Tiger Creek Regulator Dam—but the Proposed Project would not cause a substantial adverse change in the significance of the historical resource. The Proposed Project would not diminish the integrity of the resource and would not destroy or adversely impact any qualifying characteristics of the property.

The Proposed Project includes the replacement of the service spillway in the vicinity of the existing footprint of the spillway, including the abandonment of the existing spillway and construction of a new right abutment spillway designed to be able to pass the PMF. The new right abutment spillway would call for a dam notch in the Dam and minor excavation of the steep grading, though modifications would not affect the Dam's stability, but rather prolong its use. The proposed modifications would ensure the utilization and longevity of the Dam as an integral, functioning component of the Tiger Creek Subsystem Historic District.

The Proposed Project calls for replacements that would match the property's use and functionality. The Proposed Project is necessary in order to maintain the property's historic and current use. Furthermore, if the Proposed Project is not completed, the condition of the property would continue to deteriorate through deficient capacity and structural concerns. The changes to the historic property's setting are in-kind with the area and include roadway alterations, both permanent and temporary, that are consistent with the rural setting.

While the Proposed Project activities would alter some character-defining features of the property, those changes would not destroy or damage the property in a manner inconsistent with the Standards. The Dam's Buttress 23 and the northern segment of the footbridge, face of the Dam, and top of the parapet would be removed to create a notch in the face of the Dam. However, the proposed demolition is necessary for the completion of the right abutment spillway construction to resolve water capacity deficiencies and offset existing structural concerns that will guarantee the continued use of the Dam as a part of the larger subsystem and a contributor to the historic district. Within the context of the overall Dam, this small loss of materials would help ensure its continued historic function and use. The character-defining Ambursen reinforced concrete slab and buttress design of the Dam, within the overall district, will retain its massive scale will not be significantly altered as the proposed construction affects a small portion—one buttress—of the entire face of the Dam.

The Proposed Project would not introduce new visual features to the setting of the historical resource.

Additionally, most of the proposed changes are better described as repair, maintenance, or stabilization of features. The replacement of the existing spillway does propose the abandonment of the existing spillway and construction of a new right abutment spillway within the Tiger Creek Regulator Dam system. However, the proposed construction is in compliance with the Standards. The spillway's design is a character-defining feature, but its key importance is as a working part of the Dam as a whole. As proposed, the replacement spillway will support the historic function of the Dam and minimize effect on the design and material integrity of other character-defining features.

The Proposed Project was designed in conformance with the Standards, so it would not cause a substantial adverse change in the significance of historical resources in the Area of Analysis as defined in section 15064.5 of the CEQA Guidelines. While the project activities would alter some character-defining features of the property, those changes would not destroy or damage the property in a manner inconsistent with the Standards. Most proposed changes are better described as repair, maintenance, or stabilization of features throughout construction of the Proposed Project.

The Proposed Project comprises construction of a new spillway near the Dam's right abutment, which includes a spillway intake (crest structure), a notch through the existing Dam, a concrete chute, flip bucket splitter blocks, and plunge pool. Other associated features include a permanent access road, cofferdam, new log boom, lighting, and abandonment of the existing spillway. However, the proposed work would be in compliance with the Standards. The Proposed Project's staging activities have no potential to affect the historical resource.

To demonstrate how the Proposed Project would conform with the Standards, each standard is evaluated against each feature of the Proposed Project. Rehabilitation is the most appropriate approach to the Standards. The Rehabilitation Standards are as follows.

- 1. A property will be used as it was historically or be given a new use that requires minimal change to its distinctive materials, features, spaces, and spatial relationships.
- 2. The historic character of a property will be retained and preserved. The removal of distinctive materials or alteration of features, spaces and spatial relationships that characterize a property will be avoided.
- 3. Each property will be recognized as a physical record of its time, place and use. Changes that create a false sense of historical development, such as adding conjectural features or elements from other historic properties, will not be undertaken.
- 4. Changes to a property that have acquired historic significance in their own right will be retained and preserved.
- 5. Distinctive materials, features, finishes, and construction techniques or examples of craftsmanship that characterize a property will be preserved.
- 6. Deteriorated historic features will be repaired rather than replaced. Where the severity of deterioration requires replacement of a distinctive feature, the new feature will match the old in design, color, texture and, where possible, materials. Replacement of missing features will be substantiated by documentary and physical evidence.
- 7. Chemical or physical treatments, if appropriate, will be undertaken using the gentlest means possible. Treatments that cause damage to historic materials will not be used.
- 8. Archaeological resources will be protected and preserved in place. If such resources must be disturbed, mitigation measures will be undertaken.
- 9. New additions, exterior alterations, or related new construction would not destroy historic materials, features, and spatial relationships that characterize the property. The new work would be differentiated from the old and would be compatible with the historic materials, features, size, scale and proportion, and massing to protect the integrity of the property and its environment.
- 10. New additions and adjacent or related new construction would be undertaken in such a manner that, if removed in the future, the essential form and integrity of the historic property and its environment would be unimpaired.

The Proposed Project conforms with the Rehabilitation Standards. For example, the property would be used as it was historically used (Standard 1). The Proposed Project would not create a false sense of historical development (Standard 3). No previous changes to the property have acquired historic significance (Standard 4 is not applicable). No distinctive materials, features, finishes, and construction techniques would be altered as a result of the Proposed Project (Standard 5). No chemical or physical treatments are planned as part of the Proposed Project (Standard 7). Archaeological resources would be protected and preserved in place (Standard 8).

The elements of the Proposed Project require analysis to show conformance with Rehabilitation Standards 2, 6, 9, and 10. Each of the Proposed Project elements are analyzed for conformance with the applicable standards, which are included in Table 3.11-4. The Proposed Project activities that primarily have the potential to permanently alter the integrity of the Tiger Creek Subsystem Historic District and its contributor, the Tiger Creek Regulator Dam, is the abandonment of the existing spillway, a character-defining feature of the contributing resource, and the construction of a new right abutment spillway. These Proposed Project activities have the potential to most affect the integrity of materials and design.

While the eligibility evaluation of the historic district notes that the materials and design are key aspects of the district's integrity, the evaluation of integrity acknowledges that material alterations are key to the continued operation of the system. If alterations are generally compatible in form, utilitarian in design, and maintain the existing type of materials, alterations do not diminish the integrity of materials such that the district or contributors cannot convey significance. Furthermore, in the case of the spillway, reinforced concrete is a ubiquitous material that is designed to require cyclical replacement.

Many resources within the historic district have been maintained and rehabilitated over time, including repair and replacement of constituent components and upgrade of engineering and operational features to ensure operational integrity. Further, when functional alterations leave key historic-period design features in place, including massing, plan, and detailing, the contributing resources continue to exhibit their integrity of design through their historic period engineering and aesthetic design features.

Table 3.11-4. Analysis of Proposed Project Elements' Conformance with Rehabilitation Standards 2, 6, 9, and 10 for the Tiger Creek Subsystem Historic District

| Proposed Project Element | Type of Project Activity | Analysis of Conformance with Rehabilitation Standard 2 | Analysis of Conformance with Rehabilitation Standard 6 | Analysis of Conformance with Rehabilitation Standard 9 | Analysis of Conformance with Rehabilitation Standard 10 |
|--|-----------------------------|--|---|---|--|
| Temporary Access Roads, Bridges, and Trails | Temporary | The existing access road—Tiger Creek Road—is not character- defining to the historic district. The existing and potential access roads will fall within the historic district boundaries but will not remove distinctive materials or alter features, spaces, and spatial relationships that characterize the historic district. The temporary bridges and trails would not cause damage to the historic property, except for the removal of trees and other vegetation. While the setting is a character-defining feature to the resource, the removal of a small number of trees would not cause a noticeable change to the setting. | Standard 6 does not apply. | The construction of the temporary bridge over the plunge pool would result in the permanent installation of rock slope protection in an area of approximately 30 feet by 20 feet on each bank. While a new feature, the proposed rock slope protection is consistent with the setting. Furthermore, the materials and the appearance of the plunge pool are not character-defining to the historic property, whereas the operation of the facility is character-defining. The rock slope protection in this area will help insure the operation of the water conveyance system. | The Proposed Project element, if removed in the future, would leave the essential form and integrity of the historic property. The project element conforms with Standard 10. |
| Mobilization and Site Preparation | Temporary | This Proposed Project element is temporary and would be restored to pre-construction conditions. Standard 2 does not apply. | This Proposed Project element is temporary and would be restored to pre-construction conditions. Standard 6 does not apply. | This Proposed Project element is temporary and would be restored to pre-construction conditions. Standard 9 does not apply. | This Proposed Project element is temporary and would be restored to pre-construction conditions. Standard 10 does not apply. |
| Existing Spillway Abandonment and Right Abutment Spillway Construction | Permanent | This Proposed Project element will not remove distinctive materials or alter features, spaces, and spatial relationships that characterize the historic property or its contributor. The materials that will be abandoned are no longer functional in the manner as intended. | Reinforced concrete is a ubiquitous material and the material in-and-of itself does not constitute a "distinctive feature." When deteriorated, reinforced concrete cannot be repaired such that it would remain functional as part of an engineering feature. In-kind replacement of deteriorated concrete is the best alternative to maintain the overall functionality of the spillway as a feature of the Dam: a contributor to the historic district. The construction of a new right abutment spillway will utilize in-kind materials (reinforced concrete or | The construction of the new right abutment spillway will not destroy the historic materials or spatial relationships on the Tiger Creek Regulator Dam as a contributor to the historic district. Though a segment of the Dam will be removed for construction, it is a small section that will not affect the extant use or overall Ambursen reinforced concrete slab and buttress design, both character-defining features. Additionally, the new work will be distinguished from the old with in- | The new right abutment spillway, if removed in the future, would leave the essential form, function, and integrity of the Ambursen reinforced concrete slab and buttress design. |

| Proposed Project Element | Type of Project Activity | Analysis of Conformance with Rehabilitation Standard 2 | Analysis of Conformance with Rehabilitation Standard 6 | Analysis of Conformance with Rehabilitation Standard 9 | Analysis of Conformance with Rehabilitation Standard 10 |
|-----------------------------|-----------------------------|---|--|--|--|
| | | | shotcrete). In addition, the construction of the new right abutment spillway will maintain similar geometry of the existing spillway by way of intake structure, chute, flip bucket, and plunge pool. Missing features will not be replaced as part of this project. | kind materials and compatible in size, scale, and proportion. Continued function within the larger subsystem is vital to the historic district, therefore, a spillway with proper capacity and integrity is necessary. | |
| Construction Phasing | Temporary | This Proposed Project element is temporary and would be restored to pre-construction conditions. Standard 2 does not apply. | This Proposed Project element is temporary and would be restored to pre-construction conditions. Standard 6 does not apply. | This Proposed Project element is temporary and would be restored to pre-construction conditions. Standard 9 does not apply | This Proposed Project element is temporary and would be restored to pre-construction conditions. Standard 10 does not apply. |
| Demobilization and Cleanup | Temporary | This Proposed Project element is temporary and would be restored to pre-construction conditions. Standard 2 does not apply. | This Proposed Project element is temporary and would be restored to pre-construction conditions. Standard 6 does not apply. | This Proposed Project element is temporary and would be restored to pre-construction conditions. Standard 9 does not apply. | This Proposed Project element is temporary and would be restored to pre-construction conditions. Standard 10 does not apply. |
| Potential Staging Areas | Temporary | This Proposed Project element will not remove distinctive materials or alter features, spaces, and spatial relationships that characterize the historic district. In some cases, this project element is outside of the historic district boundaries. | Standard 6 does not apply. | Standard 9 does not apply. | This adjacent construction is in keeping with the setting of the district. If the staging areas are changed in the future undertaken in such a manner that, if removed in the future, the essential form and integrity of the historic property and its environment would be unimpaired. |
| Fire Hazard Prevention | Temporary | This Proposed Project element is precautionary and would not additionally alter pre-construction conditions. Standard 2 does not apply. | This Proposed Project element is precautionary and would not additionally alter pre-construction conditions. Standard 6 does not apply. | This Proposed Project element is precautionary and would not additionally alter pre-construction conditions. Standard 9 does not apply. | This Proposed Project element is precautionary and would not additionally alter pre-construction conditions. Standard 10 does not apply. |

As designed, each Proposed Project element and the overall Proposed Project conforms with the Rehabilitation Standards. The Proposed Project would not materially impair any aspects of the resource's integrity. The Proposed Project would have a less than significant potential impact on the Tiger Creek Subsystem Historic District.

Tiger Creek Regulator Dam

The Proposed Project would potentially impact the Tiger Creek Regulator Dam, but the Proposed Project would not cause a substantial adverse change in the significance of the historical resource. The Proposed Project would not diminish the integrity of the resource and would not destroy or adversely affect any qualifying characteristics of the property.

The Proposed Project includes the replacement of the service spillway in the vicinity of the existing footprint of the spillway, including the abandonment of the existing spillway and construction of a new right abutment spillway designed to be able to pass the PMF. The new right abutment spillway would call for a dam notch in the Dam and minor excavation of the steep grading, though modifications would not affect the Dam's stability, but rather prolong its use. The proposed modifications would ensure the utilization and longevity of the Dam.

The Proposed Project proposes modifications that would maintain the property's use and functionality. The Proposed Project is necessary in order to maintain the property's historic and current use. Furthermore, if the Proposed Project is not completed, the condition of the property would continue to deteriorate. The changes to the historic property's setting are in-kind with the area and include roadway alterations, both permanent and temporary, that are consistent with the rural setting.

While the Proposed Project activities would alter some character-defining features of the property, those changes would not destroy or damage the property in a manner inconsistent with the Standards. The Dam's Buttress 23 and the northern segment of the footbridge, face of the Dam, and top of the parapet will be removed to create a notch in the face of the Dam. However, the proposed demolition is necessary for the completion of the right abutment spillway construction to resolve water capacity deficiencies and offset existing structural concerns that will guarantee the continued use of the Dam as a contributing part of the subsystem. Additionally, the character-defining Ambursen reinforced concrete slab and buttress design and massive scale will not be significantly altered as the proposed construction affects a small portion—one buttress—of the entire face of the Dam.

Most of the proposed changes are better described as repair, maintenance, or stabilization of features. The replacement of the existing spillway does propose the abandonment of the existing spillway and construction of a new right abutment spillway within the Tiger Creek Regulator Dam system. However, the proposed construction is in compliance with the Standards. The spillway's design is a character-defining feature, but its key importance is a as a working part of the Dam as a whole. As proposed, the replacement spillway will support the historic function of the Dam and minimize effects on the design and material integrity of other character-defining features.

The Proposed Project would not result in the introduction of any atmospheric or audible elements that would diminish the integrity of the property's historic features.

Rehabilitation is the most appropriate approach to the Standards.

The Proposed Project conforms with the Rehabilitation Standards. The property would be used as it was historically used (Standard 1). The Proposed Project would not create a false sense of historical development (Standard 3). No previous changes to the property have acquired historic significance (Standard 4 is not applicable). No distinctive materials, features, finishes, and construction techniques would be altered as a result of the project (Standard 5). No chemical or physical treatments are planned as part of the project (Standard 7). Archaeological resources would be protected and preserved in place (Standard 8).

The Proposed Project elements require analysis to show conformance with Rehabilitation Standards 2, 6, 9, and 10. Each of the Proposed Project elements are analyzed for conformance with the applicable standards, which are included in Table 3.11-5. The project activities that primarily have the potential to permanently alter the integrity of the Tiger Creek Subsystem Historic District and its contributor, the Tiger Creek Regulator Dam, is the abandonment of the existing spillway, a character-defining feature of the contributing resource, and the construction of a new right abutment spillway. These activities of the Proposed Project have the potential to most affect the integrity of materials and design.

While the eligibility evaluation of the Tiger Creek Regulator Dam notes that the materials and design are key aspects of the district's integrity, the evaluation of integrity acknowledges that material alterations are key to the continued operation of the system. If alterations are generally compatible in form, utilitarian in design, and maintain the existing type of materials, alterations do not diminish the integrity of materials such that the district or contributors cannot convey significance. Furthermore, in the case of the spillway, reinforced concrete is a ubiquitous material that is designed to require cyclical replacement.

Many resources within the district have been maintained and rehabilitated over time, including repair and replacement of constituent components and upgrade of engineering and operational features to ensure operational integrity. Thus is the case for the Proposed Project and the need to replace the existing spillway with a compatible spillway with a greater water capacity and structural integrity. Further, when functional alterations leave key historic-period design features in place, including massing, plan, and detailing, the contributing resources continue to exhibit their integrity of design through their historic period engineering and aesthetic design features.

Table 3.11-5. Analysis of Proposed Project Elements' Conformance with Rehabilitation Standards 2, 6, 9, and 10 for the Tiger Creek Regulator Dam

| Proposed Project Element | Type of Project Activity | Analysis of Conformance with Rehabilitation Standard 2 | Analysis of Conformance with Rehabilitation Standard 6 | Analysis of Conformance with Rehabilitation Standard 9 | Analysis of Conformance with Rehabilitation Standard 10 |
|--|-----------------------------|---|--|---|--|
| Temporary Access Roads, Bridges, and Trails | Temporary | The existing access road—Tiger Creek Road—is not character-defining to the Dam. The existing and potential access roads will fall within the Dam boundaries but will not remove distinctive materials or alter features, spaces, and spatial relationships that characterize the historic property or its contributor. The temporary bridges and trails would not cause damage to the Dam, except for the removal of trees and other vegetation within its setting. While the setting is a character-defining feature to the resource, the removal of a small number of trees would not cause a noticeable change to the setting. | Standard 6 does not apply. | The construction of the temporary bridge over the plunge pool would result in the permanent installation of rock slope protection in an area of approximately 30 feet by 20 feet on each bank. While a new feature, the proposed rock protection is consistent with the setting. Furthermore, the materials and the appearance of the plunge pool are not character-defining to the historic property, whereas the operation of the facility is character-defining. The rock slope protection in this area will help insure the operation of the water conveyance system. | This Proposed Project element, if removed in the future, would leave the essential form and integrity of the Dam. The project element conforms with Standard 10. |
| Mobilization and Site Preparation | Temporary | This Proposed Project element will not remove distinctive materials or alter features, spaces, and spatial relationships that characterize the historic property. | This Proposed Project element is temporary and would be restored to pre-construction conditions. Standard 6 does not apply. | This Proposed Project element is temporary and would be restored to pre-construction conditions. Standard 9 does not apply. | This Proposed Project element is temporary and would be restored to pre-construction conditions. Standard 10 does not apply. |
| Existing Spillway Abandonment and Right Abutment Spillway Construction | Permanent | This Proposed Project element will not remove distinctive materials or alter features, spaces, and spatial relationships that characterize the historic property or its contributor. The materials that will be abandoned are no longer functional in the manner as intended. | Reinforced concrete is a ubiquitous material and the material in-and-of itself does not constitute a "distinctive feature." When deteriorated, reinforced concrete cannot be repaired such that it would remain functional as part of an engineering feature. Inkind replacement of deteriorated concrete is the best alternative to maintain the overall functionality of the spillway as a feature of the Dam. | The construction of the new right abutment spillway will not destroy the historic materials or spatial relationships on the Dam. Though a segment of the Dam will be removed for construction, it is a small section that will not affect the extant use or overall Ambursen reinforced concrete slab and buttress design, both character-defining features. Additionally, the new work will be distinguished from the old with in- | The new right abutment spillway, if removed in the future, would leave the essential form, function, and integrity of the Ambursen reinforced concrete slab and buttress design. |

| Proposed Project Element | Type of Project Activity | Analysis of Conformance with Rehabilitation Standard 2 | Analysis of Conformance with Rehabilitation Standard 6 | Analysis of Conformance with Rehabilitation Standard 9 | Analysis of Conformance with Rehabilitation Standard 10 |
|----------------------------|-----------------------------|--|--|---|--|
| | | | The construction of a new right abutment spillway will utilize inkind materials (reinforced concrete or shotcrete). In addition, the construction of the new right abutment spillway will maintain similar geometry of the existing spillway by way of intake structure, chute, flip bucket, and plunge pool. Missing features will not be replaced as part of this project. | kind materials and compatible in size, scale, and proportion. | |
| Construction Phasing | Temporary | This Proposed Project element is temporary and would be restored to pre-construction conditions. Standard 2 does not apply. | This Proposed Project element is temporary and would be restored to pre-construction conditions. Standard 6 does not apply. | This Proposed Project element is temporary and would be restored to pre-construction conditions. Standard 9 does not apply. | This Proposed Project element is temporary and would be restored to pre-construction conditions. Standard 10 does not apply. |
| Demobilization and Cleanup | Temporary | This Proposed Project element is temporary and would be restored to pre-construction conditions. Standard 2 does not apply. | This Proposed Project element is temporary and would be restored to pre-construction conditions. Standard 6 does not apply. | This Proposed Project element is temporary and would be restored to pre-construction conditions. Standard 9 does not apply. | This Proposed Project element is temporary and would be restored to pre-construction conditions. Standard 10 does not apply. |
| Potential Staging Areas | Temporary | This Proposed Project element will not remove distinctive materials or alter features, spaces, and spatial relationships that characterize the historic property. This project element is outside of the historic property boundaries. | Standard 6 does not apply. | Standard 9 does not apply. | This Proposed Project element is temporary and would be restored to pre-construction conditions. Standard 10 does not apply. |
| Fire Hazard Prevention | Temporary | This Proposed Project element is precautionary and would not additionally alter pre-construction conditions. Standard 2 does not apply. | This Proposed Project element is precautionary and would not additionally alter pre-construction conditions. Standard 6 does not apply. | This Proposed Project element is precautionary and would not additionally alter pre-construction conditions. Standard 9 does not apply. | This Proposed Project element is precautionary and would not additionally alter pre-construction conditions. Standard 10 does not apply. |

As designed, each Proposed Project element and the overall Proposed Project conforms with the Rehabilitation Standards. The Proposed Project would not materially impair any aspects of the resource's integrity. As designed, the Proposed Project would have a less than significant potential impact on the Tiger Creek Regulator Dam.

b. Cause a substantial adverse change in the significance of an archaeological resource pursuant to section 15064.5?

Less than Significant with Mitigation Incorporated. As described in Section 3.11.5.2 Results, the records searches for the Proposed Project identified no known archaeological resources within the Area of Analysis and there are no previously identified areas of tribal concern or Native American-affiliated archaeological resources in the Area of Analysis. The pedestrian survey identified three historic-era features, two of which may be affected by Proposed Project activities; however, none of the features appear to have any associated archaeological deposits and do not meet the requirements of a unique archaeological resource under CEQA Guidelines section 15064.5. Any potential impacts would, therefore, be less than significant. Overall, the Area of Analysis has low sensitivity for prehistoric and moderate sensitivity for historic-era archaeological resources, and it is possible that significant buried archaeological materials are present in the Area of Analysis. Disturbance or destruction of such as yet unidentified archaeological resources may result from ground-disturbing activities associated with the Proposed Project. This potential direct effect would be significant; however, it would be reduced to a lessthan-significant level with implementation of Mitigation Measures CUL-MM-1 and CUL-MM-2.

Mitigation Measure CUL-MM-1: Conduct Mandatory Cultural Resources Awareness Training for All Project Personnel

Before any ground-disturbing work commences, a qualified archaeologist shall conduct mandatory cultural resources awareness training for all construction personnel. The training shall cover the types of materials that could be encountered and the inadvertent discovery protocol to follow in such an event. If new construction personnel are added to the project, the contractor shall ensure that the new personnel receive the mandatory training before starting work.

Mitigation Measure CUL-MM-2: Stop Work if Previously Unidentified Archaeological Resources are Encountered until a Qualified Archaeologist Assesses the Find and Native American Consultation Has Been Conducted

If previously unknown buried archaeological resources, such as chipped or ground stone artifacts, historic debris, or building foundations are inadvertently

unearthed during ground-disturbing activities, work shall stop at the location of the find and all areas within 100 feet of the find until a qualified archaeologist can assess the significance of the find. If avoidance is not possible and the resource is determined to be significant, a qualified archaeologist shall develop a treatment plan in consultation with project stakeholders. If the find is Native American in origin, consultation with local Native American representatives shall be reinitiated to determine appropriate treatment of the resource.

c. Disturb any human remains, including those interred outside of dedicated cemeteries?

Less than Significant with Mitigation Incorporated. No known human remains are present within the Area of Analysis. However, it is possible that buried human remains are present in the Area of Analysis but were not identified during the archaeological surveys. Consequently, the potential exists that human remains could be encountered during ground-disturbing activities associated with the Proposed Project. This direct potential impact would be significant; however, it would be reduced to a less-than-significant level with implementation of Mitigation Measure CUL-MM-3.

Mitigation Measure CUL-MM-3: Stop Work in Case of Accidental Discovery of Buried Human Remains until Procedures in Public Resources Code section 5097 have been Completed

In the event that human remains are discovered, all project-related ground disturbance shall halt within 100 feet of the find and the Amador County coroner shall be notified immediately. If the coroner determines the remains to be Native American in origin, the coroner shall be responsible for notifying the Native American Heritage Commission (NAHC), which shall appoint a most likely descendant (MLD) (Public Resources Code 5097.99). The project applicant and MLD shall make all reasonable efforts to develop an agreement for the dignified treatment of human remains and associated or unassociated funerary objects (CEQA Guidelines 15064.5[d]). The agreement should take into consideration the appropriate excavation, removal, recordation, analysis, custodianship, curation, and final disposition of the human remains and associated or unassociated funerary objects. The MLD shall have 48 hours after being granted access to the site to make a recommendation (Public Resources Code 5097.98). If the MLD does not agree to the treatment method, the project shall follow Public Resources Code section 5097.98(e), which states, "the landowner or his or her authorized representative shall reinter the human remains and items associated with Native American human remains with appropriate dignity on the property in a location not subject to further and future subsurface disturbance.

3.12 Tribal Cultural Resources

3.12.1 Introduction

This section analyzes the Proposed Project's potential impacts related to tribal cultural resources. It describes existing conditions in the Area of Analysis and summarizes the regulatory framework for tribal cultural resources, and it analyzes the potential for the Proposed Project to affect these resources.

3.12.2 Area of Analysis

The Area of Analysis for tribal cultural resources is the same as the Project Area, which consists of three staging areas, the log boom anchor points, and the construction area that is bounded roughly by the Dam to the east, Spur 10 to the north, and the Spur 1 staging area to the southwest.

3.12.3 Existing Conditions

The Area of Analysis is located at the Tiger Creek Regulator Reservoir on Tiger Creek, a tributary to the North Fork of the Mokelumne River, approximately 24 miles northeast of the city of Jackson in Amador County, California. The elevation of the Dam is approximately 3,500 feet above MSL.

3.12.3.1 Cultural Setting

See Section 3.11 *Cultural Resources*, for an archaeological, ethnographic, and historic setting for the Area of Analysis.

3.12.4 Regulatory Setting

The regulatory setting for tribal cultural resources in the Area of Analysis consists of Assembly Bill 52 (AB 52). There are no applicable federal or local regulations, statutes, or policies regarding tribal cultural resources in the Area of Analysis.

3.12.4.1 State Assembly Bill 52

Effective July 1, 2015, AB 52 amended CEQA to require that a lead agency provide notice to those California Native American tribes that request notice of projects proposed by the lead agency and that the lead agency consult with any tribe that responds to the notice within 30 days of receipt with a request for consultation.

Topics that may be addressed during consultation include tribal cultural resources, the potential significance of project impacts, type of environmental document that should be prepared, and possible mitigation measures and project alternatives.

Public Resources Code section 21073 defines California Native American tribes as "a Native American tribe located in California that is on the contact list maintained by the NAHC [Native American Heritage Commission] for the purposes of Chapter 905 of the Statutes of 2004." This includes both federally and non-federally recognized tribes.

Section 21074(a) of the Public Resources Code defines tribal cultural resources for the purpose of CEQA as either of the following:

- Sites, features, places, cultural landscapes (geographically defined in terms of the size and scope), sacred places, and objects with cultural value to a California Native American tribe that are either of the following:
 - A. Included or determined to be eligible for inclusion in the California Register of Historical Resources.
 - B. Included in a local register of historical resources as defined in subdivision (k) of section 5020.1.
- 2. A resource determined by the lead agency, in its discretion and supported by substantial evidence, to be significant pursuant to criteria set forth in subdivision (c) of section 5024.1. In applying the criteria set forth in subdivision (c) of section 5024.1 for the purposes of this paragraph, the lead agency shall consider the significance of the resource to a California Native American tribe.

Because Criteria A and B also meet the definition of a historical resource under CEQA, a tribal cultural resource may also require additional consideration as a historical resource. Tribal cultural resources may or may not exhibit archaeological, cultural, or physical indicators.

Recognizing that California tribes are experts in their tribal cultural resources and heritage, AB 52 requires that CEQA lead agencies provide tribes that requested notification an opportunity to consult at the commencement of the CEQA process to identify tribal cultural resources. Furthermore, because a significant effect on a tribal cultural resource is considered a significant impact on the environment under CEQA, consultation is used to develop appropriate avoidance, impact minimization, and mitigation measures.

3.12.5 Methods

3.12.5.1 Assembly Bill 52 Consultation

The State Water Board is the CEQA lead agency for the Proposed Project. Opportunities for consultation letters were sent on January 20, 2023, to the Wilton Rancheria, United Auburn Indian Community of the Auburn Rancheria, Buena Vista Rancheria of Me-Wuk Indians, Yocha Dehe Wintun Nation, and Habematolel Pomo of Upper Lake. No Tribes requested consultation (Bradbury pers. comm.); however, two of the Tribes (the Habematolel Pomo of Upper Lake on February 3, 2023, and the Yocha Dehe Wintun Nation on February 27, 2023) suggested contacting the following tribes: the Buena Vista Rancheria of Me-Wuk Indians, Shingle Springs Rancheria, Jackson Band of Miwuk Indians, and Ione Band of Miwuk Indians. These four Tribes were either already included as part of the AB 52 consultation process or were copied on the responses to the Habematolel Pomo of Upper Lake and Yocha Dehe Wintun Nation Tribes regarding their suggestions. No additional responses were received from any of the additional four Tribes. Therefore, no AB 52 or additional tribal consultation has been conducted.

In the absence of tribal consultation under AB 52, information about potential impacts on tribal cultural resources was drawn from the results of a search of the NAHC Sacred Lands File, an intensive pedestrian survey (described in Section 3.11 *Cultural Resources*) and existing information about known archaeological resources and buried site sensitivity in the Proposed Project vicinity.

3.12.5.2 Sacred Lands File Search and Correspondence with Native American Representatives

On July 17, 2023, ICF, on behalf of PG&E, requested a Tribal Consultation List and review of the NAHC Sacred Lands File for the Area of Analysis. On July 26, 2023, the NAHC replied with a list of 18 Native American contacts representing 11 tribes and a negative result from the Sacred Lands File (i.e., a search of the sacred lands file failed to indicate the presence of any potential tribal cultural resources in the Area of Analysis). On November 10, 2023, PG&E sent letters to all the identified Native American tribes. As of December 2023, no response has been received. PG&E's Native American consultation is ongoing and will continue throughout the Proposed Project.

3.12.6 Environmental Effects

Potential impacts of the Proposed Project related to tribal cultural resources are discussed in the context of CEQA Guidelines Appendix G checklist. Checklist section XVIII, *Tribal Cultural Resources*, asks:

Would the project cause a substantial adverse change in the significance of a tribal cultural resource, defined in Public Resources Code section 21074 as either a site, feature, place, cultural landscape that is geographically defined in terms of the size and scope of the landscape, sacred place, or object with cultural value to a California Native American tribe, and that is:

a. Listed or eligible for listing in the California Register of Historical Resources, or in a local register of historical resources as defined in Public Resources Code section 5020.1(k)?

No Impact. As described in Section 3.12.5.1 *Assembly Bill 52 Consultation*, no Tribes requested to consult on the Proposed Project under AB 52. Results of the NAHC Sacred Lands File search, and an intensive pedestrian survey for the Proposed Project concluded that no tribal cultural resources, which are also historical resources, are in the Area of Analysis. The records search and the survey did identify historic-era resources within the Project Area, but those are evaluated in Section 3.11 *Cultural Resources*, of this IS/MND. Consequently, the Proposed Project would not result in potential impacts on tribal cultural resources that are also historical resources.

b. A resource determined by the lead agency, in its discretion and supported by substantial evidence, to be significant pursuant to criteria set forth in subdivision (c) of Public Resources Code section 5024.1?

No Impact. As described in Section 3.12.5.1 *Assembly Bill 52 Consultation*, no consultation was requested. Results of the NAHC Sacred Lands File search and an intensive pedestrian survey for the Proposed Project concluded that no tribal cultural resources, which are also significant resources pursuant to criteria set forth in subdivision (c) of Public Resources Code section 5024.1, are in the Area of Analysis. There would be no potential impact.

3.13 Aesthetics

3.13.1 Introduction

This section analyzes the Proposed Project's potential impacts related to aesthetics. It describes existing conditions in the Area of Analysis and summarizes the overall regulatory framework for aesthetics, and it analyzes the potential for the Proposed Project to affect these resources.

3.13.2 Area of Analysis

The Area of Analysis for visual resources includes a 0.5-mile radius from the Project Area. Middleground views up to three miles from the Project Area will be considered where elevated or more expansive views are present. However, middleground views are not anticipated due to terrain and the vegetated nature of the Project Area. Background views (i.e., views beyond three miles from the Project Area) will not be considered because details become diminished beyond the middleground, and specific project features do not typically stand out in background views. In addition, background views are not present due to terrain and intervening vegetation.

3.13.3 Existing Conditions

As described in Chapter 1, *Introduction*, the Dam is located on Tiger Creek in Amador County, California (Figure 1-1, *Project Location*) on PG&E-owned lands that are under a conservation easement and CAL FIRE lands with PG&E utility easements. The land surrounding the Dam consists of CAL FIRE lands. Representative key views, taken on June 8, 2023, are mapped on Figure 3.13-1, *Key View Map*, and the corresponding key views are included in Figures 3.13-2 through 3.13-5.

The Project Area can be broken down into three distinct areas—the Doakes Ridge staging and spoils site; the Dam area, which includes the Spur 1 staging area; and the Cedar Mill staging area. There are no scenic vistas associated with any of these areas because terrain and intervening vegetation limit views to the immediate foreground, and there are no elevated vantage points that provide expansive views that include the Area of Analysis. Access to the Doakes Ridge staging and spoils site and the Dam area is controlled by locked gates, but limited public access is allowed when the gates are opened. The public uses the Dam and Reservoir shoreline to fish. During the site visit on June 8, 2023, motorcycle dirt bike usage was witnessed taking place along the cleared transmission corridor easement, and

cyclists were witnessed using Project Area roadways. However, there are no formal recreation facilities, and no swimming, boating, or float tubes are allowed in the Reservoir. Therefore, viewers primarily include PG&E, CAL FIRE, and SPI employees that are accessing the Doakes Ridge staging and spoils site and the Dam area to maintain and operate project facilities or recreationists that intermittently use the Doakes Ridge staging and spoils site and the Dam area. Viewers associated with the Cedar Mill staging area include residential and commercial viewers and drivers along SR 88 that are in close proximity.

The Doakes Ridge staging and spoils site is located to the south and up the hill from the Dam area. The terrain is gently sloping and densely vegetated with tall Douglasfir and ponderosa pine, with an understory of green grasses and fallen, orangebrown pine needles. This area contains two existing wooden PG&E buildings with metal roofs that are painted a forest green to blend with the forest canopy (Figure 3.13-2, Key View 1). Part of the Doakes Ridge staging and spoils site has already been cleared of trees, has a dirt and gravel lot, and is being used for spoils placement and rock and gravel storage (Figure 3.13-2, Key View 2). Underneath the existing tree canopy, there are several downed and decaying trees and a number of tree stumps visible from previous thinning of the canopy or hazard tree removal. The forest floor is also being used to store excess materials and equipment parts (Figure 3.13-3, Key Views 3 and 4). As seen in Key View 3, this area is used by PG&E staff for training exercises. Overall, the visual quality of the Doakes Ridge staging and spoils site is moderate because the appearance of the forest is common to this area and the use of the forest floor for materials storage and stockpile results in a slightly degraded visual condition at this site.

The Dam area is comprised of the Dam, an existing spillway structure, canal, Reservoir, and surrounding forest and hillsides. The Spur 1 staging area is downstream of the Dam, just south of the Salt Springs Road bridge over Tiger Creek. The hillsides surrounding the Tiger Creek Regulator Reservoir form a small and narrow valley around the Dam area, where the Reservoir and Dam are the main focal point (Figure 3.13-4, *Key View 5*). The flatwater surface of the Reservoir contrasts against the tall, conical trees of the conifer forest that borders the Reservoir, creating a scenic view. The sky is a prominent feature of this scenic view, where the blues, whites, and greys of the sky and clouds contrast against the browns and greens of the land and vegetation. The Reservoir reflects the quality of the sky and can range from appearing deep blue to dark grey or almost black; it can even reflect the conifer trees and take on a deep green hue. The Dam and existing spillway structure are made of concrete that is weathered and ranges in tone from warm to cool grays. The Dam creates a dramatic visual element in the landscape due to the size and height of the concrete structure and the elevation difference

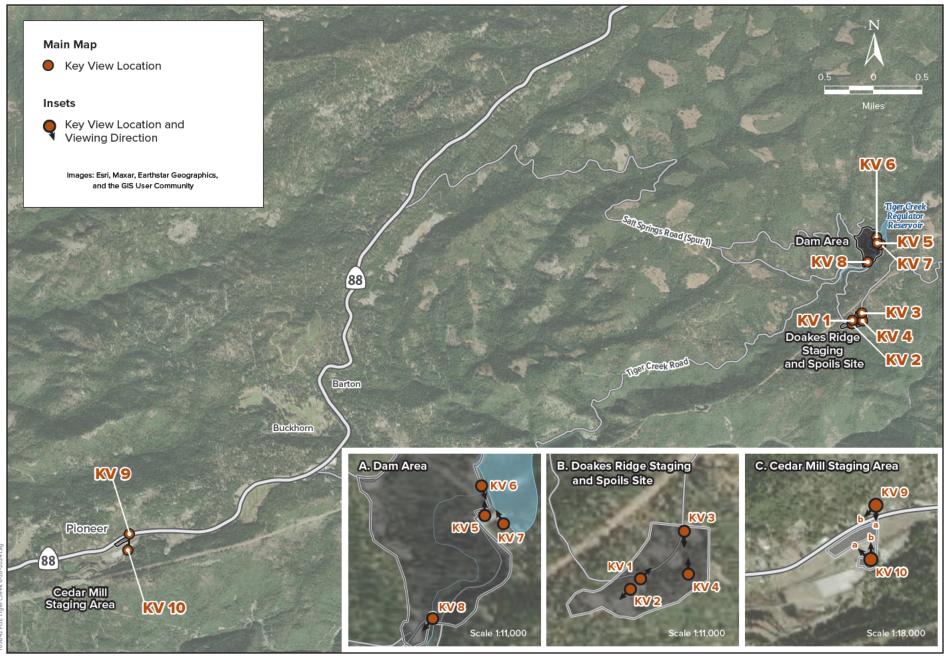




Figure 3.13-1 Key View Map



Key View 1. View from Salt Springs Road looking northeast toward the PG&E maintenance buildings and proposed spoils disposal area.



Key View 2. View looking southwest toward the existing staging and proposed spoils disposal area located off Salt Springs Road.





Key View 3. View from Salt Springs Road looking south toward a PG&E maintenance building and proposed spoils disposal area.



Key View 4. View from under the forest canopy looking north toward a PG&E maintenance building and proposed spoils disposal area.





Key View 5. View from near the existing spillway structure looking north toward the dam and reservoir.



Key View 6. View from the dam walkway looking southeast toward the electrical control building, radio tower, and existing spillway structure.





Key View 7. View from Spur 7 looking northwest toward the existing spillway structure, dam, reservoir, and location of the proposed spillway.



Key View 8. View from Tiger Creek Road looking southwest toward the proposed Spur 1 Staging Area.



between the Reservoir surface and creek channel at the base of the Dam that can be seen when approaching or crossing the Dam. The existing spillway structure also provides visual interest because viewers can see the water entering the outlet channel and flowing into the bathtub inlet or within the canal when the canal is in use. A small electrical building and a radio tower are present on the east side of the Dam, but these features are placed in the landscape in a manner in which they do not dominate or detract greatly from views (Figure 3.13-4, Key View 6). A small area surrounding the west side of the Dam is cleared of trees and is made up of steep grassy slopes (Figure 3.13-5, Key View 7). Fallen and cut trees are visible in this area that have aged to a grayish silver color, and there are some areas of exposed rocks and gravels that are dark gray. The Spur 1 staging area is cleared of vegetation, is graveled, and contains rock piles and is similar to a roadway pull-off area (Figure 3.13-5, Key View 8). The locations of the proposed temporary and permanent access road travel through dense forest that greatly limits views. Viewers on Salt Springs Road, at the Spur 1 staging area, or in proximity to the southern ends of the temporary and permanent access roads do not have existing views of the Dam or proposed spillway area due to terrain and intervening vegetation. Views of the Dam from Tiger Creek Road are also very limited because dense forest vegetation and the southern face of the existing spillway structure limit views toward the Dam. Direct views of the Dam and proposed spillway area are only available to viewers who access the Dam area from the western terminus of Spur 7 or to those who have parked at the end of Tiger Creek Road and used the stairs and walkway to cross the canal to access the Dam area. Existing lighting levels at the Dam are very low and consist of seven outdoor lights around the left abutment that come on at dusk and stay on until sunrise and are controlled by photocells. Overall, the visual quality of the Dam area is moderately high due to visual interest created by the Dam and existing spillway structure combined with quality views of the water surface of the Reservoir surface backdropped by the surrounding forested slopes.

The Cedar Mill staging area is located along SR 88, which is an Officially Designated State Scenic Highway; however, the site is disturbed (Figures 3.13-6 and 3.13-7, Key Views 9 and 10, respectively) (California Department of Transportation 2019). Therefore, residential and commercial viewers and drivers along SR 88 are accustomed to the existing disturbed nature of the Cedar Mill staging area. Visual conditions at the site consist of areas paved with asphalt and areas paved with concrete that has grasses growing through pavement joints and cracks. The portion of the site near SR 88 is flat and contains metal structures, metal storage containers, snowcat vehicles, transformers, and miscellaneous equipment. The site is also used for materials and parts storage and discarded construction materials and parts.

PG&E staff use this portion of the site for parking during training activities that take place near the Dam, as seen on the day of the site visit. Overall, the visual quality of the Cedar Mill staging area is moderately low due to the degraded visual character of the site.

Recreationists accessing Doakes Ridge and the Dam area are likely to have a high visual sensitivity for changes in the natural landscape because they are more likely to place high value on and have a high regard for the natural environment. However, visual access is intermittent and recreational viewers are aware that the Dam serves a utilitarian purpose and that it is owned, managed, and operated by PG&E. PG&E, CAL FIRE, and SPI workers also comprise the viewers who have visual access to the Project Area. These workers tend to be more focused on their tasks at hand but are also likely to enjoy the setting due to the views it affords. Therefore, their sensitivity is considered to be moderate. Residential and commercial viewers and drivers along SR 88 that are in close proximity to the Cedar Mill staging area are likely to have moderate sensitivity to changes at this site due to their familiarity with existing conditions at the site.

3.13.4 Regulatory Setting

3.13.4.1 Federal

There are no federal scenic byways or designated Wild and Scenic Rivers associated with the Proposed Project (Federal Highway Administration 2023; National Wild & Scenic Rivers System 2023). Therefore, there are no federal regulations pertaining to aesthetic resources that are applicable to the Proposed Project.

3.13.4.2 State

California Wild and Scenic Rivers

The California Wild and Scenic Rivers Act (Public Resources Code sections 5093.50 et seq.) designates the North Fork Mokelumne River, from 1,000 feet downstream of the Tiger Creek Afterbay Dam to SR 26, as a California-designated Wild and Scenic River. However, this segment of the river is over four miles away and does not have views of, and would not be affected by, the Proposed Project.

State Scenic Highways

SR 4 and SR 88 are Officially Designated State Scenic Routes (California Department of Transportation 2019). However, SR 88 is approximately 3 miles away and SR 4 is approximately 15 miles away, and neither has views of, nor would



Key View 9a. View from State Route 88 looking south toward the proposed Cedar Mill Staging Area.



Key View 9b. View from State Route 88 looking southwest toward the proposed Cedar Mill Staging Area.





Key View 10a. View from the proposed Cedar Mill Staging Area looking northwest toward State Route 88.



Key View 10b. View from the proposed Cedar Mill Staging Area looking north toward State Route 88.



be affected by, visual changes resulting from the Proposed Project at the Doakes Ridge staging and spoils site or the Dam area. However, the Cedar Mill staging area would be visible from SR 88.

3.13.4.3 Local

Amador County General Plan

The Amador County General Plan recognizes that the county's natural and scenic beauty is valuable in promoting tourism and the quality of life in the county. In addition, the definition of forestlands in the Amador County General Plan identifies that aesthetics is a resource associated with forestlands to be managed to benefit the public. However, there are no policies in the Amador County General Plan that directly relate to forestland management for aesthetics. The Circulation and Mobility Element identifies that SR 88 is an Amador County-designated scenic highway and contains the following goal and policy pertaining to aesthetic resources (Amador County 2016):

- Goal CM-4: Maintain and enhance the visual quality and scenic views along designated scenic corridors; and
 - Policy CM-4.1: Maintain visual quality and scenic views along designated scenic corridors through project review and adoption of a scenic highway ordinance.

3.13.5 Environmental Effects

Potential impacts of the Proposed Project related to aesthetics are discussed in the context of State CEQA Guidelines Appendix G checklist. Checklist section I, *Aesthetics*, asks whether the project would result in any of the following conditions.

a. Have a substantial adverse effect on a scenic vista?

No Impact. Project implementation would not damage any views associated with scenic vistas because, as described under Section 3.13.3 *Existing Conditions*, there are no scenic vistas associated with the Project Area. There would be no potential impact.

b. Substantially damage scenic resources, including, but not limited to, trees, rock outcroppings, and historic buildings along a scenic highway?

Less than Significant. Project implementation would not damage any scenic resources or change views from a scenic highway. As described under Section 3.13.4 *Regulatory Setting*, visual changes resulting from the Proposed Project at the Doakes Ridge staging and spoils site and the Dam area (including the Spur 1

staging area and mobile batch plant site) would not be visible from any federal-, state- or county-designated scenic roadways (California Department of Transportation 2019; Federal Highway Administration 2023). However, the Cedar Mill staging area would be visible from SR 88. During construction, the Cedar Mill staging area would be used for material staging, crew and craft vehicle parking, and equipment parts drop-off and maintenance. As described under Section 3.13.3 Existing Conditions, the site is already disturbed, is used for materials and parts storage, is used for parking during training activities, and contains metal structures and equipment. Viewers passing the Cedar Mill staging area along SR 88 are accustomed to the current site conditions, and the proposed conditions during construction would be in keeping with the industrial-looking nature of the site and consistent with what viewers would expect to see at the site. The site would be used for approximately 16 months, so visual changes associated with construction would be temporary. Once construction is over, any remaining materials would be removed from the Cedar Mill staging area. Therefore, there would be no potential permanent visual impacts on views along SR 88 associated with the Proposed Project. Overall, potential impacts associated with the Proposed Project would be less than significant.

c. In non-urbanized areas, substantially degrade the existing visual character or quality of public views of the site and its surroundings? (Public views are those that are experienced from publicly accessible vantage point). If the project is in an urbanized area, would the project conflict with applicable zoning and other regulations governing scenic quality?

Less than Significant. The Proposed Project would be located entirely within the boundaries of a nonurbanized area. Therefore, the Proposed Project would not conflict with applicable zoning and other regulations governing scenic quality in an urbanized area, and there would be no impact. Discussion of this topic is, therefore, excluded from further discussion in this analysis.

Public access to the Doakes Ridge staging and spoils site and Dam area (including the Spur 1 staging area and mobile batch plant site) would be closed during construction. Therefore, the public would not have views of construction activities taking place at these areas, and there would be no impact to public views at these locations during construction. The lack of public access during construction would not be perceived negatively because viewers accessing this area are accustomed to this location being closed at the discretion of PG&E. Therefore, impacts associated with no visual access during construction would be less than significant.

The Cedar Mill staging area is visible from SR 88 and to residents and businesses located immediately north and east along SR 88 from approximately postmile¹ 29.95 to postmile 30.41. Viewers along SR 88 and adjacent residents and businesses are accustomed to the existing site conditions, which are already disturbed. The site is currently used for materials and parts storage, parking during training activities, and contains metal structures and equipment. Therefore, using the site for additional material staging, crew and craft vehicle parking, and equipment parts drop-off and maintenance would not conflict with existing uses and features at the site. As a result, the proposed conditions during construction would be in keeping with the industrial-looking nature of the site and consistent with what viewers would expect to see at the site. The site would be used for approximately 16 months, so visual changes associated with construction would be temporary. Once construction is over, any remaining materials would be removed from the Cedar Mill staging area. Therefore, there would be no permanent visual potential impacts on views associated with the Proposed Project that would be seen during operation at the Cedar Mill staging area, and potential impacts associated with construction would be less than significant.

Once in operation, the public would see the visible changes resulting from construction of the Proposed Project at the Doakes Ridge staging and spoils site and the Dam area (including the Spur 1 staging area and mobile batch plant site). Changes at the Doakes Ridge staging and spoils site would consist of tree removals to the south of Salt Springs Road and replacement with a mounded landform from spoils disposal placement. Upon completion of construction, any disturbed spoils areas would be covered with a combination of temporary cover (mulch) and means to establish permanent vegetative stabilization (e.g., seed, fertilizer, soil amendments, etc.) (Pacific Gas and Electric Company Construction Stormwater Group 2017). Therefore, the exposed soil would be seeded so that the mound would be covered with grasses. The tree removal and spoils disposal area would be adjacent to an area that has already been cleared of trees and is being used for spoils placement and rock and gravel storage. Underneath the existing tree canopy, there are several downed and decaying trees and a number of tree stumps visible from previous thinning of the canopy or hazard tree removal. The forest floor is also being used to store excess materials and equipment parts. Removal of trees in this area would open up the canopy along this small section of Salt Springs Road. However, such openings are common in forested areas where tree management

1

¹ A postmile measures the length of a state or federal route, in miles, through each county, and postmile markers are physically located along these routes. The measurement of each route resets at zero upon entering a new county. Postmiles may be measured using Caltrans' Postmile Services web-based, interactive tool.

occurs, viewers visiting forested areas are accustomed to such openings, and existing openings occur further north along the roadway. In time, small shrubs and trees would recolonize the area and soften the appearance of the area that has been cut. Because viewers are accustomed to harvest practices on forested lands and the spoils would be seeded, it is anticipated that vegetation removal and spoils placement would result in potential impacts that are less than significant.

Visual changes at the Dam area would include the presence of the proposed spillway, tree removal areas, access roads, and log boom and the existing spillway structure that would be abandoned in place. Visual changes at the Spur 1 staging area and mobile batch plant site would not be very noticeable, because the site is already cleared from previous development. Staging features and the mobile batch plant, including the earthen berm, would be removed once construction is complete, so the site would retain its existing visual character and quality post-construction. If minor vegetation removal is needed for the Spur 1 staging area and mobile batch plant site, it would be viewed as a continuation of changes associated with the Dam, discussed in more detail below. The proposed spillway structure would introduce an additional concrete structure to the west side of the Dam. The proposed spillway structure would appear roughly twice the length and width of the existing structure, and the new concrete would stand out more in contrast to the weathered concrete of the existing Dam and spillway structures. However, the new concrete would weather and appear much like existing conditions over time. Removal of trees in the Dam area would open up the forest canopy to the west of and below the Dam and along the permanent and temporary access road routes (refer to Figure 2-4, *Timber* Harvest and Timberland Conversion Areas). However, such openings are common in forested areas where tree management occurs, and viewers visiting forested areas are accustomed to such openings created by harvest practices. Such openings are not present along Tiger Creek Road, but they are visible along Salt Springs Road, Spur 1, and Spur 10. The temporary access road would be abandoned, and the four temporary bridges would be removed. However, the rock slope protection, installed for the temporary bridge at the downstream end of the existing plunge pool, would remain in place. Although the temporary access road would be allowed to recolonize with trees and shrubs, softening the appearance of the area that has been cut over time, the majority of tree removals would result in the permanent conversion to non-timberland use. This would increase the visibility of Tiger Creek from the walkway across the Dam, and the permanent access road would be visible where it connects to Tiger Creek Road. However, views of rock slope protection would not be visible from the Dam walkway due to intervening terrain, and the rock slope protection is not likely to be visible from Tiger Creek Road near the Lower Tiger Creek Canal due to the remaining tree cover along the

roadway. The rock slope protection may be visible only if viewers are walking near the existing spillway that would be abandoned, but it would weather in a short period of time and blend with the existing rock slope protection. Views of the Dam and proposed spillway would likely not be visible due to the curvature of the permanent access road and remaining forest canopy that would act to screen views of the proposed spillway and vegetation removal areas below the Dam from Tiger Creek Road. Abandoning the existing spillway structure in place would retain the feature in the landscape but create a flat concrete surface where water previously flowed by capping the bathtub inlet with a steel plate or reinforced concrete slab. Other small modifications, such as bulkheads installed at the siphon intakes and vent pipes and a concrete wall closing off the canal where the radial gate is currently located would result in negligible visual changes. The new log boom would look very similar to the existing log boom, only it would be longer and placed farther north of the existing log boom. Therefore, it is anticipated to be a very minor, negligible visual change to the landscape.

Although the proposed spillway structure would be larger than the existing structure, and tree removal would open up the area in proximity to the Dam and along the permanent access road, viewers are not likely to view this addition and these changes to the visual landscape as negative, including sensitive recreational viewers. This is because all viewers are aware that this land is owned, operated, and managed by PG&E and are likely to understand that such changes to the landscape are upgrades to Reservoir operations that increase the safety of the Dam. Given that most viewers are aware of the current need to increase this safety, due to recent failures at Oroville Dam, the social climate is such that the general public supports modifications that increase the safety of existing dams. Therefore, it is not likely that viewers would perceive such changes to the landscape negatively. On the contrary, most viewers are likely to be supportive of such changes if it means safety of the Dam is increased, because it would mean that developed and natural areas downstream of the Dam are not at risk due to failure of the spillway or Dam. Therefore, it is anticipated that permanent visual changes to the landscape associated with the Dam area would result in potential impacts that are less than significant.

d. Create a new source of substantial light or glare that would adversely affect daytime or nighttime views in the area?

Less than Significant. Project construction would not occur at night, and mobile batch plant operations would typically begin at 8:00 a.m. but could start as early as 7:00 a.m. Therefore, the Proposed Project would not introduce any temporary sources of light or glare that would negatively affect views during construction.

Potential impacts resulting from changes in light and glare associated with construction would be less than significant.

During operation, the Doakes Ridge staging and spoils site would not have any new sources of lighting added. However, there would be some modified lighting associated with the dam area. The existing seven outdoor lights that are located around the left abutment of the dam would be removed. New lighting would be provided along the existing dam crest, across the proposed spillway pedestrian footbridge, down to the dam LLO, and adjacent to the new permanent access road turnaround and parking area to improve safety. New and replacement lights would be shielded to focus lighting only on the areas that require illumination for safety purposes and would be designed to meet the intent of dark-sky requirements. LED lighting would avoid the use of blue-rich white light lamps and use a correlated color temperature that is no higher than 3,000 Kelvin. In addition, most of the new and replacement lights would be controlled by a switch and would only be turned on when deemed necessary by an operator. The remaining lights would be controlled by photocells and would stay on all night only in key areas to provide safer access to the facility. The lights that would remain on all night would be motion-controlled such that they would be dimmed until the motion detectors are activated. The motion detectors would be calibrated to provide enough sensitivity to detect the presence of personnel but not so sensitive to be activated by small animals under normal conditions. With these measures, the new lighting would not result in a substantial change in nighttime lighting at the dam, and lighting levels would remain very low. Materials used to construct the proposed spillway and to cap the bathtub inlet would be visually in keeping with the existing materials in the Project Area. Changes in glare from the removal of trees at the Doakes Ridge staging and spoils site and the dam area would be negligible because the existing trees surrounding the spillway area would still provide a great deal of shade to the Project Area. Therefore, these changes in light and glare would be minor. Potential impacts during operation would be less than significant.

3.14 Transportation

3.14.1 Introduction

This section analyzes the Proposed Project's potential impacts related to transportation. It describes existing conditions in the Area of Analysis and summarizes the overall regulatory framework for transportation, and it analyzes the potential for the Proposed Project to affect these resources.

3.14.2 Area of Analysis

For the purposes of the transportation analysis, the Area of Analysis consists of the Project Area and associated on-road vehicle access routes. As described in Section 2.5.2 *On-Road Vehicle Use*, it is assumed that haul truck trips would originate in the greater Sacramento area then travel east on SR 88 through Amador County. Trucks would enter and exit the Cedar Mill staging area directly from SR 88. Trucks would access the Spur 1 staging area from SR 88 using either Salt Springs Road (Spur 1) or Tiger Creek Road. Worker and vendor trips are assumed to originate within Amador County and would use the same roads as described for the haul truck trips. SR 88, Salt Springs Road (Spur 1), and Tiger Creek Road are shown in Figure 1-1, *Project Location*. The greater Sacramento area is considered in this analysis from a high level only because the Proposed Project's haul trucks would only be passing through the region and the haul truck travel routes in the Sacramento region are not known.

3.14.3 Existing Conditions

Travel in Amador County is primarily automobile-oriented due to the rural nature of the local communities, low development densities, and limited options for using alternative modes of transport. Vehicle miles traveled (VMT) is a computed value which correlates to the extent of an area's reliance on private automobiles. VMT is calculated by adding together the length of each trip made in each county, typically over a set period (e.g., one year). VMT is often used to estimate vehicle emissions and effects on air quality. In Amador County, over 77 percent of the daily VMT is served by the state highway system, while approximately 19 percent is served by county roadways and the remainder is served by roads operated by the United States Forest Service, California Department of Parks and Recreation, or the United States Bureau of Indian Affairs (Amador County 2016:CM-2).

A small portion of Amador County's population walks or uses bicycles as their means of transportation; formal pedestrian facilities such as sidewalks and crosswalks are largely limited to developed communities, central business districts, and some newly developed commercial and residential areas, and few designated bicycle facilities presently exist in Amador County. Amador Transit provides a fixed-route shuttle service between the cities of Sutter Creek and Jackson, as well as Diala-Ride service for passengers qualified under the Americans with Disabilities Act and a commuter route between Amador County and downtown Sacramento (Amador County Transportation Commission 2020:45–48).

Within the Area of Analysis, the Amador County General Plan's roadway classification for SR 88 is "Arterial," which means it links cities and larger towns (and other traffic generators, such as major resort areas) and contributes to an integrated network of arterial highways providing interstate and intercounty service. Both Salt Springs Road (Spur 1) and Tiger Creek Road are classified as "Local Roadways," except for a short segment of Tiger Creek Road (approximately 0.33 mile) near its intersection with SR 88, where it is classified as a "Minor Collector." Local Roadways provide access to adjacent properties and provide service to travel over relatively short distances as compared to higher order facilities. Minor Collectors serve adjacent and nearby communities with shorter routes and travel distances than Major Collectors (Amador County 2016:CM-5 and Figure CM-1). Most of Salt Springs Road (Spur 1) is on SPI' private property. As described in Section 1.3 *Project Setting*, access to the Dam and Reservoir area is controlled by locked gates on both Salt Springs Road (Spur 1) and Tiger Creek Road. The gate locations are shown on Figure 1-1, *Project Location*, and Figure 2-5, *Access Roads*.

The only remaining rail service in Amador County is limited to a commercial freight line between the city of Galt and the industrial mineral resource operations near the city of Ione. This freight line is not within the Area of Analysis. Heavy trucks handle almost all of the goods movement entering, exiting, and transiting through Amador County. This truck traffic consists of five to nine percent of average daily traffic on the regional transportation system (Amador County Transportation Commission 2020:48–49).

Within the greater Sacramento area, where haul truck trips are anticipated to originate, the existing transportation system supports a broad range of passenger and freight travel. The roadway system includes three interstate highways, several state highways, and numerous local roadways that serve various combinations of automobile, truck, pedestrian, bicycle, and transit travel (Sacramento Area Council of Governments 2019a:2-5).

3.14.4 Regulatory Setting

The following sections summarize key state and local regulations, laws, and policies relevant to transportation in the Area of Analysis.

3.14.4.1 State

California Department of Transportation

Caltrans has authority over the state highway system, including freeways, interchanges, and arterial routes. Caltrans operates and maintains state highways in Amador and Sacramento Counties.

Senate Bill 375

SB 375 provides guidance regarding curbing emissions from cars and light trucks to help the State comply with AB 32. There are four major components to SB 375. First, SB 375 requires regional GHG emissions targets. CARB's Regional Targets Advisory Committee guides the adoption of targets to be met by 2020 and 2035 for each metropolitan planning organization (MPO) in the state. Second, MPOs are required to create a sustainable communities strategy (SCS) that provides a plan for meeting regional targets. The SCS and the regional transportation plan (RTP) must be consistent, including action items and financing decisions. Third, SB 375 requires regional housing elements and transportation plans to be synchronized on eight-year schedules. Finally, MPOs must use transportation and air emissions modeling techniques that are consistent with the guidelines prepared by the California Transportation Commission.

CEQA Section 21099(b)(1) (Senate Bill 743)

Section 21099(b)(1) requires the Governor's Office of Planning and Research (OPR) to develop revisions to the CEQA Guidelines, thereby establishing criteria for determining the significance of transportation impacts from projects that "promote the reduction of GHG emissions, the development of multimodal transportation networks, and a diversity of land uses." CEQA section 21099(b)(2) states that, upon certification of the revised guidelines for determining transportation impacts, pursuant to section 21099(b)(1), automobile delay, as described solely by level of service or similar measures of vehicular capacity, or vehicular traffic congestion shall not be considered a significant impact on the environment under CEQA.

Previously, level of service measured the average amount of delay experienced by vehicle drivers at an intersection during the most congested time of day, while the new metric—VMT—measures the total number of daily miles traveled by vehicles on

the roadway network and thereby the impacts on the environment from those miles traveled. SB 743 changes the focus of transportation impact analysis in CEQA from measuring impacts on drivers to measuring the impact of driving.

In January 2016, OPR published for public review and comment its *Revised Proposal on Updates to the CEQA Guidelines on Evaluating Transportation Impacts in CEQA*, recommending that project transportation impacts be measured using a VMT metric (Governor's Office of Planning and Research 2016). In December 2018, OPR issued the *Technical Advisory on Evaluating Transportation Impacts in CEQA* (Technical Advisory), which contains OPR's recommendations regarding assessment of VMT, thresholds of significance, and mitigation measures. The Technical Advisory provides screening criteria for certain project types, including a daily trip threshold to define "small projects" with respect to their potential to result in significant transportation effects. It also states that "absent substantial evidence indicating that a project would generate a potentially significant level of VMT, or inconsistency with an SCS or general plan, projects that generate or attract fewer than 110 trips per day generally may be assumed to cause a less-than-significant transportation impact" (Governor's Office of Planning and Research 2018).

The Technical Advisory outlines VMT significance thresholds for different project types not meeting the screening criteria. For example, it would be reasonable to conclude that residential and office projects demonstrating a VMT level that is 15 percent less than existing conditions (2015 through 2018 average) are consistent with statewide VMT reduction targets. The VMT level is commonly assessed on a per capita or per service population basis. With respect to retail land uses, any net increase of VMT may indicate a significant transportation impact.

In January 2019, changes to the CEQA statutes and guidelines went into effect, including a new section 15064.3 that states that VMT is the most appropriate measure of transportation impacts, and includes updated criteria for analyzing those impacts. This shift in transportation impact criteria is expected to better align transportation impact analysis and mitigation outcomes with the State's goals to reduce GHG emissions, encourage infill development, and improve public health through use of more physically active modes of transportation.

3.14.4.2 Local

Amador County Transportation Commission

The Amador County Transportation Commission (ACTC) was designated in 1972 as the Regional Transportation Planning Agency for the Amador County Region, which consists of Amador County and its five incorporated cities (Amador City, Ione,

Jackson, Plymouth, and Sutter Creek). The ACTC's primary responsibilities encompass transportation planning, which includes maintaining and implementing the county's RTP, transportation programming, and administration of the Transportation Development Act. The ACTC also assists in development and delivery of the Amador County Region's priority transportation improvement projects and provides technical assistance with traffic impact analyses for proposed development projects and land use plans to Amador County, Cities, and Caltrans (Amador County Transportation Commission 2020:1, 2). The ACTC's Transportation Impact Study Guidelines (ACTC 2009:1) describes the types of projects for which a transportation impact study must be completed. A transportation impact study is required for proposed development projects that would generate 200 or more daily trips, are inconsistent with the Amador County General Plan land use and/or zoning designations and could potentially generate greater levels of traffic than the general plan land use designations; or would generate greater levels of traffic than assumed for the area within the 2025 Amador County Traffic Model.

Amador County General Plan

The Circulation and Mobility Element of the Amador County General Plan identifies four goals, with a number of attendant policies, that are related to circulation and infrastructure needs in Amador County (Amador County 2016). These goals and policies are directed towards guiding long-term planning efforts and development projects and focus on maintaining adequate regional transportation facilities and a safe, efficient, and comprehensive traffic circulation system; maintaining and enhancing the visual quality and scenic views along designated scenic corridors; and providing transportation alternatives to the automobile.

Amador County Regional Transportation Plan

The Amador County RTP was prepared by the ACTC (2020). Its purpose is to provide a vision for the region by identifying and prioritizing the transportation improvement projects and programs that are needed by the region. The RTP also presents a Regional Improvement Strategy that establishes how the ACTC will help address the region's future transportation challenges through specific goals, policies, and objectives. These goals, policies, and objectives are generally related to improving multi-modal transportation systems; maintaining level of service standards on regional roadways; improving the safety, operations, and surface conditions of local roads; providing efficient public transportation service; improving opportunities for bicycle and pedestrian travel; achieving safe and efficient movement of goods; implementing transportation improvements that will result in regional air quality improvements; and providing careful stewardship of regional transportation funds.

Sacramento Area Council of Governments

The Sacramento Area Council of Governments (SACOG) is the MPO for the greater Sacramento region, which includes the Counties of El Dorado, Placer, Sacramento, Sutter, Yolo, and Yuba, as well as 22 cities (including the Cities of Davis, West Sacramento, Winters, and Woodland). As an MPO, SACOG is required to prepare a long-range transportation plan for all modes of transportation (including public transit, automobile, bicycles, and pedestrians) every four years.

2020 Metropolitan Transportation Plan/Sustainable Communities Strategy

SACOG is responsible for the preparation of, and updates to, the metropolitan transportation plan/sustainable communities strategy (MTP/SCS) and the corresponding metropolitan transportation improvement program (MTIP) for the six-county Sacramento region. The MTP/SCS for the Sacramento region serves as an RTP and pro-actively links land use, air quality, and transportation needs. The MTP/SCS is federally required to be updated every four years. The SACOG Board of Directors adopted the 2020 MTP/SCS and accompanying documents at a special board meeting on November 18, 2019 (Sacramento Area Council of Governments 2019b).

The congestion management process (CMP) and MTP/SCS are developed as a single integrated document. As part of the MTP/SCS, SACOG's CMP addresses the six-county Sacramento region and the transportation network therein. The CMP focuses on travel corridors with significant congestion and critical access and mobility needs to identify projects and strategies that meet CMP objectives.

Transportation projects are nominated by local agencies and analyzed against community priorities identified through public outreach, as well as technical performance and financial constraints. The output of the MTP/SCS and CMP is a list of projects with identified lead agencies and completion years that is presented in Appendix A-1 of the MTP/SCS. The adopted list and schedule of projects for the MTP/SCS subsequently informs the development of the MTIP.

3.14.5 Environmental Effects

Potential impacts of the Proposed Project related to transportation are discussed in the context of CEQA Guidelines Appendix G checklist. Checklist section XVII, *Transportation*, asks whether the Proposed Project would result in any of the following conditions.

a. Conflict with a program, plan, ordinance, or policy addressing the circulation system, including transit, roadway, bicycle, and pedestrian facilities?

Less than Significant with Mitigation Incorporated. The Proposed Project would construct a spillway and an approximately 0.5-mile-long access road at the Dam. It would not result in permanent or long-term changes to traffic volume on local roadways; as described in Section 2.2.6 *Operations and Maintenance*, once the Proposed Project is complete, PG&E would operate the Reservoir as was done prior to construction, meaning that vehicle use associated with operations and maintenance of the Dam would be the same as existing conditions, just split between the existing access road (Tiger Creek Road) and the new permanent access road, depending on the side of the Dam requiring maintenance. Additionally, the Proposed Project does not meet any of the ACTC's transportation impact study criteria and therefore preparation of a transportation impact study is not required.

During construction, haul trucks would be present on SR 88, Tiger Creek Road, and Salt Springs Road (Spur 1). To ensure that traffic would continue to flow smoothly and not conflict with any circulation policies or plans during construction activities, PG&E will implement Mitigation Measure TRAN-MM-1: *Implement a Traffic Control Plan*. This potential impact would be less than significant with mitigation incorporated.

Mitigation Measure TRAN-MM-1: Implement a Traffic Control Plan

To avoid potential conflicts between members of the public and construction vehicles, a traffic control plan shall be implemented that contains the following measures:

- Warning signs of construction activities and road closures shall be posted along Tiger Creek Road between SR 88 and the Project Area;
- Flaggers shall be used for traffic control along the portions of the construction access roads shared with the public as needed or when heavy construction traffic is expected. Alternatively, PG&E-managed roads such as Tiger Creek Road shall be closed to the public as needed;
- The construction contractor shall comply with Title 13 of the CCR, which includes idling restrictions on construction vehicles and equipment to no more than 5 minutes;
- Construction equipment and vehicles shall be properly tuned and maintained;
- All on-street construction traffic shall be required to comply with the local jurisdiction's standard construction specifications; and

 To the extent feasible, construction traffic shall be scheduled and routed to reduce congestion and related air quality impacts caused by idling vehicles along local roads during peak travel times.

b. Conflict or be inconsistent with CEQA Guidelines section 15064.3, subdivision (b)?

Less than Significant. During construction of the Proposed Project, the movements of personnel, equipment, and material would result in temporary increases in traffic in the Area of Analysis. The vehicles associated with Proposed Project implementation are anticipated to travel on SR 88, Salt Springs Road (Spur 1), and Tiger Creek Road. The highest number of Proposed Project-related vehicle trips is anticipated to occur when the "Crest Structure Construction" phase overlaps with the "Plunge Pool Construction" phase. During this period, construction personnel, haul trucks, and vendor vehicles could make up to 106 one-way trips per day in the Area of Analysis (38 one-way haul-truck trips, 16 one-way vendor trips, and 52 one-way worker trips). Therefore, the number of Proposed Project-related vehicle trips would not exceed the screening criteria threshold of 110 trips per day (Governor's Office of Planning and Research 2018). Further, as described in Section 2.2.6 Operations and Maintenance, once the Proposed Project is complete. PG&E would operate the Reservoir as was done prior to construction. No long-term operational increases in VMT would occur. For these reasons, potential VMT impacts related to the Proposed Project would be less than significant.

c. Substantially increase hazards because of a geometric design feature (e.g., sharp curves or dangerous intersections) or incompatible uses (e.g., farm equipment)?

No Impact. The geometric design of the proposed permanent access road must and would meet the standards of Amador County, FERC, and DSOD—within each agency's jurisdiction. Compliance with each respective standard would prevent geometric design-related hazards. The Proposed Project would not involve any uses incompatible with the roadways in the transportation Area of Analysis. During construction, Proposed Project-related vehicle use on publicly accessible roadways would be limited to on-road vehicles only. Further, as described in Section 2.2.6 *Operations and Maintenance*, once the Proposed Project is complete, PG&E would operate the Reservoir as was done prior to construction, meaning that public roadway uses would be the same as existing conditions. There would be no impact.

d. Result in inadequate emergency access?

Less than Significant. There would be no lane closures involved with the Proposed Project that would constrict emergency access. Haul trucks accessing the

Project Area would have the potential to briefly slow traffic during construction workday hours. However, the maximum number of haul truck round trips per day would be only 19 during the busiest period of construction, and a high volume of truck traffic already traverses Amador County's regional transportation system (including SR 88) daily. Therefore, emergency access would be maintained during construction of the Proposed Project. This potential impact would be less than significant.

3.15 Wildfire

3.15.1 Introduction

This section analyzes the Proposed Project's potential impacts related to wildfire. It describes existing conditions in the Area of Analysis and summarizes the overall regulatory framework for wildfire, and it analyzes the potential for the Proposed Project to affect these resources.

3.15.2 Area of Analysis

The Area of Analysis is the same as the Project Area, which consists of three staging areas, the log boom anchor points, and the construction area that is bounded roughly by the Dam to the east, Spur 10 to the north, and the Spur 1 staging area to the south (Figure 2-1, *Project Area*).

3.15.3 Existing Conditions

A wildland fire, or wildfire, is an uncontrolled, unplanned fire in a wildland. This section discusses the existing wildfire risk in the Area of Analysis.

Wildfires generally burn up a slope faster and more intensely than on flat ground (FIRESafe MARIN 2020). Therefore, steeply sloped terrain can represent more of a wildfire risk depending on the type of vegetation and hydrologic conditions present. The Proposed Project is located in a rural area of the foothills of the Sierra Nevada range, approximately 24 miles northeast of the city of Jackson in Amador County, California. The topography of the Project Area varies. The Dam area, specifically, the base of the Dam, is situated at approximately 3,400 feet above MSL in a narrow valley with moderately steep to very steep valley walls, and the Doakes Ridge staging and spoils site is perched on the ridge to the south of the Dam area at approximately 3,700 feet above MSL. Land cover in this area is predominantly Sierra Nevada mixed conifer forest. The Cedar Mill staging area is located at approximately 3,000 feet above MSL in a valley featuring more gentle slopes and is surrounded by the foothill community of Pioneer.

CAL FIRE identifies FHSZs within both SRAs and LRAs and maps these severity zones based on modeling of expected fire behavior over a 30- to 50-year period. The categories of FHSZs are "very high," "high," and "moderate." The area of analysis falls within an SRA categorized as a very high FHSZ (Figure 3.15-1, *State Responsibility Areas*, and Figure 3.15-2, *Fire Hazard Severity* Zones).

The wildland-urban interface (WUI) is the area where structures and other human development meet or intermingle with undeveloped wildland, and it is where wildfires have their greatest impact on people. The Dam area and the Doakes Ridge staging and spoils site are not located within the WUI, but the Cedar Mill staging area is located within an "intermix" WUI, which refers to areas where housing and wildland vegetation intermingle (United States Department of Agriculture, Forest Service 2018).

California has recently experienced a number of catastrophic wildfires caused by multiple ignition sources. These fires have not occurred within the Project Area but have led to a heightened awareness of potential ignition sources, methods to reduce wildfire risk, and the need for staffing and equipment resources across local, state, and federal levels. Previous wildfires that have encroached on Amador County include the Butte, Caldor, and Electra fires. The 2015 Butte fire primarily burned in Calaveras County and crossed over into Amador County, burning seven percent within Amador County (Amador County 2016:S-9). A similar instance occurred with the 2021 Caldor fire where the fire did not primarily burn in Amador County, but crossed the county's boundary with El Dorado County (CAL FIRE 2023a). The 2022 Electra fire burned 4,470 acres and was primarily located in Amador County. The cause is undetermined and there were no fatalities or structural damages (CAL FIRE 2023b).

3.15.4 Regulatory Setting


3.15.4.1 State

Fire Hazard Severity Zones

Government Code section 51178 and PRC sections 4201–4204 require CAL FIRE to identify FHSZs in the state. The FHSZs are derived from the Fire Hazard Severity Scale, which was created by CAL FIRE and is used for evaluating and designating potential fire hazards in wildland areas. Government Code section 51179 requires local agencies to designate, by ordinance, high and very high FHSZs in their jurisdiction. The FHSZs are derived from the Fire Hazard Severity Scale, which was created by CAL FIRE and is used for evaluating and designating potential fire hazards in wildland areas. The Project Area is located in a very high FHSZ as shown in Figure 3.15-2, *Fire Hazard Severity Zones*.

State Responsibility Areas

The areas where the state has financial responsibility for wildland fire protection are designated as SRAs and CAL FIRE has a legal responsibility to provide fire

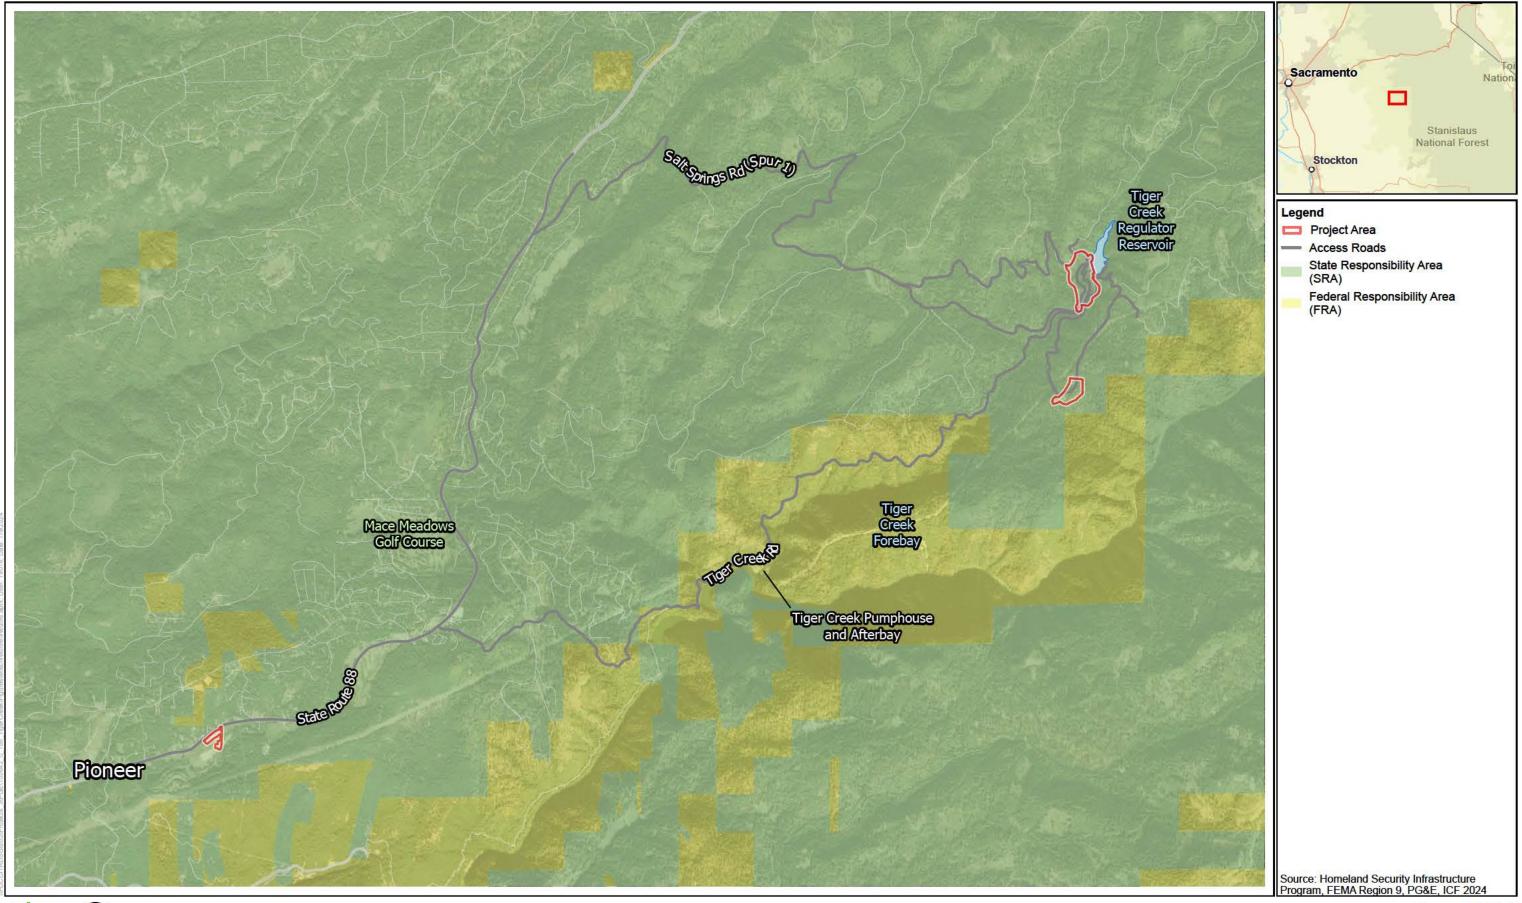






Figure 3.15-1 State Responsibility Areas

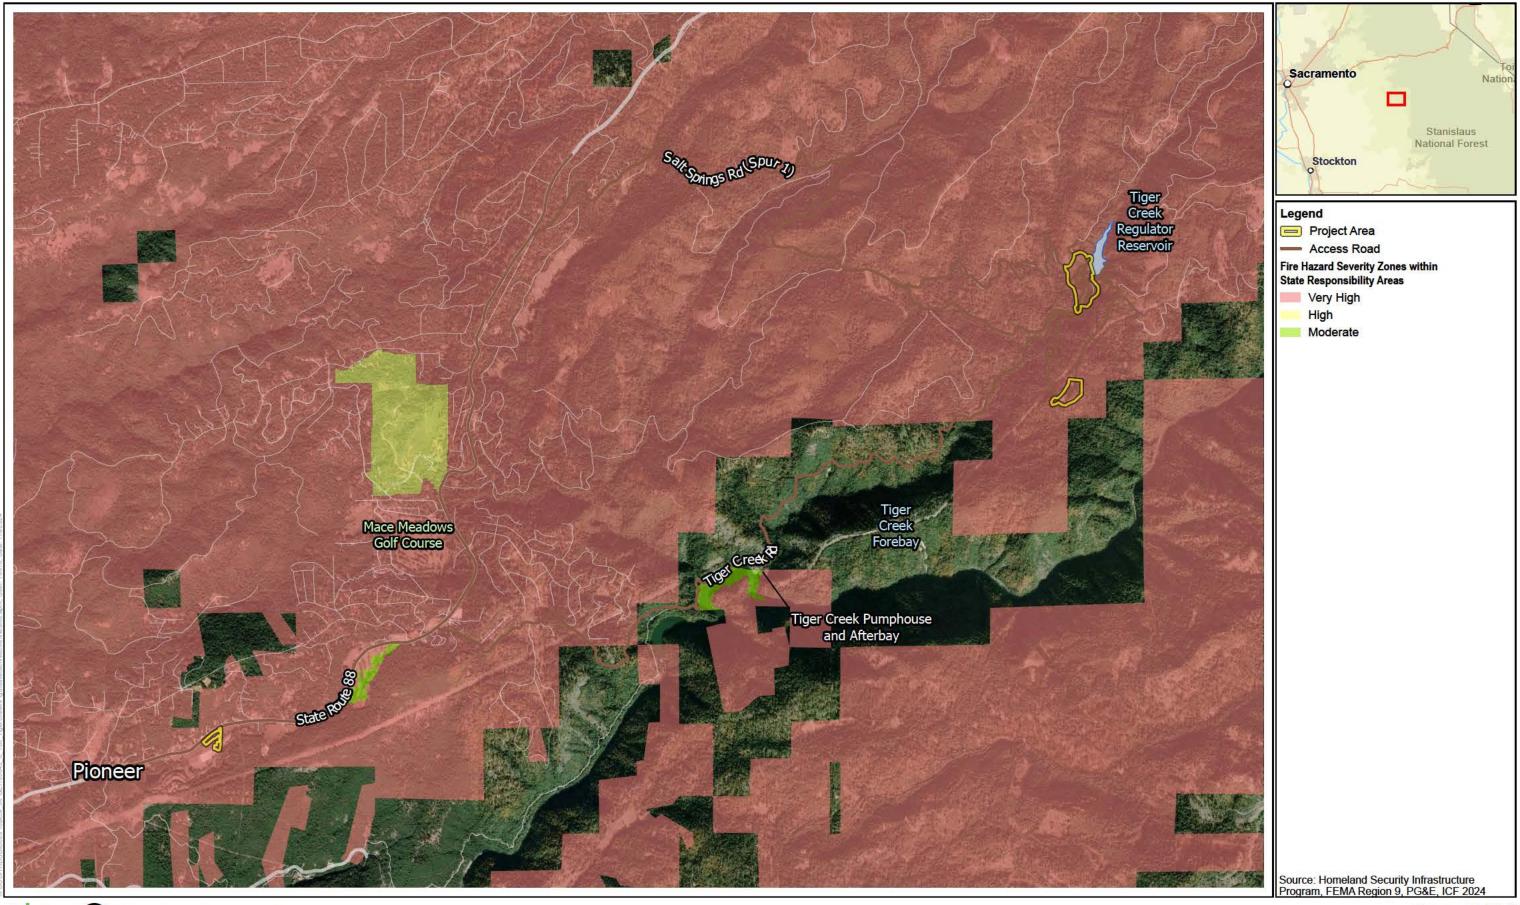



protection in SRAs. These lands are identified as SRAs based on land ownership, population density, and land use. CAL FIRE does not have responsibility in populated areas or agricultural lands. As shown in Figure 3.15-1, *State Responsibility Areas*, the entirety of the Project Area is in an SRA.

3.15.4.2 Local

Amador County General Plan

The Economic Development, Land Use, and Safety Elements of the Amador County General Plan have the following goals, policies, and program related to wildland fires that are relevant to the Proposed Project (Amador County 2016):

- Goal E-12: Promote sustainable forest management that ensures continued timber production, water quality and the timber land base, and reduces the risk of catastrophic fires;
 - Policy E-12.1: Encourage the continued economic and ecologic viability of timber harvesting and promote creation of defensible space and community wildfire protection;
- Goal LU-12: Reduce fire risks to current and future structures;
 - Policy LU-12.2: Ensure that new roadways meet County standards for firefighting access. These standards include minimum width, surface, grade, radius, turnaround, turnout, and bridge standards, as well as limitations on one-way. roads, dead-end roads, driveways, and gate entrances;
- Goal S-2: Reduce fire risks to current and future structures;
 - Policy S-2.4: Work with fire districts or other agencies and property owners to coordinate efforts to prevent wildfires and grassfires including consolidation of fuel buildup abatement efforts, firefighting equipment access, and water service provision;
 - Policy S-2.5: Work with fire districts and other agencies to educate the public regarding fire risks and periods of elevated or extreme risk due to drought or other factors; and
- **Program P-12:** Emergency Response (Final Environmental Impact Report Mitigation Measure 4.8-2a)
 - a. In order to maintain effective emergency and disaster response and reduce hazards related to fire, flood, and public safety emergencies, the County will implement and periodically update disaster plans, including the Multi-Hazard Mitigation Plan and Emergency Operations Plan, to meet federal, state, and

local emergency requirements. This effort will include planning to coordinate response actions, and the identification and planning for evacuation routes for dam failure, wildfire, and flooding.

3.15.5 Environmental Effects

Potential impacts of the Proposed Project related to wildfire are discussed in the context of CEQA Guidelines Appendix G checklist. Checklist section XX, *Wildfire*, asks whether the Proposed Project would result in any of the following conditions.

a. Substantially impair an adopted emergency response plan or emergency evacuation plan?

Less than Significant. As discussed in Section 3.10 *Hazards and Hazardous Materials*, the Project Area is outside the designated Amador County Evacuation Routes. The two main access roads would be available to construction workers during construction and would not impair an emergency response plan or emergency evacuation plan. During operations and maintenance, the Proposed Project would not impair or interfere with any adopted emergency response or emergency evacuation plans. This potential impact would be less than significant.

b. Due to slope, prevailing winds, and other factors, exacerbate wildfire risks of, and thereby expose project occupants to, pollutant concentrations from a wildfire or the uncontrolled spread of a wildfire?

Less than Significant with Mitigation Incorporated. As described in Section 3.15.3 *Existing Conditions*, the topography of the Project Area varies, and elevations generally range from 3,022 feet to 3,772 feet above MSL. Steep hills and mountains are also nearby. Public access to the Project Area would be closed during construction of the Proposed Project. There are no residences within or adjacent to the Dam area or the Doakes Ridge spoils and staging site. However, the Cedar Mill staging area is within the "intermix" WUI of the unincorporated community of Pioneer. Residences and local businesses are located less than 0.5 mile from the Cedar Mill staging area, and the Pioneer Elementary School is located just over 0.5 mile from the Cedar Mill staging area. Activities that would occur within the Cedar Mill staging area include material staging, crew and craft vehicle parking, and equipment parts drop-off and maintenance. These activities are not anticipated to exacerbate the risk of exposing nearby occupants to pollutant concentrations from a wildfire or the uncontrolled spread of a wildfire.

Construction would involve the use of heavy equipment. Ignition sources in the area during construction could include equipment striking a rock or vegetation coming into contact with hot equipment or vehicles, which could cause a wildfire. In order to

minimize wildfire risk, PG&E will implement Mitigation Measure FIRE-MM-1: *Implement Fire Hazard Prevention Measures*. This mitigation measure includes requiring the use of fire-suppression equipment and tools; equipping vehicles with fire response/suppression equipment; establishing procedures and policies for controlling any onsite fires; and daily inspections to ensure all work areas are clear of debris and trash and that flammable or combustible materials are not allowed to accumulate. In the unlikely event of an accidental fire, construction personnel on site would have adequate preparation, equipment, and plans to reduce the possibility of exacerbating wildfire risks and therefore, construction personnel would not be exposed to a substantial increase in pollutant concentrations as a result of wildfire or the risk of the uncontrolled spread of a wildfire.

Public access to the Reservoir is limited and is open to the public when weather, wildfire precautions, or operation necessities do not compromise public safety. When the Dam and Reservoir area is open to the public, only fishing is allowed. Camping and campfires are prohibited, which helps prevent fires, thus limiting the potential of pollutant exposure to the nearby public and the risk of uncontrolled spread of a wildfire.

The Proposed Project would not have permanent occupants; therefore, operations would not expose occupants to pollutant concentrations from a wildfire or the uncontrolled spread of a wildfire. With implementation of Mitigation Measure FIRE-MM-1, this potential impact would be less than significant.

Mitigation Measure FIRE-MM-1: Implement Fire Hazard Prevention Measures

During construction, crews shall take appropriate measures to eliminate the potential for fire, including the following:

- Construction crews shall follow the safe working practices outlined below and shall abide by all facility programs to prevent and suppress fires in the Project Area. Initial action shall be prompt and shall include the use of all personnel and equipment available in the Project Area. All personnel are expected to take all reasonable action to prevent the occurrence of fires;
- Crews shall follow PG&E's latest guidelines described in Utility Standard TC-1464S, Preventing and Mitigating Fires While Performing PG&E Work (Pacific Gas and Electric Company 2022);
- For any hot work (welding, cutting, or heating) onsite, fire prevention and suppression tools (e.g., backpack-type water pumps, shovels) shall be made available;

- Project vehicles shall be equipped with appropriate fire response equipment and fire prevention and suppression tools;
- Construction crews shall have the following equipment:
- One shovel, one axe, and one or more UL-rated 4BC extinguishers on each crew truck/vehicle;
- One shovel and one five-gallon, water-filled backpack pump with each welder; and
- One shovel and one fully charged chemical fire extinguisher at a point not more than 25 feet from the work site for each gasoline-powered tool, including rock drills.
- Fire extinguishers shall be placed in easily accessible locations near potential ignition sources (e.g., internal combustion engines). Each vehicle and trailer shall be equipped with a multi-purpose dry chemical extinguisher in a readily accessible location. All internal combustion engines brought onto the job site shall be equipped with a spark arrestor;
- All personnel shall perform daily inspections of work areas, laydown areas, and walkways to ensure they are clear of debris and trash and that flammable or combustible materials are not allowed to accumulate. All flammable liquids shall be stored appropriately and at a safe distance from ignition sources. All flammable gas containers shall be secured in an upright position with their valve caps in place at a safe distance from ignition sources;
- PG&E's hot work permit process (Pacific Gas and Electric Company 2008) shall be followed before any welding or cutting operations are performed. A fire watch shall be stationed at the location of the hot work activity until at least 30 minutes after the completion of that activity, and shall have either a portable fire extinguisher or water hose with a nozzle immediately available. The fire watch and person that will be performing the hot work shall ensure that the area is safe for hot work before work will be allowed to begin. The hot work permit shall be posted at the job site until hot work is complete;
- If there is a need to activate fire hazard response measures, project crews shall be directed to the temporary construction emergency action plan (TCEAP) for response actions developed to respond to a potential fire near the Project Area. The TCEAP shall be developed prior to construction and will provide instructional evacuation orders and procedures.

c. Require the installation or maintenance of associated infrastructure (such as roads, fuel breaks, emergency water sources, power lines, or other utilities) that may exacerbate fire risk or that may result in temporary or ongoing impacts on the environment?

Less than Significant with Mitigation Incorporated. Blasting may be used to excavate foundations for the concrete spillway structures and could temporarily exacerbate fire risk. However, implementation of Mitigation Measure FIRE-MM-1: Implement Fire Hazard Prevention Measures will require fire control actions taken to prevent wildland fires during construction. This mitigation measure includes PG&E's latest guidelines described in Utility Standard TC-1464S, Preventing and Mitigating Fires While Performing PG&E Work (Pacific Gas and Electric Company 2022), as well as actions such as equipping construction sites with fire prevention and suppression tools and implementing safety protocols for hot work.

The Proposed Project includes construction of an approximately 0.5-mile-long permanent access road to connect Tiger Creek Road to the Dam. As described in Section 2.2.3 *Vegetation Removal and Timberland Conversion*, trees within 20 to 50 feet of proposed improvements, including the permanent access road, would be removed for safety and maintenance purposes. Activities associated with maintenance and operation of the spillway would occur as was done prior to the project. There would be minor differences, none of which would indefinitely exacerbate fire risk more than already exists. Therefore, the installation and maintenance of associated infrastructure would not exacerbate fire risk and potential impacts would be less than significant with implementation of Mitigation Measure FIRE-MM-1.

d. Expose people or structures to significant risks, including downslope or downstream flooding or landslides, as a result of runoff, post-fire slope instability, or drainage changes?

Less than Significant with Mitigation Incorporated. There are no permanent occupants within the Project Area and there are no proposed structures where employees would permanently work. In the event of a wildland fire in the Project Area, no one would be displaced from their residences because no residences are present. Recreational visitors and operation and maintenance staff are not permanent occupants and, as described in Section 1.3 *Project Setting*, the Dam area is closed to public access when public safety is compromised due to wildfire precautions. Implementation of Mitigation Measure FIRE-MM-1: *Implement Fire Hazard Prevention Measures* will ensure appropriate measures are taken to prevent wildland fires. As such, the possibility of significant runoff, post-fire slope instability, or drainage changes resulting from a wildfire would be greatly reduced and would

not expose the construction workers, operations staff, or recreational visitors to a significant risk involving wildland fire.

Further, the principal purpose of the Proposed Project is to improve the stability of the Dam by constructing a new spillway to successfully pass design flood flows. The Proposed Project would improve long-term downstream flooding conditions which would thereby decrease the exposure of people and structures to significant risk of flooding, including in post-fire conditions. With implementation of Mitigation Measure FIRE-MM-1, this potential impact would be less than significant.

3.16 Agriculture and Forestry Resources

3.16.1 Introduction

This section analyzes the Proposed Project's potential impacts related to agriculture and forestry resources. It describes existing conditions in the Area of Analysis and summarizes the overall regulatory framework for agriculture and forestry resources, and it analyzes the potential for the Proposed Project to affect these resources.

3.16.1.1 Area of Analysis

For the purpose of determining potential impacts on agriculture and forestry resources due to implementation of the Proposed Project, the Area of Analysis is the same as the Project Area. Accordingly, it consists of three staging areas, the log boom anchor points, and the construction area that is bounded roughly by the Dam to the east, Spur 10 to the north, and the Spur 1 staging area to the south (Figure 2-1, *Project Area*).

3.16.2 Existing Conditions

The Project Area is located in the foothills of the Sierra Nevada range in Amador County. The dominant vegetation type in the Project Area is Sierra Nevada mixed conifer forest. A large portion of the Project Area (i.e., land surrounding the Reservoir) is zoned as "Timberland Preserve Zone" and has been logged in the past with periodic entries for commercial timber harvesting.

There is no Prime Farmland, Unique Farmland, or Farmland of Statewide Importance (collectively, Farmland), as categorized by the California Department of Conservation Farmland Mapping and Monitoring Program (FMMP), in the Project Area. Rather, land in the Project Area is categorized as "Other Land", which is land not included in any other FMMP mapping category and includes brush, timber, low density rural housing, and water bodies smaller than 40 acres (California Department of Conservation 2023).

3.16.3 Regulatory Setting

The following section summarizes the key state and local regulations, plans, and policies relevant to forestry resources in the Area of Analysis. There are no federal plans, policies, regulations, or laws relevant to the analysis of forestry resources for the Proposed Project.

3.16.3.1 State

California Forest Practice Act of 1973

Tree removals required for the construction of the Proposed Project prompt compliance with the Forest Practice Act (California Public Resources Code, Division 4, Part 2, Chapter 8), which requires a THP to be submitted to CAL FIRE for commercial timber harvesting on all nonfederal timberlands. Under the Forest Practice Act, "timberland" is defined as land, other than land owned by the federal government and land designated by the State Board of Forestry and Fire Protection, which is available for, and capable of, growing a crop of trees of a commercial species used to produce lumber and other forest products, including Christmas trees (California Public Resources Code section 4526). Timber harvest plans ensure that timber harvesting activities comply with California's Forest Practice Regulations and must be approved by CAL FIRE prior to the start of those activities. The Forest Practice Act also requires that a TCP be sought from CAL FIRE for any property that would be taken out of timber production or that would be converted from timberland to non-timber growing use.

California Public Resources Code Section 12220(g)

California Public Resources Code section 12220(g) defines "forest land" as land that can support 10 percent native tree cover of any species, including hardwoods, under natural conditions, and that allows for management of one or more forest resources, including timber, aesthetics, fish and wildlife, biodiversity, water quality, recreation, and other public benefits.

California Government Code Section 51104(g)

California Government Code section 51104(g) defines timberland production zone (TPZ) as an area which has been zoned pursuant to section 51112 or section 51113 and is devoted to and used for growing and harvesting timber, or for growing and harvesting timber and compatible uses. "Compatible use" is any use that does not significantly detract from the use of the property for, or inhibit, growing and harvesting timber and includes watershed management; management for fish and wildlife habitat or hunting and fishing; a use integrally related to the growing, harvesting and processing of forest products; the erection, construction, alteration, or maintenance of gas, electric, water, or communication transmission facilities; grazing; or a residence or other structure necessary for the management of land zoned as timberland production.

3.16.3.2 Local

Amador County General Plan

The Amador County General Plan (Amador County 2016a) Economic Development Element includes a goal and associated policies relevant to the management and production of timber resources, as well as the protection of timber resources from incompatible uses:

- Goal E-12: Promote sustainable forest management that ensures continued timber production, water quality and the timber land base, and reduces the risk of catastrophic fires;
 - Policy E-12.1: Encourage the continued economic and ecologic viability of timber harvesting and promote creation of defensible space and community wildfire protection;
 - Policy E-12.2: Maintain Timber Production Zone (TPZ) areas as a renewable source of timber and wood products;
 - Policy E-12.3: Encourage value-added activities (such as sawmills, cogeneration plants, timber-based manufacturing, and other uses) which contribute to the economic viability of timber production; and
 - o **Policy E-12.4**: Protect timber resource areas from incompatible uses.

3.16.4 Environmental Effects

Potential impacts of the Proposed Project related to agriculture and forestry resources are discussed in the context of CEQA Guidelines Appendix G checklist. Checklist section II, *Agricultural and Forestry Resources*, asks whether the Proposed Project would result in any of the following conditions.

a. Convert Prime Farmland, Unique Farmland, or Farmland of Statewide Importance (Farmland), as shown on the maps prepared pursuant to the Farmland Mapping and Monitoring Program of the California Resources Agency, to non-agricultural use?

No Impact. There is no Farmland in the Area of Analysis. Therefore, the Proposed Project would not convert Farmland to non-agricultural use and there would be no potential impact.

b. Conflict with existing zoning for agricultural use or conflict with a Williamson Act contract?

Less than Significant. As discussed in Section 3.17 Land Use and Planning, a portion of the Area of Analysis is zoned Single Family Residential – Agricultural. As multiple uses, in addition to farming, are permitted in areas with this zoning designation, including water storage and reservoirs and associated on-site excavation, the implementation of the Proposed Project would not conflict with existing zoning for agricultural use. There are no lands within the Area of Analysis under Williamson Act contract; therefore, implementation of the Proposed Project would not conflict with a Williamson Act contract. As such, this potential impact is less than significant.

c. Conflict with existing zoning for, or cause rezoning of forest land (as defined in Public Resources Code section 12220(g)), timberland (as defined by Public Resources Code section 4526), or timberland zoned Timberland Production (as defined by Government Code section 51104(g))?

Less than Significant. Tree removal would be required for the proposed spillway, permanent access road, as well as the permanent spoils disposal area at the Doakes Ridge staging and spoils site under the Proposed Project. Trees within 20 to 50 feet of the proposed spillway and permanent access road would be cut down to stumps, and trees and other vegetation within the excavation limits would be removed entirely. Additional trees would be removed in the area between the proposed spillway, Dam, and existing spillway. Most of the tree removal areas would be permanently converted to non-timberland use because Proposed Project features would be constructed in their place, or because trees would not be allowed to regrow around the facilities of the Proposed Project for safety and maintenance purposes. Some tree removal would be required to make the temporary access road passable. However, the temporary access road would be abandoned after construction is completed and trees would be allowed to regrow within the road's footprint. Tree removal areas are shown in Figure 2-4, *Timber Harvest and Timberland Conversion Areas*.

Most land where trees would be permanently removed meets the definition of "Timberland" under California Public Resources Code section 4526 and under California Government Code section 51104(f). Further, much of the land where trees would be removed is zoned "Timberland Production" (TPZ) as defined by California Government Code section 51104(g)¹. California Government Code

¹ Per California Government Code section 51104(g), "timberland production zone" is the same as "timberland preserve zone" as identified by county and city general plans.

section 51104(g) allows for the erection, construction, alteration, or maintenance of water transmission facilities in a TPZ without a special use permit or variance. Therefore, although implementation of the Proposed Project would result in timberland conversion in a TPZ, this would not represent a zoning conflict because the Proposed Project entails both construction and alteration of PG&E's existing Tiger Creek water transmission facilities (i.e., spillway construction and decommissioning) and construction of the permanent access road would facilitate maintenance of the new spillway crest structure, which is a TPZ compatible use. In compliance with the Forest Practice Act, PG&E will prepare and implement a THP in coordination with CAL FIRE and will apply for a TCP for permanent conversion of timberland as a result of implementation of the Proposed Project. This potential impact would be less than significant.

d. Result in the loss of forest land or conversion of forest land to non-forest use?

Less than Significant. As previously discussed, implementation of the Proposed Project would require removal of trees; most of the 15 acres of trees to be removed in the Area of Analysis are on lands managed as forest land for timber production. Permanent removal of trees on forest land would be limited to the number of trees and areas necessary for the construction of the proposed spillway and associated features and the permanent access road, as well as for safety and maintenance of these permanent Proposed Project features. As described in Chapter 1, *Introduction*, elements of the Proposed Project would be constructed on land donated to CAL FIRE by PG&E; this land includes utility easements that allow PG&E to operate and maintain existing and future hydroelectric facilities and to construct improvements necessary to meet water delivery requirements for power generation. In addition, a portion of the Area of Analysis is on land owned by PG&E and under conservation easement, which restricts development of the land to protect and preserve "beneficial public values" of the property, including forest resources.

Implementation of the Proposed Project in general, and tree removal, specifically, would not result in a substantial loss of forest land in Amador County given that it is estimated that there are over 218,000 acres of forest land in the county (Amador County 2016b). Further, removal of trees with implementation of the Proposed Project would not result in a significant change in the overall existing forest structure and would not interfere with the management of, or minimize the benefits to fish, wildlife, and the public from, surrounding forest lands. In compliance with the Forest Practice Act, PG&E will prepare and implement a THP in coordination with CAL FIRE and will apply for a TCP for permanent conversion of timberland as a result of implementation of the Proposed Project. Tree removal would be conducted in a

manner consistent with a THP, which would ensure that logging activities are in compliance with California's Forest Practice Rules, and which are approved by CAL FIRE. For these reasons, this potential impact is less than significant.

e. Involve other changes in the existing environment that, due to their location or nature, could result in conversion of Farmland to non-agricultural use or conversion of forest land to non-forest use?

No Impact. Implementation of the Proposed Project would not involve other changes in the existing environment that would result in the conversion of forest land to non-forest use beyond that discussed previously in this section. There is no Farmland in the Area of Analysis and therefore the Proposed Project would not convert Farmland to non-agricultural use. There would be no potential impact.

3.17 Land Use and Planning

3.17.1 Introduction

This section analyzes the Proposed Project's potential impacts related to land use and planning. It describes existing conditions in the Area of Analysis and summarizes the overall regulatory framework for land use and planning, and it analyzes the potential for the Proposed Project to affect these resources.

3.17.2 Area of Analysis

For the purpose of determining potential impacts on land use and planning due to implementation of the Proposed Project, the Area of Analysis is the same as the Project Area. Accordingly, the Area of Analysis consists of three staging areas, the log boom anchor points, and the construction area that is bounded roughly by the Dam to the east, Spur 10 to the north, and the Spur 1 staging area to the south (Figure 2-1, *Project Area*).

3.17.3 Existing Conditions

The Proposed Project would be constructed in Amador County, approximately 24 miles northeast of the city of Jackson, at the Reservoir on Tiger Creek. The Project Area (Figure 2-1, *Project Area*) is situated in a narrow valley in the Sierra Nevada foothills surrounded by mixed conifer forest. The nearest communities to the northern Project Area are the unincorporated communities of Barton and Buckhorn, which are approximately 4.5 and five miles southeast of the Reservoir, respectively. The existing Cedar Mill property in the westernmost portion of the Project Area is in the unincorporated community of Pioneer.

The Dam is on land owned by PG&E and under a conservation easement held by the Mother Lode Land Trust. The conservation easement restricts development of the land to protect and preserve beneficial public values but includes an express reservation of PG&E's right for continued operation, maintenance, and improvements of existing and future hydroelectric facilities and associated water delivery facilities located on, above, or under the property. PG&E also owns or has use agreements for the nearby staging and laydown areas of the Proposed Project. Surrounding lands are owned by CAL FIRE. Elements of the Proposed Project would be constructed on CAL FIRE land; PG&E donated this property to CAL FIRE and it includes utility easements that allow PG&E to operate and maintain existing and future hydroelectric facilities and to construct improvements necessary to meet

water delivery requirements for power generation. Some of the existing access roads to and around the Dam area pass through lands owned by SPI. PG&E has access rights and road use agreements with SPI for use of these roads.

The Land Use Element of the Amador County General Plan contains goals, policies, and implementation programs that guide the physical development of county land and designates land and zoning uses. The Amador County zoning code regulates development type and intensity throughout the unincorporated county and is the primary tool used to implement the Amador County General Plan. Table 3.17-1 identifies the land use and zoning designations and associated allowable uses for areas where permanent Proposed Project facilities would be located. Like the permanent Proposed Project facilities, the temporary Proposed Project facilities would mostly occur on lands designated as Open Recreation and General Forest. These temporary facilities would include an access road to the plunge pool and the lower end of the spillway chute, four temporary bridges, access trails for construction equipment, and the Spur 1 staging area. The land use designation for the Cedar Mill staging area is Industrial (zoned Manufacturing).

Table 3.17-1. Amador County Land Use and Zoning Designations for Permanent Proposed Project Facilities

| Land Use Designation | Allowable Uses per Land Use Designation | Zoning Designation | Allowable Uses per Zoning Designation | Proposed Project Facilities (acres ^a) |
|-------------------------|--|--|--|--|
| Open Recreation | Public, quasi-public, and private recreation uses, either exclusively or in combination with compatible uses; Resource uses such as managed forestry, mining, and grazing; and Residential, resort, and commercial recreation uses under appropriate controls and zoning. | Single Family Residential- Agricultural | Multiple uses are permitted that are suited to residential and agricultural land uses including single-family dwelling; crop and tree farming; general farming; wells, water storage and reservoirs, including on-site excavation or removal of materials for construction thereof. | Log boom anchor (0.0003) Crest structure (0.09) Plunge pool (0.05) Permanent access road (0.73) Rock slope protection (0.03) |
| General Forest | Lands in both public and private ownership where significant timber production resources have been identified. Conversion to other uses and encroachment of incompatible land uses that may adversely affect timber production are discouraged. | Timberland Preserve (Timber Production Zone) | These uses are allowed by right without special use permit or variances: Growing and harvesting of timber; Management for watershed; Management for fish and wildlife habitat or hunting and fishing; Uses integrally related to growing, harvesting, and processing of forest products; | Spoils disposal (6.21) Dam notch and foot bridge (0.01) Log boom anchor (0.0003) Crest structure (0.09) Chute and flip bucket (0.26) Plunge pool (0.16) Permanent access road (1.03) |

| Land Use Designation | Allowable Uses per Land Use Designation | Zoning Designation | Allowable Uses per Zoning Designation | Proposed Project Facilities (acres ^a) |
|-------------------------|---|-----------------------|---|---|
| | | | Erection, construction, alternation, or maintenance of gas, electric, water or communication transmission facilities; Grazing; and One single-family residence zoned pursuant to section 51112 of the Government Code | |

^a Acreage rounded to nearest one-hundredth of an acre unless otherwise noted. Sources: Amador County 2016; Amador County Code Title 19, Chapter 19.24.

3.17.4 Regulatory Setting

The following sections summarize the key state and local regulations, plans, and policies relevant to land use and planning in the Area of Analysis. There are no federal plans, policies, regulations, or laws relevant to the analysis of land use and planning for the Proposed Project.

3.17.4.1 State

California Planning and Zoning Laws

California law requires that cities and counties adopt and implement a comprehensive, long-term general plan for the physical development of the city or county (Government Code section 65300 et seq.). General plans must include development and conservation policies that are designed to guide the city's or county's long-term development. State law mandates that general plans address land use, housing, circulation, open space, conservation, noise, and public safety, as well as other topics that may be of interest to the city or county.

California Zoning Law (California Government Code, section 65800 et seq.) establishes that zoning ordinances, which are laws that outline permitted uses for land within a specific zone district, are required to be consistent with the applicable general plan.

3.17.4.2 Local

Amador County General Plan

Land use and planning in the Area of Analysis is guided by the Land Use Element of the Amador County General Plan (Amador County 2016). Land use designations presented in the Land Use Element identify the types and nature of development permitted throughout the unincorporated area of Amador County. The Land Use Element includes policies to provide a framework for land use patterns and building sites. In addition, the Safety Element addresses flood hazards, as well as other natural conditions and human activities that potentially threaten public health and safety in Amador County. The following Land Use Element policy and Safety Element goal are relevant to the Proposed Project:

Land Use

 Policy LU-1.1: Protect existing land uses and public facilities from encroachment by incompatible land uses.

Safety

• Goal S-1: Prevent loss of life or property from flooding.

Amador County Zoning Ordinance

The Amador County Zoning Ordinance (Title 19 of the Amador County Code) serves as the primary implementation tool for the Amador County General Plan. The zoning ordinance establishes standards for the use and development of property in Amador County and, per state law, provisions of the ordinance are required to be consistent with the land use and development policies of the Land Use Element of the Amador County General Plan. The zoning code outlines regulations that indicate which land uses are permitted in various zones.

3.17.5 Environmental Effects

Potential impacts of the Proposed Project related to land use and planning are discussed in the context of CEQA Guidelines Appendix G checklist. Checklist section XI, *Land Use and Planning*, asks whether the Proposed Project would result in any of the following conditions.

a. Physically divide an established community?

No Impact. The Proposed Project would occur on undeveloped lands and entails construction of a new spillway near the Dam's right abutment on Tiger Creek to mitigate known spillway deficiencies, which will allow the Dam to safely pass a flood event of up to 6,000 cfs. Other associated features include a permanent access road connecting Tiger Creek Road to the right abutment of the Dam, cofferdam, new log boom, lighting, and abandonment of the existing spillway. The Area of Analysis is not located within an established community and access to nearby communities would remain unchanged during and after construction of the Proposed Project. There would be no lane closures during construction. Therefore, implementation of the Proposed Project would not physically divide an established community and there would be no potential impact.

b. Cause a significant environmental impact due to a conflict with any land use plan, policy, or regulation adopted for the purpose of avoiding or mitigating an environmental effect?

Less than Significant. Permanent facilities of the Proposed Project would include a new spillway structure; a 15-foot-wide access road connecting Tiger Creek Road to the right abutment of the Dam just above the new spillway crest structure; a turnaround and parking area at the terminus of the access road; rock slope protection placement on the banks of the existing plunge pool; and a spoils disposal

area near existing PG&E buildings on Doakes Ridge south of Salt Springs Road. These facilities would be sited on lands designated as Open Recreation (Single Family Residential-Agricultural zone) and General Forest (Timberland Preserve [Timber Production Zone]) (Table 3.17-1). As described in Section 2.2.3 *Vegetation Removal and Timberland Conversion*, tree removal would be required and approximately 15 acres of trees would be permanently removed on Open Recreation and General Forest lands. These permanent conversion areas are shown in Figure 2-4, *Timber Harvest and Timberland Conversion Areas*. Most of the tree removal areas would be permanently converted to non-timberland use because Proposed Project features would be constructed in their place, or because trees would not be allowed to regrow around the Proposed Project features for safety and maintenance purposes.

Local land use policies related to a specific resource area are discussed in this IS/MND under other sections such as noise, air quality, and transportation, as appropriate. In addition, the technical sections of this IS/MND identify specific policies that guide the determination of environmental impact significance (e.g., noise levels and VMT). The Proposed Project would be consistent with the Amador County General Plan Safety Element Goal S-1 of preventing the loss of life or property from flooding because the purpose of the Proposed Project is to allow the Dam to safely pass a flood event of up to 6,000 cfs through construction of a new spillway to meet FERC requirements for passing the PMF without overtopping the Dam.

Implementation of the Proposed Project would not result in a change in the land use designation or zoning of the Area of Analysis. Water storage and reservoirs, including on-site excavation or removal of materials for construction thereof, are an allowable use on lands designated as Open Recreation, and to the extent that public safety is not compromised (e.g., due to weather, wildfire precautions, or operational necessities), the public would still be allowed to fish from the Dam and Reservoir shoreline after the Proposed Project is completed. The erection, construction, alteration, or maintenance of water transmission facilities in a TPZ is allowed by right without a special use permit or variance, per the Amador County Zoning Ordinance. Therefore, although implementation of the Proposed Project would result in timberland conversion in a TPZ, this would not represent a land use planning, policy, or regulation conflict because the Proposed Project entails both construction and alteration of PG&E's existing Tiger Creek water transmission facilities (i.e., spillway construction and decommissioning) and construction of the permanent access road would facilitate maintenance of the new spillway crest structure, which is a TPZ compatible use. As such, the Proposed Project would be generally consistent with

the Land Use Element of the Amador County General Plan. This potential impact is less than significant.

4.1 Cumulative Projects

CEQA Guidelines section 15355 defines cumulative impacts as "two or more individual effects which, when considered together, are considerable or which compound or increase other environmental impacts." Pursuant to CEQA Guidelines section 15130(b)(1)(A), the following projects have been identified as those past, present, and probable future projects that could produce related or cumulative impacts, including those projects outside the control of the lead agency. These projects (cumulative projects) are listed below:

- Upper Blue Lake Dam Seismic Retrofit Project. PG&E undertook the Upper Blue Lake Dam Seismic Retrofit Project to improve the seismic stability of Upper Blue Lake Dam, approximately 30 miles east-northeast of the Tiger Creek Regulator Dam. Upper Blue Lake is in Alpine County within the upper watershed of the Mokelumne River, and is also operated by PG&E as part of the Mokelumne River Project (FERC Project No. 137). The project consisted of placement of a 50-foot-wide by 175-foot-long rock fill buttress on the upstream side of the dam, extension of two LLO pipes by approximately 50 feet, and reconfiguration of the intake structure and trash rack. Construction of the improvements to Upper Blue Lake Dam was completed in 2019 (ICF International 2019);
- Lower Blue Lake Dam Seepage Mitigation and Weir Replacement Project. PG&E plans to construct the Lower Blue Lake Dam Seepage Mitigation and Weir Replacement Project at Lower Blue Lake in Alpine County to reduce the risk of dam instability associated with seepage through and under the dam. The project would involve installation of a filter, seepage collection system, and rock fill buttress along the downstream earthen embankment of the dam. Lower Blue Lake is approximately 30 miles east-northeast of the Tiger Creek Regulator Dam. As part of this project, PG&E would also replace an instream flow release weir downstream of the dam that has degraded over time. Lower Blue Lake is within the upper watershed of the Mokelumne River, and is also operated by PG&E as part of the Mokelumne River Project (FERC Project No. 137) (ICF 2023). Construction is anticipated to occur from July 2025 to October 2025;
- Amador County Ingress, Egress and Education Plan. CAL FIRE is implementing the Amador County Ingress, Egress and Education Plan, which involves clearance of roadside vegetation (fuels) on private roads within

unincorporated regions west of Dew Drop in Amador County. On identified private roads, all roadside vegetation up to 10 inches dbh is to be removed within 20 feet of the road edge on either side. All trees greater than 10 inches dbh within the project area are to be limbed up to a minimum height of 10 feet. Removal would be achieved by the hand cutting of vegetation with the cut vegetation chipped on-site and blown back onto the cut-bank and road edge. This roadside vegetation clearance project includes the maintenance of some or all of the treated areas in perpetuity by a variety of methods, including re-cutting and chipping, mechanical mastication, or the selective use of herbicides. Implementation of the project began in 2022 (California Department of Forestry and Fire Protection 2022);

- Caples Spillway Channel Stabilization. The Caples Spillway takes water released from the Caples Lake Auxiliary Dam, approximately 26 miles northeast of the Tiger Creek Regulator Dam, down to Caples Creek, which is a tributary to the American River. As a condition of its FERC license for the El Dorado Hydroelectric Project (FERC Project No. 184), the El Dorado Irrigation District (EID) was required to stabilize the spillway to accommodate flows of up to 60 cfs. The 3,000-foot-long Caples Spillway Channel is a natural channel consisting of an upper cascading segment comprised of cobbles and boulders and a lower pool-riffle segment. The channel is used from May through July, when inflow to Caples Lake exceeds the capacity of the Caples Lake Dam outlet or EID flushes a build-up of pollen and debris from the Caples Lake Auxiliary Dam. Through this project, EID restored and stabilized two channel areas using rock-and-log stabilization measures and vegetative treatments. Construction of the Caples Spillway Channel Stabilization project was completed in 2020 (State Water Resources Control Board 2020);
- SR 88 Pine Grove Corridor Improvement Project. The California Department of Transportation (Caltrans), Amador County, and the Amador County Transportation Commission propose to construct intersection modifications, lane reconfiguration, pedestrian and bicycle improvements, and general highway improvements along SR 88 to improve safety through the town of Pine Grove. This segment of SR 88 is located along the corridor that may be used by the construction contractor to import materials to the Proposed Project's staging areas. Construction of the SR 88 Pine Grove Corridor Improvement Project is anticipated to be completed by fall 2024 (California Department of Transportation 2023a); and
- SR 88 Roadway Improvements. Caltrans proposes to make roadway improvements along SR 88 between post mile 5.5 and post mile 14.3 in Amador County (in the vicinity of the community of Martell). The work would include cold-

planing the asphalt pavement and overlaying the road surface; digging out spot locations to repair localized failures; adding shoulder backing; removing and replacing roadway signage; replacing culverts and end treatments; replacing down drains; and upgrading existing guardrails (California Department of Transportation 2021). This segment of SR 88 is located along the corridor that may be used by the construction contractor to import materials to the Proposed Project's staging areas. Caltrans anticipates that construction would begin in December 2024 and would be completed in December 2027 (California Department of Transportation 2023b).

4.2 Cumulative Impacts by Resource

The following analysis focuses on the potential for impacts identified in Chapter 3, *Environmental Setting and Impacts*, to make a considerable contribution to significant cumulative impacts. The Proposed Project would not cause significant long-term impacts on the resources discussed in Chapter 3. However, the Proposed Project has the potential to incur temporary, short-term impacts during the construction period. The potential cumulatively considerable impacts on these resources, in combination with potential impacts from the projects described in Section 4.1 *Cumulative Projects* (where applicable) are discussed below.

4.2.1 Hydrology and Water Quality

The cumulative impact context for evaluation of potential impacts on hydrology and water quality resources primarily includes only the improvements associated with the Proposed Project. There are no anticipated developments or improvements in the areas adjacent to the Project Area that have the potential to affect the local hydrology and water quality conditions or act in combination with the Proposed Project. Past projects (e.g., the Upper Blue Lake Dam Seismic Retrofit Project) and future projects (e.g., the Lower Blue Lake Dam Seepage Mitigation and Weir Replacement Project; Amador County Ingress, Egress and Education Plan Projects; SR 88 Pine Grove Corridor Improvement Project; and the SR 88 Roadway Improvements Project), each having components within the Mokelumne River watershed, have either implemented or would implement BMPs and required environmental commitments to not adversely affect surface water or groundwater quantity or quality. Both the SR 88 Pine Grove Corridor Improvement Project and the SR 88 Roadway Improvements Project are anticipated to have no impacts on hydrology and water quality resources, and the other projects are anticipated to have less-than-significant impacts on hydrology and water quality resources.

The Proposed Project would comply with DSOD and FERC seismic safety policy standards, as well as state and federal water quality regulations and, therefore, the Proposed Project's effect on local hydrology and water quality conditions would be minimized. The potential impacts of the Proposed Project would be reduced to a less-than-significant level through adherence to permit requirements and implementation of Mitigation Measures WQ-MM-1: *Implement Water Quality Protection Measures and Erosion and Sediment Control Plans*, WQ-MM-2: *Implement Spur 1 Staging Area Water Quality Protection Measures*, WQ-MM-3: *Implement Sediment Control Measures along Downstream Edge of Existing Plunge Pool prior to Rock Slope Protection Placement*, WQ-MM-4: *Develop and Implement a Water Quality Monitoring and Adaptive Management Plan*, HAZ-MM-1: *Implement Hazardous Materials Control Measures*, and AQ-MM-1: *Implement Fugitive Dust Abatement Measures*.

For these reasons, the Proposed Project is not anticipated to contribute to any cumulatively considerable impacts related to hydrologic or water quality conditions.

4.2.2 Geology and Soils

In general, a project's potential impacts related to geology and soils are individual and localized, depending on the project site and underlying soils. Each structure will have different levels of excavation, cut-and-fill work, and grading, which would affect local geologic conditions in different ways. Therefore, the geographic context for geology and soils is site-specific.

Past projects (e.g., the Upper Blue Lake Dam Seismic Retrofit Project) and future projects (e.g., the Lower Blue Lake Dam Seepage Mitigation and Weir Replacement Project; the Amador County Ingress, Egress and Education Plan Projects; the SR 88 Pine Grove Corridor Improvement Project; and the SR 88 Roadway Improvements Project), were required to go through environmental and regulatory review and comply with the California Building Code. Each project was also required to have a site-specific geotechnical investigation performed, which provides design recommendations to reduce each project's impacts. Similar seismic safety standards and conditions of approval would apply to the reasonably foreseeable future projects. For these reasons, the Proposed Project, in combination with other past, present, and reasonably foreseeable future projects, would not result in a significant cumulative geology and soils impact.

If the Proposed Project resulted in damage to or loss of paleontological resources, it could result in a cumulatively considerable impact. However, impacts would be limited to the footprint of the Proposed Project, and implementation Mitigation Measures GEO-MM-1: Educate Construction Personnel in Recognizing Fossil Material, and GEO-MM-2: Stop Work if Substantial Fossil Remains are Encountered

during Construction, to protect paleontological resources would reduce the potential impact to a less-than-significant level. The Proposed Project would therefore not contribute to a cumulatively considerable paleontological resources impact.

4.2.3 Biological Resources

Of the projects identified above, the Upper Blue Lake Dam Seismic Retrofit Project, Lower Blue Lake Dam Seepage Mitigation and Weir Replacement Project, Caples Spillway Channel Stabilization, and SR 88 Pine Grove Corridor Improvement projects, when considered with the Proposed Project, would not result in cumulative impacts on biological resources. The Upper Blue Lake Dam Seismic Retrofit Project and Lower Blue Lake Dam Seepage Mitigation and Weir Replacement Project are located approximately 30 miles from the Project Area and are at elevations of 8,100 and 8,040 feet, respectively. Due to the spatial distances and elevational differences, these projects would affect different biological resources than those in the Proposed Project's Area of Analysis and would not cumulatively contribute to the same impacts on biological resources as the Proposed Project. The Caples Spillway Channel Stabilization is also located 26 miles from the Proposed Project at 7,800 feet. This habitat restoration project would affect different biological resources than those in the Project Area due to the spatial and elevation differences and would not cumulatively contribute to the same impacts on biological resources as the Proposed Project. The SR 88 Pine Grove Corridor Improvement Project would affect existing paved surfaces in the town of Pine Grove and is unlikely to affect biological resources. As such, this project, when considered with the Proposed Project would not result in cumulative impacts on biological resources. The two remaining projects, Amador County Ingress, Egress and Education Plan, and SR 88 Roadway Improvements, are discussed in the following sections for plants and waters of the United States/waters of the State, fish, and wildlife.

4.2.3.1 Special-Status Plants, Sensitive Natural Communities, and Waters of the United States/Waters of the State

The Amador County Ingress, Egress and Education Plan project would remove roadside vegetation along private roads west of the Project Area, including removal of vegetation up to 10 inches dbh and limbing of trees greater than 10 inches dbh up to a minimum height of 10 feet. No records of special-status plants were found in the project area for the Amador County Ingress, Egress and Education Plan, and the project was not anticipated to have impacts on special-status plants. Project activities to remove and trim vegetation would avoid all impacts on riparian habitat, stream beds, banks, and channels. The Proposed Project would have no impact on special-status plants or riparian habitat and would implement Mitigation Measures

BIO-MM-1: Conduct Worker Environmental Awareness Training and Implement General Requirements, BIO-MM-5: Avoid and Minimize Disturbance of Waters of the United States/Waters of the State, and BIO-MM-6: Compensate for the Temporary and Permanent Losses of Waters of the United States/Waters of the State to ensure temporary and permanent impacts on perennial stream and reservoir are minimized and compensated. The Proposed Project, when considered with the Amador County Ingress, Egress and Education Plan, would therefore not contribute to cumulatively considerable impacts on biological resources.

The SR 88 Roadway Improvements project consists of roadway improvements along approximately 8.8 miles of roadway in Amador County from south of Ione to the community of Martell. The project would not have impacts on special-status plants. The project would remove mature riparian trees and narrow-leaf willow riparian canopy and would result in the loss of intermittent stream that potentially qualifies as waters of the United States and is a waters of the State. The project would implement mitigation to protect water quality, avoid introduction and spread of weeds, compensate for loss of mature riparian trees and narrow-leaf willow canopy. and compensate for loss of intermittent stream. The Proposed Project would have no potential impact on special-status plants or riparian habitat and would implement Mitigation Measures WQ-MM-1: Implement Water Quality Protection Measures and Erosion and Sediment Control Plans, WQ-MM-2: Implement Spur 1 Staging Area Water Quality Protection Measures, WQ-MM-3: Implement Sediment Control Measures along Downstream Edge of Existing Plunge Pool prior to Rock Slope Protection Placement, and WQ-MM-4: Develop and Implement a Water Quality Monitoring and Adaptive Management Plan to ensure impacts on water quality are avoided; and Mitigation Measures BIO-MM-1: Conduct Worker Environmental Awareness Training and Implement General Requirements, BIO-MM-5: Avoid and Minimize Disturbance of Waters of the United States/Waters of the State, and BIO-MM-6: Compensate for the Temporary and Permanent Losses of Waters of the United States/Waters of the State to ensure temporary and permanent impacts on wetland and non-wetland waters are minimized and compensated. The Proposed Project, when considered with the SR 88 Roadway Improvements project, would therefore not contribute to cumulatively considerable impacts on waters of the United States/waters of the State.

4.2.3.2 Special-Status Fish and Native Resident Fish

Neither the Amador County Ingress, Egress and Education Plan project nor the SR 88 Roadway Improvements project would affect any special-status fish or native resident fish. The Amador County Ingress, Egress and Education Plan project would avoid all impacts on riparian habitat, stream bed, bank, and channel. The SR

88 Roadway Improvements project would affect a small amount (0.02 acre) of intermittent stream and remove mature riparian trees and narrow-leaf willow riparian canopy. The Initial Study with Mitigated Negative Declaration for the project (California Department of Transportation 2021) did not identify these impacts as potentially affecting fish habitat. Therefore, neither project would have a substantial adverse effect, either directly or through habitat modifications, on any special status fish or native resident fish. No special-status fish species would be affected by the Proposed Project and implementation of Mitigation Measures BIO-MM-7: Implement Flow Pumping System and Water Drafting Requirements, BIO-MM-8: Rescue and Relocate Fish from Affected Habitat, WQ-MM-1: Implement Water Quality Protection Measures and Erosion and Sediment Control Plans, WQ-MM-2: Implement Spur 1 Staging Area Water Quality Protection Measures, WQ-MM-3: Implement Sediment Control Measures along Downstream Edge of Existing Plunge Pool prior to Rock Slope Protection Placement, WQ-MM-4: Develop and Implement a Water Quality Monitoring and Adaptive Management Plan, and AQ-MM-1: Implement Fugitive Dust Abatement Measures would ensure effects on native resident fish are minimized. Therefore, the Proposed Project, when considered with the Amador County Ingress, Egress and Education Plan and the SR 88 Roadway Improvements projects would not contribute to cumulatively considerable impacts on special status fish or native resident fish.

4.2.3.3 Special-Status Wildlife

Removal of vegetation up to 10 inches dbh and limbing of trees greater than 10 inches dbh up to a minimum height of 10 feet as part of the Amador County Ingress, Egress and Education Plan project could remove suitable nesting habitat for migratory birds and suitable roosting habitat for bats. A mitigation measure for that project requires vegetation removal to be conducted outside of the raptor nesting period (March 1-September 1). This measure would provide protection for nesting migratory birds and roosting bats. If vegetation removal does not occur between September 2 and February 28, nesting migratory birds and roosting bats could be affected, unless identified during a preconstruction survey that is required for raptors in lieu of the avoidance period. The roadside vegetation removal for the Amador County Ingress, Egress and Education Plan project could also affect northwestern pond turtle. A mitigation measure for the project requires a preconstruction survey for northwestern pond turtle in the area where northwestern pond turtle has been previously recorded. Additionally, a 50-foot protective buffer will be established on each side of all perennial watercourses, which would also provide protection for northwestern pond turtle. The roadside vegetation management mitigation measures would minimize impacts on special-status wildlife that could also be affected by the Proposed Project. Mitigation Measures BIO-MM-1: Conduct Worker

Environmental Awareness Training and Implement General Requirements, BIO-MM-2: Conduct a Preconstruction Survey for Northwestern Pond Turtle at the Cedar Mill Staging Area, BIO-MM-3: Evaluate Trees for Removal and Implement Protective Measures to Avoid or Minimize Injury or Mortality of Special-status Roosting Bats, and BIO-MM-9: Conduct a Preconstruction Survey for Nesting Birds and Implement Protective Buffers around Active Nests, will be implemented as part of the Proposed Project to ensure effects on northwestern pond turtle, migratory birds (including raptors), and roosting bats are minimized, and that the Proposed Project does not result in long-term adverse impacts on these species. The Proposed Project, when considered with the Amador County Ingress, Egress and Education Plan, would therefore not contribute to cumulatively considerable impacts on special-status wildlife.

The SR 88 Roadway Improvements project consists of roadway improvements along approximately 8.8 miles of roadway in Amador County from south of Ione to the community of Martell. Special-status wildlife that could be affected by roadway improvement work include northwestern pond turtle, migratory birds, and tree roosting bats. The project requires designation of environmentally sensitive areas, biological monitoring of work that may affect biologically sensitive areas, and surveys for active bird nests, if work occurs during the nesting season. These measures would generally protect the special-status wildlife that could also be affected by the Proposed Project. Mitigation Measures BIO-MM-1: Conduct Worker Environmental Awareness Training and Implement General Requirements, BIO-MM-2: Conduct a Preconstruction Survey for Northwestern Pond Turtle at the Cedar Mill Staging Area, BIO-MM-3: Evaluate Trees for Removal and Implement Protective Measures to Avoid or Minimize Injury or Mortality of Special-status Roosting Bats, and BIO-MM-9: Conduct a Preconstruction Survey for Nesting Birds and Implement Protective Buffers around Active Nests, will be implemented as part of the Proposed Project to ensure effects on northwestern pond turtle, migratory birds, and roosting bats are minimized, and that the Proposed Project does not result in long-term adverse impacts on these species. The Proposed Project, when considered with the SR 88 Roadway Improvements project, would therefore not contribute to cumulatively considerable impacts on special-status wildlife.

4.2.3.4 Biological Resources Cumulative Impact Conclusion

The impacts on biological resources of these past and future projects and the Proposed Project would not be cumulatively considerable for the reasons in the preceding discussion.

4.2.4 Air Quality

The evaluation of air quality impacts is an inherently cumulative approach and does not consider individual planned projects in the vicinity of the Proposed Project. Rather, it uses the same thresholds as the project-level analysis, which consider levels at which Proposed Project emissions would be cumulatively considerable. The project-level thresholds were developed to prevent deterioration of ambient air quality, which is influenced by emissions generated by past, present, and reasonably foreseeable future projects. Therefore, exceedances of the project-level thresholds, as identified in Section 3.6.4 *Environmental Effects*, would be cumulatively considerable.

Amador County currently does not attain the state and federal ozone standards. Sacramento County, through which construction materials would be hauled, does not attain the state and federal ozone and particulate matter standards. Therefore, a significant cumulative impact for air quality exists in the Area of Analysis. Construction and operations of future projects, including the Proposed Project, could further contribute to nonattainment of the state and federal air quality standards in the air quality Area of Analysis. However, as shown in Tables 3.6-3 through 3.6-5, neither construction activities nor material hauling through SMAQMD would generate ozone precursors or criteria pollutant emissions above the analysis thresholds with implementation of Mitigation Measure AQ-MM-1: *Implement Fugitive Dust Abatement Measures*. Accordingly, the Proposed Project's contribution to the existing cumulative impact would not be cumulatively considerable with mitigation.

The combined effects of air pollution in the MCAB and SVAB from existing and future sources represent the emissions paradigm to which receptors would be exposed. The contribution of Proposed Project-generated emissions to potential adverse health effects induced by exposure to regional criteria pollutant emissions (i.e., ozone precursors and particulate matter) depends on numerous interconnected variables (e.g., cumulative concentrations, local meteorology and atmospheric conditions, the number and character of exposed individuals [e.g., age, gender]). Moreover, emissions of ozone precursors (ROG and NO_X) generated in one area may not equate to an ozone concentration in that same area. Similarly, some types of particulate pollutants may be transported over long distances or formed through atmospheric reactions. As such, the magnitudes and locations of specific health effects from exposure to increased ozone or regional particulate matter concentrations are the product of emissions generated by numerous sources throughout a region, as opposed to a single individual project. Project-specific correlations of regional criteria pollutant emissions to specific health endpoints (e.g., increased cases of asthma) are not commonly performed because models that

quantify changes in ambient pollution and resultant health effects were developed to support regional planning and policy analysis and generally have limited sensitivity to changes in criteria pollutant concentrations induced by individual projects. This is particularly pronounced for projects with relatively small contributions of emissions (i.e., emissions that would be below regional thresholds), such as the Proposed Project.

In general, community health conditions near the Proposed Project, as measured by CalEnviroScreen indicators, are slightly better when compared to conditions across the state (Office of Environmental Health Hazard Assessment 2022). Regardless, Amador County does not currently attain the state and federal ozone standards. Certain individuals residing in areas that do not meet the ambient air quality standards could be exposed to pollutant concentrations that cause or aggravate acute and/or chronic health conditions, regardless of implementation of the Proposed Project. Compliance with AAD rules and implementation of Mitigation Measure AQ-MM-1: *Implement Fugitive Dust Abatement Measures*, would minimize Proposed Project-generated emissions. Moreover, as shown in Table 3.6-3, the highest predicted daily ROG and NOx emissions during construction would not contribute to the significant cumulative regional ozone pollution impact.

Localized pollutants and odors generated by a project are deposited near the emissions source and can affect the population near that emissions source. While construction of the Proposed Project would result in localized pollutant emissions (i.e., fugitive dust, DPM, and CO) and minor odors from diesel fuel combustion and paving, construction activities would be short-term (about two years). As localized pollutant concentrations and odor emissions regularly decline as a function of distance from the emission source, the Proposed Project, in combination with other existing and future projects, would not expose receptors to substantial cumulative localized pollutant concentrations or substantial odors with implementation of Mitigation Measure AQ-MM-1: *Implement Fugitive Dust Abatement Measures*.

4.2.5 Greenhouse Gas Emissions

Global GHG emissions due to population growth and economic growth continue to increase and are worsening the effects of global climate change. While there are myriad efforts at local, state, national, and international levels to promote the reduction of GHG emissions overall, current projections are that these emissions will still increase for the following decades and add to the current GHG concentrations in the atmosphere.

Environmental impacts associated with GHG emissions are exclusively cumulative in nature in accordance with the contemporary scientific knowledge of their effects on

climate change. GHG emissions, once emitted, mix into the atmosphere and affect a larger area than any individual project site. Thus, the GHG cumulative impacts analysis does not consider individual planned projects in the vicinity of the Proposed Project. Rather, it uses the same thresholds and conditions as the project-level analysis.

As discussed in Section 3.7 *Greenhouse Gas Emissions*, operational lighting emissions would not exceed one metric ton CO₂e per year. Total emissions generated by construction of the Proposed Project are estimated to be 1,691 metric tons CO₂e. Maximum annual (900 metric tons CO₂e) construction emissions are below the analysis screening threshold of 1,100 metric tons CO₂e. However, the Proposed Project would result in a permanent loss of stored carbon and sequestration capacity (3,733 metric tons CO₂). PG&E would implement Mitigation Measure GHG-MM-1: *Implement Best Management Practices to Mitigate Tree Loss and Reduce Construction Generated Greenhouse Gas Emissions* to replace removed trees at a one:one ratio, or compensate for the lost sequestration potential through the purchase of GHG offsets. The measure also requires strategies to further reduce construction-generated GHGs. Mitigation Measure GHG-MM-1 ensures GHG emissions generated by the Proposed Project would not result in a significant cumulative contribution to impacts on global climate change.

4.2.6 Energy

Potential cumulative energy impacts include contributing to the wasteful, inefficient, or unnecessary consumption of energy resources, or conflicting with or obstructing a state or local plan for renewable energy or energy efficiency.

As discussed under checklist item a in Section 3.8 *Energy*, construction activities would be short-term and would not result in wasteful, inefficient, or unnecessary consumption of energy resources with implementation of Mitigation Measure TRAN-MM-1: *Implement a Traffic Control Plan*. Additionally, the increased use of electrical energy for operations is necessary for improved visibility and safety at the Dam and incorporates energy-efficiency features into the design. The Proposed Project would therefore not contribute to a cumulatively considerable impact related to the wasteful, inefficient, or unnecessary consumption of energy resources.

As discussed under checklist item *b* in Section 3.8 *Energy*, the Proposed Project would modify the Dam spillway and access routes but would not construct any new buildings. There would be only minimal changes to existing operations. The Proposed Project new and replacement lighting features would be consistent with policies of the Conservation Element of the *Amador County General Plan*. Because no new buildings would be developed, the renewable energy or energy efficiency

measures in other state or local plans are not applicable to the Proposed Project. Accordingly, the Proposed Project would not contribute to any cumulative impacts related to conflicts with or obstruction of state or local plans for renewable energy or energy efficiency.

4.2.7 **Noise**

Cumulative noise or vibration impacts can occur when two or more projects are under construction simultaneously or generate operational noise or vibration at the same time in the same general area. As noise and vibration are localized impacts that decrease with distance from the source, significant cumulative impacts do not typically occur unless two or more projects are close to a single receptor. The presence of any natural (e.g., hills, topography) or human-made (e.g., walls, buildings) barriers between a project site and a receptor will increase the rate of noise reduction over distance and will further reduce any cumulative noise levels.

Related projects in the vicinity of the noise- and vibration-sensitive receptors considered in this analysis include construction activities that could occur simultaneously with construction of the Proposed Project, depending on its timing. For the reasons previously discussed, construction noise and vibration levels at any single receptor are typically dominated by the closest construction activity. As a result, the probability of construction noise from more distant related project sites making a substantial contribution to overall noise levels at the same receptor is generally low. Nonetheless, incremental increases in total construction noise levels could occur.

Based on the related projects list provided in Section 4.1 *Cumulative Projects*, the nearest project to the Project Area would be the Amador County Ingress, Egress and Education Plan, which includes roadside vegetation clearing along many roadways including part of Spur 1. Other nearby projects include the SR 88 Pine Grove Corridor Improvement Project and the SR 88 Roadway Improvements Project, which both involve work along segments of SR 88 located along the corridor that may be used for material import under the Proposed Project.

The other main cumulative project, located farther from the Project Area, is the Lower Blue Lake Dam Seepage Mitigation and Weir Replacement Project (located approximately 30 miles east-northeast of the Dam); construction for the Upper Blue Lake Dam Seismic Retrofit Project (located approximately 30 miles east-northeast of the Dam), and the Caples Spillway Channel Stabilization (located approximately 26 miles northeast of the Dam) are both already complete.

Regarding construction noise, there are no cumulative projects located in close proximity to the Project Area. The closest cumulative projects are the two projects

located along the SR 88 corridor. Proposed Project construction would generally not result in elevated Proposed Project-related construction noise levels along most of the SR 88 corridor leading to the Project Area. The SR 88 Pine Grove Corridor Improvement Project is expected to complete by fall 2024. With respect to the other cumulative projects, construction noise from the projects located 26 to 30 miles from the Project Area would be reduced and unlikely to be perceptible at the Project Area or along the adjacent SR 88 segments. As construction noise from the Proposed Project would generally not be produced in the same areas as construction noise from other cumulative projects, noise associated with proposed project construction would not be expected to combine with construction noise from cumulative projects at noise-sensitive uses in the Area of Analysis. The Proposed Project would therefore not contribute to any cumulatively considerable construction noise impacts.

With respect to operational noise, after construction of the Proposed Project, PG&E would continue to operate the Reservoir as was done prior to construction. In addition, there would be no new noise-generating stationary equipment installed. The only subtle difference in Proposed Project operations and maintenance that could be relevant to noise is the potential for a shift in maintenance access for the Dam, spillway, and log boom. The new permanent access road is over 2.5 miles from the nearest noise-sensitive land use. Therefore, once construction is complete, noise from the Proposed Project operations and maintenance at the nearest sensitive land uses would be similar to noise from operations and maintenance prior to Proposed Project implementation and would likely be inaudible. The Proposed Project would not result in any increases in operational noise at nearby noisesensitive land uses, and noise from Proposed Project operations would not be expected to combine with noise from the operation of other cumulative projects to expose nearby noise-sensitive land uses to excessive operational noise. Therefore, the Proposed Project would not contribute to any cumulatively considerable impacts related to operational noise.

As vibration impacts are assessed based on instantaneous maximum peak levels (PPV), worst-case ground-borne vibration levels from construction are generally determined by whichever individual piece of equipment being used generates the highest vibration levels. As a result, the vibration from multiple construction sites, even if the sites are near each other, does not generally combine to raise the maximum PPV, and the cumulative impact is no more severe than the impact from the largest individual contribution. The Proposed Project would not contribute to any cumulatively considerable vibration impacts because of the nature of PPV vibration levels and because of the distance between project construction areas and the nearest sensitive uses. Project construction activities would be expected to not result in perceptible vibration levels at any sensitive use. Additionally, the Proposed

Project would not contribute to any cumulatively considerable vibration impacts because no other Proposed Project components are near construction areas for any other related projects.

4.2.8 Hazards and Hazardous Materials

The cumulative context for hazards and hazardous materials is the Proposed Project vicinity. In general, a project's potential impacts related to hazards are individual and localized, depending on activities occurring at the project site and proximity to hazardous facilities. Hazardous materials used during construction as a result of Proposed Project implementation would be of low toxicity and would consist of fuels, oils, lubricants, cement, and cementitious materials. Because these materials are required for operation of construction vehicles and equipment and for construction of the new spillway, measures from the SWPPP, which is included in Mitigation Measure WQ-MM-1: Implement Water Quality Protection Measures and Erosion and Sediment Control Plans, as well as Mitigation Measures WQ-MM-2: Implement Spur 1 Staging Area Water Quality Protection Measures and HAZ-MM-1: Implement Hazardous Materials Control Measures will be implemented to reduce the potential for or exposure to accidental spills or fires involving the use of hazardous materials. While foreseeable projects have the potential to cause similar impacts, it is assumed these projects would also implement similar measures and follow all regulations regarding the transport, disposal, and handling of hazardous wastes during construction.

As a result of the regulatory framework described in Section 3.10.4 *Regulatory Setting*, there would be no cumulative significant effect from hazardous materials. The Proposed Project's potential impacts are less than significant, and its contribution would not create a new cumulative impact.

4.2.9 Cultural Resources

Cumulative impacts on cultural resources could result when the impacts of the Proposed Project, in conjunction with other projects and development in the region, result in multiple or cumulative impacts on cultural resources. A review of the environmental documentation for the past, present, and reasonably foreseeable projects listed above found that several of the projects on the list do not have the potential to affect built-environment cultural resources and have low to no potential to affect archaeological resources. These projects include the Amador County Ingress, Egress and Education Plan; the Caples Spillway Channel Stabilization project; the SR 88 Pine Grove Corridor Improvement Project; and the SR 88 Roadway Improvements project. The Upper Blue Lake Dam Seismic Retrofit Project involved modifications to a non-eligible resource that does not contribute to any of

the previously identified historic districts and it had no impact on archaeological resources. The Lower Blue Lake Dam Seepage Mitigation and Weir Replacement Project would take place on a contributing feature to the Mokelumne River Rock-Faced Dam Discontinuous Historic District, but that project would not have a significant impact on the historical resource, and it has low potential to affect archaeological resources. Since none of the past, present, or reasonably foreseeable projects listed above would result in substantial effects to cultural resources, and because Proposed Project Mitigation Measures CUL-MM-1: Conduct Mandatory Cultural Resources Awareness Training for All Project Personnel, CUL-MM-2: Stop Work if Previously Unidentified Archaeological Resources are Encountered until a Qualified Archaeologist Assesses the Find and Native American Consultation Has Been Conducted, and CUL-MM-3: Stop Work in Case of Accidental Discovery of Buried Human Remains until Procedures in Public Resources Code section 5097 have been Completed, would reduce the potential adverse effects on cultural resources that may occur in the Area of Analysis to a less-than-significant level, the Proposed Project is unlikely to contribute to a cumulatively considerable impact on cultural resources.

4.2.10 Tribal Cultural Resources

Cumulative impacts on tribal cultural resources could result when the potential impacts of the Proposed Project, in conjunction with other projects and developments in the region, result in multiple or cumulative impacts on tribal cultural resources in the Proposed Project region. Because there are no known tribal cultural resources in the Project Area, the Proposed Project is unlikely to contribute to cumulatively considerable impacts on tribal cultural resources.

4.2.11 Aesthetics

The cumulative analysis for aesthetics resources considers actions associated with the projects identified in Section 4.1 *Cumulative Projects*. Refer to Section 3.13 *Aesthetics*, for a more detailed description of the existing aesthetics setting of the Area of Analysis. The landscape in the cumulative Area of Analysis is characterized by mixed conifer forest-covered ridges and slopes, interspersed with slopes with little vegetation, and small towns and communities centralized along main travel routes through the county.

Past actions include construction of the Upper Blue Lake Dam Seismic Retrofit Project and the Caples Spillway Channel Stabilization Project. The Upper Blue Lake Dam Seismic Retrofit Project constructed a rock buttress that slightly widened the dam, most of which is submerged, and the placed rock fill is visually similar to existing conditions. The Caples Spillway Channel Stabilization Project restored and

stabilized two channel areas using rock-and-log stabilization measures and vegetative treatments. This resulted in negligible visual changes because the changes are natural looking.

The Amador County Ingress, Egress and Education Plan removes or prunes trees, based on size, along private roads within unincorporated regions west of Dew Drop in Amador County. Tree removals spread out along miles of private roadway would result in changes that mimic small forest canopy openings and would not greatly alter the visual landscape when compared to the amount to public and private roadways that would not be affected by the plan.

In the near future, the Lower Blue Lake Dam Seepage Mitigation and Weir Replacement Project would install a filter, seepage collection system, and rock fill buttress along the downstream earthen embankment of the dam. Potential visual impacts from project features and vegetation removal would be minimal because the proposed features would be relatively small and in keeping with the existing visual character of features associated with the dam. In addition, the views of the surrounding forests, ridges, and peaks would be retained and vegetation removal would be minimal. The SR 88 Pine Grove Corridor Improvement Project would result in minor visual changes from the intersection modifications, lane reconfiguration, pedestrian and bicycle improvements, and highway improvements along SR 88 through the town of Pine Grove. Similarly, cold-planing the asphalt pavement and overlaying the road surface; digging out spot locations to repair localized failures; adding shoulder backing; removing and replacing roadway signage; replacing culverts and end treatments; replacing down drains; and upgrading existing guardrails would be also result in minor visual changes associated with the SR 88 Roadway Improvements near Martell that would not greatly alter the visual landscape.

As discussed under checklist item *a* in Section 3.13 *Aesthetics*, there are no scenic vistas associated with the Project Area and as discussed under checklist item *b* in Section 3.13 *Aesthetics*, the Proposed Project would not result in permanent visual potential impacts on views along SR 88. Therefore, the contribution of the Proposed Project to significant cumulative impacts related to changes to scenic vista views and scenic roadways would not be cumulatively considerable.

As discussed under checklist item *c* in Section 3.13 *Aesthetics*, during construction, public access would be restricted so the public would not have views of construction activities taking place at the Doakes Ridge staging and spoils site and the Dam area (including the Spur 1 staging area and mobile batch plant site). The Cedar Mill staging area would retain the same visual quality because conditions during construction would be in keeping with the industrial-looking nature of the site and

consistent with what viewers would expect to see at the site. There would be no permanent visual potential impacts on views associated with the Proposed Project that would be seen during operation at the Cedar Mill staging area. However, the public would see the visible changes resulting from construction of the Proposed Project at the Doakes Ridge staging and spoils site and the Dam area during operation. Vegetation removal and spoils placement at the Doakes Ridge staging and spoils site would be in keeping with harvest practices on forested lands that are familiar to viewers, and the spoils would be seeded with grasses. The proposed spillway would be larger than the existing structure, and tree removal would open up the area in proximity to the Dam and along the permanent access road. However, the materials would be in keeping with existing structures at the site, and viewers are not likely to view this addition and these changes to the visual landscape as negative because most viewers are likely to be supportive of changes that result in increased safety of the Dam. In addition, visual changes at the Spur 1 staging area and mobile batch plant site would not be very noticeable because staging features and the mobile batch plant, including the earthen berm, would be removed once construction is complete, and the site is already cleared from previous development. If minor vegetation removal is needed for the Spur 1 staging area and mobile batch plant site, it would be viewed as a continuation of changes associated with the Dam. Therefore, the contribution of the Proposed Project to significant cumulative impacts related to changes in visual character and the quality of views would not be cumulatively considerable.

As discussed under checklist item d in Section 3.13 Aesthetics, the Proposed Project would be constructed during daylight hours. The proposed project changes are not expected to increase daytime glare because removal of trees that provide shade would not be enough to greatly increase glare. Changes in nighttime lighting would be minor because the new lighting would be shielded to focus lighting only on the areas that require illumination, LED lighting would avoid the use of blue-rich white light lamps and use a correlated color temperature that is no higher than 3,000 Kelvin, most of the new and replacement lights would be controlled by a switch and be used only when needed, and the remaining lights would be controlled by photocells that would be dimmed until the motion detectors are activated by personnel. These measures would ensure that the new lighting would not result in a substantial change in nighttime lighting at the Dam and lighting levels would remain very low. In addition, the new concrete spillway would weather in a short period of time and blend with the surroundings. The resulting increase in glare reflecting off new structures would be negligible. Therefore, the contribution of the Proposed Project to significant cumulative impacts related to daytime or nighttime views would not be cumulatively considerable.

Construction and operation of the Proposed Project would not cause an incremental impact related to aesthetics resources that would be significant when added to the impacts from other past, present, and reasonably foreseeable future actions.

4.2.12 Transportation

As all potential transportation impacts related to the Proposed Project would be temporary in nature, this cumulative impact analysis focuses on other construction projects that could occur concurrently with the Proposed Project and within the Proposed Project's transportation Area of Analysis within Amador County. The Amador County Ingress, Egress and Education Plan; SR 88 Pine Grove Corridor Improvement Project; and the SR 88 Roadway Improvements Project may be implemented within the Proposed Project's Area of Analysis during its construction period. Additionally, the haul trucks associated with the Lower Blue Lake Dam Seepage Mitigation and Weir Replacement Project may be using SR 88 during the 2025 construction season. Although these projects would have similar transportation effects, they would be temporary and would not cause any long-term changes in VMT or emergency access. Therefore, the Proposed Project is not anticipated to contribute to any cumulatively considerable transportation impacts.

4.2.13 Wildfire

The cumulative geographic scope for wildfire as it relates to the wildfire Area of Analysis and the surrounding areas in the vicinity. Development of other current and future projects in the surrounding vicinity (Section 4.1 *Cumulative Projects*) would be required to adhere to any state and federal environmental regulations, including those related to emergency access, evacuation plans, and wildfire risk. It is assumed that other future projects would employ a measure similar to Mitigation Measure FIRE-MM-1: *Implement Fire Hazard Prevention Measures* that would include keeping wildfire risks low. The Area of Analysis is in a remote wilderness area so there is not a high degree of development or activity occurring in the surrounding areas, which lowers the cumulative impact with respect to wildfire.

The contribution of the Proposed Project to a cumulative impact on wildfire would not be cumulatively considerable. Implementation of the Proposed Project would not cumulatively increase the risk of wildfire because it would not involve the addition of a significant number of structures or people to an undeveloped area, and any construction or operation activities associated with the Proposed Project would be conducted in accordance with Mitigation Measure FIRE-MM-1: *Implement Fire Hazard Prevention Measures*, which will reduce the potential for wildfire. Standard practices would reduce the risk of, or prevent, ignition and would expedite the immediate control of an accidental fire. Therefore, the Proposed Project's

contribution to a significant cumulative impact would not be considerable due to the limited amount of activity or development that would occur as a result of the Proposed Project, and the measures that would be implemented or incorporated to prevent risk of wildfire or the spread of wildfire.

4.2.14 Agriculture and Forestry Resources

There is no Farmland or lands under Williamson Act contract in the Area of Analysis and the Proposed Project would not conflict with existing zoning for agricultural use. Therefore, implementation of the Proposed Project would not incrementally contribute to a cumulative impact or result in a potential cumulatively considerable significant impact on agriculture when combined with other past, present and reasonably foreseeable projects considered in Section 4.1 Cumulative Projects. Although implementation of the Proposed Project would result in permanent tree removal on forest land and timberland conversion in a TPZ, it would not result in a significant change in the overall existing forest structure, would not interfere with the management of, or minimize the benefits to fish, wildlife, and the public from. surrounding forest lands, and would not be inconsistent with allowable uses in areas with the "TPZ" zoning designation. As such, the Proposed Project would not incrementally contribute to a cumulative impact on forestry resources and, when combined with other past, present and reasonably foreseeable projects identified in Section 4.1, and would not result in a potential cumulatively considerable significant impact on forestry resources in Amador County.

4.2.15 Land Use and Planning

The Proposed Project would not contribute to a potential significant cumulative impact on land use and planning. As discussed in Section 3.17 *Land Use and Planning*, the Proposed Project would not divide an established community and would be generally consistent with applicable land use policies, plans and regulations. Accordingly, the Proposed Project would not incrementally contribute to a cumulative impact on land use and planning, and when combined with other past, present, and reasonably foreseeable projects would not result in a potential cumulatively considerable significant impact on land use and planning in Amador County.

Chapter 5 **Mandatory Findings of Significance**

CEQA Guidelines section 15065 requires that a lead agency prepare an environmental impact report if any of the following conditions may result from a proposed project.

- 1. The project has the potential to substantially degrade the quality of the environment; substantially reduce the habitat of a fish or wildlife species; cause a fish or wildlife population to drop below self-sustaining levels; threaten to eliminate a plant or animal community; substantially reduce the number or restrict the range of an endangered, rare, or threatened species; or eliminate important examples of the major periods of California history or prehistory.
- 2. The project has the potential to achieve short-term environmental goals to the disadvantage of long-term environmental goals.
- 3. The project has possible environmental effects that are individually limited but cumulatively considerable.
- 4. The environmental effects of a project will cause substantial adverse effects on human beings, either directly or indirectly.

If the project proponent agrees to mitigation measures that would avoid any significant effects on the environment, or would mitigate significant effects to a point where clearly no significant effect on the environment would result from project implementation, an environmental impact report need not be prepared.

The Proposed Project would not result in any mandatory findings of significance. The Proposed Project would not result in significant impacts on the environment; fish, wildlife, or plant species; endangered species; or cultural resources. Nor would the Proposed Project cause long-term adverse environmental effects, cumulatively considerable effects, or adverse effects on humans. The Proposed Project would result in no impacts on mineral resources, population and housing, public services, recreation, tribal cultural resources, or utilities and service systems. All impacts related to the Proposed Project on aesthetics, agriculture and forestry resources, land use and planning, and noise would be less than significant, and implementation of the mitigation measures described in Chapter 3, *Environmental Setting and Impacts*, would ensure that all potential environmental impacts on air quality; biological resources; cultural resources; energy; geology, soils, seismicity, and paleontological resources; greenhouse gas emissions; hazards and hazardous materials; hydrology and water quality; transportation; and wildfire would be reduced to a less-than-significant level. Please refer to individual resource sections in

Chapter 3 for a complete discussion of the potential environmental impacts and, where applicable, associated mitigation measures, and to Chapter 4, *Cumulative Impacts*, for a full discussion of the Proposed Project's potential to contribute to cumulatively considerable effects.

6.1 Proposed Mitigated Negative Declaration

California Department of Water Resources. 2017. Letter from Sharon K. Tapia, Chief, Division of Safety of Dams, to David Ritzman, Pacific Gas and Electric Company: "Salt Springs, No. 97-66, Tiger Creek Regulator, No. 97-104, Amador County; Courtright Dam, No. 97-119, Wishon Dam, No. 97-118, Fresno County; Crane Valley Storage, No. 95-3, Madera County; Lake Fordyce, No. 97-28, Lake Spaulding, No. 97-29, Nevada County; Butt Valley Dam, No. 93, Lake Almanor, No. 93-3, Plumas County; McCloud Dam, No. 97-123, Iron Canyon Dam, No. 97-124, Shasta County; Main Strawberry Dam, No. 97-074, Tuolumne County." May 22.

Federal Energy Regulatory Commission. 2017. Letter from Frank L., Blackett, P.E., Regional Engineer, to Debbie Powell, Pacific Gas and Electric Company: "New Focused Spillway Assessments – REVISED List of Dams." June 1.

6.2 Chapter 1, Introduction

California Department of Water Resources. 2017. Letter from Sharon K. Tapia, Chief, Division of Safety of Dams, to David Ritzman, Pacific Gas and Electric Company: "Salt Springs, No. 97-66, Tiger Creek Regulator, No. 97-104, Amador County; Courtright Dam, No. 97-119, Wishon Dam, No. 97-118, Fresno County; Crane Valley Storage, No. 95-3, Madera County; Lake Fordyce, No. 97-28, Lake Spaulding, No. 97-29, Nevada County; Butt Valley Dam, No. 93, Lake Almanor, No. 93-3, Plumas County; McCloud Dam, No. 97-123, Iron Canyon Dam, No. 97-124, Shasta County; Main Strawberry Dam, No. 97-074, Tuolumne County." May 22.

Federal Energy Regulatory Commission. 2017. Letter from Frank L., Blackett, P.E., Regional Engineer, to Debbie Powell, Pacific Gas and Electric Company: "New Focused Spillway Assessments – REVISED List of Dams." June 1.

6.3 Chapter 2, Proposed Project Description

6.3.1 Published References

No references were cited in this chapter.

6.4 Chapter 3, Environmental Setting and Impacts

6.4.1 Section 3.1, Introduction

No references were cited in this section.

6.4.2 Section 3.2, Resources Upon Which the Proposed Project Would Have No Impact

Amador County. 2016. *Amador County General Plan Environmental Impact Report.*Section 4.6, Geology, Soils, Mineral Resources, and Paleontological Resources.
Prepared by AECOM. July 2016. Available:
https://www.amadorgov.org/home/showpublisheddocument/23904/636015941570170000. Accessed: October 30, 2023.

6.4.3 Section 3.3, Hydrology and Water Quality

6.4.3.1 Published References

Amador County. 2016. Amador County General Plan. Revised October 2016. Awuah, P., A. Adjaottor, E. Gikunoo, E. Arthur, F. Agyemang, and D. Baah. 2022. Dust Deposition and Associated Heavy Metal Contamination in the Neighborhood of a Cement Production Plant at Konongo, Ghana. Available: https://onlinelibrary.wiley.com/doi/epdf/10.1155/2022/6370679. Accessed: July 9, 2024)

Buffington, J.M. and D.R. Montgomery. 2022. Geomorphic Classification of Rivers: An Updated Review. *Treatise on Geomorphology*, 2nd edition, Volume 6. https://www.sciencedirect.com/science/article/abs/pii/B9780128182345000778?via%3Dihub.

California Department of Water Resources. 2003. *California's Groundwater, Bulletin* 118 – Update 2003. Sacramento, CA. Last Revised: 2018. Available: https://water.ca.gov/-/media/DWR-Website/Web-Pages/Programs/Groundwater-

- Management/Bulletin-118/Files/Statewide-Reports/Bulletin_118_Update_2003.pdf. Accessed: July 23, 2023.
- ——. 2024. Best Available Map (BAM). Last Revised: Unknown. Available: https://gis.bam.water.ca.gov/bam/. Accessed: August 4, 2024.
- California Water Boards. 2019. *General Waste Discharge Requirements for Aggregate and/or Concrete Facilities*. Administrative Draft. October 24. Available: https://www.waterboards.ca.gov/water_issues/programs/waste_discharge_requirements/docs/admindraft_agg_conc_order_2019-1024.pdf. Accessed: October 25, 2023.
- Central Valley Regional Water Quality Control Board. 2019. Water Quality Control Plan (Basin Plan) for the Sacramento River and San Joaquin River Basins (Fifth Edition). Last Revised: June 29, 2023. Available: https://www.waterboards.ca.gov/centralvalley/water_issues/basin_plans/sacsjr_2 01902.pdf. Accessed: July 24, 2023.
- Cluer, B., and C. Thorne. 2013. A Stream Evolution Model Integrating Habitat and Ecosystem Benefits. River Research and Applications.
- Cotton, Shires and Associates. 2023. Geotechnical Investigation, Pacific Gas & Electric Tiger Creek Regulator Dam, Right Abutment Spillway Cofferdam, Amador County, California. Prepared for Black & Veatch Corporation. Los Gatos, CA. February.
- Federal Emergency Management Agency. 2005. Federal Guidelines for Dam Safety, Earthquake Analyses and Design of Dams. May.
- Federal Energy Regulatory Commission. 2018. *Engineering Guidelines for the Evaluation of Hydropower Projects, Chapter 13 Evaluation of Earthquake Ground Motions*. May 30.
- Pacific Gas and Electric Company Construction Stormwater Group. 2017a. *Good Housekeeping Activity Specific Erosion and Sediment Control Plan (A-ESCP)*. April.
- ———. 2017b. Stockpile Management Activity Specific Erosion and Sediment Control Plan A-ESCP). March.
- Pacific Gas and Electric Company Storm Water Program Group. 2011.

 Laydown/Staging Area Construction Activity Specific Erosion and Sediment
 Control Plan (A-ESCP). January.

- Pacific Gas and Electric Company Water Quality Group. 2013. *Dirt and Gravel Access Road Maintenance—Mountain Regions Activity Specific Erosion and Sediment Control plan (A-ESCP)*. November.
- State Water Resources Control Board. 2023. 2020–2022 Integrated Report (Clean Water Act Section 303(d) List / 305(b) Report). USEPA approved: May 11, 2022. Last Revised: March 15, 2023. Available: https://www.waterboards.ca.gov/water_issues/programs/water_quality_assessment/2020_2022_integrated_report.html. Accessed: July 24, 2023.
- United States Environmental Protection Agency. 2023. *How's My Waterway? Tiger Creek, CA, USA*. Last Revised: Unknown. Available: https://mywaterway.epa.gov/community/Tiger%20Creek,%20CA,%20USA/overview. Accessed: July 24, 2023.
- . n.d. Stormwater Best Management Practice: Concrete Washout. Available: https://www3.epa.gov/npdes/pubs/concretewashout.pdf. Accessed: July 9, 2023.
- United States Geological Survey. 2020. Science in Your Watershed, Locate Your Watershed. Last Revised: July 17, 2020. Available: https://water.usgs.gov/wsc/cat/18040012.html#.html. Accessed: July 23, 2023.

6.4.3.2 Personal Communication

- Lecina, Kristina. Water Resources Engineer. Black & Veatch, Los Gatos, CA. July 12, 2024—Electronic message to Sara Martin, ICF, and Mike Farmer, Pacific Gas and Electric Company, regarding water levels at the M16 bridge and near the Spur 1 Laydown Area.
- McGuckin, Trevor. Senior Project Engineer. Pacific Gas and Electric Company, Angels Camp, CA. September 7, 2023—Electronic message to Sara Martin, ICF, and Mike Farmer, Pacific Gas and Electric Company, regarding potential rock slope placement impacts at the proposed crossing over the existing plunge pool downstream of the Tiger Creek Regulator Dam.

6.4.4 Section 3.4, Geology and Soils

Amador County. 2016a. *Amador County General Plan*. Revised October 2016. Available: https://www.amadorgov.org/departments/planning/general-plan-update-draft-environmental-impact-report-and-draft-general-plan. Accessed: July 10, 2023.

- ——. 2016b. Amador County General Plan Environmental Impact Report, Section 4.6, Geology, Soils, Mineral Resources, and Paleontological Resources. Final. July. Jackson, CA. Prepared by AECOM, Sacramento, CA.
- Bryant, W. and E. Hart. 2007. Special Publication 42 Fault-Rupture Hazard Zones in California, Interim Revision. California Geological Survey. August.
- California Geological Survey. 2002. *California Geomorphic Provinces*. Last revised: Unknown. Available: http://
 https://www.coastal.ca.gov/coastalvoices/resources/California_Geomorphic_Prov inces.pdf. Accessed: August 3, 2023.
- 2008. Guidelines for Evaluating and Mitigating Seismic Hazards in California. CDMG Special Publication 117A: Sacramento, CA. Last revised: Unknown. Available:
 - http://www.conservation.ca.gov/cgs/shzp/webdocs/documents/sp117.pdf. Accessed: August 7, 2023.
- 2015. CGS Information Warehouse: Regulatory Maps. Last revised: Unknown. Available: http://maps.conservation.ca.gov/cgs/informationwarehouse/index.html?map=regulatorymaps. Accessed: August 4, 2023.
- ——. 2016. Earthquake Shaking Potential for California, 2016. Map Sheet 48. Compiled by David Branum, Rueven Chen, David M. Petersen and Charles James Wills. Last revised: 2016. Available: https://https://www.conservation.ca.gov/cgs/Documents/Publications/Map-Sheets/MS_048.pdf. Accessed: August 7, 2023.
- Cotton, Shires and Associates. 2023. Geotechnical Investigation, Pacific Gas & Electric Tiger Creek Regulator Dam, Right Abutment Spillway Cofferdam, Amador County, California. Prepared for Black & Veatch Corporation. Los Gatos, CA. February.
- Federal Emergency Management Agency. 2005. Federal Guidelines for Dam Safety, Earthquake Analyses and Design of Dams. May.
- Federal Energy Regulatory Commission. 2018. Engineering Guidelines for the Evaluation of Hydropower Projects, Chapter 13–Evaluation of Earthquake Ground Motions. May 30.
- Natural Resources Conservation Service. 2024. Web Soil Survey. Last revised: August 31, 2023. Available: https://websoilsurvey.nrcs.usda.gov/app/. Accessed: July 19, 2024.

- Society of Vertebrate Paleontology. 2010. Standard Procedures for the Assessment and Mitigation of Adverse Impacts to Paleontological Resources. Available: https://vertpaleo.org/wp-content/uploads/2021/01/SVP_Impact_Mitigation_Guidelines-1.pdf. Accessed: July 28, 2023.
- United States Geological Survey. 2018. Devils Nose Quadrangle, California, 7.5-Minute Series, Topographic Map.
- University of California Museum of Paleontology. 2023. UCMP Specimen and Advanced Searches. Available: http://ucmpdb.berkeley.edu/. Accessed: July 28, 2023.

6.4.5 Section 3.5, Biological Resources

6.4.5.1 Published References

- Amador County. 2016. *Amador County General Plan, Final.* Open Space Element. Approved October 4, 2016.
- Baldwin, B. G., D. H. Goldman, D. J. Keil, R. Patterson, T. J. Rosatti, and D. H. Wilken (eds). 2012. The Jepson Manual: Vascular Plants of California, second edition, revised. Berkeley, CA: University of California Press.
- Bjornn, T.C. and D.W. Reiser. 1991. Habitat requirements of salmonids in streams. Pages 83–138 in W. R. Meehan (editor), *Influence of forest and rangeland management on salmonids fishes and their habitats*. Special Publication 19. Bethesda, MD: American Fisheries Society. 751 p.
- Brown, P.E. and E. D. Pierson. 1996. *Natural History and Management of Bats in California and Nevada*. Workshop sponsored by the Western Section of The Wildlife Society. November 13–15, 1996.
- Buehler, D. A. 2000. *Bald Eagle (Haliaeetus leucocephalus)*. Version 2.0. In *The Birds of North America* (A. F. Poole and F. B. Gill, Editors). Cornell Lab of Ornithology, Ithaca, NY. https://doi.org/10.2173/bna.506
- CalFlora. 2023. A non-profit database providing information on wild California plants. Web application. Available: http://www.calflora.org/. Accessed: August, 2023.
- California Department of Food and Agriculture. 2021. CDFA Weed Pest Ratings and CCR 4500 Noxious Weeds as of June 22, 2021. Available: https://www.cdfa.ca.gov/plant/IPC/encycloweedia/winfo_weedratings.html. Accessed: August 16, 2023.

California Department of Fish and Game. 2000. California Wildlife Habitat Relationships System. Townsend's Big-eared Bat Life History Account. Life history accounts for species in the California Wildlife Habitat Relationships System were originally published in: Zeiner, D.C., W.F. Laudenslayer, Jr., K.E. Mayer, and M. White, eds. 1988-1990. California's Wildlife. Vol. I-III. California Department of Fish and Game, Sacramento, California. Available: https://www.wildlife.ca.gov/Data/CWHR/Life-History-and-Range. 2005. Northern Goshawk. Originally published in Zeiner, D. C., W. F. Laudenslayer, Jr., and K. E. Mayer (eds.). 1990. California's Wildlife. Volume II: Birds. California Statewide Wildlife Habitat Relationships System. Sacramento, CA: California Department of Fish and Game. California Department of Fish and Wildlife. 2016. A Status Review of Townsend's Big-Eared Bat (Corynorhinus townsendii) in California. Prepared for the State of California Fish and Game Commission, Sacramento, CA. 2018. Protocols for Surveying and Evaluating Impacts to Special Status Native Plant Populations and Sensitive Natural Communities. March 20, 2018. Available: < https://www.wildlife.ca.gov/Conservation/Survey-Protocols#377281280-plants. 2019. ACE Dataset Fact Sheet Terrestrial Connectivity. DS2734. Last updated 8/21/2019. Available: https://nrm.dfg.ca.gov/FileHandler.ashx?DocumentID=150835&inline 2021. California Wildlife Habitat Relationship System, Version 10.1.29. Habitat Connectivity Viewer. Sacramento, CA. Available: https://wildlife.ca.gov/Data/Analysis/Connectivity#589603664-terrestrialconnectivity-ace 2024a. California Natural Diversity Database, RareFind 5. Version 5.3.0. Search of the Devil's Nose, Omo Ranch, Caldor, Peddler Hill, West Point, Garnet Hill, Rail Road Flat, Fort Mountain, Dorrington, Mokelumne Hill, Pine Grove, and Aukum USGS 7.5-minute Quadrangles. Last Updated: August 2, 2024. Accessed: August 6, 2024. —. 2024b. Special Animals List. July. Available:

https://nrm.dfg.ca.gov/FileHandler.ashx?DocumentID=109406&inline

California Invasive Plant Council. 2023. The Cal-IPC Inventory. Berkeley, CA.

Available: http://www.cal-ipc.org/plants/inventory/.

- California Native Plant Society. 2024. *Inventory of Rare and Endangered Plants* (Online Edition, Version v9.5). Search of the Devil's Nose, Omo Ranch, Caldor, Peddler Hill, West Point, Garnet Hill, Rail Road Flat, Fort Mountain, Dorrington, Mokelumne Hill, Pine Grove, and Aukum USGS 7.5-minute Quadrangles. Available: http://www.rareplants.cnps.org. Accessed: August 8, 2024.
- Consortium of California Herbaria. 2023. *CCH2, Specimen data from the Consortium of California Herbaria*. Data for CRPR List 4 species locations. Available: CCH2 Portal Collection Search Parameters. Accessed: August 15, 2023.
- Environmental Laboratory. 1987. *Corps of Engineers Wetland Delineation Manual*. Technical Report Y-87-1. Vicksburg, MS: U.S. Army Waterways Experiment Station.
- Gutiérrez, R. J., A. B. Franklin, and W. S. Lahaye. 2020. Spotted Owl (*Strix occidentalis*), version 1.0. In Birds of the World (A. F. Poole and F. B. Gill, Editors). Cornell Lab of Ornithology, Ithaca, NY, USA. Available: https://doi.org/10.2173/bow.spoowl.01
- Holland, D. C. 1994. *The Western Pond Turtle: Habitat and History*. Final Report. Oregon Department of Fish and Wildlife, Wildlife Diversity Program, Portland, Oregon.
- Jennings, M. R., M. P. Hayes, and D. C. Holland. 1992. A Petition to the U.S. Fish and Wildlife Service to Place the California Red-Legged Frog (Rana aurora draytonii) and the Western Pond Turtle (Clemmys marmorata) on the List of Endangered and Threatened Wildlife and Plants.
- Jennings, M. R., and M. P. Hayes. 1994. *Amphibian and Reptile Species of Special Concern in California*. Rancho Cordova, CA: California Department of Fish and Game, Inland Fisheries Division.
- Lovich, J., and K. Meyer. 2002. The Western Pond Turtle (*Clemmys marmorata*) in the Mojave River, California, USA: Highly Adapted Survivor or Tenuous Relict? *Journal of Zoology London*. 256:537–545.
- National Invasive Species Council. 2016. National Invasive Species Council Management Plan 2016-2018. Available: https://www.doi.gov/sites/doi.gov/files/uploads/2016-2018-nisc-management-plan.pdf.
- National Marine Fisheries Service. 2022. NMFS California Species List Tools for the Tiger Creek Regulator Dam Spillway Replacement Project for Devils Nose USGS 7.5-minute Topographic Quadrangle Map (Quadrangle Number: 38120-D4).

- Pacific Gas and Electric Company. 2017a. Mokelumne River Project: 10-Year Summary Report Stream Ecology Monitoring Program (SEMP), Fish Population Monitoring. FERC Project No. 137. January. Prepared by PG&E with technical assistance from: Garcia and Associates. San Ramon, CA.
- ——. 2017b. Fish sampling summary for Tiger Creek (TIGE1, TIGE2, TIGE3) for SEMP 1 and SEMP 2 monitoring, 1999–2016. Excel file. San Ramon, CA.
- ———. 2020. Mokelumne River Project: Stream Ecology Monitoring Program (SEMP), 2019 Fish Population Monitoring Report. SEMP Year 13. FERC Project No. 137. January. San Ramon, CA.
- ——. 2021. Mokelumne River Project: Stream Ecology Monitoring Program (SEMP), 2020 Fish Population Monitoring Report. SEMP Year 14. FERC Project No. 137. January. San Ramon, CA.
- ——. 2022a. Mokelumne River Project: Stream Ecology Monitoring Program (SEMP), 2021 Fish Population Monitoring Report. SEMP Year 15. FERC Project No. 137. January. Oakland, CA.
- ——. 2022b. 15-Year Summary Report Stream Ecology Monitoring Program (SEMP), Amphibian Monitoring. Mokelumne River Project FERC Project No. 137. January. Oakland, CA.
- Pierson, E. D. and W. E. Rainey. 1998. *Distribution, Status, and Management of Townsend's Big-eared Bat (Corynorhinus townsendii) in California*. Prepared for the State of California Resources Agency, Department of Fish and Game, Wildlife Management Division, Bird and Mammal Conservation Program. Sacramento, CA.
- Raleigh, R. F., T. Hickman, R. C. Solomon, and P. C. Nelson. 1984. Habitat Suitability Information: Rainbow Trout. U.S. Fish and Wildlife Service. FWS/OBS-82/10.60. 64 pp.
- Shuford, W. D. and T. Gardali (eds.). 2008. California Bird Species of Special Concern: A Ranked Assessment of Species, Subspecies, and Distinct Populations of Birds of Immediate Conservation Concern in California. Studies of Western Birds 1. Western Field Ornithologists, Camarillo, California, and California Department of Fish and Game, Sacramento, California
- Sierra Pacific Industries. 2022. 2022 California Spotted Owl Surveys for Tiger Creek Regulator Project. Prepared for PG&E. Sierra Pacific Industries- Martell District.
- Spencer, W.D., P. Beier, K. Penrod, K. Winters, C. Paulman, H. Rustigian-Romsos, J. Strittholt, M. Parisi, and A. Pettler. 2010. California Essential Habitat

- Connectivity Project: A Strategy for Conserving a Connected California. Prepared for California Department of Transportation, California Department of Fish and Game, and Federal Highways Administration. Sacramento, CA.
- Squires, J. R., R. T. Reynolds, J. Orta, and J. S. Marks. 2020. Northern Goshawk (*Accipiter gentilis*), version 1.0. In Birds of the World (S. M. Billerman, Editor). Cornell Lab of Ornithology, Ithaca, NY, USA. Available: https://doi.org/10.2173/bow.norgos.01
- State Water Resources Control Board. 2021. State Policy for Water Quality Control: State Wetland Definition and Procedures for Discharges of Dredged or Fill Material to Waters of the State. Revised April 6, 2021.
- Stebbins, R. C. 1954. *Amphibians and Reptiles of Western North America*. Second Edition. New York, NY: McGraw-Hill Book Company.
- ——. 2003. *Western Reptiles and Amphibians*. Third Edition. New York, NY: Houghton Mifflin Company.
- Szewczak, J.M., M.L. Morrison, and L.S. Harris. 2018. *Townsend's Big-Eared Bat Statewide Assessment*. Prepared for the State of California Resources Agency, Department of Fish and Wildlife, Wildlife Branch. Sacramento, CA.
- Thomson, R. C., A. N. Wright, and H. B. Shaffer. 2016. *California Amphibian and Reptile Species of Special Concern*. California Department of Fish and Wildlife. University of California Press. Oakland, CA.
- United States Army Corps of Engineers. 2005. *Ordinary High Water Mark Identification*. USACE Regulatory Guidance Letter 05-05. December.
- ——. 2010. Regional Supplement to the Corps of Engineers Wetland Delineation Manual: Western Mountains, Valleys, and Coast Region (Version 2.0). Vicksburg, MS: U.S. Army Engineer Research and Development Center. May. Available:
 - https://usace.contentdm.oclc.org/utils/getfile/collection/p266001coll1/id/7646.
- 2014. A Guide to the Ordinary High Water Mark (OHWM) Delineation for Non-Perennial Streams in the Western Mountains, Valleys, and Coast Region of the United States. Vicksburg, MS: U.S. Army Engineer Research and Development Center. August. Available:
 - https://usace.contentdm.oclc.org/utils/getfile/collection/p266001coll1/id/7645.
- United States Department of Agriculture. 2010. *Federal Noxious Weed List*. Available:

- http://www.aphis.usda.gov/plant_health/plant_pest_info/weeds/downloads/weedlist.pdf. Accessed: August 16, 2023.
- United States Department of Agriculture, Natural Resources Conservation Service. 2022. *Soil Survey Amador Area, California*. Version 15. Available: Web Soil Survey (usda.gov). Last Updated: September 1, 2022. Accessed: August 14, 2023.
- ——. 2023. Climate Data for Tiger Creek PH, California. Available: https://agacis.rcc-acis.org/?fips=06009. Accessed: March 13, 2023.
- United States Department of Agriculture, Forest Service. 2004. Sierra Nevada Forest Plan Amendment Final Supplemental Environmental Impact Statement, Volume 1. Sacramento, CA: Pacific Southwest Region. Available: https://www.fs.usda.gov/Internet/FSE_DOCUMENTS/stelprdb5416717.pdf. Accessed: August 19, 2023.
- ——. 2017. The California Spotted Owl: Current State of Knowledge. General Technical Report PSW-GTR-25. August. Southwest Research Station. Albany, CA.
- United States Fish and Wildlife Service. 2022. Species Status Assessment for the California Spotted Owl (*Strix occidentalis occidentalis*), Version 2.0. November 2022. Sacramento, California.
- ——. 2024. List of threatened and endangered species that may occur in your proposed project location or may be affected by your proposed project. Sacramento Fish and Wildlife Office. Available: https://ipac.ecosphere.fws.gov/. Accessed: August 6, 2024.
- United States Geological Survey. 2021a. Science in Your Watershed, Locate Your Stream by 12-digit HUC 180400120405 Tiger Creek-North Fork Mokelumne River. Last revised: August 3, 2021. Available: https://water.usgs.gov/wsc/a_api/wbd/subwatershed18/180400120404.html. Accessed: March 15, 2023.
- 2021b. Science in Your Watershed, Locate Your Stream by 12-digit HUC 180400120501 Upper Sutter Creek. Last revised: August 3, 2021. Available: https://water.usgs.gov/wsc/a_api/wbd/subwatershed18/180400120501.html. Accessed: March 15, 2023.
- Western Bat Working Group. 2005. Species information for fringed myotis (*Myotis thysanodes*). Available: http://wbwg.org/western-bat-species/.

- ——. 2017a. *Regional Bat Species Priority Matrix*. Available: http://wbwg.org/matrices/.
- ——. 2017b. Western Bat Species. Species information for long-legged myotis (*Myotis volans*), and hoary bat (*Lasiurus cinereus*). Last revised: 2017. Available: http://wbwg.org/western-bat-species/.
- Woodbridge, B. and Hargis, C.D. 2006. Northern goshawk inventory and monitoring technical guide. General Technical Report WO-71. Washington, DC: U.S. Department of Agriculture, Forest Service.
- Zeiner, D. C., W. F. Laudenslayer, Jr., and K. E. Mayer (eds.). 1990a. *California's Wildlife*. Volume 2: Birds. California Department of Fish and Game. Sacramento, CA.
- ——. 1990b. *California's Wildlife*. Volume 3: Mammals. California Department of Fish and Game. Sacramento, CA.

6.4.5.2 Personal Communications

Wagner, Luke. Wildlife Biologist. Sierra Pacific Industries, Martell, CA. December 2, 2021—Electronic messages to Mike Farmer, Pacific Gas and Electric Company, regarding California spotted owl survey areas, survey results, and locations of activity centers in the vicinity of the Tiger Creek Regulator Dam area.

6.4.6 Section 3.6, Air Quality

6.4.6.1 Published References

Amador County Air Pollution Control District. 2019. *Ozone Emergency Episode Plan*. August.

Amador County. 2016. General Plan. Conservation Element. July.

- California Air Pollution Control Officers Association. n.d. *Health Effects*. Available: http://www.capcoa.org/health-effects/. Accessed: June 6, 2023.
- California Air Resources Board. 2005. Air Quality and Land Use Handbook: A Community Health Perspective. April.
- ——. 2016. *Ambient Air Quality Standards*. Last Revised: May 4, 2016. Available: http://www.arb.ca.gov/research/aaqs/aaqs2.pdf. Accessed: June 6, 2023.
- ——. 2023. *Area Designations Maps/ State and National*. Available: http://www.arb.ca.gov/desig/adm/adm.htm. Accessed: June 6, 2023.

- California Department of Conservation. 2000. A General Location Guide for Ultramafic Rocks in California—Areas More Likely to Contain Naturally Occurring Asbestos. Pages 1 through 7. August. Division of Mines and Geology. Sacramento, CA.
- Countess Environmental. 2006. WRAP Fugitive Dust Handbook. September.
- Office of Environmental Health Hazard Assessment. 2015. *Air Toxics Hot Spots Program: Risk Assessment Guidelines and Guidance Manual for Preparation of Health Risk Assessments*. February.
- Sacramento Metropolitan Air Quality Management District. 2020. SMAQMD Thresholds of Significance Table. April.
- United States Environmental Protection Agency. 2006. *Compilation of Air Pollutant Emission Factors*. Section 11.12, Concrete Batching. Available: https://www3.epa.gov/ttn/chief/ap42/ch11/final/c11s12.pdf. Accessed: June 6, 2023.
- ——. 2023. *Nonattainment Areas for Criteria Pollutants (Green Book)*. Last Revised: May 31, 2023. Available: https://www.epa.gov/green-book. Accessed: June 6, 2023.
- ——. 2024. National Ambient Air Quality Standards (NAAQA) for PM. Last Revised: March 4, 2024. Available: https://www.epa.gov/pm-pollution/national-ambient-air-quality-standards-naags-pm. Accessed: August 5, 2024.

6.4.6.2 Personal Communications

Perry, Herminia. Air Pollution Control Officer. Amador Air District. Jackson, CA. June 20, 2023—email to ICF.

McGuckin, Trevor. Pacific Gas and Electric Company. July 3, 2024—email to ICF.

6.4.7 Section 3.7, Greenhouse Gas Emissions

6.4.7.1 Published References

Amador County. 2016. General Plan. Conservation Element. July.

California Air Resources Board. 2017. *California's 2017 Climate Change Scoping Plan*. November.

——. 2022. 2022 Scoping Plan for Achieving Carbon Neutrality. December.

- ———. 2023. GHG Global Warming Potentials. Available: https://ww2.arb.ca.gov/ghg-gwps. Accessed: June 6, 2023.
- California Natural Resources Agency. 2018. Final Statement of Reasons for Regulatory Action—Amendments to the State CEQA Guidelines. Pages 41 and 42. OAL Notice File No. Z-2018-0116-12. November 2018.
- Intergovernmental Panel on Climate Change. 2007. Climate Change 2007: The Physical Science Basis. Contribution of Working Group I to the Fourth Assessment Report of the Intergovernmental Panel on Climate Change [Solomon, S., D. Qin, M. Manning, Z. Chen, M. Marquis, K.B. Averyt, M. Tignor and H.L. Miller (eds.)]. Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA, 996 pp.
- Marceau, M. L., M. A. Nisbet, and M. G. VanGeem. 2007. *Life Cycle Inventory of Portland Cement Concrete*. Tables E1b and G1b. PCA R&D Serial No. 3007. Portland Cement Association. Skokie, IL.
- Sacramento Metropolitan Air Quality Management District. 2020. SMAQMD Thresholds of Significance Table. Last Revised: April 2020. Available: https://www.airquality.org/LandUseTransportation/Documents/CH2ThresholdsTable4-2020.pdf. Accessed; June 6, 2023.

6.4.7.2 Personal Communications

Perry, Herminia. Air Pollution Control Officer. Amador Air District. Jackson, CA. June 20, 2023—email to ICF.

McGuckin, Trevor. Pacific Gas and Electric Company. July 3, 2024—email to ICF.

6.4.8 Section 3.8, Energy

Amador County. 2016. General Plan. Conservation Element. July.

California Energy Commission. 2023a. *California gasoline data, facts, and statistics*. Available: https://www.energy.ca.gov/data-reports/energy-almanac/transportation-energy/california-gasoline-data-facts-and-statistics. Accessed: August 3, 2023.

——. 2023b. *Diesel fuel data, facts, and statistics*. Available: https://www.energy.ca.gov/data-reports/energy-almanac/transportation-energy/diesel-fuel-data-facts-and-statistics. Accessed: August 10, 2023.

- Climate Registry. 2023. The Climate Registry. Available: https://theclimateregistry.org/wp-content/uploads/2023/06/2023-Default-Emission-Factors-Final.pdf. Accessed: August 7, 2023.
- Sierra Business Council. 2016. *Amador County Energy Action Plan*. Available: https://www.amadorgov.org/home/showpublisheddocument/23721/63599341789 0200000. Accessed: August 3, 2023.
- United States Energy Information Administration. 2019. *Electricity use in homes*. Last Revised: May 9, 2019. Available: https://www.eia.gov/energyexplained/use-of-energy/electricity-use-in-homes.php. Accessed: August 11, 2023.

6.4.9 Section 3.9, Noise

- California Department of Transportation 2013. *Technical Noise Supplement to the Traffic Noise Analysis Protocol.* May. Sacramento, CA: Division of Environmental Analysis. Available: dot.ca.gov/-/media/dot-media/programs/environmental-analysis/documents/env/tens-sep2013-a11y.pdf. Accessed: June 15, 2023
- ——. 2020. Transportation and Construction Vibration Guidance Manual. April. Available: https://dot.ca.gov/-/media/dot-media/programs/environmental-analysis/documents/env/tcvgm-apr2020-a11y.pdf. Accessed: March 25, 2023
- County of Amador. 2016. *Amador County General Plan FEIR. Noise Section*. Available:
 - https://www.amadorgov.org/home/showpublisheddocument/23914/636015941927900000. Accessed March 30, 2023.
- Federal Highway Administration. 2006. FHWA Roadway Construction Noise Model User's Guide. January. Available:
 - https://www.fhwa.dot.gov/ENVIRonment/noise/construction_noise/rcnm/rcnm.pdf Accessed: March 15, 2023.
- Federal Transit Administration. 2018. *Transit Noise and Vibration Impact Assessment Manual. September.* Available:
 - https://www.transit.dot.gov/sites/fta.dot.gov/files/docs/research-innovation/118131/transit-noise-and-vibration-impact-assessment-manual-fta-report-no-0123_0.pdf. Accessed: March 15, 2023.
- United States Department of Housing and Urban Development. 1985. *The Noise Guidebook*, p. 24. Available:
 - https://www.hudexchange.info/onecpd/assets/File/Noise-Guidebook-Chapter-4.pdf. Accessed: May 20, 2023.

United States Environmental Protection Agency. 1974. *Information on Levels of Environmental Noise Requisite to Protect Public Health and Welfare with an Adequate Margin of Safety*. Appendix B, Table B-4, p. B-6. March.

6.4.10 Section 3.10, Hazards and Hazardous Materials

- Amador County. 2016. *Amador County General Plan.* October. Available: https://www.amadorgov.org/home/showpublisheddocument/34501/63715458328 7970000. Accessed: July 18, 2023.
- ——. 2018. Office of Emergency Services Plans and Documents. Available: https://www.amadorgov.org/departments/office-of-emergency-services/plans-and-documents. Accessed: July 18, 2023.
- Amador County Transportation Commission. 2021. *Amador County Evacuation Areas and Evacuation Routes*. Available: https://actc-amador.org/wp-content/uploads/2021/08/AMADOR_COUNTYWIDE_EvacRouteMap_wQRs.pdf. Accessed: July 18, 2023.
- Amador County Unified School District. n.d. Public Schools. Facilities and Project Information. Available: https://amadorcoe.org/departments/business/facilities-projects/. Accessed: July 6, 2023.
- California Department of Forestry and Fire Protection. 2007. *Amador County Fire Hazard Severity Zones in SRA*.
- California Department of Toxic Substances Control. 2023. EnviroStor. Available: https://www.envirostor.dtsc.ca.gov/public/map/?myaddress=pioneer%2C+ca. Accessed: July 18, 2023.

6.4.11 Section 3.11, Cultural Resources

6.4.11.1 Published References

- Applied EarthWorks, Inc. 2007. Historic Properties Management Plan for the Mokelumne River Project (FERC No. 137) in Alpine, Amador, and Calaveras Counties, California. Report on file with Pacific Gas and Electric Company.
- Far Western Anthropological Research Group, Inc. 2020. *Archaeological Resources Inventory Report for the PG&E Tiger Creek Regulator Dam Project* (Work Order No. 74029542), Amador County, California. Report on file with Pacific Gas and Electric Company.
- ICF. 2023. Cultural Resources Inventory and Evaluation and Finding of Effect for the PG&E Tiger Creek Regulator Dam Spillway Replacement Project, Amador

- County, California. Prepared for Pacific Gas and Electric Company. August. Draft.
- Levy, R, 1978. Eastern Miwok. In *California*, edited by R. F. Heizer, pages 398–413. *Handbook of North American Indians*, Volume 8, W. C. Sturtevant, general editor. Washington, DC: Smithsonian Institution.
- Mellon, K., State Historic Preservation Officer. Office of Historic Preservation,
 Department of Parks and Recreation. 2003. Mokelumne River Project (FERC No. 137) National Register Evaluations & Tiger Creek Regulator and Bear River Diversion Flow Facility Modifications. Sacramento, CA. May 7.
- PAR Environmental Services, Inc. 2002a. *Tiger Creek Hydroelectric Subsystem Historic District Department of Parks and Recreation 523 Form Set.* Prepared for Pacific Gas and Electric Company. December.
- ——. 2002b. *Tiger Creek Regulator Dam Department of Parks and Recreation 523 Form Set.* Prepared for Pacific Gas and Electric Company. October.
- ——. 2003. National Register of Historic Places Evaluation, Mokelumne River Hydroelectric System, FERC No. 127, Alpine, Amador, and Calaveras Counties, California. Prepared for Pacific Gas and Electric Company. April.

6.4.11.2 Personal Communication

Fancher, Zachary. 2018. Personal Communication (Letter) between Kimberly Bose, Federal Energy Regulation Commission, and Zachary Fancher, U.S. Army Corps of Engineers, Sacramento District.

6.4.12 Section 3.12, Tribal Cultural Resources

6.4.12.1 Personal Communications

Bradbury, Eric. Environmental Scientist, Division of Water Rights. State Water Resources Control Board. August 3, 2023—email to Sara Martin, ICF.

6.4.13 Section 3.13, Aesthetics

- Amador County. 2016. *Amador County General Plan*. Approved: October 4, 2016. Jackson, CA.
- California Department of Transportation. 2019. List of Eligible and Officially Designated State Scenic Highways. Available: https://dot.ca.gov/programs/design/lap-landscape-architecture-and-community-

- livability/lap-liv-i-scenic-highways. Last updated: July 2019. Accessed: July 7, 2023.
- Federal Highway Administration. 2023. *National Scenic Byways & All-American Roads: Ebbetts Pass Scenic Byway*. Available: https://fhwaapps.fhwa.dot.gov/bywaysp/byway/2305/map. Accessed: July 10, 2023.
- National Wild & Scenic Rivers System. 2023. *National Wild and Scenic Rivers System, California*. Available: https://www.rivers.gov/california.php. Accessed: July 13, 2023.
- Pacific Gas and Electric Company Construction Stormwater Group. 2017. Good Housekeeping Activity Specific Erosion and Sediment Control Plan (A-ESCP). April.

6.4.14 Section 3.14, Transportation

- Amador County. 2016. *Amador County General Plan, Circulation and Mobility Element.* Final. Last Revised: October 2016. Available: https://www.amadorgov.org/departments/planning/general-plan-update-draft-environmental-impact-report-and-draft-general-plan. Accessed: July 25, 2023.
- Amador County Transportation Commission. 2009. *Transportation Impact Study Guidelines*. Updated: February 2009. Available: < https://actc-amador.org/wp-content/uploads/2016/12/Traffic-Impact-Study-Guidelines_2009.pdf>. Accessed: July 26, 2023.
- ——. 2020. Amador County Regional Transportation Plan. Final. Adopted: March 5, 2020. Available: https://actc-amador.org/wp-content/uploads/2021/01/2020-RTP_Final.pdf. Accessed: July 25, 2023.
- Governor's Office of Planning and Research. 2016. Revised Proposal on Updates to the CEQA Guidelines on Evaluating Transportation Impacts in CEQA. January. Available:
 - http://opr.ca.gov/docs/Revised_VMT_CEQA_Guidelines_Proposal_January_20_2016.pdf. Accessed: July 26, 2023.
- ——. 2018. *Technical Advisory on Evaluating Transportation Impacts in CEQA*. December. Available: https://opr.ca.gov/docs/20190122-743_Technical_Advisory.pdf. Accessed: July 26, 2018.
- Sacramento Area Council of Governments. 2019a. Environmental Impact Report for the 2020 Metropolitan Transportation Plan/Sustainable Communities Strategy.

Draft. Available: https://www.sacog.org/sites/main/files/file-attachments/sacog_deir_-_optimized.pdf?1569042224. Accessed: July 28, 2023.

— 2019b. 2020 Metropolitan Transportation Plan/Sustainable Communities Strategy. Adopted: November 18, 2019. Available: https://www.sacog.org/2020-metropolitan-transportation-plansustainable-communities-strategy. Accessed: July 26, 2023.

6.4.15 Section 3.15, Wildfire

- Amador County. 2016. *Amador County General Plan.* October. Available: https://www.amadorgov.org/home/showpublisheddocument/34501/63715458328 7970000. Accessed: July 28, 2023.
- CAL FIRE. 2023a. *Caldor Fire*. Last revised: February 16, 2023. Available: https://www.fire.ca.gov/incidents/2021/8/14/caldor-fire. Accessed: July 31, 2023.
- ——. 2023b. *Electra Fire*. Last revised: June 14, 2023. Available: https://www.fire.ca.gov/incidents/2022/7/4/electra-fire. Accessed: July 31, 2023.
- FIRESafe MARIN. 2020. *How Topography Influences Wildfire Risk*. FIRESafe MARIN. Available: https://www.firesafemarin.org/topography. Accessed: August 25, 2023.
- Pacific Gas and Electric Company. 2008. SH&C Procedure 236, Fire Prevention during Welding, Cutting and other Hot Work. August.
- ——. 2022. Utility Standard: TD-1464S, Preventing and Mitigating Fires While Performing PG&E Work. Internal. June 13.
- United States Department of Agriculture, Forest Service. 2018. *Wildland-Urban Interface for 2010.* U.S. Forest Service Geospatial Data Discovery, Vector Digital Data. Second Edition. Updated: August 29, 2022. Available: https://data-usfs.hub.arcgis.com/documents/c2b2c400961e4e6ab397ff10f9e466ba/explore. Accessed: August 22, 2023.

6.4.16 Section 3.16, Agriculture and Forestry Resources

- Amador County. 2016a. *Amador County General Plan.* October. Available: https://www.amadorgov.org/home/showpublisheddocument/34501/63715458328 7970000. Accessed: July 18, 2023.
- ——. 2016b. Agricultural and Forest Resources. From: Amador County General Plan Final Environmental Impact Report. July. Available:

https://www.amadorgov.org/home/showpublisheddocument/23896/63601594121 7030000. Accessed: July 27, 2023.

California Department of Conservation. 2023. *Important Farmland Categories*. Available: https://www.conservation.ca.gov/dlrp/fmmp/Pages/Important-Farmland-Categories.aspx. Accessed: July 25, 2023.

6.4.17 Section 3.17, Land Use and Planning

Amador County. 2016. *Amador County General Plan.* October. Available: https://www.amadorgov.org/home/showpublisheddocument/34501/63715458328 7970000. Accessed: July 18, 2023.

6.5 Chapter 4, Cumulative Impacts

- California Department of Forestry and Fire Protection. 2022. Final Initial Study-Mitigated Negative Declaration for the proposed Amador County Ingress, Egress and Education Plan, Amador County, California. September. Sacramento, CA. SCH #2022090184.
- California Department of Transportation. 2021. State Route 88 Roadway Improvements: Initial Study with Mitigated Negative Declaration, Volume 1 of 2. December. Stockton, CA. SCH #2021090506.
- ——. 2023a. State Route 88 Pine Grove Improvements Project.

 Available:https://dot.ca.gov/caltrans-near-me/district-10/district-10-current-projects/state-route-88-pinegrove-sr-88-improvements-project. Accessed: July 21, 2023.
- ——. 2023b. State Route 88 Roadway Improvements.

 Available:https://dot.ca.gov/caltrans-near-me/district-10/district-10-current-projects/10-0Q210. Accessed: July 21, 2023.
- ICF. 2023. Lower Blue Lake Dam Seepage Mitigation and Weir Replacement Project Initial Study/Mitigated Negative Declaration. Final. May. (ICF 103642.0.188.01.002.) Sacramento, CA. Prepared for Central Valley Regional Water Quality Control Board, Rancho Cordova, CA and Pacific Gas and Electric Company, Sacramento, CA. SCH #2023030107.
- ICF International. 2019. *Upper Blue Lake Dam Seismic Retrofit Project Initial Study/Mitigated Negative Declaration*. Final. April. (ICF 00708.17.) Sacramento, CA. Prepared for the Central Valley Regional Water Quality Control Board and Pacific Gas and Electric Company, Sacramento, CA. SCH #2019039037.

Office of Environmental Health Hazard Assessment. 2022. *CalEnviroScreen 4.0*. Available: https://oehha.ca.gov/calenviroscreen/report/calenviroscreen-40. Accessed: June 6, 2023.

State Water Resources Control Board. 2020. Water Quality Certification for Federal Permit or License, El Dorado Irrigation District's Caples Spillway Channel Stabilization Project. March 4. Available: https://www.waterboards.ca.gov/waterrights/water_issues/programs/water_qualit y_cert/docs/eldorado_hydro_ferc184/eid_caples_cert.pdf. Accessed: July 19, 2023.

6.6 Chapter 5, Mandatory Findings of Significance

No references were cited in this chapter.

Appendix A **Environmental Checklist**

Appendix A **Environmental Checklist**

1. Project Title: Tiger Creek Regulator Dam Spillway

Replacement Project

2. Lead Agency Name and State W

Address:

State Water Resources Control Board

P.O. Box 100

Sacramento, CA 95812-0100

3. Contact Person and Phone

Number:

Eric Bradbury (916) 327-9401

4. Project Location: Tiger Creek Regulator Reservoir, Amador

County

5. Project Sponsor's Name and

Address:

Pacific Gas and Electric Company

Attn: Mike Farmer

5555 Florin Perkins Road Sacramento, CA 95826

6. General Plan Designation: General Forest, Open Recreation, and

Industrial

7. Zoning: Timberland Preserve (Timber Production

Zone), Single Family Residential-Agricultural,

and Manufacturing

8. Description of Project:

Pacific Gas and Electric Company (PG&E) is proposing to construct the Tiger Creek Regulator Dam Spillway Replacement Project (Proposed Project) at the Tiger Creek Regulator Reservoir (Reservoir) in Amador County (Figure 1-1, Project Location). Prompted by the spillway failure at Lake Oroville Dam (a non-PG&E site) in February 2017, the Federal Energy Regulatory Commission (FERC) and the California Department of Water Resources Division of Safety of Dams (DSOD) requested that PG&E perform assessments of the spillways at several PG&E-owned dams. PG&E completed the spillway assessment for the Tiger Creek Regulator Dam (TCRD or Dam) in December 2017 and identified several structural and hydraulic deficiencies of the existing spillway, and determined that it does not have the capacity to meet FERC requirements for passing the probable maximum flood (PMF) without overtopping the Dam. The PMF flow of 5,652 cubic feet per second (cfs) is approximately double that of the existing spillway capacity. The purpose of the Proposed Project is to mitigate these known spillway deficiencies through construction of a new spillway and decommissioning of the old spillway infrastructure, allowing the Dam to safely pass a flood event of up to 6,000 cfs. The Proposed Project

comprises construction of a new spillway near the Dam's right abutment, which includes a spillway intake (crest structure), a notch through the existing Dam, a concrete chute, flip bucket splitter blocks, and plunge pool. Other associated features include a permanent access road, cofferdam, new log boom, lighting, and abandonment of the existing spillway.

9. Surrounding Land Uses and Setting:

The Tiger Creek Regulator Dam is located on Tiger Creek, a tributary to the North Fork of the Mokelumne River, approximately 24 miles northeast of Jackson in Amador County, California. The elevation of the Dam is approximately 3,500 feet above mean sea level. The Dam and Reservoir are situated in a narrow valley in the foothills of the Sierra Nevada mountain range, and the valley slopes rise steeply to approximately 300 feet above the water surface of the Reservoir. The dominant vegetation type is Sierra Nevada mixed conifer forest. The lands surrounding the Reservoir are zoned as "Timberland Preserve Zone (Timber Production Zone)" and have been logged in the past with periodic entries for commercial timber harvesting.

The Dam is on land owned by PG&E and PG&E also owns or has use agreements for the nearby proposed staging and laydown areas. Surrounding lands are owned by the California Department of Forestry and Fire Protection (CAL FIRE). Elements of the Proposed Project would be constructed on CAL FIRE land; however, this property was donated to CAL FIRE by PG&E and includes utility easements that allow PG&E to operate and maintain existing and future hydroelectric facilities and to construct improvements necessary to meet water delivery requirements for power generation.

Access to the Dam and Reservoir area is controlled by locked gates on Tiger Creek Road and Salt Springs Road. The public is allowed to fish from the Dam and Reservoir shoreline when public safety is not compromised due to weather, wildfire precautions, or operational necessities. There are no formal recreation facilities and no swimming, boating, or float tubes are allowed in the Reservoir. Camping and fires are also prohibited. PG&E has the authority to lock the gates to the public when needed (e.g., for public safety, during road repair/maintenance activities, or during construction within the watershed).

10. Other Public Agencies Whose Approval is Required:

Federal Energy Regulatory Commission
United States Fish and Wildlife Service
United States Army Corps of Engineers
California Division of Safety of Dams
California Department of Forestry and Fire Protection

11. Have California Native American tribes traditionally and culturally affiliated with the project area requested consultation pursuant to Public Resources Code section 21080.3.1? If so, has consultation begun?

No Tribes requested to consult on the Proposed Project with the lead agency pursuant to Public Resources Code section 21080.3.1.

Environmental Factors Potentially Affected

The environmental factors checked below would potentially be affected by this

project (i.e., the project would involve at least one impact that is a "Potentially Significant Impact"), as indicated by the checklist on the following pages. Aesthetics Agricultural and Forestry Air Quality Resources Biological Resources Cultural Resources Energy Geology/Soils/ Greenhouse Gas Hazards and Paleontological Hazardous Materials **Emissions** Resources Hydrology/Water Land Use/Planning | | Mineral Resources Quality Noise Population/Housing ☐ Public Services Recreation Transportation Tribal Cultural Resources Utilities/Service Wildfire Mandatory Findings **Systems** of Significance

Final

A-3

A.1 Aesthetics

| 1. / | Aesthetics | Potentially Significant Impact | Less than Significant with Mitigation Incorporated | Less-than-Significant Impact | No Impact |
|------|--|-----------------------------------|--|---------------------------------|-----------|
| | cept as provided in Public Resources de section 21099, would the project: | | | | |
| a. | Have a substantial adverse effect on a scenic vista? | | | | |
| b. | Substantially damage scenic resources, including, but not limited to, trees, rock outcroppings, and historic buildings along a scenic highway? | | | | |
| C. | In non-urbanized areas, substantially degrade the existing visual character or quality of public views of the site and its surroundings? (Public views are those that are experienced from publicly accessible vantage point). If the project is in an urbanized area, would the project conflict with applicable zoning and other regulations governing scenic quality? | | | | |
| d. | Create a new source of substantial light or glare that would adversely affect daytime or nighttime views in the area? | | | | |

A.2 Agricultural and Forestry Resources

| II. Agricultural and Forestry Resources | Potentially Significant Impact | Less than Significant with Mitigation Incorporated | Less-than-Significant Impact | No Impact |
|--|-----------------------------------|--|---------------------------------|-----------|
| In determining whether impacts on agricultural resources are significant environmental effects, lead agencies may refer to the California Agricultural Land Evaluation and Site Assessment Model (1997) prepared by the California Department of Conservation as an optional model to use in assessing impacts on agriculture and farmland. In determining whether impacts on forest resources, including timberland, are significant environmental effects, lead agencies may refer to information compiled by the California Department of Forestry and Fire Protection regarding the state's inventory of forest land, including the Forest and Range Assessment Project and the Forest Legacy Assessment Project, and forest carbon measurement methodology provided in the Forest Protocols adopted by the California Air Resources Board. Would the project: | | | | |
| a. Convert Prime Farmland, Unique Farmland, or Farmland of Statewide Importance (Farmland), as shown on the maps prepared pursuant to the Farmland Mapping and Monitoring Program of the California Resources Agency, to non-agricultural use? | | | | |
| b. Conflict with existing zoning for agricultural use or conflict with a Williamson Act contract? | | | | |

| 11. | Agricultural and Forestry Resources | Potentially Significant Impact | Less than Significant with Mitigation Incorporated | Less-than-Significant Impact | No Impact |
|-----|--|-----------------------------------|--|---------------------------------|-----------|
| C. | Conflict with existing zoning for, or cause rezoning of forest land (as defined in Public Resources Code section 12220(g)), timberland (as defined by Public Resources Code section 4526), or timberland zoned Timberland Production (as defined by Government Code section 51104(g))? | | | | |
| d. | Result in the loss of forest land or conversion of forest land to non-forest use? | | | | |
| e. | Involve other changes in the existing environment that, due to their location or nature, could result in conversion of Farmland to non-agricultural use or conversion of forest land to non-forest use? | | | | |

A.3 Air Quality

| | o An Quanty | | | | |
|--------------------------|---|-----------------------------------|--|---------------------------------|-----------|
| III. | Air Quality | Potentially Significant Impact | Less than Significant with Mitigation Incorporated | Less-than-Significant Impact | No Impact |
| est ma dis foll | nere available, the significance criteria cablished by the applicable air quality inagement district or air pollution control trict may be relied upon to make the owing determinations. Would the bject: | | | | |
| a. | Conflict with or obstruct implementation of the applicable air quality plan? | | | \boxtimes | |
| b. | Result in a cumulatively considerable net increase of any criteria pollutant for which the project region is a nonattainment area for an applicable federal or state ambient air quality standard? | | | | |
| C. | Expose sensitive receptors to substantial pollutant concentrations? | | | | |
| d. | Result in other emissions (such as those leading to odors) adversely affecting a substantial number of people? | | | | |

A.4 Biological Resources

| | | Potentially Significant Impact | Less than Significant with Mitigation Incorporated | Less-than-Significant Impact | No Impact |
|----|---|-----------------------------------|--|---------------------------------|-----------|
| | Biological Resources | <u> </u> | | | |
| a. | uld the project: Have a substantial adverse effect, either directly or through habitat modifications, on any species identified as a candidate, sensitive, or special-status species in local or regional plans, policies, or regulations, or by the California Department of Fish and Wildlife or U.S. Fish and Wildlife Service? | | | | |
| b. | Have a substantial adverse effect on any riparian habitat or other sensitive natural community identified in local or regional plans, policies, or regulations, or by the California Department of Fish and Wildlife or U.S. Fish and Wildlife Service? | | | | |
| C. | Have a substantial adverse effect on state or federally protected wetlands (including, but not limited to, marshes, vernal pools, coastal wetlands, etc.) through direct removal, filling, hydrological interruption, or other means? | | | | |
| d. | Interfere substantially with the movement of any native resident or migratory fish or wildlife species or with established native resident or migratory wildlife corridors, or impede the use of native wildlife nursery sites? | | | | |

| IV. | Biological Resources | Potentially Significant Impact | Less than Significant with Mitigation Incorporated | Less-than-Significant Impact | No Impact |
|-----|---|-----------------------------------|--|---------------------------------|-----------|
| e. | Conflict with any local policies or ordinances protecting biological resources, such as a tree preservation policy or ordinance? | | | | |
| f. | Conflict with the provisions of an adopted habitat conservation plan, natural community conservation plan, or other approved local, regional, or state habitat conservation plan? | | | | |

A.5 Cultural Resources

| V. | Cultural Resources | Potentially Significant Impact | Less than Significant with Mitigation Incorporated | Less-than-Significant Impact | No Impact |
|----|---|-----------------------------------|--|---------------------------------|-----------|
| Wo | ould the project: | | | | |
| a. | Cause a substantial adverse change in the significance of a historical resource pursuant to section 15064.5? | | | | |
| b. | Cause a substantial adverse change in the significance of an archaeological resource pursuant to section 15064.5? | | | | |
| C. | Disturb any human remains, including those interred outside of dedicated cemeteries? | | | | |

A.6 Energy

| | | Potentially Significant Impact | Less than Significant with Mitigation Incorporated | Less-than-Significant Impact | No Impact |
|-----|--|-----------------------------------|--|---------------------------------|-----------|
| VI. | Energy | 2 E | Le wi | E E | ž |
| Wo | uld the project: | | | | |
| a. | Result in potentially significant environmental impact due to wasteful, inefficient, or unnecessary consumption of energy resources, during project construction or operation? | | | | |
| b. | Conflict with or obstruct a state or local plan for renewable energy or energy efficiency? | | | | |

A.7 Geology, Soils, and Paleontological Resources

| | | eology, Soils, and Paleontological | Potentially Significant Impact | Less than Significant with Mitigation Incorporated | Less-than-Significant Impact | No Impact |
|----|------------------------|---|-----------------------------------|--|---------------------------------|-----------|
| Wo | uld | the project: | | | | |
| a. | su the | rectly or indirectly cause potential bstantial adverse effects, including e risk of loss, injury, or death volving: | | | | |
| | 1. | Rupture of a known earthquake fault, as delineated on the most recent Alquist-Priolo Earthquake Fault Zoning Map issued by the State Geologist for the area or based on other substantial evidence of a known fault? Refer to Division of Mines and Geology Special Publication 42. | | | | |
| | 2. | Strong seismic ground shaking? | | | \boxtimes | |
| | 3. | Seismic-related ground failure, including liquefaction? | | | | |
| | 4. | Landslides? | | | \boxtimes | |
| b. | | esult in substantial soil erosion or the ss of topsoil? | | | | |
| C. | tha un po lar | e located on a geologic unit or soil at is unstable or that would become stable as a result of the project and tentially result in an onsite or offsite adslide, lateral spreading, bsidence, liquefaction, or collapse? | | | | |

| | Geology, Soils, and Paleontological sources | Potentially Significant Impact | Less than Significant with Mitigation Incorporated | Less-than-Significant Impact | No Impact |
|----|--|-----------------------------------|--|---------------------------------|-----------|
| d. | Be located on expansive soil, as defined in Table 18-1-B of the Uniform Building Code (1994), creating substantial direct or indirect risks to life or property? | | | | |
| e. | Have soils incapable of adequately supporting the use of septic tanks or alternative wastewater disposal systems in areas where sewers are not available for the disposal of wastewater? | | | | |
| f. | Directly or indirectly destroy a unique paleontological resource or site or unique geologic feature? | | | | |

A.8 Greenhouse Gas Emissions

| VIII | . Greenhouse Gas Emissions | Potentially Significant Impact | Less than Significant with Mitigation Incorporated | Less-than-Significant Impact | No Impact |
|------|--|-----------------------------------|--|---------------------------------|-----------|
| Wo | uld the project: | | | | |
| a. | Generate greenhouse gas emissions, either directly or indirectly, that may have a significant impact on the environment? | | | | |
| b. | Conflict with an applicable plan, policy, or regulation adopted for the purpose of reducing the emissions of greenhouse gases? | | | | |

A.9 Hazards and Hazardous Materials

| IX. | Hazards and Hazardous Materials | Potentially Significant Impact | Less than Significant with Mitigation Incorporated | Less-than-Significant Impact | No Impact |
|-----|---|-----------------------------------|--|---------------------------------|-----------|
| Wo | uld the project: | | | | |
| a. | Create a significant hazard to the public or the environment through the routine transport, use, or disposal of hazardous materials? | | | | |
| b. | Create a significant hazard to the public or the environment through reasonably foreseeable upset and accident conditions involving the release of hazardous materials into the environment? | | | | |
| C. | Emit hazardous emissions or involve handling hazardous or acutely hazardous materials, substances, or waste within one-quarter mile of an existing or proposed school? | | | | |
| d. | Be located on a site that is included on a list of hazardous materials sites compiled pursuant to Government Code section 65962.5 and, as a result, would it create a significant hazard to the public or the environment? | | | | |
| e. | Be located within an airport land use plan area or, where such a plan has not been adopted, be within two miles of a public airport or public use airport, and result in a safety hazard or excessive noise for people residing or working in the project area? | | | | |

| IX. | Hazards and Hazardous Materials | Potentially Significant Impact | Less than Significant with Mitigation Incorporated | Less-than-Significant Impact | No Impact |
|-----|---|-----------------------------------|--|---------------------------------|-----------|
| f. | Impair implementation of or physically interfere with an adopted emergency response plan or emergency evacuation plan? | | | | |
| g. | Expose people or structures, either directly or indirectly, to a significant risk of loss, injury, or death involving wildland fires? | | | | |

A.10 Hydrology and Water Quality

| | <u> </u> | <u> </u> | | | |
|----|---|-----------------------------------|--|---------------------------------|-----------|
| X. | Hydrology and Water Quality | Potentially Significant Impact | Less than Significant with Mitigation Incorporated | Less-than-Significant Impact | No Impact |
| Wo | ould the project: | | | | |
| a. | Violate any water quality standar waste discharge requirements of otherwise substantially degrade or groundwater quality? | r | | | |
| b. | Substantially decrease groundw supplies or interfere substantiall groundwater recharge such that project may impede sustainable groundwater management of the | y with the | | | |
| C. | Substantially alter the existing dipattern of the site or area, including through the alteration of the coustream or river or through the action of impervious surfaces, in a marthat would: | ling rse of a Idition | | | |
| | Result in substantial erosion siltation on or off site; | or \square | \boxtimes | | |
| | Substantially increase the ra amount of surface runoff in a manner that would result in f on or off site; | <u> </u> | | | |
| | Create or contribute runoff we that would exceed the capaci existing or planned stormwate drainage systems or provide substantial additional source polluted runoff; or | ity of er | | | |
| | 4. Impede or redirect flood flow | s? | | | |

| X. | Hydrology and Water Quality | Potentially Significant Impact | Less than Significant with Mitigation Incorporated | Less-than-Significant Impact | No Impact |
|----|--|-----------------------------------|--|---------------------------------|-----------|
| d. | In flood hazard, tsunami, or seiche zones, risk release of pollutants due to project inundation? | | | | |
| e. | Conflict with or obstruct implementation of a water quality control plan or sustainable groundwater management plan? | | | | |

A.11 Land Use and Planning

| XI. | Land Use and Planning | Potentially Significant Impact | Less than Significant with Mitigation Incorporated | Less-than-Significant Impact | No Impact |
|-----|---|-----------------------------------|--|---------------------------------|-----------|
| Wc | ould the project: | | | | |
| a. | Physically divide an established community? | | | | |
| b. | Cause a significant environmental impact due to a conflict with any land use plan, policy, or regulation adopted for the purpose of avoiding or mitigating an environmental effect? | | | | |

A.12 Mineral Resources

| XII. | Mineral Resources | Potentially Significant Impact | Less than Significant with Mitigation Incorporated | Less-than-Significant Impact | No Impact |
|------|---|-----------------------------------|--|---------------------------------|-----------|
| Wo | uld the project: | | | | |
| a. | Result in the loss of availability of a known mineral resource that would be of value to the region and the residents of the state? | | | | |
| b. | Result in the loss of availability of a locally important mineral resource recovery site delineated on a local general plan, specific plan, or other land use plan? | | | | |

Please refer to Chapter 3, *Environmental Setting and Impacts*, for a complete discussion of the potential environmental impacts.

A-20

A.13 Noise

| | | Potentially Significant Impact | Less than Significant with Mitigation Incorporated | ess-than-Significant mpact | pact |
|------|---|-----------------------------------|--|-------------------------------|-----------|
| XIII | . Noise | Potenti Impact | Less with I Incor | Less-th Impact | No Impact |
| Wo | uld the project: | | | | |
| a. | Generate a substantial temporary or permanent increase in ambient noise levels in the vicinity of the project in excess of standards established in a local general plan or noise ordinance or applicable standards of other agencies? | | | | |
| b. | Generate excessive groundborne vibration or groundborne noise levels? | | | | |
| C. | Be located within the vicinity of a private airstrip or an airport land use plan, or, where such a plan has not been adopted, within two miles of a public airport or public use airport and expose people residing or working in the project area to excessive noise levels? | | | | |

A.14 Population and Housing

| | • | Potentially Significant Impact | Less than Significant with Mitigation ncorporated | .ess-than-Significant mpact | act |
|-----|--|-----------------------------------|---|--------------------------------|-----------|
| ΧI\ | /. Population and Housing | Potentia Impact | Less than Sign with Mitigation Incorporated | Less-tha Impact | No Impact |
| Wc | ould the project: | | | | |
| a. | Induce substantial unplanned population growth in an area, either directly (e.g., by proposing new homes and businesses) or indirectly (e.g., through extension of roads or other infrastructure)? | <u> </u> | | | |
| b. | Displace a substantial number of existing people or housing, necessitating the construction of replacement housing elsewhere? | | | | |

A.15 Public Services

| XV. Public Services Would the project: | Potentially Significant Impact | Less than Significant with Mitigation Incorporated | Less-than-Significant Impact | No Impact |
|--|-----------------------------------|--|---------------------------------|-------------|
| a. Result in substantial adverse physical impacts associated with the provision of new or physically altered governmental facilities or a need for new or physically altered governmental facilities, the construction of which could cause significant environmental impacts, in order to maintain acceptable service ratios, response times, or other performance objectives for any of the following public services: | | | | |
| Fire protection? | | | | \boxtimes |
| Police protection? | | | | \boxtimes |
| Schools? | | | | \boxtimes |
| Parks? | | | | \boxtimes |
| Other public facilities? | | | | |

A.16 Recreation

| ΧV | T. Recreation | Potentially Significant Impact | Less than Significant with Mitigation Incorporated | Less-than-Significant Impact | No Impact |
|----|---|-----------------------------------|--|---------------------------------|-----------|
| Wo | ould the project: | | | | |
| a. | Increase the use of existing neighborhood and regional parks or other recreational facilities such that substantial physical deterioration of the facility would occur or be accelerated? | | | | |
| b. | Include recreational facilities or require the construction or expansion of recreational facilities that might have an adverse physical effect on the environment? | | | | |

A.17 Transportation

| XV | II. Transportation | Potentially Significant Impact | Less than Significant with Mitigation Incorporated | Less-than-Significant Impact | No Impact |
|----|---|-----------------------------------|--|---------------------------------|-----------|
| Wc | ould the project: | | | | |
| a. | Conflict with a program, plan, ordinance, or policy addressing the circulation system, including transit, roadway, bicycle, and pedestrian facilities? | | | | |
| b. | Conflict or be inconsistent with State CEQA Guidelines section 15064.3, subdivision (b)? | | | | |
| C. | Substantially increase hazards because of a geometric design feature (e.g., sharp curves or dangerous intersections) or incompatible uses (e.g., farm equipment)? | | | | |
| d. | Result in inadequate emergency access? | | | \boxtimes | |

A.18 Tribal Cultural Resources

| | 10 Tribai Galtarai Nese | - 41 000 | | | |
|--|--|-----------------------------------|--|---------------------------------|-----------|
| XV | III. Tribal Cultural Resources | Potentially Significant Impact | Less than Significant with Mitigation Incorporated | Less-than-Significant Impact | No Impact |
| adv trib Re site is g size pla | rould the project cause a substantial verse change in the significance of a all cultural resource, defined in Public sources Code section 21074 as either a e, feature, place, cultural landscape that geographically defined in terms of the e and scope of the landscape, sacred ce, or object with cultural value to a lifornia Native American tribe, and that | | | | |
| a. | Listed or eligible for listing in the California Register of Historical Resources, or in a local register of historical resources as defined in Public Resources Code section 5020.1(k), or | | | | |
| b. | A resource determined by the lead agency, in its discretion and supported by substantial evidence, to be significant pursuant to criteria set forth in subdivision (c) of Public Resources Code section 5024.1. In applying the criteria set forth in subdivision (c) of Public Resource Code section 5024.1, the lead agency shall consider the significance of the resource to a California Native American tribe. | | | | |

A.19 Utilities and Service Systems

| | | Potentially Significant Impact | Less than Significant with Mitigation Incorporated | Less-than-Significant Impact | No Impact |
|----|--|--------------------------------|--|---------------------------------|-----------|
| | . Utilities and Service Systems | <u>ਰ</u> ਵ | 2 ≷ ⊑ | | Z |
| a. | uld the project: Require or result in the relocation or construction of new or expanded water, wastewater treatment, stormwater drainage, electric power, natural gas, or telecommunications facilities, the construction or relocation of which could cause significant environmental effects? | | | | |
| b. | Have sufficient water supplies available to serve the project and reasonably foreseeable future development during normal, dry, and multiple dry years? | | | | |
| C. | Result in a determination by the wastewater treatment provider that serves or may serve the project that it has adequate capacity to serve the project's projected demand in addition to the provider's existing commitments? | | | | |
| d. | Generate solid waste in excess of state or local standards, or in excess of the capacity of local infrastructure, or otherwise impair the attainment of solid waste reduction goals? | | | | |
| e. | Comply with federal, state, and local management and reduction statutes and regulations related to solid waste? | | | | |

Please refer to Chapter 3, *Environmental Setting and Impacts*, for a complete discussion of the potential environmental impacts.

A-27

A.20 Wildfire

| | | Potentially Significant Impact | Less than Significant with Mitigation Incorporated | Less-than-Significant Impact | No Impact |
|-----|--|-----------------------------------|--|---------------------------------|-----------|
| are | ocated in or near state responsibility eas or lands classified as very high fire zard severity zones, would the project: | | | | |
| a. | Substantially impair an adopted emergency response plan or emergency evacuation plan? | | | | |
| b. | Due to slope, prevailing winds, and other factors, exacerbate wildfire risks of, and thereby expose project occupants to, pollutant concentrations from a wildfire or the uncontrolled spread of a wildfire? | | | | |
| C. | Require the installation or maintenance of associated infrastructure (such as roads, fuel breaks, emergency water sources, power lines, or other utilities) that may exacerbate fire risk or that may result in temporary or ongoing impacts on the environment? | | | | |
| d. | Expose people or structures to significant risks, including downslope or downstream flooding or landslides, as a result of runoff, post-fire slope instability, or drainage changes? | | | | |

Appendix B **Species Lists**

Appendix B1 California Native Plant Society Online Inventory of Rare and Endangered Plants Records Search Results



Selected Elements by Scientific Name

California Department of Fish and Wildlife California Natural Diversity Database



Query Criteria:

Quad IS (Devils Nose (3812044) OR Omo Ranch (3812055) OR Caldor (3812054) OR Peddler Hill (3812053) OR West Point (3812045) OR Garnet Hill (3812043) OR Rail Road Flat (3812035) OR Fort Mountain (3812034) OR Dorrington (3812033) OR Mokelumne Hill (3812036) OR Pine Grove (3812046) OR Aukum (3812056))

'span style='color:Red'> OR Taxonomic Group OR Herbaceous OR Reverine OR Reverine OR Reverine OR Dicots<span style='col

Tiger Creek Regulator Dam Spillway Replacement Project

| Species | Element Code | Federal Status | State Status | Global Rank | State Rank | Rare Plant Rank/CDFW SSC or FP |
|--|--------------|----------------|--------------|-------------|------------|--------------------------------------|
| Allium tribracteatum | PMLIL022D0 | None | None | G2 | S2 | 1B.2 |
| three-bracted onion | | | | | | |
| Arctostaphylos myrtifolia | PDERI04240 | Threatened | None | G1 | S1 | 1B.2 |
| Ione manzanita | | | | | | |
| Big Tree Forest | CTT84250CA | None | None | G3 | S3.2 | |
| Big Tree Forest | | | | | | |
| Botrychium crenulatum | PPOPH010L0 | None | None | G4 | S3 | 2B.2 |
| scalloped moonwort | | | | | | |
| Botrychium minganense | PPOPH010R0 | None | None | G5 | S4 | 4.2 |
| Mingan moonwort | | | | | | |
| Brasenia schreberi | PDCAB01010 | None | None | G5 | S3 | 2B.3 |
| watershield | | | | | | |
| Calochortus clavatus var. avius | PMLIL0D095 | None | None | G4T2 | S2 | 1B.2 |
| Pleasant Valley mariposa-lily | | | | | | |
| Central Valley Drainage Hardhead/Squawfish Stream | CARA2443CA | None | None | GNR | SNR | |
| Central Valley Drainage Hardhead/Squawfish Stream | | | | | | |
| Central Valley Drainage Resident Rainbow Trout Stream | CARA2421CA | None | None | GNR | SNR | |
| Central Valley Drainage Resident Rainbow Trout Stream | | | | | | |
| Chlorogalum grandiflorum | PMLIL0G020 | None | None | G3 | S3 | 1B.2 |
| Red Hills soaproot | | | | | | |
| Crocanthemum suffrutescens | PDCIS020F0 | None | None | G2?Q | S2? | 3.2 |
| Bisbee Peak rush-rose | | | | | | |
| Cuscuta jepsonii | PDCUS011T0 | None | None | G3 | S3 | 1B.2 |
| Jepson's dodder | | | | | | |
| Diplacus pulchellus | PDSCR1B280 | None | None | G2 | S2 | 1B.2 |
| yellow-lip pansy monkeyflower | | | | | | |
| Eryngium pinnatisectum | PDAPI0Z0P0 | None | None | G2 | S2 | 1B.2 |
| Tuolumne button-celery | | | | | | |
| Erythranthe marmorata | PDPHR01130 | None | None | G2? | S2? | 1B.1 |
| Stanislaus monkeyflower | | | | | | |



Selected Elements by Scientific Name

California Department of Fish and Wildlife California Natural Diversity Database



| Species | Element Code | Federal Status | State Status | Global Rank | State Rank | Rare Plant Rank/CDFW SSC or FP |
|---|--------------|----------------|--------------|-------------|------------|--------------------------------------|
| Horkelia parryi | PDROS0W0C0 | None | None | G2 | S2 | 1B.2 |
| Parry's horkelia | | | | | | |
| Ione Chaparral | CTT37D00CA | None | None | G1 | S1.1 | |
| Ione Chaparral | | | | | | |
| Lathyrus sulphureus var. argillaceus | PDFAB25101 | None | None | G5T1T2Q | S1S2 | 3 |
| dubious pea | | | | | | |
| Lomatium stebbinsii | PDAPI1B1V0 | None | None | G2 | S2 | 1B.1 |
| Stebbins' lomatium | | | | | | |
| Peltigera gowardii | NLVER00460 | None | None | G4? | S3 | 4.2 |
| western waterfan lichen | | | | | | |
| Sacramento-San Joaquin Foothill/Valley Ephemeral Stream | CARA2130CA | None | None | GNR | SNR | |
| Sacramento-San Joaquin Foothill/Valley Ephemeral Stream | | | | | | |
| Sphenopholis obtusata | PMPOA5T030 | None | None | G5 | S2 | 2B.2 |
| prairie wedge grass | | | | | | |



Selected Elements by Common Name

California Department of Fish and Wildlife California Natural Diversity Database



Query Criteria:

Quad IS (Devils Nose (3812044) OR Omo Ranch (3812055) OR Caldor (3812054) OR Peddler Hill (3812053) OR West Point (3812045) OR Garnet Hill (3812043) OR Rail Road Flat (3812035) OR Fort Mountain (3812034) OR Dorrington (3812033) OR Mokelumne Hill (3812036) OR Pine Grove (3812046) OR Aukum (3812056))

'> Span Style='color:Red'> IS (Fish OR Amphibians
Span style='color:Red'> OR Reptiles
OR Mammals
Span style='color:Red'> OR Mollusks
OR Mammals
OR Style='color:Red'> OR Mollusks
OR Crustaceans
Span style='color:Red'> OR Insects

Tiger Creek Regulator Dam Spillway Replacement Project

| Species | Element Code | Federal Status | State Status | Global Rank | State Rank | Rare Plant Rank/CDFW SSC or FP |
|--|--------------|------------------------|--------------|-------------|------------|--------------------------------------|
| American goshawk | ABNKC12061 | None | None | G5 | S3 | SSC |
| Accipiter atricapillus | | | | | | |
| California red-legged frog | AAABH01022 | Threatened | None | G2G3 | S2S3 | SSC |
| Rana draytonii | | | | | | |
| Crotch's bumble bee | IIHYM24480 | None | Candidate | G2 | S2 | |
| Bombus crotchii | | | Endangered | | | |
| Fisher | AMAJF01020 | None | None | G5 | S2S3 | SSC |
| Pekania pennanti | | | | | | |
| foothill yellow-legged frog - south Sierra DPS | AAABH01055 | Endangered | Endangered | G3T2 | S2 | |
| Rana boylii pop. 5 | | | | | | |
| fringed myotis | AMACC01090 | None | None | G4 | S3 | |
| Myotis thysanodes | | | | | | |
| Grady's Cave amphipod | ICMAL05460 | None | None | G1 | S1 | |
| Stygobromus gradyi | | | | | | |
| Graham's Cave amphipod | ICMAL05920 | None | None | G2 | S2 | |
| Stygobromus grahami | | | | | | |
| great gray owl | ABNSB12040 | None | Endangered | G5 | S1 | |
| Strix nebulosa | | | | | | |
| Grubbs' cave harvestman | ILARA14060 | None | None | G1 | S1 | |
| Banksula grubbsi | | | | | | |
| hoary bat | AMACC05032 | None | None | G3G4 | S4 | |
| Lasiurus cinereus | | | | | | |
| Leech's skyline diving beetle | IICOL55040 | None | None | G3 | S2S3 | |
| Hydroporus leechi | | | | | | |
| long-legged myotis | AMACC01110 | None | None | G4G5 | S3 | |
| Myotis volans | | | | | | |
| North American porcupine | AMAFJ01010 | None | None | G5 | S3 | |
| Erethizon dorsatum | | | | | | |
| northwestern pond turtle | ARAAD02031 | Proposed Threatened | None | G2 | SNR | SSC |
| Actinemys marmorata | | meatened | | | | |
| obscure bumble bee | IIHYM24380 | None | None | G2G3 | S1S2 | |
| Bombus caliginosus | | | | | | |
| osprey | ABNKC01010 | None | None | G5 | S4 | WL |
| Pandion haliaetus | | | | | | |



Selected Elements by Common Name

California Department of Fish and Wildlife California Natural Diversity Database



| Species | Element Code | Federal Status | State Status | Global Rank | State Rank | Rare Plant Rank/CDFW SSC or FP |
|---|--------------|----------------|--------------|-------------|------------|--------------------------------------|
| sharp-shinned hawk | ABNKC12020 | None | None | G5 | S4 | WL |
| Accipiter striatus | | | | | | |
| Sierra Nevada red fox - Sierra Nevada DPS | AMAJA03017 | Endangered | Threatened | G5TNR | S1 | |
| Vulpes vulpes necator pop. 2 | | | | | | |
| Sierra Nevada yellow-legged frog | AAABH01340 | Endangered | Threatened | G2 | S2 | WL |
| Rana sierrae | | | | | | |
| silver-haired bat | AMACC02010 | None | None | G3G4 | S3S4 | |
| Lasionycteris noctivagans | | | | | | |
| southern long-toed salamander | AAAAA01085 | None | None | G5T4 | S2 | SSC |
| Ambystoma macrodactylum sigillatum | | | | | | |
| Townsend's big-eared bat | AMACC08010 | None | None | G4 | S2 | SSC |
| Corynorhinus townsendii | | | | | | |

Record Count: 23

Appendix B-2 California Natural Diversity Database Records Search Results



CNPS Rare Plant Inventory

Search Results

38 matches found. Click on scientific name for details

 $Search\ Criteria: \underline{Quad}\ is\ one\ of\ [3812044:3812054:3812053:3812043:3812034:3812035:3812045:3812055:3812055:3812056:3812046:3812036]$

| ▲ SCIENTIFIC NAME | COMMON NAME | FAMILY | LIFEFORM | BLOOMING PERIOD | FED LIST | STATE LIST | GLOBAL RANK | | CA RARE PLANT RANK | CA ENDEMIC | DATE ADDED | РНОТО |
|--|-----------------------|-----------------|----------------------------------|--------------------|-------------|---------------|----------------|------|-----------------------------|---------------|----------------|--|
| <u>Allium</u> sanbornii var. sanbornii | Sanborn's onion | Alliaceae | perennial bulbiferous herb | May-Sep | None | None | G3T4? | S3S4 | 4.2 | | 1994- 01-01 | ©2018 Steven |
| <u>Allium</u> <u>tribracteatum</u> | three-bracted onion | Alliaceae | perennial bulbiferous herb | Apr-Aug | None | None | G2 | S2 | 1B.2 | Yes | 1988- 01-01 | © 2018 Sierra Pacific Industrie |
| <u>Arctostaphylos</u> <u>myrtifolia</u> | lone manzanita | Ericaceae | perennial evergreen shrub | Nov-Mar | FT | None | G1 | S1 | 1B.2 | Yes | 1974- 01-01 | © 2006 Steve Matson |
| <u>Botrychium</u> <u>ascendens</u> | upswept moonwort | Ophioglossaceae | perennial rhizomatous herb | (Jun)Jul- Aug | None | None | G4 | S2 | 2B.3 | | 1994- 01-01 | © 2005 Steve Matson |
| <u>Botrychium</u> crenulatum | scalloped moonwort | Ophioglossaceae | perennial rhizomatous herb | Jun-Sep | None | None | G4 | \$3 | 2B.2 | | 1984- 01-01 | © 2016 Steve Matson |
| <u>Botrychium</u> <u>minganense</u> | Mingan moonwort | Ophioglossaceae | perennial rhizomatous herb | Jul- Sep(Oct) | None | None | G5 | S4 | 4.2 | | 1994- 01-01 | © 2011 Aaron E. Sims |

| <u>Brasenia</u> <u>schreberi</u> | watershield | Cabombaceae | perennial rhizomatous herb (aquatic) | Jun-Sep | None | None | G5 | S3 | 2B.3 | | 2010- 10-27 | ©2014 Kirsten Bovee |
|--|-------------------------------------|-----------------|--|------------------|------|------|--------|-----|------|-----|----------------|---|
| Calochortus clavatus var. avius | Pleasant Valley mariposa-lily | Liliaceae | perennial bulbiferous herb | May-Jul | None | None | G4T2 | S2 | 1B.2 | Yes | 1980- 01-01 | No Photo Available |
| <u>Ceanothus</u> <u>fresnensis</u> | Fresno ceanothus | Rhamnaceae | perennial evergreen shrub | (Apr)May- Jul | None | None | G4 | S4 | 4.3 | Yes | 1980- 01-01 | No Photo Available |
| <u>Chlorogalum</u> grandiflorum | Red Hills soaproot | Agavaceae | perennial bulbiferous herb | (Apr)May- Jun | None | None | G3 | S3 | 1B.2 | Yes | 1974- 01-01 | No Photo Available |
| <u>Clarkia biloba</u> <u>ssp.</u> <u>brandegeeae</u> | Brandegee's clarkia | Onagraceae | annual herb | (Mar)May- Jul | None | None | G4G5T4 | S4 | 4.2 | Yes | 2001- 01-01 | No Photo Available |
| <u>Clarkia virgata</u> | Sierra clarkia | Onagraceae | annual herb | May-Aug | None | None | G3 | S3 | 4.3 | Yes | 1974- 01-01 | No Photo Available |
| <u>Claytonia</u> parviflora ssp. grandiflora | streambank spring beauty | Montiaceae | annual herb | Feb-May | None | None | G5T3 | S3 | 4.2 | Yes | 2006- 09-29 | No Photo Available |
| <u>Crocanthemum</u> <u>suffrutescens</u> | Bisbee Peak rush-rose | Cistaceae | perennial evergreen shrub | Apr-Aug | None | None | G2?Q | S2? | 3.2 | Yes | 1974- 01-01 | No Photo Available |
| <u>Cuscuta</u> <u>jepsonii</u> | Jepson's dodder | Convolvulaceae | annual vine (parasitic) | Jul-Sep | None | None | G3 | S3 | 1B.2 | Yes | 1974- 01-01 | ©2019 Dean Wm. Taylor |
| <u>Cypripedium</u> <u>montanum</u> | mountain lady's-slipper | Orchidaceae | perennial rhizomatous herb | Mar-Aug | None | None | G4G5 | S4 | 4.2 | | 1980- 01-01 | ©2021 Scot Loring |
| <u>Diplacus</u> <u>pulchellus</u> | yellow-lip pansy monkeyflower | Phrymaceae | annual herb | Apr-Jul | None | None | G2 | S2 | 1B.2 | Yes | 1974- 01-01 | © 2018 Sierra Pacific Industries |
| <u>Engellaria</u> <u>obtusa</u> | obtuse starwort | Caryophyllaceae | perennial rhizomatous herb | May- Sep(Oct) | None | None | G5 | S4 | 4.3 | | 1988- 01-01 | ©2014 Kirsten Bovee |

| <u>Eriogonum</u> <u>tripodum</u> | tripod buckwheat | Polygonaceae | perennial deciduous shrub | May-Jul | None | None | G4 | S4 | 4.2 | Yes | 1974- 01-01 | ©2008 Steven Perry |
|---|---|-----------------|---|------------------|------|------|--------|------|------|-----|----------------|--|
| <u>Eriophorum</u> g <u>racile</u> | slender cottongrass | Cyperaceae | perennial rhizomatous herb (emergent) | May-Sep | None | None | G5 | S4 | 4.3 | | 2006-10-31 | ©2011 Steven Perry |
| Eriophyllum confertiflorum var. tanacetiflorum | tansy- flowered woolly sunflower | Asteraceae | perennial shrub | May-Jul | None | None | G5T2?Q | S2? | 4.3 | Yes | 2001- 01-01 | No Photo Available |
| <u>Eryngium</u> <u>pinnatisectum</u> | Tuolumne button-celery | Apiaceae | annual/perennial herb | May-Aug | None | None | G2 | S2 | 1B.2 | Yes | 1974- 01-01 | © 2007 Robert E. Preston, Ph.D. |
| Erythranthe inconspicua | small- flowered monkeyflower | Phrymaceae | annual herb | May-Jun | None | None | G4 | S4 | 4.3 | Yes | 1974- 01-01 | © 2017 Debra L. Cook |
| Erythranthe laciniata | cut-leaved monkeyflower | Phrymaceae | annual herb | Apr-Jul | None | None | G4 | S4 | 4.3 | Yes | 1974- 01-01 | © 2017 Steven Perry |
| Erythranthe marmorata | Stanislaus monkeyflower | Phrymaceae | annual herb | Mar-May | None | None | G2? | S2? | 1B.1 | Yes | 1974- 01-01 | No Photo Available |
| <u>Hartmaniella</u> <u>sierrae</u> | Sierra starwort | Caryophyllaceae | perennial rhizomatous herb | May-Aug | None | None | G3G4 | S3S4 | 4.2 | Yes | 2004- 01-01 | No Photo Available |
| Horkelia parryi | Parry's horkelia | Rosaceae | perennial herb | Apr-Sep | None | None | G2 | S2 | 1B.2 | Yes | 1974- 01-01 | © 2009 Barry Breckling |
| <u>Jensia</u> <u>yosemitana</u> | Yosemite tarplant | Asteraceae | annual herb | (Apr)May- Jul | None | None | G3 | S3 | 3.2 | Yes | 1994- 01-01 | No Photo Available |
| <u>Jepsonia</u> heterandra | foothill jepsonia | Saxifragaceae | perennial herb | Aug-Dec | None | None | G3 | \$3 | 4.3 | Yes | 1994- 01-01 | © 2014 Belinda Lo |

| sulphureus var argillaceus Lewisia kelloggii ssp. hutchisonii Hutchisonis Montiaceae Montiaceae perennial herb (Apr)May- Aug None None G3G4T3Q S3 3.2 Yes 2001 Aug Lewisia kelloggii ssp. hutchisonii Kelloggis kelloggii ssp. lewisia Kelloggis Montiaceae perennial herb (Apr)May- None None G3G4T2T3Q S2S3 3.2 Yes 2013 Aug Lilium humboldtii Humboldt lily Liliaceae perennial berb May- Dullofferous herb None None G4T3 S3 4.2 Yes 1994 Aug Lomatium stebbinsti Stebbins' lomatium Apiaceae perennial herb Mar-May None None G2 S2 1B.1 Yes 1980 1994 1994 1994 1994 1994 1994 1994 199 | | | | | | | | | | | | | |
|--|-----------|----------------|-----|------|------|-----------|------|------|---------|----------------|---------------|---------------|--|
| kelloggii ssp. hutchisonii kelloggi's kelloggii ssp. humboldti lily humboldtii ssp. hu | | 1994- 01-01 | Yes | 3 | S1S2 | G5T1T2Q | None | None | Apr-May | perennial herb | Fabaceae | dubious pea | sulphureus var. |
| kelloggii lewisia Aug 10-02 Lilium humboldti lily humboldti lily humboldtiissp, humboldtii Humboldtiissp, humboldtii May- humboldtiissp, humboldtii None None G4T3 S3 4.2 Yes 1994 humboldtiissp, humboldtii Lomatium stebbinsi Stebbins' alomatium Apiaceae perennial herb Mar-May None None G2 S2 18.1 Yes 1980 on-oil Myrica hartwegii Sierra sweet hartwegii Myricaceae perennial deciduous shrub May-Jun hone None G4 S4 4.3 Yes 1974 hartwegii Peltigera gowardii western lichen Peltigeraceae foliose lichen (aquatic) None None G4? S3 4.2 2014 on-oil Piperia colemanii Coleman's rein orchid Orchidaceae perennial herb Jun-Aug None None G4 S4 4.3 Yes 2001 on-oil | | 2001- 01-01 | Yes | 3.2 | S3 | G3G4T3Q | None | None | , . | perennial herb | Montiaceae | | <u>kelloggii ssp.</u> |
| humboldtii Stebbins' Apiaceae perennial herb Mar-May None None G2 S2 1B.1 Yes 1980 on 198 | | 2013- 10-02 | Yes | 3.2 | S2S3 | G3G4T2T3Q | None | None | | perennial herb | Montiaceae | | <u>kelloggii ssp.</u> |
| StebbinsiiIomatium01-0°Myrica hartwegiiSierra sweet bayMyricaceae deciduous shrubPerennial deciduous shrubMay-Jun None NoneNone NoneG4S44.3Yes1974 1974 1974 1974 1974 | | 1994- 01-01 | Yes | 4.2 | S3 | G4T3 | None | None | | • | Liliaceae | Humboldt lily | <u>humboldtii ssp.</u> |
| hartwegii bay deciduous shrub 01-07 Peltigera western Peltigeraceae foliose lichen None None G4? S3 4.2 2014 gowardii waterfan lichen 03-07 Piperia Coleman's Orchidaceae perennial herb Jun-Aug None None G4 S4 4.3 Yes 2001 colemanii rein orchid 01-07 | | 1980- 01-01 | Yes | 1B.1 | S2 | G2 | None | None | Mar-May | perennial herb | Apiaceae | | |
| gowardii waterfan (aquatic) 03-07 lichen Piperia Coleman's Orchidaceae perennial herb Jun-Aug None None G4 S4 4.3 Yes 2001 colemanii rein orchid 01-07 | | 1974- 01-01 | Yes | 4.3 | S4 | G4 | None | None | May-Jun | | Myricaceae | | |
| <u>colemanii</u> rein orchid 01-0 ⁻¹ | Service ! | 2014- 03-01 | | 4.2 | S3 | G4? | None | None | | | Peltigeraceae | waterfan | _ |
| <u>Sphenopholis</u> prairie wedge Poaceae perennial herb Apr-Jul None None G5 S2 2B.2 1974 | fol | 2001- 01-01 | Yes | 4.3 | S4 | G4 | None | None | Jun-Aug | perennial herb | Orchidaceae | | |
| | | 1974- 01-01 | | 2B.2 | S2 | G5 | None | None | Apr-Jul | perennial herb | Poaceae | | <u>Sphenopholis</u> <u>obtusata</u> |

Showing 1 to 38 of 38 entries

Suggested Citation:

California Native Plant Society, Rare Plant Program. 2024. Rare Plant Inventory (online edition, v9.5). Website https://www.rareplants.cnps.org [accessed 8 August 2024].

Appendix B-3 U.S. Fish and Wildlife Service Species List



United States Department of the Interior



FISH AND WILDLIFE SERVICE

Sacramento Fish And Wildlife Office Federal Building 2800 Cottage Way, Room W-2605 Sacramento, CA 95825-1846 Phone: (916) 414-6600 Fax: (916) 414-6713

In Reply Refer To: 08/07/2024 00:30:15 UTC

Project Code: 2023-0118932

Project Name: Tiger Creek Regulator Dam Spillway Replacement Project

Subject: List of threatened and endangered species that may occur in your proposed project

location or may be affected by your proposed project

To Whom It May Concern:

The enclosed species list identifies threatened, endangered, proposed, and candidate species, as well as proposed and final designated critical habitat, that may occur within the boundary of your proposed project and/or may be affected by your proposed project. The species list fulfills the requirements of the U.S. Fish and Wildlife Service (Service) under section 7(c) of the Endangered Species Act (Act) of 1973, as amended (16 U.S.C. 1531 *et seq.*).

New information based on updated surveys, changes in the abundance and distribution of species, changed habitat conditions, or other factors could change this list. Please feel free to contact us if you need more current information or assistance regarding the potential impacts to federally proposed, listed, and candidate species and federally designated and proposed critical habitat. Please note that under 50 CFR 402.12(e) of the regulations implementing section 7 of the Act, the accuracy of this species list should be verified after 90 days. This verification can be completed formally or informally as desired. The Service recommends that verification be completed by visiting the IPaC website at regular intervals during project planning and implementation for updates to species lists and information. An updated list may be requested through IPaC by completing the same process used to receive the enclosed list.

The purpose of the Act is to provide a means whereby threatened and endangered species and the ecosystems upon which they depend may be conserved. Under sections 7(a)(1) and 7(a)(2) of the Act and its implementing regulations (50 CFR 402 *et seq.*), Federal agencies are required to utilize their authorities to carry out programs for the conservation of threatened and endangered species and to determine whether projects may affect threatened and endangered species and/or designated critical habitat.

A Biological Assessment is required for construction projects (or other undertakings having similar physical impacts) that are major Federal actions significantly affecting the quality of the human environment as defined in the National Environmental Policy Act (42 U.S.C. 4332(2)

(c)). For projects other than major construction activities, the Service suggests that a biological evaluation similar to a Biological Assessment be prepared to determine whether the project may affect listed or proposed species and/or designated or proposed critical habitat. Recommended contents of a Biological Assessment are described at 50 CFR 402.12.

Project code: 2023-0118932

If a Federal agency determines, based on the Biological Assessment or biological evaluation, that listed species and/or designated critical habitat may be affected by the proposed project, the agency is required to consult with the Service pursuant to 50 CFR 402. In addition, the Service recommends that candidate species, proposed species and proposed critical habitat be addressed within the consultation. More information on the regulations and procedures for section 7 consultation, including the role of permit or license applicants, can be found in the "Endangered Species Consultation Handbook" at: https://www.fws.gov/sites/default/files/documents/endangered-species-consultation-handbook.pdf

Migratory Birds: In addition to responsibilities to protect threatened and endangered species under the Endangered Species Act (ESA), there are additional responsibilities under the Migratory Bird Treaty Act (MBTA) and the Bald and Golden Eagle Protection Act (BGEPA) to protect native birds from project-related impacts. Any activity, intentional or unintentional, resulting in take of migratory birds, including eagles, is prohibited unless otherwise permitted by the U.S. Fish and Wildlife Service (50 C.F.R. Sec. 10.12 and 16 U.S.C. Sec. 668(a)). For more information regarding these Acts, see Migratory Bird Permit | What We Do | U.S. Fish & Wildlife Service (fws.gov).

The MBTA has no provision for allowing take of migratory birds that may be unintentionally killed or injured by otherwise lawful activities. It is the responsibility of the project proponent to comply with these Acts by identifying potential impacts to migratory birds and eagles within applicable NEPA documents (when there is a federal nexus) or a Bird/Eagle Conservation Plan (when there is no federal nexus). Proponents should implement conservation measures to avoid or minimize the production of project-related stressors or minimize the exposure of birds and their resources to the project-related stressors. For more information on avian stressors and recommended conservation measures, see https://www.fws.gov/library/collections/threats-birds.

In addition to MBTA and BGEPA, Executive Order 13186: *Responsibilities of Federal Agencies to Protect Migratory Birds*, obligates all Federal agencies that engage in or authorize activities that might affect migratory birds, to minimize those effects and encourage conservation measures that will improve bird populations. Executive Order 13186 provides for the protection of both migratory birds and migratory bird habitat. For information regarding the implementation of Executive Order 13186, please visit https://www.fws.gov/partner/council-conservation-migratory-birds.

We appreciate your concern for threatened and endangered species. The Service encourages Federal agencies to include conservation of threatened and endangered species into their project planning to further the purposes of the Act. Please include the Consultation Code in the header of this letter with any request for consultation or correspondence about your project that you submit to our office.

Attachment(s):

Official Species List

OFFICIAL SPECIES LIST

This list is provided pursuant to Section 7 of the Endangered Species Act, and fulfills the requirement for Federal agencies to "request of the Secretary of the Interior information whether any species which is listed or proposed to be listed may be present in the area of a proposed action".

This species list is provided by:

Sacramento Fish And Wildlife Office

Federal Building 2800 Cottage Way, Room W-2605 Sacramento, CA 95825-1846 (916) 414-6600

PROJECT SUMMARY

Project code: 2023-0118932

Project Code: 2023-0118932

Project Name: Tiger Creek Regulator Dam Spillway Replacement Project

Project Type: Dam - Maintenance/Modification

Project Description: A new spillway near the dam's right abutment, which includes a spillway

intake (crest structure), a notch through the existing dam, a concrete chute, flip bucket splitter blocks, and plunge pool. Other associated features include a permanent access road, cofferdam, new log boom, lighting, abandonment of the existing spillway, and staging areas. Construction would occur off and on between July 2024 and May 2026.

Project Location:

The approximate location of the project can be viewed in Google Maps: https://www.google.com/maps/@38.43234725,-120.5610411741861,14z



Counties: Amador County, California

ENDANGERED SPECIES ACT SPECIES

Project code: 2023-0118932

There is a total of 6 threatened, endangered, or candidate species on this species list.

Species on this list should be considered in an effects analysis for your project and could include species that exist in another geographic area. For example, certain fish may appear on the species list because a project could affect downstream species.

IPaC does not display listed species or critical habitats under the sole jurisdiction of NOAA Fisheries¹, as USFWS does not have the authority to speak on behalf of NOAA and the Department of Commerce.

See the "Critical habitats" section below for those critical habitats that lie wholly or partially within your project area under this office's jurisdiction. Please contact the designated FWS office if you have questions.

1. <u>NOAA Fisheries</u>, also known as the National Marine Fisheries Service (NMFS), is an office of the National Oceanic and Atmospheric Administration within the Department of Commerce.

BIRDS

NAME STATUS

California Spotted Owl Strix occidentalis occidentalis

Proposed Threatened

No critical habitat has been designated for this species.

Species profile: https://ecos.fws.gov/ecp/species/7266

REPTILES

Population: Sierra Nevada

NAME STATUS

Northwestern Pond Turtle Actinemys marmorata

Proposed Threatened

No critical habitat has been designated for this species. Species profile: https://ecos.fws.gov/ecp/species/1111

AMPHIBIANS

NAME STATUS

California Red-legged Frog Rana draytonii

Threatened

There is **final** critical habitat for this species. Your location does not overlap the critical habitat.

Species profile: https://ecos.fws.gov/ecp/species/2891

Foothill Yellow-legged Frog Rana boylii

Endangered

Population: South Sierra Distinct Population Segment (South Sierra DPS)

No critical habitat has been designated for this species. Species profile: https://ecos.fws.gov/ecp/species/5133

Western Spadefoot Spea hammondii

Proposed

No critical habitat has been designated for this species.

Threatened

Species profile: https://ecos.fws.gov/ecp/species/5425

INSECTS

NAME STATUS

Monarch Butterfly Danaus plexippus

Candidate

No critical habitat has been designated for this species. Species profile: https://ecos.fws.gov/ecp/species/9743

CRITICAL HABITATS

THERE ARE NO CRITICAL HABITATS WITHIN YOUR PROJECT AREA UNDER THIS OFFICE'S JURISDICTION.

YOU ARE STILL REQUIRED TO DETERMINE IF YOUR PROJECT(S) MAY HAVE EFFECTS ON ALL ABOVE LISTED SPECIES.

Project code: 2023-0118932 08/07/2024 00:30:15 UTC

IPAC USER CONTACT INFORMATION

Agency: ICF

Name: Jennifer Hale

Address: 980 9th Street, Suite 1200

City: Sacramento

State: CA Zip: 95814

Email jennifer.hale@icf.com

Phone: 9162319575

LEAD AGENCY CONTACT INFORMATION

Lead Agency: Federal Energy Regulatory Commission

Appendix B-4 **National Marine Fisheries Service Species List**

Quad Name **Devils Nose**Quad Number **38120-D4**

ESA Anadromous Fish

SONCC Coho ESU (T) -

CCC Coho ESU (E) -

CC Chinook Salmon ESU (T) -

CVSR Chinook Salmon ESU (T) -

SRWR Chinook Salmon ESU (E) -

NC Steelhead DPS (T) -

CCC Steelhead DPS (T) -

SCCC Steelhead DPS (T) -

SC Steelhead DPS (E) -

CCV Steelhead DPS (T) -

Eulachon (T) -

sDPS Green Sturgeon (T) -

ESA Anadromous Fish Critical Habitat

SONCC Coho Critical Habitat -

CCC Coho Critical Habitat -

CC Chinook Salmon Critical Habitat -

CVSR Chinook Salmon Critical Habitat -

SRWR Chinook Salmon Critical Habitat -

NC Steelhead Critical Habitat -

CCC Steelhead Critical Habitat -

SCCC Steelhead Critical Habitat -

SC Steelhead Critical Habitat -

CCV Steelhead Critical Habitat -

Eulachon Critical Habitat -

sDPS Green Sturgeon Critical Habitat -

ESA Marine Invertebrates

Range Black Abalone (E) -

Range White Abalone (E) -

ESA Marine Invertebrates Critical Habitat

Black Abalone Critical Habitat -

ESA Sea Turtles

East Pacific Green Sea Turtle (T) Olive Ridley Sea Turtle (T/E) Leatherback Sea Turtle (E) North Pacific Loggerhead Sea Turtle (E) -

ESA Whales

Blue Whale (E) Fin Whale (E) Humpback Whale (E) Southern Resident Killer Whale (E) North Pacific Right Whale (E) Sei Whale (E) Sperm Whale (E) -

ESA Pinnipeds

Guadalupe Fur Seal (T) -Steller Sea Lion Critical Habitat -

Essential Fish Habitat

Coho EFH Chinook Salmon EFH Groundfish EFH Coastal Pelagics EFH Highly Migratory Species EFH -

MMPA Species (See list at left)

ESA and MMPA Cetaceans/Pinnipeds See list at left and consult the NMFS Long Beach office 562-980-4000

MMPA Cetaceans - MMPA Pinnipeds -

Appendix C

Plants and Animals Observed in the Tiger Creek Regulator Dam Spillway Replacement Project Area of Analysis

Table C-1. Plants Observed in the Tiger Creek Regulator Dam Spillway Replacement Project Area of Analysis

| Scientific Name | Common Name | Family | Status ¹ | | |
|--|----------------------------|---------------|-------------------------|--|--|
| Acer macrophyllum | Big-leaf maple | Sapindaceae | Native | | |
| Achillea millefolium | Common yarrow | Asteraceae | Native | | |
| Acmispon americanus var. armericanus | Spanish lotus | Fabaceae | Native | | |
| Acmispon nevadensis | Sierra Nevada lotus | Fabaceae | Native | | |
| Acmispon parviflorus | Hill lotus | Fabaceae | Native | | |
| Acmispon strigosus | Strigose lotus | Fabaceae | Native | | |
| Adenocaulon bicolor | Trail plant | Asteraceae | Native | | |
| Adenostoma fasciculatum | Chamise | Rosaceae | Native | | |
| Adiantum aleuticum | Five finger fern | Pteridaceae | Native | | |
| Aesculus californica | Buckeye | Sapindaceae | Native | | |
| Agoseris heterophylla var. heterophylla | Annual agoseris | Asteraceae | Native | | |
| Agrostis exarata | Spike bent grass | Poaceae | Native | | |
| Aira caryophyllea | Common silver-hair grass | Poaceae | Non-native | | |
| <i>Allium</i> sp. | Onion | Alliaceae | Native | | |
| Alnus rhombifolia | White alder | Betulaceae | Native | | |
| Amelanchier sp. | Serviceberry | Rosaceae | Native | | |
| Anaphalis margaritacea | Pearly everlasting | Asteraceae | Native | | |
| Athyrium filix-femina | Common ladyfern | Woodsiaceae | Native | | |
| Apocynum androsaemifolium | Spreading dogbane | Apocynaceae | Native | | |
| Aquilegia formosa | Crimson columbine | Ranunculaceae | Native | | |
| Arbutus menziesii | Pacific madrone | Ericaceae | Native | | |
| Arctostaphylos viscida ssp. viscida | Sticky whiteleaf manzanita | Ericaceae | Native | | |
| Artemisia douglasiana | Mugwort | Asteraceae | Native | | |
| Avena barbata | Slim oat | Poaceae | Non-native ^m | | |

| Scientific Name | Common Name | Family | Status ¹ | | |
|--|-------------------------------|-----------------|--------------------------------|--|--|
| Boykinia major | Large boykinia | Saxifragaceae | Native | | |
| Brassica nigra | Black mustard | Fabaceae | Non-native ^m | | |
| Bromus carinatus | California brome | Poaceae | Native | | |
| Bromus commutatus | Hairy chess | Poaceae | Non-native | | |
| Bromus diandrus | Ripgut brome | Poaceae | Non-native ^m | | |
| Bromus grandis | Tall brome | Poaceae | Non-native | | |
| Bromus hordeaceus | Soft chess | Poaceae | Non-native ^L | | |
| Bromus madritensis ssp. rubens | Foxtail brome | Poaceae | Non-native ^H | | |
| Bromus racemosus | Smooth brome | Poaceae | Non-native | | |
| Bromus tectorum | Cheatgrass | Poaceae | Non- native ^{H, C} | | |
| Calocedrus decurrens | Incense cedar | Cupressaceae | Native | | |
| Calochortus superbus | Superb Mariposa lily | Liliaceae | Native | | |
| Calystegia occidentalis | Bush morning glory | Convolvulaceae | Native | | |
| Carex feta | Green sheathed sedge | Cyperaceae | Native | | |
| Carex praegracilis | Clustered field sedge | Cyperaceae | Native | | |
| Ceanothus diversifolius | Pinemat | Rhamnaceae | Native | | |
| Ceanothus integerrimus | Deer brush | Rhamnaceae | Native | | |
| Ceanothus prostrates | Mahala mats | Rhamnaceae | Native | | |
| Cerastium glomeratum | Large mouse ears | Caryophllyaceae | Non-native | | |
| Centaurea solstitialis | Yellow star thistle | Asteraceae | Non- native ^{H, *} | | |
| Chamaebatia foliolosa | Mountain misery | Rosaceae | Native | | |
| Chlorogalum pomeridianum var. pomeridianum | Common soaproot | Agavaceae | Native | | |
| Cirsium vulgare | Bullthistle | Asteraceae | Non- native ^{M, *} | | |
| Claytonia parviflora | Narrow leaved miner's lettuce | Montiaceae | Native | | |
| Claytonia perfoliata | Miner's lettuce | Montiaceae | Native | | |
| Collomia heterophylla | Varied leaved collomia | Polemoniaceae | Native | | |
| Convolvulus arvensis | Bind weed | Convolvulaceae | Non-native | | |
| Cornus nuttallii | Mountain dogwood | Cornaceae | Native | | |
| | | | | | |

| Scientific Name | Common Name | Family | Status ¹ | | |
|-----------------------------|-------------------------------|-------------------------|--------------------------------|--|--|
| Cornus sericea | American dogwood | Cornaceae | Native | | |
| Corylus cornuta | California hazelnut | Betulaceae | Native | | |
| Croton setiger | Turkey mullein | Euphorbiaceae | Native | | |
| Cynosurus echinatus | Bristly dogtail grass | Poaceae | Non-native ^M | | |
| Dactylis glomerata | Orchard grass | Poaceae | Non-native ^L | | |
| Daucus pusillus | Wild carrot | Apiaceae | Native | | |
| Delphinium sp. | Larkspur | Ranunculaceae | Native | | |
| Delphinium nuttallianum | Nuttall's larkspur | Ranunculaceae | Native | | |
| Deschampsia cespitosa | Tufted hairgrass | Poaceae | Native | | |
| Dicentra formosa | Pacific bleedinghearts | Papaveraceae | Native | | |
| Dichelostemma capitatum | Blue dicks | Themidaceae | Native | | |
| Drymocallis glandulosa | Sticky cinquefoil | Rosaceae | Native | | |
| Dryopteris arguta | Wood fern | Dryopteraceae | Native | | |
| Dudleya cymosa | Rock lettuce | ck lettuce Crassulaceae | | | |
| Eleocharis macrostachya | Spike rush | Cyperaceae | Native | | |
| Elymus caput-medusae | Medusa head Poaceae | | Non- native ^{H, *} | | |
| Elymus glaucus ssp. glaucus | Blue wild rye | Poaceae | Native | | |
| Elymus triticoides | Beardless wild rye | Poaceae | Non-native | | |
| Epilobium ciliatum | Willowherb | Onagraceae | Native | | |
| Equisetum arvense | Common horsetail | Equisetaceae | Native | | |
| Ericameria arborescens | Golden fleece | Asteraceae | Native | | |
| Erigeron foliosus | Leafy fleabane | Asteraceae | Native | | |
| Eriophyllum lanatum | Common woolly sunflower | Asteraceae | Native | | |
| Erodium botrys | Big heron bill | Geraniaceae | Non-native | | |
| Erythranthe bicolor | Yellow and white monkeyflower | Phrymaceae | Native | | |
| Erythranthe guttata | Yellow monkeyflower | Phrymaceae | Native | | |
| Eschscholzia californica | California poppy | Papaveraceae | Native | | |
| Euphorbia maculata | Spotted spurge | Euphorbiaceae | Non-native | | |
| Festuca bromoides | Brome fescue | Poaceae | Non-native | | |
| Festuca microstachys | Small fescue | Poaceae | Native | | |

| Scientific Name | Common Name | Family | Status ¹ | | |
|---|---------------------------------|---------------|---------------------------------|--|--|
| Festuca myuros | Rattail sixweeks grass | Poaceae | Non-native ^M | | |
| Festuca perennis | Italian rye grass | Poaceae | Non-native ^M | | |
| Ficus carica | Common fig | Moraceae | Non-native ^M | | |
| Fragaria virginiana | Mountain strawberry | Rosaceae | Native | | |
| Frangula californica | California coffeeberry | Rhamnaceae | Native | | |
| Galium aparine | Cleavers | Rubiaceae | Native | | |
| Galium parisiense | Climbing bedstraw | Rubiaceae | Non-native | | |
| Galium trifidum | Three petaled bedstraw | Rubiaceae | Native | | |
| Gilia capitata | Globe gilia | Polemoniaceae | Native | | |
| Genista monspessulana | French broom | Fabaceae | Non- native ^{H, C*} | | |
| Geranium molle | Crane's bill geranium | Geraniaceae | Non-native | | |
| Goodyera oblongifolia | Green-leaf rattlesnake-plantain | Orchidaceae | Native | | |
| Grindelia hirsutula | Gumweed | Asteraceae | Native | | |
| Heteromeles arbutifolia | Toyon | Rosaceae | Native | | |
| Heterotheca grandiflora | Telegraph weed | Asteraceae | Native | | |
| Heuchera micrantha | Alum root | Saxifragaceae | Native | | |
| Hieracium albiflorum | White hawkweed | Asteraceae | Native | | |
| Hirschfeldia incana | Mustard | Fabaceae | Non-native ^M | | |
| Holcus lanatus | Common velvetgrass | Poaceae | Native | | |
| Hordeum marinum ssp. gussoneanum | Seaside barley | Poaceae | Non-native ^M | | |
| Hosackia incana | Wolly lotus | Fabaceae | Native | | |
| Hypericum perforatum ssp. perforatum | Klamathweed | Hypericaceae | Non-native ^L | | |
| Hypochaeris glabra | Smooth cat's-ear | Asteraceae | Non-native ^L | | |
| Iris hartwegii | Hartweg's iris | Iridaceae | Native | | |
| Juncus balticus | Wire rush | Juncaceae | Native | | |
| Juncus bufonius var. bufonius | Toad rush | Juncaceae | Native | | |
| Juncus effusus | Lamp rush | Juncaceae | Native | | |
| Juncus occidentalis | Slender juncus | Juncaceae | Native | | |
| Juncus patens | Rush | Juncaceae | Native | | |
| Juncus tenuis | Poverty rush | Juncaceae | Native | | |

| Scientific Name | Common Name | Family | Status ¹ | | |
|---|--------------------------|--------------------------|-------------------------|--|--|
| Lathyrus latifolius | Perennial sweet pea | Fabaceae | Non-native ^W | | |
| Lemna minor | Smaller duckweed | Araceae | Native | | |
| Lepidium nitidum | Shining pepper grass | Brassicaceae | Native | | |
| Leptosiphon ciliatus | Whisker brush | Polemoniaceae | Native | | |
| Leptosiphon montanus | Mustang clover | Polemoniaceae | Native | | |
| Lessingia leptoclada | Sierra lessingia | Asteracea | Native | | |
| Lithophragma sp. | Woodland star | Saxifragaceae | Native | | |
| Lonicera interrupta | Chaparral honeysuckle | Caprifoliaceae | Native | | |
| Lotus corniculatus | Birds foot trefoil | Fabaceae | Non-native | | |
| Lupinus bicolor | Annual Iupine | Fabaceae | Native | | |
| Lupinus latifolia | Broadleaf lupine | Fabaceae | Native | | |
| Lupinus microcarpus | Chick lupine | Fabaceae | Native | | |
| Lysimachia latifolia | Pacific starflower | Myrsinaceae | Native | | |
| Madia elegans | Common tarweed | Asteraceae | Native | | |
| Madia gracilis | Slender tarweed | ender tarweed Asteraceae | | | |
| Maianthemum racemosum | False lily of the valley | Ruscaceae | Native | | |
| Marrubium vulgare | White horehound | Lamiaceae | Non-native ^L | | |
| Melilotus albus | White sweetclover | Fabaceae | Non-native | | |
| Myosotis discolor | Forget me not | Boraginaceae | Non-native | | |
| Nemophila heterophylla | Canyon nemophila | Hydrophyllaceae | Native | | |
| Osmorhiza berteroi | Sweet cicely | Apiaceae | Native | | |
| Penstemon laetus | Mountain blue penstemon | Plantaginaceae | Native | | |
| Pentagramma triangularis | Goldenback fern | Pteridaceae | Native | | |
| Pinus lambertiana | Sugar pine | Pinaceae | Native | | |
| Pinus ponderosa | Ponderosa pine | Pinaceae | Native | | |
| Plantago lanceolata | English plantain | Plantaginaceae | Non-native ^L | | |
| Poa bulbosa | Bulbous blue grass | Poaceae | Non-native | | |
| Polypogon monspeliensis | Annual beard grass | Poaceae | Non-native ^L | | |
| Polystichum munitum | Western sword fern | Dryopteridaceae | Native | | |
| Potentilla gracilis | Cinquefoil | Rosaceae | Native | | |
| Pseudotsuga menziesii var. menziesii | Douglas-fir | Pinaceae | Native | | |
| Pteridium aquilinum | Western bracken fern | Dennstaedtiaceae | Native | | |
| | | | | | |

| Scientific Name | Common Name | Family | Status ¹ |
|---|------------------------|-----------------|--------------------------------|
| Quercus chrysolepis | Canyon live oak | Fagaceae | Native |
| Quercus ilex | Holly oak | Fagaceae | Non-native |
| Quercus kelloggii | California black oak | Fagaceae | Native |
| Quercus lobata | Valley oak | Fagaceae | Native |
| Quercus vacciniifolia | Huckleberry oak | Fagaceae | Native |
| Ranunculus occidentalis var. occidentalis | Western buttercup | Ranunculaceae | Native |
| Ranunculus orthorhynchus | Bloomer's buttercup | Ranunculaceae | Native |
| Rhododendron sp. | Azalea | Ericaceae | Native |
| Ribes sp. | Currant | Grossulariaceae | Native |
| Rosa gymnocarpa | Baldhip rose | Rosaceae | Native |
| Rubus armeniacus | Himalayan blackberry | Rosaceae | Non-native ^H |
| Rubus lacinatus | Cut leaved blackberry | Rosaceae | Non-native |
| Rubus leucodermis | Whitebark raspberry | Rosaceae | Native |
| Rubus parviflorus | Western thimbleberry | Rosaceae | Native |
| Rumex acetosella | Common sheep sorrel | Polygonaceae | Non-native ^M |
| Salix lasiolepis | Arroyo willow | Salicaceae | Native |
| Sanicula crassicaulis | Pacific sanicle | Apiaceae | Native |
| Sedum obtusatum | Sierra stonecrop | Crassulaceae | Native |
| Senecio sp. | Ragweed | Asteraceae | |
| Sidalcea glaucescens | Glaucus checker mallow | Malvaceae | Native |
| Silene laciniata | Cardinal catchfly | Caryophyllaceae | Native |
| Sonchus asper | Spiny sow thistle | Asteraceae | Non-native |
| Sonchus oleraceus | Sow thistle | Asteraceae | Non-native |
| Stachys ajugoides | Hedge nettle | Lamiaceae | Native |
| Stellaria media | Common chickweed | Caryophllyaceae | Non-native |
| Symphyotrichum bracteolatum | Eaton's aster | Asteraceae | Native |
| Tamarix sp. | Tamarisk | Tamaricaceae | Non- native ^{H, *} |
| Taraxacum officinale | Common dandelion | Asteraceae | Non-native |
| Torilis arvensis | Field hedge parsley | Apiaceae | Non-native |
| Toxicodendron diversilobum | Western poison oak | Anacardiaceae | Native |

| Scientific Name | Common Name | Family | Status ¹ | |
|-------------------------|---------------------|------------------|-------------------------|--|
| Toxicoscordion sp. | Death camas | Melanthiaceae | Native | |
| Tragopogon dubius | Yellow salsify | Asteraceae | Non-native | |
| Trifolium dubium | Suckling clover | Fabaceae | Non-native | |
| Trifolium hirtum | Rose clover | Fabaceae | Non-native ^L | |
| Trifolium microcephalum | Small headed clover | Fabaceae | Native | |
| Trifolium variegatum | Variegated clover | Fabaceae | Native | |
| Triticum aestivum | Winter wheat | Asteraceae | Non-native | |
| Vaccinium parvifolium | Red huckleberry | Ericaceae | Native | |
| Verbascum thapsus | Common mullein | Scrophulariaceae | Non-native ^L | |
| Vicia americana | American vetch | Fabaceae | Native | |
| Vicia hirsuta | Hairy vetch | Fabaceae | Non-native | |
| Viola glabella | Stream violet | Violaceae | Native | |
| Viola bakeri | Baker's violet | Violaceae | Native | |
| Viola lobata | Moose horn violet | Violaceae | Native | |

Sources: Baldwin et al. 2012, Calflora 2023

Cal-IPC Inventory Ratings:

- W = Watch--These species have been assessed as posing a high risk of becoming invasive in the future in California.
- Limited--These species are invasive but their ecological impacts are minor on a statewide level or there was not enough information to justify a higher score. Their reproductive biology and other attributes result in low to moderate rates of invasiveness. Ecological amplitude and distribution are generally limited, but these species may be locally persistent and problematic.
- M = Moderate--These species have substantial and apparent-but generally not severe-ecological impacts on physical processes, plant and animal communities, and vegetation structure. Their reproductive biology and other attributes are conducive to moderate to high rates of dispersal, though establishment is generally dependent upon ecological disturbance. Ecological amplitude and distribution may range from limited to widespread.
- H = High--These species have severe ecological impacts on physical processes, plant and animal communities, and vegetation structure. Their reproductive biology and other attributes are conducive to moderate to high rates of dispersal and establishment. Most are widely distributed ecologically.

CDFA Ratings:

- ^B = A pest of known economic or environmental detriment and, if present in California, it is of limited distribution.
- ^C = A pest of known economic or environmental detriment and, if present in California, it is usually widespread.

¹Status:

Table C-2. Animals Observed in the Tiger Creek Regulator Dam Spillway Replacement Project Area of Analysis

| Common Name | Scientific Name |
|-------------------------------|--------------------------|
| Tiger swallowtail (butterfly) | Pterourus spp. |
| American bullfrog | Lithobates catesbeianus |
| Western fence lizard | Sceloporus occidentalis |
| Canada goose | Branta canadensis |
| Turkey vulture | Cathartes aura |
| Red-tailed hawk | Buteo jamaicensis |
| Bald eagle | Haliaeetus leucocephalus |
| Acorn woodpecker | Melanerpes formicivorus |
| Black phoebe | Sayornis nigricans |
| Western scrub jay | Aphelocoma californica |
| American crow | Corvus brachyrhynchos |
| Northern mockingbird | Mimus polyglottos |
| Botta's pocket gopher (sign) | Thomomys bottae |
| Mule deer | Odocoileus hemionus |

⁼ Plant is included in the CCR Section 4500 list of California State Noxious Weeds.

Appendix D **Air Quality Calculations and Assumptions**

Tiger Creek Const (Annual) Custom Report

Table of Contents

- 1. Basic Project Information
 - 1.1. Basic Project Information
 - 1.2. Land Use Types
 - 1.3. User-Selected Emission Reduction Measures by Emissions Sector
- 2. Emissions Summary
 - 2.1. Construction Emissions Compared Against Thresholds
 - 2.2. Construction Emissions by Year, Unmitigated
 - 2.3. Construction Emissions by Year, Mitigated
- 3. Construction Emissions Details
 - 3.1. P4.2 Crest form and pour concrete (2026) Unmitigated
 - 3.2. P4.2 Crest form and pour concrete (2026) Mitigated
 - 3.3. P4.1 Crest excavation/ subgrade (2026) Unmitigated
 - 3.4. P4.1 Crest excavation/ subgrade (2026) Mitigated
 - 3.5. P4 Crest structure (2026) Unmitigated
 - 3.6. P4 Crest structure (2026) Mitigated

- 3.7. P3.6 Trench Cutoff Concrete 3 (2026) Unmitigated
- 3.8. P3.6 Trench Cutoff Concrete 3 (2026) Mitigated
- 3.9. P3.5 Trench Cutoff Concrete 2 (2026) Unmitigated
- 3.10. P3.5 Trench Cutoff Concrete 2 (2026) Mitigated
- 3.11. P3.4 Trench Cutoff Concrete 1 (2026) Unmitigated
- 3.12. P3.4 Trench Cutoff Concrete 1 (2026) Mitigated
- 3.13. P3.3 Place piles, sheets, and concrete (2026) Unmitigated
- 3.14. P3.3 Place piles, sheets, and concrete (2026) Mitigated
- 3.15. P3.1 Mass concrete (2025) Unmitigated
- 3.16. P3.1 Mass concrete (2025) Mitigated
- 3.17. P3 Cofferdam (2025) Unmitigated
- 3.18. P3 Cofferdam (2025) Mitigated
- 3.19. P3 Cofferdam (2026) Unmitigated
- 3.20. P3 Cofferdam (2026) Mitigated
- 3.21. P2.3 Drains, Cleanouts, and Backfill (2026) Unmitigated
- 3.22. P2.3 Drains, Cleanouts, and Backfill (2026) Mitigated
- 3.23. P2.2 Spillway form and pour concrete (2025) Unmitigated
- 3.24. P2.2 Spillway form and pour concrete (2025) Mitigated

- 3.25. P2.2 Spillway form and pour concrete (2026) Unmitigated
- 3.26. P2.2 Spillway form and pour concrete (2026) Mitigated
- 3.27. P2.1 Spillway excavation/subgrade (2025) Unmitigated
- 3.28. P2.1 Spillway excavation/subgrade (2025) Mitigated
- 3.29. P2 Spillway chute and flip bucket (2025) Unmitigated
- 3.30. P2 Spillway chute and flip bucket (2025) Mitigated
- 3.31. P2 Spillway chute and flip bucket (2026) Unmitigated
- 3.32. P2 Spillway chute and flip bucket (2026) Mitigated
- 3.33. P1.4 Access road construction (2025) Unmitigated
- 3.34. P1.4 Access road construction (2025) Mitigated
- 3.35. P3.2 Excavate cofferdam (2026) Unmitigated
- 3.36. P3.2 Excavate cofferdam (2026) Mitigated
- 3.37. P1.3 Laydown area development (2025) Unmitigated
- 3.38. P1.3 Laydown area development (2025) Mitigated
- 3.39. P1.2 Mobilization (2025) Unmitigated
- 3.40. P1.2 Mobilization (2025) Mitigated
- 3.41. P1.1 Tree removal (2025) Unmitigated
- 3.42. P1.1 Tree removal (2025) Mitigated

- 3.43. P1 Mobilization and access development (2025) Unmitigated
- 3.44. P1 Mobilization and access development (2025) Mitigated
- 3.45. P5 Dam notch and tie-in chute (2026) Unmitigated
- 3.46. P5 Dam notch and tie-in chute (2026) Mitigated
- 3.47. P5 Dam notch and tie-in chute (2027) Unmitigated
- 3.48. P5 Dam notch and tie-in chute (2027) Mitigated
- 3.49. P5.1 Demolition (2026) Unmitigated
- 3.50. P5.1 Demolition (2026) Mitigated
- 3.51. P5.2 Excavation, Subgrade (2026) Unmitigated
- 3.52. P5.2 Excavation, Subgrade (2026) Mitigated
- 3.53. P5.3 Form and Pour Concrete (2026) Unmitigated
- 3.54. P5.3 Form and Pour Concrete (2026) Mitigated
- 3.55. P5.4 Install Footbridge (2026) Unmitigated
- 3.56. P5.4 Install Footbridge (2026) Mitigated
- 3.57. P5.4 Install Footbridge (2027) Unmitigated
- 3.58. P5.4 Install Footbridge (2027) Mitigated
- 3.59. P6 Plunge pool (2026) Unmitigated
- 3.60. P6 Plunge pool (2026) Mitigated

- 3.61. P6.1 Flow bypass (2026) Unmitigated
- 3.62. P6.1 Flow bypass (2026) Mitigated
- 3.63. P6.2 Excavation (2026) Unmitigated
- 3.64. P6.2 Excavation (2026) Mitigated
- 3.65. P6.3 Slope protection (2026) Unmitigated
- 3.66. P6.3 Slope protection (2026) Mitigated
- 3.67. P7 Remaining Work Scope (2026) Unmitigated
- 3.68. P7 Remaining Work Scope (2026) Mitigated
- 3.69. P7 Remaining Work Scope (2027) Unmitigated
- 3.70. P7 Remaining Work Scope (2027) Mitigated
- 3.71. P7.1 Cofferdam removal (2027) Unmitigated
- 3.72. P7.1 Cofferdam removal (2027) Mitigated
- 3.73. P7.2 Lighting (2027) Unmitigated
- 3.74. P7.2 Lighting (2027) Mitigated
- 3.75. P7.3 Log boom (2026) Unmitigated
- 3.76. P7.3 Log boom (2026) Mitigated
- 3.77. P7.3 Log boom (2027) Unmitigated
- 3.78. P7.3 Log boom (2027) Mitigated

- 3.79. P7.4 Restoration (2027) Unmitigated
- 3.80. P7.4 Restoration (2027) Mitigated
- 3.81. P7.5 Demobilization (2027) Unmitigated
- 3.82. P7.5 Demobilization (2027) Mitigated
- 3.83. P8 Spillway abandonment (2027) Unmitigated
- 3.84. P8 Spillway abandonment (2027) Mitigated
- 3.85. P8.1 Remove Cofferdam (2027) Unmitigated
- 3.86. P8.1 Remove Cofferdam (2027) Mitigated
- 3.87. P8.2 Canal Side Channel (2027) Unmitigated
- 3.88. P8.2 Canal Side Channel (2027) Mitigated
- 3.89. P8.3 Cover Bathtub (2027) Unmitigated
- 3.90. P8.3 Cover Bathtub (2027) Mitigated
- 3.91. P9 Batch Plant Equip (2025) Unmitigated
- 3.92. P9 Batch Plant Equip (2025) Mitigated
- 3.93. P9 Batch Plant Equip (2026) Unmitigated
- 3.94. P9 Batch Plant Equip (2026) Mitigated
- 4. Operations Emissions Details
 - 4.10. Soil Carbon Accumulation By Vegetation Type

- 4.10.1. Soil Carbon Accumulation By Vegetation Type Unmitigated
- 4.10.2. Above and Belowground Carbon Accumulation by Land Use Type Unmitigated
- 4.10.3. Avoided and Sequestered Emissions by Species Unmitigated
- 4.10.4. Soil Carbon Accumulation By Vegetation Type Mitigated
- 4.10.5. Above and Belowground Carbon Accumulation by Land Use Type Mitigated
- 4.10.6. Avoided and Sequestered Emissions by Species Mitigated
- 5. Activity Data
 - 5.1. Construction Schedule
 - 5.2. Off-Road Equipment
 - 5.2.1. Unmitigated
 - 5.3. Construction Vehicles
 - 5.3.1. Unmitigated
 - 5.3.2. Mitigated
 - 5.4. Vehicles
 - 5.4.1. Construction Vehicle Control Strategies
 - 5.5. Architectural Coatings
 - 5.6. Dust Mitigation
 - 5.6.1. Construction Earthmoving Activities

- 5.6.2. Construction Earthmoving Control Strategies
- 5.7. Construction Paving
- 5.8. Construction Electricity Consumption and Emissions Factors
- 8. User Changes to Default Data

1. Basic Project Information

1.1. Basic Project Information

| Data Field | Value |
|-----------------------------|--------------------------------------|
| Project Name | Tiger Creek Const (Annual) |
| Construction Start Date | 7/8/2024 |
| Lead Agency | _ |
| Land Use Scale | Project/site |
| Analysis Level for Defaults | County |
| Windspeed (m/s) | 2.70 |
| Precipitation (days) | 38.2 |
| Location | 38.477123683429426, -120.45229072675 |
| County | Amador |
| City | Unincorporated |
| Air District | Amador County APCD |
| Air Basin | Mountain Counties |
| TAZ | 3002 |
| EDFZ | 4 |
| Electric Utility | Pacific Gas & Electric Company |
| Gas Utility | Pacific Gas & Electric |
| App Version | 2022.1.1.26 |

1.2. Land Use Types

| Land Use Subtype | Size | Unit | Lot Acreage | Building Area (sq ft) | Landscape Area (sq ft) | Special Landscape Area (sq ft) | Population | Description |
|-------------------------|------|-------------------|-------------|-----------------------|---------------------------|-----------------------------------|------------|-------------|
| User Defined Industrial | 1.00 | User Defined Unit | 1.00 | 0.00 | 1.00 | 1.00 | _ | _ |

1.3. User-Selected Emission Reduction Measures by Emissions Sector

| Sector | # | Measure Title |
|--------------|--------|---------------------------------------|
| Construction | C-10-A | Water Exposed Surfaces |
| Construction | C-10-C | Water Unpaved Construction Roads |
| Construction | C-11 | Limit Vehicle Speeds on Unpaved Roads |

2. Emissions Summary

2.1. Construction Emissions Compared Against Thresholds

| Ontona | i Oliatai | 110 (15) 40 | ., | iy, toinyi | ioi aiiii | adij dila | 01100 | 1.0, 0.0. | or adiry, i | , | 0 | / | | | | | |
|---------------------------|-----------|-------------|------|------------|-----------|-----------|-------|-----------|-------------|--------|------|--------|--------|------|------|------|--------|
| Un/Mit. | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Unmit. | 94.7 | 52.6 | 270 | 0.17 | 1.86 | 170 | 171 | 1.71 | 19.8 | 21.5 | _ | 18,938 | 18,938 | 0.67 | 1.11 | 12.3 | 19,130 |
| Mit. | 94.7 | 52.6 | 270 | 0.17 | 1.86 | 44.5 | 46.4 | 1.71 | 5.68 | 7.39 | _ | 18,938 | 18,938 | 0.67 | 1.11 | 12.3 | 19,130 |
| % Reduced | _ | _ | _ | _ | _ | 74% | 73% | _ | 71% | 66% | - | _ | _ | - | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Unmit. | 6.93 | 53.0 | 52.8 | 0.17 | 1.86 | 170 | 171 | 1.71 | 19.8 | 21.5 | _ | 18,864 | 18,864 | 0.67 | 0.65 | 0.24 | 19,056 |
| Mit. | 6.93 | 53.0 | 52.8 | 0.17 | 1.86 | 44.5 | 46.4 | 1.71 | 5.68 | 7.39 | _ | 18,864 | 18,864 | 0.67 | 0.65 | 0.24 | 19,056 |
| % Reduced | _ | _ | _ | _ | _ | 74% | 73% | _ | 71% | 66% | _ | _ | _ | _ | - | _ | _ |
| Average Daily (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | |
| Unmit. | 10.5 | 13.1 | 36.7 | 0.04 | 0.53 | 37.7 | 38.3 | 0.47 | 4.38 | 4.86 | _ | 4,718 | 4,718 | 0.15 | 0.23 | 1.57 | 4,792 |
| Mit. | 10.5 | 13.1 | 36.7 | 0.04 | 0.53 | 10.0 | 10.6 | 0.47 | 1.28 | 1.76 | _ | 4,718 | 4,718 | 0.15 | 0.23 | 1.57 | 4,792 |

| % Reduced | _ | _ | _ | _ | _ | 73% | 72% | _ | 71% | 64% | _ | _ | _ | _ | _ | _ | _ |
|-----------------|------|------|------|------|------|------|------|------|------|------|---|-----|-----|------|------|------|-----|
| Annual (Max) | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Unmit. | 1.91 | 2.40 | 6.69 | 0.01 | 0.10 | 6.88 | 6.98 | 0.09 | 0.80 | 0.89 | _ | 781 | 781 | 0.02 | 0.04 | 0.26 | 793 |
| Mit. | 1.91 | 2.40 | 6.69 | 0.01 | 0.10 | 1.83 | 1.93 | 0.09 | 0.23 | 0.32 | _ | 781 | 781 | 0.02 | 0.04 | 0.26 | 793 |
| % Reduced | _ | _ | _ | _ | _ | 73% | 72% | _ | 71% | 64% | _ | _ | _ | _ | _ | _ | _ |

2.2. Construction Emissions by Year, Unmitigated

| Year | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------------------------|------|------|------|---------|-------|-------|-------|--------|--------|--------|------|--------|--------|------|------|------|--------|
| Daily - Summer (Max) | - | - | _ | _ | _ | _ | _ | - | _ | - | - | _ | _ | - | - | - | - |
| 2025 | 94.7 | 52.6 | 270 | 0.17 | 1.86 | 170 | 171 | 1.71 | 19.8 | 21.5 | _ | 18,938 | 18,938 | 0.67 | 1.11 | 12.3 | 19,130 |
| 2026 | 4.34 | 31.0 | 36.7 | 0.10 | 1.05 | 104 | 105 | 0.96 | 10.6 | 11.6 | _ | 11,905 | 11,905 | 0.41 | 0.42 | 7.12 | 12,049 |
| 2027 | 0.90 | 8.64 | 8.44 | 0.03 | 0.31 | 29.7 | 30.0 | 0.28 | 3.02 | 3.30 | _ | 2,976 | 2,976 | 0.09 | 0.15 | 1.80 | 3,025 |
| Daily - Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| 2025 | 6.93 | 53.0 | 52.8 | 0.17 | 1.86 | 170 | 171 | 1.71 | 19.8 | 21.5 | _ | 18,864 | 18,864 | 0.67 | 0.65 | 0.24 | 19,056 |
| 2026 | 1.70 | 16.2 | 16.1 | 0.05 | 0.48 | 45.1 | 45.6 | 0.44 | 4.64 | 5.08 | _ | 5,040 | 5,040 | 0.14 | 0.34 | 0.14 | 5,145 |
| 2027 | 1.29 | 13.3 | 13.8 | 0.04 | 0.39 | 126 | 126 | 0.36 | 12.7 | 12.9 | _ | 4,619 | 4,619 | 0.12 | 0.32 | 0.11 | 4,716 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| 2025 | 10.5 | 13.1 | 36.7 | 0.04 | 0.53 | 37.7 | 38.3 | 0.47 | 4.38 | 4.86 | _ | 4,721 | 4,721 | 0.15 | 0.23 | 1.32 | 4,795 |
| 2026 | 1.20 | 9.89 | 10.6 | 0.03 | 0.30 | 24.0 | 24.3 | 0.27 | 2.49 | 2.77 | _ | 3,569 | 3,569 | 0.11 | 0.21 | 1.57 | 3,636 |
| 2027 | 0.12 | 1.24 | 1.27 | < 0.005 | 0.03 | 8.69 | 8.72 | 0.03 | 0.88 | 0.91 | _ | 466 | 466 | 0.01 | 0.04 | 0.21 | 478 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| 2025 | 1.91 | 2.40 | 6.69 | 0.01 | 0.10 | 6.88 | 6.98 | 0.09 | 0.80 | 0.89 | _ | 782 | 782 | 0.02 | 0.04 | 0.22 | 794 |

| 2026 | 0.22 | 1.80 | 1.93 | 0.01 | 0.05 | 4.38 | 4.44 | 0.05 | 0.45 | 0.50 | _ | 591 | 591 | 0.02 | 0.03 | 0.26 | 602 |
|------|------|------|------|---------|------|------|------|------|------|------|---|------|------|---------|------|------|------|
| 2027 | 0.02 | 0.23 | 0.23 | < 0.005 | 0.01 | 1.59 | 1.59 | 0.01 | 0.16 | 0.17 | _ | 77.2 | 77.2 | < 0.005 | 0.01 | 0.04 | 79.1 |

2.3. Construction Emissions by Year, Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

| Year | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------------------------|------|------|------|---------|-------|-------|-------|--------|--------|--------|------|--------|--------|---------|------|------|--------|
| Daily - Summer (Max) | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| 2025 | 94.7 | 52.6 | 270 | 0.17 | 1.86 | 44.5 | 46.4 | 1.71 | 5.68 | 7.39 | _ | 18,938 | 18,938 | 0.67 | 1.11 | 12.3 | 19,130 |
| 2026 | 4.34 | 31.0 | 36.7 | 0.10 | 1.05 | 27.2 | 28.2 | 0.96 | 2.90 | 3.86 | _ | 11,905 | 11,905 | 0.41 | 0.42 | 7.12 | 12,049 |
| 2027 | 0.90 | 8.64 | 8.44 | 0.03 | 0.31 | 7.72 | 8.03 | 0.28 | 0.82 | 1.10 | _ | 2,976 | 2,976 | 0.09 | 0.15 | 1.80 | 3,025 |
| Daily - Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| 2025 | 6.93 | 53.0 | 52.8 | 0.17 | 1.86 | 44.5 | 46.4 | 1.71 | 5.68 | 7.39 | _ | 18,864 | 18,864 | 0.67 | 0.65 | 0.24 | 19,056 |
| 2026 | 1.70 | 16.2 | 16.1 | 0.05 | 0.48 | 12.1 | 12.5 | 0.44 | 1.35 | 1.79 | _ | 5,040 | 5,040 | 0.14 | 0.34 | 0.14 | 5,145 |
| 2027 | 1.29 | 13.3 | 13.8 | 0.04 | 0.39 | 32.2 | 32.5 | 0.36 | 3.33 | 3.59 | _ | 4,619 | 4,619 | 0.12 | 0.32 | 0.11 | 4,716 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| 2025 | 10.5 | 13.1 | 36.7 | 0.04 | 0.53 | 10.0 | 10.6 | 0.47 | 1.28 | 1.76 | _ | 4,721 | 4,721 | 0.15 | 0.23 | 1.32 | 4,795 |
| 2026 | 1.20 | 9.89 | 10.6 | 0.03 | 0.30 | 6.52 | 6.81 | 0.27 | 0.74 | 1.02 | _ | 3,569 | 3,569 | 0.11 | 0.21 | 1.57 | 3,636 |
| 2027 | 0.12 | 1.24 | 1.27 | < 0.005 | 0.03 | 2.25 | 2.29 | 0.03 | 0.24 | 0.27 | _ | 466 | 466 | 0.01 | 0.04 | 0.21 | 478 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| 2025 | 1.91 | 2.40 | 6.69 | 0.01 | 0.10 | 1.83 | 1.93 | 0.09 | 0.23 | 0.32 | _ | 782 | 782 | 0.02 | 0.04 | 0.22 | 794 |
| 2026 | 0.22 | 1.80 | 1.93 | 0.01 | 0.05 | 1.19 | 1.24 | 0.05 | 0.14 | 0.19 | _ | 591 | 591 | 0.02 | 0.03 | 0.26 | 602 |
| 2027 | 0.02 | 0.23 | 0.23 | < 0.005 | 0.01 | 0.41 | 0.42 | 0.01 | 0.04 | 0.05 | _ | 77.2 | 77.2 | < 0.005 | 0.01 | 0.04 | 79.1 |

3. Construction Emissions Details

3.1. P4.2 - Crest form and pour concrete (2026) - Unmitigated

| | ROG | NOx | co | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|------|---------|---------|---------|---------|---------|----------|----------|----------|------|-------|-------|---------|---------|---------|-------|
| | | NUX | CO | 302 | PIVITUE | PIVITUD | PIVITUT | PIVIZ.5E | PIVIZ.5D | PIVIZ.51 | BCU2 | NBCU2 | CO21 | СП4 | INZU | K | COZe |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 5.20 | 5.11 | 0.01 | 0.20 | _ | 0.20 | 0.18 | _ | 0.18 | _ | 1,188 | 1,188 | 0.05 | 0.01 | _ | 1,192 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | 0.06 | 43.1 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 5.20 | 5.11 | 0.01 | 0.20 | _ | 0.20 | 0.18 | _ | 0.18 | _ | 1,188 | 1,188 | 0.05 | 0.01 | _ | 1,192 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 1.81 | 1.78 | < 0.005 | 0.07 | _ | 0.07 | 0.06 | _ | 0.06 | _ | 413 | 413 | 0.02 | < 0.005 | _ | 415 |
| Onsite truck | < 0.005 | 0.03 | < 0.005 | < 0.005 | < 0.005 | 4.59 | 4.59 | < 0.005 | 0.46 | 0.46 | _ | 14.3 | 14.3 | < 0.005 | < 0.005 | 0.01 | 15.0 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.33 | 0.32 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | - | 0.01 | - | 68.4 | 68.4 | < 0.005 | < 0.005 | _ | 68.7 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.84 | 0.84 | < 0.005 | 0.08 | 0.08 | _ | 2.37 | 2.37 | < 0.005 | < 0.005 | < 0.005 | 2.48 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | - | _ | _ | _ | - | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.06 | 0.02 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 10.1 | 10.1 | < 0.005 | < 0.005 | 0.01 | 10.6 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.06 | 0.02 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 10.1 | 10.1 | < 0.005 | < 0.005 | < 0.005 | 10.5 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.02 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 3.51 | 3.51 | < 0.005 | < 0.005 | < 0.005 | 3.68 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.58 | 0.58 | < 0.005 | < 0.005 | < 0.005 | 0.61 |

3.2. P4.2 - Crest form and pour concrete (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|------|------|----------|----------|-------|-------|---------|----------|--------|------|-------|----------|---------|------|------|-------|
| Onsite | _ | | _ | <u> </u> | <u> </u> | _ | _ | _ | <u> </u> | _ | _ | _ | <u> </u> | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 5.20 | 5.11 | 0.01 | 0.20 | _ | 0.20 | 0.18 | _ | 0.18 | _ | 1,188 | 1,188 | 0.05 | 0.01 | _ | 1,192 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | 0.06 | 43.1 |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|------|---------|---------|---------|---------|---------|---------|---------|---------|---|-------|-------|---------|---------|---------|-------|
| Off-Road Equipmen | | 5.20 | 5.11 | 0.01 | 0.20 | _ | 0.20 | 0.18 | _ | 0.18 | _ | 1,188 | 1,188 | 0.05 | 0.01 | _ | 1,192 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | - | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | - | _ | _ | _ | _ | - | _ | _ | _ | - | _ | - | _ | - | _ | _ |
| Off-Road Equipmen | | 1.81 | 1.78 | < 0.005 | 0.07 | _ | 0.07 | 0.06 | _ | 0.06 | - | 413 | 413 | 0.02 | < 0.005 | - | 415 |
| Onsite truck | < 0.005 | 0.03 | < 0.005 | < 0.005 | < 0.005 | 1.16 | 1.16 | < 0.005 | 0.12 | 0.12 | - | 14.3 | 14.3 | < 0.005 | < 0.005 | 0.01 | 15.0 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.33 | 0.32 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 68.4 | 68.4 | < 0.005 | < 0.005 | _ | 68.7 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.21 | 0.21 | < 0.005 | 0.02 | 0.02 | - | 2.37 | 2.37 | < 0.005 | < 0.005 | < 0.005 | 2.48 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.06 | 0.02 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 10.1 | 10.1 | < 0.005 | < 0.005 | 0.01 | 10.6 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.06 | 0.02 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 10.1 | 10.1 | < 0.005 | < 0.005 | < 0.005 | 10.5 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Hauling | < 0.005 | 0.02 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 3.51 | 3.51 | < 0.005 | < 0.005 | < 0.005 | 3.68 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.58 | 0.58 | < 0.005 | < 0.005 | < 0.005 | 0.61 |

3.3. P4.1 - Crest excavation/ subgrade (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|------|----------|----------|---------|-------|-------|----------|--------|--------|------|-------|-------|----------|---------|---------|-------|
| Onsite | _ | _ | <u> </u> | <u> </u> | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 21.5 | 23.1 | 0.07 | 0.82 | _ | 0.82 | 0.75 | _ | 0.75 | _ | 7,779 | 7,779 | 0.32 | 0.06 | _ | 7,806 |
| Onsite truck | 0.01 | 0.44 | 0.03 | < 0.005 | < 0.005 | 88.3 | 88.3 | < 0.005 | 8.82 | 8.82 | _ | 240 | 240 | < 0.005 | 0.04 | 0.38 | 251 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 2.00 | 2.15 | 0.01 | 0.08 | _ | 0.08 | 0.07 | _ | 0.07 | _ | 725 | 725 | 0.03 | 0.01 | _ | 727 |
| Onsite truck | < 0.005 | 0.04 | < 0.005 | < 0.005 | < 0.005 | 7.37 | 7.37 | < 0.005 | 0.74 | 0.74 | _ | 22.3 | 22.3 | < 0.005 | < 0.005 | 0.02 | 23.4 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.37 | 0.39 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 120 | 120 | < 0.005 | < 0.005 | _ | 120 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 1.34 | 1.34 | < 0.005 | 0.13 | 0.13 | _ | 3.70 | 3.70 | < 0.005 | < 0.005 | < 0.005 | 3.87 |

| Offsite | _ | _ | _ | <u> </u> | <u> </u> | _ | _ | <u> </u> | <u> </u> | <u> </u> | _ | _ | <u> </u> | _ | <u> </u> | _ | _ |
|---------------------------|------|------|------|----------|----------|------|------|----------|----------|----------|---|------|----------|------|----------|------|------|
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | | _ | | _ | _ | _ | _ | | _ | _ | _ | _ | | _ | |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.4. P4.1 - Crest excavation/ subgrade (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|---------|---------|-------|-------|---------|--------|--------|------|-------|-------|---------|------|------|-------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 21.5 | 23.1 | 0.07 | 0.82 | _ | 0.82 | 0.75 | _ | 0.75 | _ | 7,779 | 7,779 | 0.32 | 0.06 | _ | 7,806 |
| Onsite truck | 0.01 | 0.44 | 0.03 | < 0.005 | < 0.005 | 22.3 | 22.3 | < 0.005 | 2.23 | 2.23 | _ | 240 | 240 | < 0.005 | 0.04 | 0.38 | 251 |

| Daily, Winter (Max) | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | | _ |
|---------------------------|---------|------|---------|---------|---------|------|------|---------|------|------|---|------|------|---------|---------|---------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmer | | 2.00 | 2.15 | 0.01 | 0.08 | _ | 0.08 | 0.07 | _ | 0.07 | _ | 725 | 725 | 0.03 | 0.01 | _ | 727 |
| Onsite truck | < 0.005 | 0.04 | < 0.005 | < 0.005 | < 0.005 | 1.86 | 1.86 | < 0.005 | 0.19 | 0.19 | _ | 22.3 | 22.3 | < 0.005 | < 0.005 | 0.02 | 23.4 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmer | | 0.37 | 0.39 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 120 | 120 | < 0.005 | < 0.005 | _ | 120 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.34 | 0.34 | < 0.005 | 0.03 | 0.03 | _ | 3.70 | 3.70 | < 0.005 | < 0.005 | < 0.005 | 3.87 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | - | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | - | _ | - | _ | _ | _ | | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.5. P4 - Crest structure (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | СО2Т | CH4 | N2O | R | CO2e |
|---------------------------|------|----------|------|----------|---------|-------|-------|---------|--------|--------|------|-------|------|---------|------|------|------|
| Onsite | _ | <u> </u> | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | - | _ | _ | _ | _ | _ | _ | - | _ | - | _ | - | _ | _ | _ | - |
| Worker | 0.30 | 0.25 | 4.08 | 0.00 | 0.00 | 0.40 | 0.40 | 0.00 | 0.09 | 0.09 | _ | 434 | 434 | 0.02 | 0.02 | 1.78 | 441 |
| Vendor | 0.01 | 0.43 | 0.08 | < 0.005 | < 0.005 | 0.06 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 242 | 242 | < 0.005 | 0.04 | 0.54 | 253 |
| Hauling | 0.02 | 1.20 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 1.02 | 677 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.27 | 0.32 | 2.98 | 0.00 | 0.00 | 0.40 | 0.40 | 0.00 | 0.09 | 0.09 | _ | 386 | 386 | 0.03 | 0.02 | 0.05 | 391 |
| Vendor | 0.01 | 0.46 | 0.08 | < 0.005 | < 0.005 | 0.06 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 242 | 242 | < 0.005 | 0.04 | 0.01 | 253 |

| Hauling | 0.02 | 1.27 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 0.03 | 676 |
|------------------|---------|------|------|---------|---------|---------|------|---------|---------|---------|---|------|------|---------|---------|------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.12 | 0.13 | 1.39 | 0.00 | 0.00 | 0.17 | 0.17 | 0.00 | 0.04 | 0.04 | _ | 175 | 175 | 0.01 | 0.01 | 0.34 | 178 |
| Vendor | < 0.005 | 0.20 | 0.03 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 107 | 107 | < 0.005 | 0.02 | 0.10 | 112 |
| Hauling | 0.01 | 0.56 | 0.04 | < 0.005 | < 0.005 | 0.06 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 285 | 285 | < 0.005 | 0.04 | 0.19 | 298 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.02 | 0.02 | 0.25 | 0.00 | 0.00 | 0.03 | 0.03 | 0.00 | 0.01 | 0.01 | _ | 29.0 | 29.0 | < 0.005 | < 0.005 | 0.06 | 29.4 |
| Vendor | < 0.005 | 0.04 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 17.7 | 17.7 | < 0.005 | < 0.005 | 0.02 | 18.5 |
| Hauling | < 0.005 | 0.10 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 47.2 | 47.2 | < 0.005 | 0.01 | 0.03 | 49.4 |

3.6. P4 - Crest structure (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|----------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | - | _ | _ | - | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ |
|---------------------------|---------|------|------|---------|---------|---------|------|---------|---------|---------|---|------|------|---------|---------|------|------|
| Daily, Summer (Max) | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.30 | 0.25 | 4.08 | 0.00 | 0.00 | 0.40 | 0.40 | 0.00 | 0.09 | 0.09 | _ | 434 | 434 | 0.02 | 0.02 | 1.78 | 441 |
| Vendor | 0.01 | 0.43 | 0.08 | < 0.005 | < 0.005 | 0.06 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 242 | 242 | < 0.005 | 0.04 | 0.54 | 253 |
| Hauling | 0.02 | 1.20 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 1.02 | 677 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.27 | 0.32 | 2.98 | 0.00 | 0.00 | 0.40 | 0.40 | 0.00 | 0.09 | 0.09 | _ | 386 | 386 | 0.03 | 0.02 | 0.05 | 391 |
| Vendor | 0.01 | 0.46 | 0.08 | < 0.005 | < 0.005 | 0.06 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 242 | 242 | < 0.005 | 0.04 | 0.01 | 253 |
| Hauling | 0.02 | 1.27 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 0.03 | 676 |
| Average Daily | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ |
| Worker | 0.12 | 0.13 | 1.39 | 0.00 | 0.00 | 0.17 | 0.17 | 0.00 | 0.04 | 0.04 | _ | 175 | 175 | 0.01 | 0.01 | 0.34 | 178 |
| Vendor | < 0.005 | 0.20 | 0.03 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 107 | 107 | < 0.005 | 0.02 | 0.10 | 112 |
| Hauling | 0.01 | 0.56 | 0.04 | < 0.005 | < 0.005 | 0.06 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 285 | 285 | < 0.005 | 0.04 | 0.19 | 298 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.02 | 0.02 | 0.25 | 0.00 | 0.00 | 0.03 | 0.03 | 0.00 | 0.01 | 0.01 | _ | 29.0 | 29.0 | < 0.005 | < 0.005 | 0.06 | 29.4 |
| Vendor | < 0.005 | 0.04 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 17.7 | 17.7 | < 0.005 | < 0.005 | 0.02 | 18.5 |
| Hauling | < 0.005 | 0.10 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 47.2 | 47.2 | < 0.005 | 0.01 | 0.03 | 49.4 |

3.7. P3.6 - Trench Cutoff Concrete 3 (2026) - Unmitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Off-Road Equipmen | | 2.64 | 2.80 | 0.01 | 0.10 | _ | 0.10 | 0.10 | _ | 0.10 | _ | 479 | 479 | 0.02 | < 0.005 | _ | 480 |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | - | 41.1 | 41.1 | < 0.005 | 0.01 | 0.06 | 43.1 |
| Daily, Winter (Max) | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | - | _ | _ | _ |
| Off-Road Equipmen | | 0.01 | 0.01 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | - | 1.31 | 1.31 | < 0.005 | < 0.005 | _ | 1.32 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.04 | 0.04 | < 0.005 | < 0.005 | < 0.005 | - | 0.11 | 0.11 | < 0.005 | < 0.005 | < 0.005 | 0.12 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | - | < 0.005 | _ | 0.22 | 0.22 | < 0.005 | < 0.005 | _ | 0.22 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | - | 0.02 | 0.02 | < 0.005 | < 0.005 | < 0.005 | 0.02 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | - | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.02 | 0.80 | 0.27 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | 0.01 | 0.01 | _ | 135 | 135 | < 0.005 | 0.02 | 0.13 | 141 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | - |
| Average Daily | _ | _ | - | _ | - | - | _ | _ | - | - | - | - | _ | - | - | - | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.37 | 0.37 | < 0.005 | < 0.005 | < 0.005 | 0.39 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.06 | 0.06 | < 0.005 | < 0.005 | < 0.005 | 0.06 |

3.8. P3.6 - Trench Cutoff Concrete 3 (2026) - Mitigated

| | | _ | | · J, · · · · · J | | | | | | | | | | | | | _ |
|---------------------------|---------|---------|---------|------------------|---------|---------|---------|---------|---------|---------|------|-------|------|---------|---------|---------|------|
| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 2.64 | 2.80 | 0.01 | 0.10 | _ | 0.10 | 0.10 | _ | 0.10 | _ | 479 | 479 | 0.02 | < 0.005 | _ | 480 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | 0.06 | 43.1 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.01 | 0.01 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 1.31 | 1.31 | < 0.005 | < 0.005 | _ | 1.32 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 0.11 | 0.11 | < 0.005 | < 0.005 | < 0.005 | 0.12 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 0.22 | 0.22 | < 0.005 | < 0.005 | _ | 0.22 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.02 | 0.02 | < 0.005 | < 0.005 | < 0.005 | 0.02 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.02 | 0.80 | 0.27 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | 0.01 | 0.01 | _ | 135 | 135 | < 0.005 | 0.02 | 0.13 | 141 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.37 | 0.37 | < 0.005 | < 0.005 | < 0.005 | 0.39 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.06 | 0.06 | < 0.005 | < 0.005 | < 0.005 | 0.06 |

3.9. P3.5 - Trench Cutoff Concrete 2 (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|------|------|---------|---------|-------|-------|---------|--------|--------|------|-------|------|---------|---------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 2.64 | 2.80 | 0.01 | 0.10 | _ | 0.10 | 0.10 | _ | 0.10 | _ | 479 | 479 | 0.02 | < 0.005 | _ | 480 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | 0.06 | 43.1 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Off-Road Equipmen | | 0.01 | 0.01 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 1.31 | 1.31 | < 0.005 | < 0.005 | _ | 1.32 |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.04 | 0.04 | < 0.005 | < 0.005 | < 0.005 | _ | 0.11 | 0.11 | < 0.005 | < 0.005 | < 0.005 | 0.12 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 0.22 | 0.22 | < 0.005 | < 0.005 | _ | 0.22 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 0.02 | 0.02 | < 0.005 | < 0.005 | < 0.005 | 0.02 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.02 | 0.80 | 0.27 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | 0.01 | 0.01 | - | 135 | 135 | < 0.005 | 0.02 | 0.13 | 141 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.37 | 0.37 | < 0.005 | < 0.005 | < 0.005 | 0.39 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.06 | 0.06 | < 0.005 | < 0.005 | < 0.005 | 0.06 |

3.10. P3.5 - Trench Cutoff Concrete 2 (2026) - Mitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|------|-------|------|---------|---------|---------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | - | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 2.64 | 2.80 | 0.01 | 0.10 | _ | 0.10 | 0.10 | _ | 0.10 | _ | 479 | 479 | 0.02 | < 0.005 | _ | 480 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | 0.06 | 43.1 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | - | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Off-Road Equipmen | | 0.01 | 0.01 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 1.31 | 1.31 | < 0.005 | < 0.005 | _ | 1.32 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 0.11 | 0.11 | < 0.005 | < 0.005 | < 0.005 | 0.12 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 0.22 | 0.22 | < 0.005 | < 0.005 | _ | 0.22 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.02 | 0.02 | < 0.005 | < 0.005 | < 0.005 | 0.02 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.02 | 0.80 | 0.27 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | 0.01 | 0.01 | _ | 135 | 135 | < 0.005 | 0.02 | 0.13 | 141 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.37 | 0.37 | < 0.005 | < 0.005 | < 0.005 | 0.39 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.06 | 0.06 | < 0.005 | < 0.005 | < 0.005 | 0.06 |

3.11. P3.4 - Trench Cutoff Concrete 1 (2026) - Unmitigated

| | | | | <i>y</i> , | | | | | · J, | | | | | | | | |
|---------------------------|---------|---------|-------------|------------|---------|-------|---------|---------|---------|---------|------|-------|------|---------|---------|---------|------|
| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | |
| Off-Road Equipmen | | 2.64 | 2.80 | 0.01 | 0.10 | _ | 0.10 | 0.10 | _ | 0.10 | _ | 479 | 479 | 0.02 | < 0.005 | _ | 480 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.01 | 0.01 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 1.31 | 1.31 | < 0.005 | < 0.005 | _ | 1.32 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.04 | 0.04 | < 0.005 | < 0.005 | < 0.005 | _ | 0.11 | 0.11 | < 0.005 | < 0.005 | < 0.005 | 0.12 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Off-Road Equipmer | | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 0.22 | 0.22 | < 0.005 | < 0.005 | _ | 0.22 |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 0.02 | 0.02 | < 0.005 | < 0.005 | < 0.005 | 0.02 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.02 | 0.81 | 0.29 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | 0.01 | 0.01 | _ | 134 | 134 | < 0.005 | 0.02 | < 0.005 | 141 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.37 | 0.37 | < 0.005 | < 0.005 | < 0.005 | 0.39 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.06 | 0.06 | < 0.005 | < 0.005 | < 0.005 | 0.06 |

3.12. P3.4 - Trench Cutoff Concrete 1 (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|----------|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Off-Road Equipmen | | 2.64 | 2.80 | 0.01 | 0.10 | _ | 0.10 | 0.10 | _ | 0.10 | _ | 479 | 479 | 0.02 | < 0.005 | _ | 480 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.01 | 0.01 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 1.31 | 1.31 | < 0.005 | < 0.005 | _ | 1.32 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 0.11 | 0.11 | < 0.005 | < 0.005 | < 0.005 | 0.12 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 0.22 | 0.22 | < 0.005 | < 0.005 | _ | 0.22 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | - | 0.02 | 0.02 | < 0.005 | < 0.005 | < 0.005 | 0.02 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | - | - | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.02 | 0.81 | 0.29 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | 0.01 | 0.01 | _ | 134 | 134 | < 0.005 | 0.02 | < 0.005 | 141 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.37 | 0.37 | < 0.005 | < 0.005 | < 0.005 | 0.39 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.06 | 0.06 | < 0.005 | < 0.005 | < 0.005 | 0.06 |

3.13. P3.3 - Place piles, sheets, and concrete (2026) - Unmitigated

| | | 10 (10/ 40 | , | .y,, y | 101 41111 | aai, aiia | | ib, day it | , adiiy, i | VI 17 y 1 10 | armaai | / | | | | | |
|---------------------------|---------|------------|---------|---------|-----------|-----------|---------|------------|------------|--------------|--------|-------|------|---------|---------|---------|------|
| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 3.61 | 3.72 | 0.01 | 0.15 | _ | 0.15 | 0.13 | _ | 0.13 | _ | 945 | 945 | 0.04 | 0.01 | _ | 949 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | 0.06 | 43.1 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 3.61 | 3.72 | 0.01 | 0.15 | _ | 0.15 | 0.13 | _ | 0.13 | _ | 945 | 945 | 0.04 | 0.01 | _ | 949 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Off-Road Equipmen | | 0.20 | 0.20 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 51.8 | 51.8 | < 0.005 | < 0.005 | _ | 52.0 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.72 | 0.72 | < 0.005 | 0.07 | 0.07 | _ | 2.25 | 2.25 | < 0.005 | < 0.005 | < 0.005 | 2.36 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.04 | 0.04 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 8.58 | 8.58 | < 0.005 | < 0.005 | _ | 8.61 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.13 | 0.13 | < 0.005 | 0.01 | 0.01 | _ | 0.37 | 0.37 | < 0.005 | < 0.005 | < 0.005 | 0.39 |

| Offsite | _ | _ | <u> </u> | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> |
|---------------------------|------|------|----------|------|------|------|------|------|------|------|---|------|------|------|------|------|----------|
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | - | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.14. P3.3 - Place piles, sheets, and concrete (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Off-Road Equipmen | | 3.61 | 3.72 | 0.01 | 0.15 | _ | 0.15 | 0.13 | _ | 0.13 | _ | 945 | 945 | 0.04 | 0.01 | _ | 949 |
|---------------------------|---------|---------|---------|---------|---------|------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | 0.06 | 43.1 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 3.61 | 3.72 | 0.01 | 0.15 | _ | 0.15 | 0.13 | _ | 0.13 | _ | 945 | 945 | 0.04 | 0.01 | _ | 949 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.20 | 0.20 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 51.8 | 51.8 | < 0.005 | < 0.005 | _ | 52.0 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.18 | 0.18 | < 0.005 | 0.02 | 0.02 | _ | 2.25 | 2.25 | < 0.005 | < 0.005 | < 0.005 | 2.36 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.04 | 0.04 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 8.58 | 8.58 | < 0.005 | < 0.005 | _ | 8.61 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | < 0.005 | < 0.005 | _ | 0.37 | 0.37 | < 0.005 | < 0.005 | < 0.005 | 0.39 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.15. P3.1 - Mass concrete (2025) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|------|---------|---------|---------|-------|-------|---------|--------|--------|------|-------|------|---------|---------|---------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | |
| Daily, Winter (Max) | | _ | _ | | _ | _ | _ | _ | _ | _ | | _ | _ | _ | | _ | |
| Off-Road Equipmen | | 3.82 | 3.76 | 0.01 | 0.16 | _ | 0.16 | 0.14 | _ | 0.14 | _ | 946 | 946 | 0.04 | 0.01 | _ | 949 |
| Onsite truck | < 0.005 | 0.10 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 41.8 | 41.8 | < 0.005 | 0.01 | < 0.005 | 43.8 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.31 | 0.31 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 77.7 | 77.7 | < 0.005 | < 0.005 | _ | 78.0 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 1.08 | 1.08 | < 0.005 | 0.11 | 0.11 | _ | 3.44 | 3.44 | < 0.005 | < 0.005 | < 0.005 | 3.60 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Off-Road Equipmer | | 0.06 | 0.06 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | - | 12.9 | 12.9 | < 0.005 | < 0.005 | _ | 12.9 |
|---------------------------|---------|---------|---------|---------|---------|------|---------|---------|------|---------|---|------|------|---------|---------|---------|------|
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.20 | 0.20 | < 0.005 | 0.02 | 0.02 | - | 0.57 | 0.57 | < 0.005 | < 0.005 | < 0.005 | 0.60 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.16. P3.1 - Mass concrete (2025) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Winter (Max) | _ | _ | _ | | _ | | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ |
|---------------------------|---------|---------|---------|---------|---------|------|---------|---------|---------|---------|---|------|------|---------|---------|---------|----------|
| Off-Road Equipmen | | 3.82 | 3.76 | 0.01 | 0.16 | _ | 0.16 | 0.14 | _ | 0.14 | _ | 946 | 946 | 0.04 | 0.01 | _ | 949 |
| Onsite truck | < 0.005 | 0.10 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 41.8 | 41.8 | < 0.005 | 0.01 | < 0.005 | 43.8 |
| Average Daily | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | - |
| Off-Road Equipmen | | 0.31 | 0.31 | < 0.005 | 0.01 | - | 0.01 | 0.01 | - | 0.01 | _ | 77.7 | 77.7 | < 0.005 | < 0.005 | _ | 78.0 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.27 | 0.27 | < 0.005 | 0.03 | 0.03 | - | 3.44 | 3.44 | < 0.005 | < 0.005 | < 0.005 | 3.60 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.06 | 0.06 | < 0.005 | < 0.005 | - | < 0.005 | < 0.005 | _ | < 0.005 | - | 12.9 | 12.9 | < 0.005 | < 0.005 | _ | 12.9 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.05 | 0.05 | < 0.005 | < 0.005 | < 0.005 | _ | 0.57 | 0.57 | < 0.005 | < 0.005 | < 0.005 | 0.60 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | | - | _ | _ | - |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | - | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.17. P3 - Cofferdam (2025) - Unmitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|-------------------------------------|----------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | <u> </u> | _ | _ | _ | _ | 0.00 | 0.00 | _ | 0.00 | 0.00 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | :t | _ | _ | _ | _ | 0.00 | 0.00 | _ | 0.00 | 0.00 | _ | - | _ | _ | _ | - | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | _ | _ | _ | _ | _ | 0.00 | 0.00 | _ | 0.00 | 0.00 | _ | _ | _ | _ | _ | _ | _ |

| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.08 | 0.10 | 0.95 | 0.00 | 0.00 | 0.12 | 0.12 | 0.00 | 0.03 | 0.03 | _ | 118 | 118 | 0.01 | 0.01 | 0.01 | 120 |
| Vendor | < 0.005 | 0.24 | 0.04 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 123 | 123 | < 0.005 | 0.02 | 0.01 | 128 |
| Hauling | 0.02 | 1.34 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 657 | 657 | < 0.005 | 0.10 | 0.03 | 688 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.01 | 0.01 | 0.11 | 0.00 | 0.00 | 0.01 | 0.01 | 0.00 | < 0.005 | < 0.005 | _ | 13.1 | 13.1 | < 0.005 | < 0.005 | 0.03 | 13.3 |
| Vendor | < 0.005 | 0.03 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 13.3 | 13.3 | < 0.005 | < 0.005 | 0.01 | 13.9 |
| Hauling | < 0.005 | 0.14 | 0.01 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | 0.01 | _ | 71.0 | 71.0 | < 0.005 | 0.01 | 0.05 | 74.4 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | 0.02 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | < 0.005 | < 0.005 | _ | 2.16 | 2.16 | < 0.005 | < 0.005 | < 0.005 | 2.20 |
| Vendor | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 2.20 | 2.20 | < 0.005 | < 0.005 | < 0.005 | 2.30 |
| Hauling | < 0.005 | 0.03 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 11.7 | 11.7 | < 0.005 | < 0.005 | 0.01 | 12.3 |

3.18. P3 - Cofferdam (2025) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| _ | | | | | | | | | | | | | | | | | |
|-------------------------------------|---------|------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|------|------|
| Dust From Material Movemen | — t | _ | _ | _ | | 0.00 | 0.00 | | 0.00 | 0.00 | _ | _ | _ | _ | | _ | |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | 0.00 | 0.00 | _ | 0.00 | 0.00 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | 0.00 | 0.00 | _ | 0.00 | 0.00 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | - | | _ | _ | _ | - | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | - | _ |
| Worker | 0.08 | 0.10 | 0.95 | 0.00 | 0.00 | 0.12 | 0.12 | 0.00 | 0.03 | 0.03 | _ | 118 | 118 | 0.01 | 0.01 | 0.01 | 120 |
| Vendor | < 0.005 | 0.24 | 0.04 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 123 | 123 | < 0.005 | 0.02 | 0.01 | 128 |
| Hauling | 0.02 | 1.34 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 657 | 657 | < 0.005 | 0.10 | 0.03 | 688 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.01 | 0.01 | 0.11 | 0.00 | 0.00 | 0.01 | 0.01 | 0.00 | < 0.005 | < 0.005 | _ | 13.1 | 13.1 | < 0.005 | < 0.005 | 0.03 | 13.3 |
| Vendor | < 0.005 | 0.03 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 13.3 | 13.3 | < 0.005 | < 0.005 | 0.01 | 13.9 |

| Hauling | < 0.005 | 0.14 | 0.01 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | 0.01 | _ | 71.0 | 71.0 | < 0.005 | 0.01 | 0.05 | 74.4 |
|---------|---------|---------|---------|----------|---------|---------|---------|----------|---------|---------|---|------|----------|---------|---------|---------|------|
| Annual | _ | _ | _ | <u> </u> | _ | _ | _ | <u> </u> | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | 0.02 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | < 0.005 | < 0.005 | _ | 2.16 | 2.16 | < 0.005 | < 0.005 | < 0.005 | 2.20 |
| Vendor | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 2.20 | 2.20 | < 0.005 | < 0.005 | < 0.005 | 2.30 |
| Hauling | < 0.005 | 0.03 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 11.7 | 11.7 | < 0.005 | < 0.005 | 0.01 | 12.3 |

3.19. P3 - Cofferdam (2026) - Unmitigated

| onicona | | 10 (10/ 40 | , | ,, | 101 41111 | aai, aiia | 000 | ibi day ic | · · · · · · · · · · · · · · · · · | vi i / y i i Oi | | | | | | | |
|-------------------------------------|----------|------------|------|------|-----------|-----------|----------|------------|-----------------------------------|-----------------|------|-------|------|----------|------|------|------|
| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | <u> </u> | _ | _ | _ | _ | <u> </u> | <u> </u> | _ | _ | _ | _ | _ | <u> </u> | _ | _ | - |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | 0.00 | 0.00 | _ | 0.00 | 0.00 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | - | - | _ | _ | 0.00 | 0.00 | - | 0.00 | 0.00 | _ | _ | _ | - | _ | _ | - |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | <u> </u> | _ | _ | _ | _ | 0.00 | 0.00 | _ | 0.00 | 0.00 | _ | _ | _ | _ | _ | _ | _ |

| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|-------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | — | _ | _ | _ | _ | 0.00 | 0.00 | _ | 0.00 | 0.00 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.09 | 0.08 | 1.23 | 0.00 | 0.00 | 0.12 | 0.12 | 0.00 | 0.03 | 0.03 | _ | 130 | 130 | 0.01 | < 0.005 | 0.53 | 132 |
| Vendor | < 0.005 | 0.22 | 0.04 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 121 | 121 | < 0.005 | 0.02 | 0.27 | 127 |
| Hauling | 0.02 | 1.20 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 1.02 | 677 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.08 | 0.10 | 0.89 | 0.00 | 0.00 | 0.12 | 0.12 | 0.00 | 0.03 | 0.03 | _ | 116 | 116 | 0.01 | 0.01 | 0.01 | 117 |
| Vendor | < 0.005 | 0.23 | 0.04 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 121 | 121 | < 0.005 | 0.02 | 0.01 | 126 |
| Hauling | 0.02 | 1.27 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 0.03 | 676 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.02 | 0.02 | 0.24 | 0.00 | 0.00 | 0.03 | 0.03 | 0.00 | 0.01 | 0.01 | _ | 30.2 | 30.2 | < 0.005 | < 0.005 | 0.06 | 30.7 |
| Vendor | < 0.005 | 0.06 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 30.7 | 30.7 | < 0.005 | < 0.005 | 0.03 | 32.1 |
| Hauling | < 0.005 | 0.32 | 0.02 | < 0.005 | < 0.005 | 0.04 | 0.04 | < 0.005 | 0.01 | 0.01 | _ | 164 | 164 | < 0.005 | 0.03 | 0.11 | 172 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | 0.04 | 0.00 | 0.00 | 0.01 | 0.01 | 0.00 | < 0.005 | < 0.005 | _ | 5.00 | 5.00 | < 0.005 | < 0.005 | 0.01 | 5.08 |
| Vendor | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 5.08 | 5.08 | < 0.005 | < 0.005 | < 0.005 | 5.31 |
| Hauling | < 0.005 | 0.06 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 27.1 | 27.1 | < 0.005 | < 0.005 | 0.02 | 28.4 |

3.20. P3 - Cofferdam (2026) - Mitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|-------------------------------------|-------|------|------|------|-------|-------|-------|----------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | | | _ | 0.00 | 0.00 | | 0.00 | 0.00 | | | | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | 0.00 | 0.00 | _ | 0.00 | 0.00 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | | _ | 0.00 | 0.00 | _ | 0.00 | 0.00 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | 0.00 | 0.00 | _ | 0.00 | 0.00 | _ | _ | _ | _ | _ | _ | _ |

| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ |
| Worker | 0.09 | 0.08 | 1.23 | 0.00 | 0.00 | 0.12 | 0.12 | 0.00 | 0.03 | 0.03 | _ | 130 | 130 | 0.01 | < 0.005 | 0.53 | 132 |
| Vendor | < 0.005 | 0.22 | 0.04 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 121 | 121 | < 0.005 | 0.02 | 0.27 | 127 |
| Hauling | 0.02 | 1.20 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 1.02 | 677 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.08 | 0.10 | 0.89 | 0.00 | 0.00 | 0.12 | 0.12 | 0.00 | 0.03 | 0.03 | _ | 116 | 116 | 0.01 | 0.01 | 0.01 | 117 |
| Vendor | < 0.005 | 0.23 | 0.04 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 121 | 121 | < 0.005 | 0.02 | 0.01 | 126 |
| Hauling | 0.02 | 1.27 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | - | 646 | 646 | < 0.005 | 0.10 | 0.03 | 676 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.02 | 0.02 | 0.24 | 0.00 | 0.00 | 0.03 | 0.03 | 0.00 | 0.01 | 0.01 | _ | 30.2 | 30.2 | < 0.005 | < 0.005 | 0.06 | 30.7 |
| Vendor | < 0.005 | 0.06 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 30.7 | 30.7 | < 0.005 | < 0.005 | 0.03 | 32.1 |
| Hauling | < 0.005 | 0.32 | 0.02 | < 0.005 | < 0.005 | 0.04 | 0.04 | < 0.005 | 0.01 | 0.01 | _ | 164 | 164 | < 0.005 | 0.03 | 0.11 | 172 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | 0.04 | 0.00 | 0.00 | 0.01 | 0.01 | 0.00 | < 0.005 | < 0.005 | _ | 5.00 | 5.00 | < 0.005 | < 0.005 | 0.01 | 5.08 |
| Vendor | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 5.08 | 5.08 | < 0.005 | < 0.005 | < 0.005 | 5.31 |
| Hauling | < 0.005 | 0.06 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 27.1 | 27.1 | < 0.005 | < 0.005 | 0.02 | 28.4 |

3.21. P2.3 - Drains, Cleanouts, and Backfill (2026) - Unmitigated

| Lo | ocation | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----|---------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| 0 | nsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, | _ | | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | | |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Summer (Max) | | | | | | | | | | | | | | | | | |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | - | _ | _ | | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Haulii | 00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|--------|----|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|

3.22. P2.3 - Drains, Cleanouts, and Backfill (2026) - Mitigated

| | | | | | r for ann | | | · | | | | | | | | | |
|---------------------------|------|------|------|------|-----------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.23. P2.2 - Spillway form and pour concrete (2025) - Unmitigated

| Location | ROG | NOx | CO | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | СО2Т | CH4 | N2O | R | CO2e |
|---------------------------|---------|------|---------|---------|---------|-------|---------|---------|--------|---------|------|-------|-------|---------|---------|---------|-------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 5.40 | 5.16 | 0.01 | 0.21 | _ | 0.21 | 0.19 | _ | 0.19 | _ | 1,188 | 1,188 | 0.05 | 0.01 | _ | 1,192 |
| Onsite truck | < 0.005 | 0.10 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 41.8 | 41.8 | < 0.005 | 0.01 | < 0.005 | 43.8 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | |
| Off-Road Equipmen | | 0.58 | 0.56 | < 0.005 | 0.02 | _ | 0.02 | 0.02 | _ | 0.02 | _ | 128 | 128 | 0.01 | < 0.005 | _ | 129 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 1.42 | 1.42 | < 0.005 | 0.14 | 0.14 | _ | 4.52 | 4.52 | < 0.005 | < 0.005 | < 0.005 | 4.73 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.11 | 0.10 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 21.2 | 21.2 | < 0.005 | < 0.005 | _ | 21.3 |

| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.26 | 0.26 | < 0.005 | 0.03 | 0.03 | _ | 0.75 | 0.75 | < 0.005 | < 0.005 | < 0.005 | 0.78 |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.06 | 0.02 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 10.2 | 10.2 | < 0.005 | < 0.005 | < 0.005 | 10.7 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 1.11 | 1.11 | < 0.005 | < 0.005 | < 0.005 | 1.16 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.18 | 0.18 | < 0.005 | < 0.005 | < 0.005 | 0.19 |

3.24. P2.2 - Spillway form and pour concrete (2025) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Off-Road Equipmen | | 5.40 | 5.16 | 0.01 | 0.21 | _ | 0.21 | 0.19 | _ | 0.19 | _ | 1,188 | 1,188 | 0.05 | 0.01 | _ | 1,192 |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|-------|-------|---------|---------|---------|-------|
| Onsite truck | < 0.005 | 0.10 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 41.8 | 41.8 | < 0.005 | 0.01 | < 0.005 | 43.8 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Off-Road Equipmen | | 0.58 | 0.56 | < 0.005 | 0.02 | _ | 0.02 | 0.02 | _ | 0.02 | _ | 128 | 128 | 0.01 | < 0.005 | _ | 129 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.36 | 0.36 | < 0.005 | 0.04 | 0.04 | _ | 4.52 | 4.52 | < 0.005 | < 0.005 | < 0.005 | 4.73 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.11 | 0.10 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 21.2 | 21.2 | < 0.005 | < 0.005 | _ | 21.3 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.07 | 0.07 | < 0.005 | 0.01 | 0.01 | _ | 0.75 | 0.75 | < 0.005 | < 0.005 | < 0.005 | 0.78 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.06 | 0.02 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 10.2 | 10.2 | < 0.005 | < 0.005 | < 0.005 | 10.7 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 1.11 | 1.11 | < 0.005 | < 0.005 | < 0.005 | 1.16 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Vorker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| | 0.00= | | 0.00= | | 0.005 | 0.00= | 0.00= | 0.005 | 0.00= | | | 0.40 | 0.40 | | | 0.00= | 0.40 |
|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.18 | 0.18 | < 0.005 | < 0.005 | < 0.005 | 0.19 |
| | | | | | | | | | | | | | | | | | 1 |

3.25. P2.2 - Spillway form and pour concrete (2026) - Unmitigated

| riteria | Pollutan | its (Ib/da | ay for da | ily, ton/yi | r for ann | ual) and | GHGs (| (lb/day fo | or daily, I | VII/yr foi | r annual |) | | | | | |
|---------------------------|----------|------------|-----------|-------------|-----------|----------|--------|------------|-------------|------------|----------|-------|-------|---------|---------|---------|-------|
| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmer | | 5.20 | 5.11 | 0.01 | 0.20 | _ | 0.20 | 0.18 | _ | 0.18 | _ | 1,188 | 1,188 | 0.05 | 0.01 | _ | 1,192 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | 0.06 | 43.1 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmer | | 5.20 | 5.11 | 0.01 | 0.20 | _ | 0.20 | 0.18 | _ | 0.18 | _ | 1,188 | 1,188 | 0.05 | 0.01 | _ | 1,192 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmer | | 1.40 | 1.38 | < 0.005 | 0.05 | _ | 0.05 | 0.05 | _ | 0.05 | _ | 321 | 321 | 0.01 | < 0.005 | _ | 322 |
| Onsite truck | < 0.005 | 0.02 | < 0.005 | < 0.005 | < 0.005 | 3.56 | 3.56 | < 0.005 | 0.36 | 0.36 | _ | 11.1 | 11.1 | < 0.005 | < 0.005 | 0.01 | 11.6 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmer | | 0.26 | 0.25 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 53.1 | 53.1 | < 0.005 | < 0.005 | _ | 53.3 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.65 | 0.65 | < 0.005 | 0.06 | 0.06 | _ | 1.84 | 1.84 | < 0.005 | < 0.005 | < 0.005 | 1.93 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.06 | 0.02 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 10.1 | 10.1 | < 0.005 | < 0.005 | 0.01 | 10.6 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.06 | 0.02 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 10.1 | 10.1 | < 0.005 | < 0.005 | < 0.005 | 10.5 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.02 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 2.73 | 2.73 | < 0.005 | < 0.005 | < 0.005 | 2.86 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.45 | 0.45 | < 0.005 | < 0.005 | < 0.005 | 0.47 |

3.26. P2.2 - Spillway form and pour concrete (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|-------|------|------|---|-------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 5.20 | 5.11 | 0.01 | 0.20 | _ | 0.20 | 0.18 | _ | 0.18 | _ | 1,188 | 1,188 | 0.05 | 0.01 | _ | 1,192 |

| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | 0.06 | 43.1 |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|-------|-------|---------|---------|---------|-------|
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | - | _ | _ |
| Off-Road Equipmen | | 5.20 | 5.11 | 0.01 | 0.20 | _ | 0.20 | 0.18 | _ | 0.18 | _ | 1,188 | 1,188 | 0.05 | 0.01 | _ | 1,192 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 1.40 | 1.38 | < 0.005 | 0.05 | _ | 0.05 | 0.05 | _ | 0.05 | _ | 321 | 321 | 0.01 | < 0.005 | _ | 322 |
| Onsite truck | < 0.005 | 0.02 | < 0.005 | < 0.005 | < 0.005 | 0.90 | 0.90 | < 0.005 | 0.09 | 0.09 | _ | 11.1 | 11.1 | < 0.005 | < 0.005 | 0.01 | 11.6 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.26 | 0.25 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 53.1 | 53.1 | < 0.005 | < 0.005 | _ | 53.3 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.16 | 0.16 | < 0.005 | 0.02 | 0.02 | _ | 1.84 | 1.84 | < 0.005 | < 0.005 | < 0.005 | 1.93 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.06 | 0.02 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 10.1 | 10.1 | < 0.005 | < 0.005 | 0.01 | 10.6 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.06 | 0.02 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 10.1 | 10.1 | < 0.005 | < 0.005 | < 0.005 | 10.5 |

| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.02 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 2.73 | 2.73 | < 0.005 | < 0.005 | < 0.005 | 2.86 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.45 | 0.45 | < 0.005 | < 0.005 | < 0.005 | 0.47 |

3.27. P2.1 - Spillway excavation/subgrade (2025) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|------|------|---------|---------|-------|-------|---------|--------|--------|------|-------|-------|---------|------|------|-------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 23.7 | 24.4 | 0.07 | 0.90 | _ | 0.90 | 0.83 | _ | 0.83 | _ | 7,923 | 7,923 | 0.32 | 0.06 | _ | 7,951 |
| Onsite truck | < 0.005 | 0.39 | 0.02 | < 0.005 | < 0.005 | 73.6 | 73.6 | < 0.005 | 7.35 | 7.35 | _ | 203 | 203 | < 0.005 | 0.03 | 0.33 | 213 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 23.7 | 24.4 | 0.07 | 0.90 | _ | 0.90 | 0.83 | _ | 0.83 | _ | 7,923 | 7,923 | 0.32 | 0.06 | _ | 7,951 |
| Onsite truck | < 0.005 | 0.41 | 0.02 | < 0.005 | < 0.005 | 73.6 | 73.6 | < 0.005 | 7.35 | 7.35 | _ | 203 | 203 | < 0.005 | 0.03 | 0.01 | 213 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 3.50 | 3.61 | 0.01 | 0.13 | _ | 0.13 | 0.12 | _ | 0.12 | _ | 1,172 | 1,172 | 0.05 | 0.01 | _ | 1,176 |

| Onsite truck | < 0.005 | 0.06 | < 0.005 | < 0.005 | < 0.005 | 9.75 | 9.75 | < 0.005 | 0.97 | 0.97 | _ | 30.1 | 30.1 | < 0.005 | < 0.005 | 0.02 | 31.5 |
|---------------------------|---------|------|---------|---------|---------|------|------|---------|------|------|---|------|------|---------|---------|---------|------|
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.64 | 0.66 | < 0.005 | 0.02 | _ | 0.02 | 0.02 | _ | 0.02 | _ | 194 | 194 | 0.01 | < 0.005 | _ | 195 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 1.78 | 1.78 | < 0.005 | 0.18 | 0.18 | _ | 4.98 | 4.98 | < 0.005 | < 0.005 | < 0.005 | 5.22 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.28. P2.1 - Spillway excavation/subgrade (2025) - Mitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | СО2Т | CH4 | N2O | R | CO2e |
|---------------------------|---------|------|---------|---------|---------|-------|-------|---------|--------|--------|------|-------|-------|---------|---------|---------|-------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 23.7 | 24.4 | 0.07 | 0.90 | _ | 0.90 | 0.83 | _ | 0.83 | _ | 7,923 | 7,923 | 0.32 | 0.06 | _ | 7,951 |
| Onsite truck | < 0.005 | 0.39 | 0.02 | < 0.005 | < 0.005 | 18.6 | 18.6 | < 0.005 | 1.85 | 1.86 | _ | 203 | 203 | < 0.005 | 0.03 | 0.33 | 213 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 23.7 | 24.4 | 0.07 | 0.90 | _ | 0.90 | 0.83 | _ | 0.83 | _ | 7,923 | 7,923 | 0.32 | 0.06 | _ | 7,951 |
| Onsite truck | < 0.005 | 0.41 | 0.02 | < 0.005 | < 0.005 | 18.6 | 18.6 | < 0.005 | 1.85 | 1.86 | _ | 203 | 203 | < 0.005 | 0.03 | 0.01 | 213 |
| Average Daily | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ |
| Off-Road Equipmen | | 3.50 | 3.61 | 0.01 | 0.13 | _ | 0.13 | 0.12 | _ | 0.12 | _ | 1,172 | 1,172 | 0.05 | 0.01 | _ | 1,176 |
| Onsite truck | < 0.005 | 0.06 | < 0.005 | < 0.005 | < 0.005 | 2.46 | 2.46 | < 0.005 | 0.25 | 0.25 | _ | 30.1 | 30.1 | < 0.005 | < 0.005 | 0.02 | 31.5 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.64 | 0.66 | < 0.005 | 0.02 | _ | 0.02 | 0.02 | _ | 0.02 | _ | 194 | 194 | 0.01 | < 0.005 | _ | 195 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.45 | 0.45 | < 0.005 | 0.04 | 0.04 | _ | 4.98 | 4.98 | < 0.005 | < 0.005 | < 0.005 | 5.22 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|------|------|------|------|------|------|------|------|------|------|----------|------|------|------|------|------|------|
| Daily, Winter (Max) | - | _ | _ | _ | _ | - | _ | _ | - | _ | _ | _ | _ | _ | _ | - | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | <u> </u> | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.29. P2 - Spillway chute and flip bucket (2025) - Unmitigated

| Location | ROG | | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|-------------------------------------|-------|---|----|-----|-------|-------|-------|--------|---------|---------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | 0.01 | 0.01 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|--------------------------------------|----------|------|------|------|------|---------|---------|------|---------|---------|---|------|------|------|------|------|------|
| truck Daily, | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Winter (Max) | | | | | | | | | | | | | | | | | |
| Dust From Material Movement | <u> </u> | _ | _ | _ | _ | 0.01 | 0.01 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movement | t | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movement | ! | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|------|------|
| Worker | 0.32 | 0.28 | 4.35 | 0.00 | 0.00 | 0.40 | 0.40 | 0.00 | 0.09 | 0.09 | _ | 441 | 441 | 0.02 | 0.02 | 1.90 | 448 |
| Vendor | 0.01 | 0.46 | 0.08 | < 0.005 | < 0.005 | 0.06 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 246 | 246 | < 0.005 | 0.04 | 0.61 | 257 |
| Hauling | 0.02 | 1.26 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 657 | 657 | < 0.005 | 0.10 | 1.07 | 689 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.28 | 0.35 | 3.17 | 0.00 | 0.00 | 0.40 | 0.40 | 0.00 | 0.09 | 0.09 | _ | 392 | 392 | 0.03 | 0.03 | 0.05 | 402 |
| Vendor | 0.01 | 0.49 | 0.09 | < 0.005 | < 0.005 | 0.06 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 245 | 245 | < 0.005 | 0.04 | 0.02 | 257 |
| Hauling | 0.02 | 1.34 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 657 | 657 | < 0.005 | 0.10 | 0.03 | 688 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.08 | 0.09 | 0.91 | 0.00 | 0.00 | 0.11 | 0.11 | 0.00 | 0.02 | 0.02 | _ | 110 | 110 | 0.01 | < 0.005 | 0.22 | 112 |
| Vendor | < 0.005 | 0.13 | 0.02 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | 0.01 | _ | 66.9 | 66.9 | < 0.005 | 0.01 | 0.07 | 70.0 |
| Hauling | < 0.005 | 0.36 | 0.02 | < 0.005 | < 0.005 | 0.04 | 0.04 | < 0.005 | 0.01 | 0.01 | _ | 179 | 179 | < 0.005 | 0.03 | 0.13 | 188 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.01 | 0.02 | 0.17 | 0.00 | 0.00 | 0.02 | 0.02 | 0.00 | < 0.005 | < 0.005 | _ | 18.2 | 18.2 | < 0.005 | < 0.005 | 0.04 | 18.5 |
| Vendor | < 0.005 | 0.02 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 11.1 | 11.1 | < 0.005 | < 0.005 | 0.01 | 11.6 |
| Hauling | < 0.005 | 0.07 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 29.6 | 29.6 | < 0.005 | < 0.005 | 0.02 | 31.0 |

3.30. P2 - Spillway chute and flip bucket (2025) - Mitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Dust From Material Movemen | t | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
|-------------------------------------|--------|------|------|------|------|---------|---------|------|---------|---------|---|------|------|------|------|------|------|
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | — t | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | - |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | | _ | _ | _ | _ | | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | | _ | _ | _ | _ | _ | _ |

| Architect Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|------|------|
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.32 | 0.28 | 4.35 | 0.00 | 0.00 | 0.40 | 0.40 | 0.00 | 0.09 | 0.09 | _ | 441 | 441 | 0.02 | 0.02 | 1.90 | 448 |
| Vendor | 0.01 | 0.46 | 0.08 | < 0.005 | < 0.005 | 0.06 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 246 | 246 | < 0.005 | 0.04 | 0.61 | 257 |
| Hauling | 0.02 | 1.26 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 657 | 657 | < 0.005 | 0.10 | 1.07 | 689 |
| Daily, Winter (Max) | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | - | _ |
| Worker | 0.28 | 0.35 | 3.17 | 0.00 | 0.00 | 0.40 | 0.40 | 0.00 | 0.09 | 0.09 | _ | 392 | 392 | 0.03 | 0.03 | 0.05 | 402 |
| Vendor | 0.01 | 0.49 | 0.09 | < 0.005 | < 0.005 | 0.06 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 245 | 245 | < 0.005 | 0.04 | 0.02 | 257 |
| Hauling | 0.02 | 1.34 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 657 | 657 | < 0.005 | 0.10 | 0.03 | 688 |
| Average Daily | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.08 | 0.09 | 0.91 | 0.00 | 0.00 | 0.11 | 0.11 | 0.00 | 0.02 | 0.02 | _ | 110 | 110 | 0.01 | < 0.005 | 0.22 | 112 |
| Vendor | < 0.005 | 0.13 | 0.02 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | 0.01 | _ | 66.9 | 66.9 | < 0.005 | 0.01 | 0.07 | 70.0 |
| Hauling | < 0.005 | 0.36 | 0.02 | < 0.005 | < 0.005 | 0.04 | 0.04 | < 0.005 | 0.01 | 0.01 | _ | 179 | 179 | < 0.005 | 0.03 | 0.13 | 188 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.01 | 0.02 | 0.17 | 0.00 | 0.00 | 0.02 | 0.02 | 0.00 | < 0.005 | < 0.005 | _ | 18.2 | 18.2 | < 0.005 | < 0.005 | 0.04 | 18.5 |
| Vendor | < 0.005 | 0.02 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 11.1 | 11.1 | < 0.005 | < 0.005 | 0.01 | 11.6 |
| Hauling | < 0.005 | 0.07 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 29.6 | 29.6 | < 0.005 | < 0.005 | 0.02 | 31.0 |

3.31. P2 - Spillway chute and flip bucket (2026) - Unmitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|--------------------------------------|----------|------|------|------|------|---------|---------|------|---------|---------|---|------|------|------|------|------|------|
| Dust From Material Movement | — t | _ | _ | _ | _ | 0.01 | 0.01 | _ | < 0.005 | < 0.005 | _ | | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movement | <u> </u> | _ | _ | _ | _ | 0.01 | 0.01 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movement | <u> </u> | - | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Dust From Material Movemen | t | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
|-------------------------------------|---------|------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|------|------|
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.30 | 0.25 | 4.08 | 0.00 | 0.00 | 0.40 | 0.40 | 0.00 | 0.09 | 0.09 | _ | 434 | 434 | 0.02 | 0.02 | 1.78 | 441 |
| Vendor | 0.01 | 0.43 | 0.08 | < 0.005 | < 0.005 | 0.06 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 242 | 242 | < 0.005 | 0.04 | 0.54 | 253 |
| Hauling | 0.02 | 1.20 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 1.02 | 677 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.27 | 0.32 | 2.98 | 0.00 | 0.00 | 0.40 | 0.40 | 0.00 | 0.09 | 0.09 | _ | 386 | 386 | 0.03 | 0.02 | 0.05 | 391 |
| Vendor | 0.01 | 0.46 | 0.08 | < 0.005 | < 0.005 | 0.06 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 242 | 242 | < 0.005 | 0.04 | 0.01 | 253 |
| Hauling | 0.02 | 1.27 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 0.03 | 676 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.09 | 0.10 | 1.03 | 0.00 | 0.00 | 0.13 | 0.13 | 0.00 | 0.03 | 0.03 | _ | 130 | 130 | 0.01 | 0.01 | 0.25 | 132 |
| Vendor | < 0.005 | 0.15 | 0.03 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | 0.01 | 0.01 | _ | 79.0 | 79.0 | < 0.005 | 0.01 | 0.08 | 82.5 |
| Hauling | 0.01 | 0.41 | 0.03 | < 0.005 | < 0.005 | 0.05 | 0.05 | < 0.005 | 0.01 | 0.02 | _ | 211 | 211 | < 0.005 | 0.03 | 0.14 | 221 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.02 | 0.02 | 0.19 | 0.00 | 0.00 | 0.02 | 0.02 | 0.00 | 0.01 | 0.01 | _ | 21.4 | 21.4 | < 0.005 | < 0.005 | 0.04 | 21.8 |
| Vendor | < 0.005 | 0.03 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 13.1 | 13.1 | < 0.005 | < 0.005 | 0.01 | 13.7 |
| Hauling | < 0.005 | 0.08 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 34.9 | 34.9 | < 0.005 | 0.01 | 0.02 | 36.6 |

3.32. P2 - Spillway chute and flip bucket (2026) - Mitigated

| | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|-------------------------------------|-------|------|------|------|-------|---------|---------|--------|---------|---------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | < 0.005 | < 0.005 | | < 0.005 | < 0.005 | | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | | | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | < 0.005 | < 0.005 | - | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |

| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|-------------------------------------|---------|------|------|---------|---------|---------|---------|---------|---------|---------|---|------|------|----------|------|------|------|
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | - | - | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.30 | 0.25 | 4.08 | 0.00 | 0.00 | 0.40 | 0.40 | 0.00 | 0.09 | 0.09 | _ | 434 | 434 | 0.02 | 0.02 | 1.78 | 441 |
| Vendor | 0.01 | 0.43 | 0.08 | < 0.005 | < 0.005 | 0.06 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 242 | 242 | < 0.005 | 0.04 | 0.54 | 253 |
| Hauling | 0.02 | 1.20 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 1.02 | 677 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | - | _ | _ | - | - | _ | _ |
| Worker | 0.27 | 0.32 | 2.98 | 0.00 | 0.00 | 0.40 | 0.40 | 0.00 | 0.09 | 0.09 | _ | 386 | 386 | 0.03 | 0.02 | 0.05 | 391 |
| Vendor | 0.01 | 0.46 | 0.08 | < 0.005 | < 0.005 | 0.06 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 242 | 242 | < 0.005 | 0.04 | 0.01 | 253 |
| Hauling | 0.02 | 1.27 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 0.03 | 676 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.09 | 0.10 | 1.03 | 0.00 | 0.00 | 0.13 | 0.13 | 0.00 | 0.03 | 0.03 | _ | 130 | 130 | 0.01 | 0.01 | 0.25 | 132 |
| Vendor | < 0.005 | 0.15 | 0.03 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | 0.01 | 0.01 | _ | 79.0 | 79.0 | < 0.005 | 0.01 | 0.08 | 82.5 |
| Hauling | 0.01 | 0.41 | 0.03 | < 0.005 | < 0.005 | 0.05 | 0.05 | < 0.005 | 0.01 | 0.02 | _ | 211 | 211 | < 0.005 | 0.03 | 0.14 | 221 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.02 | 0.02 | 0.19 | 0.00 | 0.00 | 0.02 | 0.02 | 0.00 | 0.01 | 0.01 | _ | 21.4 | 21.4 | < 0.005 | < 0.005 | 0.04 | 21.8 |
|---------|---------|------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|------|------|
| Vendor | < 0.005 | 0.03 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 13.1 | 13.1 | < 0.005 | < 0.005 | 0.01 | 13.7 |
| Hauling | < 0.005 | 0.08 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 34.9 | 34.9 | < 0.005 | 0.01 | 0.02 | 36.6 |

3.33. P1.4 - Access road construction (2025) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|-------------------------------------|-------|------|------|---------|---------|-------|-------|---------|--------|--------|------|-------|-------|---------|------|------|-------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 23.4 | 23.2 | 0.07 | 0.91 | _ | 0.91 | 0.84 | _ | 0.84 | _ | 7,708 | 7,708 | 0.31 | 0.06 | _ | 7,735 |
| Dust From Material Movemen | t | _ | _ | _ | _ | 6.56 | 6.56 | _ | 3.37 | 3.37 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.01 | 0.46 | 0.03 | < 0.005 | < 0.005 | 88.3 | 88.3 | < 0.005 | 8.82 | 8.82 | _ | 244 | 244 | < 0.005 | 0.04 | 0.40 | 256 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Off-Road Equipmen | | 23.4 | 23.2 | 0.07 | 0.91 | _ | 0.91 | 0.84 | _ | 0.84 | _ | 7,708 | 7,708 | 0.31 | 0.06 | _ | 7,735 |
| Dust From Material Movemen | t | _ | _ | _ | _ | 6.56 | 6.56 | _ | 3.37 | 3.37 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.01 | 0.49 | 0.03 | < 0.005 | < 0.005 | 88.3 | 88.3 | < 0.005 | 8.82 | 8.82 | _ | 244 | 244 | < 0.005 | 0.04 | 0.01 | 255 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 4.75 | 4.71 | 0.01 | 0.19 | _ | 0.19 | 0.17 | _ | 0.17 | _ | 1,563 | 1,563 | 0.06 | 0.01 | _ | 1,568 |

| Dust | _ | _ | _ | _ | _ | 1.33 | 1.33 | _ | 0.68 | 0.68 | _ | _ | _ | _ | _ | _ | _ |
|-------------------------------------|---------|------|---------|---------|---------|------|------|---------|------|------|----------|----------|------|---------|---------|------|------|
| From Material Movemen | t | | | | | | | | | | | | | | | | |
| Onsite truck | < 0.005 | 0.10 | 0.01 | < 0.005 | < 0.005 | 16.0 | 16.0 | < 0.005 | 1.60 | 1.60 | _ | 49.4 | 49.4 | < 0.005 | 0.01 | 0.03 | 51.8 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.87 | 0.86 | < 0.005 | 0.03 | _ | 0.03 | 0.03 | _ | 0.03 | _ | 259 | 259 | 0.01 | < 0.005 | _ | 260 |
| Dust From Material Movemen | t | _ | _ | _ | _ | 0.24 | 0.24 | _ | 0.12 | 0.12 | | _ | - | _ | _ | _ | _ |
| Onsite truck | < 0.005 | 0.02 | < 0.005 | < 0.005 | < 0.005 | 2.93 | 2.93 | < 0.005 | 0.29 | 0.29 | _ | 8.18 | 8.18 | < 0.005 | < 0.005 | 0.01 | 8.58 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> | <u> </u> | | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|----------|------|------|------|------|------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | <u> </u> | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.34. P1.4 - Access road construction (2025) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|-------------------------------------|--------|------|------|---------|---------|-------|-------|---------|--------|--------|------|-------|-------|---------|------|------|-------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 23.4 | 23.2 | 0.07 | 0.91 | _ | 0.91 | 0.84 | _ | 0.84 | _ | 7,708 | 7,708 | 0.31 | 0.06 | _ | 7,735 |
| Dust From Material Movemen | t | _ | _ | _ | _ | 2.56 | 2.56 | _ | 1.31 | 1.31 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.01 | 0.46 | 0.03 | < 0.005 | < 0.005 | 22.3 | 22.3 | < 0.005 | 2.23 | 2.23 | _ | 244 | 244 | < 0.005 | 0.04 | 0.40 | 256 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Off-Road Equipmen | | 23.4 | 23.2 | 0.07 | 0.91 | _ | 0.91 | 0.84 | _ | 0.84 | _ | 7,708 | 7,708 | 0.31 | 0.06 | _ | 7,735 |
| Dust From Material Movemen | _ t | _ | _ | _ | _ | 2.56 | 2.56 | _ | 1.31 | 1.31 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.01 | 0.49 | 0.03 | < 0.005 | < 0.005 | 22.3 | 22.3 | < 0.005 | 2.23 | 2.23 | _ | 244 | 244 | < 0.005 | 0.04 | 0.01 | 255 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 4.75 | 4.71 | 0.01 | 0.19 | _ | 0.19 | 0.17 | _ | 0.17 | _ | 1,563 | 1,563 | 0.06 | 0.01 | _ | 1,568 |

| Dust From Material | _ | _ | _ | _ | _ | 0.52 | 0.52 | _ | 0.27 | 0.27 | _ | _ | _ | _ | _ | _ | _ |
|-------------------------------------|---------|------|---------|---------|---------|------|------|---------|------|------|---|------|------|---------|---------|------|------|
| Movemen | t | | | | | | | | | | | | | | | | |
| Onsite truck | < 0.005 | 0.10 | 0.01 | < 0.005 | < 0.005 | 4.04 | 4.04 | < 0.005 | 0.40 | 0.40 | _ | 49.4 | 49.4 | < 0.005 | 0.01 | 0.03 | 51.8 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.87 | 0.86 | < 0.005 | 0.03 | _ | 0.03 | 0.03 | _ | 0.03 | _ | 259 | 259 | 0.01 | < 0.005 | _ | 260 |
| Dust From Material Movemen | t | _ | _ | _ | _ | 0.09 | 0.09 | - | 0.05 | 0.05 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | < 0.005 | 0.02 | < 0.005 | < 0.005 | < 0.005 | 0.74 | 0.74 | < 0.005 | 0.07 | 0.07 | - | 8.18 | 8.18 | < 0.005 | < 0.005 | 0.01 | 8.58 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.35. P3.2 - Excavate cofferdam (2026) - Unmitigated

| | | _ | | ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,, | | | | | | | | | | | | | |
|---------------------------|---------|---------|---------|---|---------|-------|---------|---------|--------|---------|------|-------|------|---------|---------|---------|------|
| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 3.61 | 3.72 | 0.01 | 0.15 | _ | 0.15 | 0.13 | _ | 0.13 | _ | 945 | 945 | 0.04 | 0.01 | _ | 949 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.08 | 0.08 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 20.7 | 20.7 | < 0.005 | < 0.005 | _ | 20.8 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.29 | 0.29 | < 0.005 | 0.03 | 0.03 | _ | 0.90 | 0.90 | < 0.005 | < 0.005 | < 0.005 | 0.94 |
| Annual | _ | _ | _ | | _ | | | _ | _ | _ | | _ | _ | _ | | | _ |
| Off-Road Equipmen | | 0.01 | 0.01 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 3.43 | 3.43 | < 0.005 | < 0.005 | _ | 3.44 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.05 | 0.05 | < 0.005 | 0.01 | 0.01 | _ | 0.15 | 0.15 | < 0.005 | < 0.005 | < 0.005 | 0.16 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | - | - | - | - | _ | _ | _ | - | _ | _ | _ | - | _ | _ |

| Daily, Winter (Max) | _ | _ | | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.36. P3.2 - Excavate cofferdam (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|------|------|---------|---------|-------|-------|---------|--------|--------|------|-------|------|---------|------|---------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 3.61 | 3.72 | 0.01 | 0.15 | _ | 0.15 | 0.13 | _ | 0.13 | _ | 945 | 945 | 0.04 | 0.01 | _ | 949 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Off-Road Equipmen | | 0.08 | 0.08 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 20.7 | 20.7 | < 0.005 | < 0.005 | _ | 20.8 |
|---------------------------|--------------|---------|---------|---------|---------|------|---------|---------|---------|---------|---|------|------|----------|---------|---------|------|
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.07 | 0.07 | < 0.005 | 0.01 | 0.01 | _ | 0.90 | 0.90 | < 0.005 | < 0.005 | < 0.005 | 0.94 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | < 0.005 t | 0.01 | 0.01 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 3.43 | 3.43 | < 0.005 | < 0.005 | - | 3.44 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 0.15 | 0.15 | < 0.005 | < 0.005 | < 0.005 | 0.16 |
| Offsite | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.37. P1.3 - Laydown area development (2025) - Unmitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|---------|---------|---------|---------|-------|---------|---------|--------|---------|------|-------|-------|---------|---------|---------|-------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | - | _ | _ | - | _ | _ | _ | _ | - | _ | _ | - | _ | _ | _ | _ |
| Off-Road Equipmer | | 10.8 | 10.6 | 0.02 | 0.49 | _ | 0.49 | 0.45 | _ | 0.45 | _ | 1,868 | 1,868 | 0.08 | 0.02 | _ | 1,874 |
| Onsite truck | < 0.005 | 0.37 | 0.02 | < 0.005 | < 0.005 | 69.9 | 69.9 | < 0.005 | 6.98 | 6.98 | _ | 193 | 193 | < 0.005 | 0.03 | 0.32 | 203 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | - | _ | _ | - | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Off-Road Equipmer | | 0.18 | 0.17 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 30.7 | 30.7 | < 0.005 | < 0.005 | _ | 30.8 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 1.03 | 1.03 | < 0.005 | 0.10 | 0.10 | _ | 3.18 | 3.18 | < 0.005 | < 0.005 | < 0.005 | 3.33 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.03 | 0.03 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 5.08 | 5.08 | < 0.005 | < 0.005 | _ | 5.10 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.19 | 0.19 | < 0.005 | 0.02 | 0.02 | _ | 0.53 | 0.53 | < 0.005 | < 0.005 | < 0.005 | 0.55 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.38. P1.3 - Laydown area development (2025) - Mitigated

| | | (| , | .,, | | | | , | | | | | | | | | _ |
|---------------------------|---------|------|---------|---------|---------|-------|-------|---------|----------|--------|------|-------|-------|---------|---------|---------|-------|
| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | СО2Т | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 10.8 | 10.6 | 0.02 | 0.49 | _ | 0.49 | 0.45 | _ | 0.45 | _ | 1,868 | 1,868 | 0.08 | 0.02 | _ | 1,874 |
| Onsite truck | < 0.005 | 0.37 | 0.02 | < 0.005 | < 0.005 | 17.6 | 17.6 | < 0.005 | 1.76 | 1.77 | _ | 193 | 193 | < 0.005 | 0.03 | 0.32 | 203 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.18 | 0.17 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 30.7 | 30.7 | < 0.005 | < 0.005 | _ | 30.8 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.26 | 0.26 | < 0.005 | 0.03 | 0.03 | _ | 3.18 | 3.18 | < 0.005 | < 0.005 | < 0.005 | 3.33 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Off-Road Equipmer | | 0.03 | 0.03 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | | < 0.005 | _ | 5.08 | 5.08 | < 0.005 | < 0.005 | _ | 5.10 |
|---------------------------|---------|---------|---------|---------|---------|------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.05 | 0.05 | < 0.005 | < 0.005 | < 0.005 | _ | 0.53 | 0.53 | < 0.005 | < 0.005 | < 0.005 | 0.55 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.39. P1.2 - Mobilization (2025) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|----------|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|---------|------|---------|---------|---------|---------|---------|---------|---------|---------|---|-------|-------|---------|---------|------|-------|
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | - | _ | _ | _ | _ | _ | - | _ | _ | - | - | - | _ | - |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.05 | 3.79 | 0.25 | 0.02 | 0.03 | 0.45 | 0.48 | 0.03 | 0.12 | 0.15 | _ | 1,971 | 1,971 | < 0.005 | 0.31 | 3.22 | 2,067 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | - | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.16 | 0.01 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | 0.01 | _ | 81.0 | 81.0 | < 0.005 | 0.01 | 0.06 | 84.9 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.03 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 13.4 | 13.4 | < 0.005 | < 0.005 | 0.01 | 14.1 |

3.40. P1.2 - Mobilization (2025) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | СО2Т | CH4 | N2O | R | CO2e |
|---------------------------|------|----------|------|------|-------|-------|-------|--------|--------|--------|------|-------|-------|---------|------|------|-------|
| Onsite | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.05 | 3.79 | 0.25 | 0.02 | 0.03 | 0.45 | 0.48 | 0.03 | 0.12 | 0.15 | _ | 1,971 | 1,971 | < 0.005 | 0.31 | 3.22 | 2,067 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Hauling | < 0.005 | 0.16 | 0.01 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | 0.01 | _ | 81.0 | 81.0 | < 0.005 | 0.01 | 0.06 | 84.9 |
|---------|---------|----------|---------|----------|---------|----------|---------|---------|---------|---------|----------|------|----------|---------|---------|------|------|
| Annual | _ | <u> </u> | _ | <u> </u> | _ | <u> </u> | _ | _ | _ | _ | <u> </u> | _ | <u> </u> | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.03 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 13.4 | 13.4 | < 0.005 | < 0.005 | 0.01 | 14.1 |

3.41. P1.1 - Tree removal (2025) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|------|---------|----------|----------|-------|----------|---------|--------|--------|----------|-------|-------|---------|---------|---------|-------|
| Onsite | _ | _ | _ | <u> </u> | <u> </u> | _ | <u> </u> | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 12.1 | 267 | 0.04 | 1.58 | _ | 1.58 | 1.27 | _ | 1.27 | _ | 3,366 | 3,366 | 0.14 | 0.04 | _ | 3,380 |
| Onsite truck | 0.01 | 0.41 | 0.03 | < 0.005 | < 0.005 | 77.3 | 77.3 | < 0.005 | 7.72 | 7.72 | _ | 214 | 214 | < 0.005 | 0.03 | 0.35 | 224 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 1.16 | 25.6 | < 0.005 | 0.15 | _ | 0.15 | 0.12 | _ | 0.12 | _ | 323 | 323 | 0.01 | < 0.005 | _ | 324 |
| Onsite truck | < 0.005 | 0.04 | < 0.005 | < 0.005 | < 0.005 | 6.64 | 6.64 | < 0.005 | 0.66 | 0.66 | _ | 20.5 | 20.5 | < 0.005 | < 0.005 | 0.01 | 21.5 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.21 | 4.67 | < 0.005 | 0.03 | _ | 0.03 | 0.02 | _ | 0.02 | _ | 53.4 | 53.4 | < 0.005 | < 0.005 | _ | 53.7 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 1.21 | 1.21 | < 0.005 | 0.12 | 0.12 | _ | 3.39 | 3.39 | < 0.005 | < 0.005 | < 0.005 | 3.55 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|------|------|---------|---------|------|------|---------|---------|---------|---|-------|-------|---------|------|------|-------|
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.08 | 6.32 | 0.42 | 0.04 | 0.05 | 0.75 | 0.80 | 0.05 | 0.20 | 0.26 | _ | 3,285 | 3,285 | < 0.005 | 0.52 | 5.36 | 3,445 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.64 | 0.04 | < 0.005 | 0.01 | 0.07 | 0.08 | 0.01 | 0.02 | 0.02 | _ | 315 | 315 | < 0.005 | 0.05 | 0.22 | 330 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.12 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 52.1 | 52.1 | < 0.005 | 0.01 | 0.04 | 54.6 |

3.42. P1.1 - Tree removal (2025) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|---------|---------|-------|-------|---------|--------|--------|------|-------|-------|---------|------|------|-------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 12.1 | 267 | 0.04 | 1.58 | _ | 1.58 | 1.27 | _ | 1.27 | _ | 3,366 | 3,366 | 0.14 | 0.04 | _ | 3,380 |
| Onsite truck | 0.01 | 0.41 | 0.03 | < 0.005 | < 0.005 | 19.5 | 19.5 | < 0.005 | 1.95 | 1.95 | _ | 214 | 214 | < 0.005 | 0.03 | 0.35 | 224 |

| Daily, Winter (Max) | _ | _ | _ | | | | _ | _ | _ | | _ | | _ | _ | | | _ |
|---------------------------|---------|------|---------|---------|---------|------|------|---------|---------|---------|---|-------|-------|---------|---------|---------|-------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmer | | 1.16 | 25.6 | < 0.005 | 0.15 | _ | 0.15 | 0.12 | _ | 0.12 | - | 323 | 323 | 0.01 | < 0.005 | _ | 324 |
| Onsite truck | < 0.005 | 0.04 | < 0.005 | < 0.005 | < 0.005 | 1.67 | 1.67 | < 0.005 | 0.17 | 0.17 | _ | 20.5 | 20.5 | < 0.005 | < 0.005 | 0.01 | 21.5 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmer | | 0.21 | 4.67 | < 0.005 | 0.03 | _ | 0.03 | 0.02 | - | 0.02 | - | 53.4 | 53.4 | < 0.005 | < 0.005 | _ | 53.7 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.31 | 0.31 | < 0.005 | 0.03 | 0.03 | - | 3.39 | 3.39 | < 0.005 | < 0.005 | < 0.005 | 3.55 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | - | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | - | - | _ | _ | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.08 | 6.32 | 0.42 | 0.04 | 0.05 | 0.75 | 0.80 | 0.05 | 0.20 | 0.26 | _ | 3,285 | 3,285 | < 0.005 | 0.52 | 5.36 | 3,445 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | - | _ | _ | _ | - | - | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.64 | 0.04 | < 0.005 | 0.01 | 0.07 | 0.08 | 0.01 | 0.02 | 0.02 | _ | 315 | 315 | < 0.005 | 0.05 | 0.22 | 330 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.12 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 52.1 | 52.1 | < 0.005 | 0.01 | 0.04 | 54.6 |

3.43. P1 - Mobilization and access development (2025) - Unmitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|-------------------------------------|-------|------|------|------|-------|---------|---------|--------|---------|---------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | - | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | < 0.005 | < 0.005 | - | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |

| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|---------|------|------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|------|-------|
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Worker | 0.16 | 0.14 | 2.17 | 0.00 | 0.00 | 0.20 | 0.20 | 0.00 | 0.05 | 0.05 | _ | 221 | 221 | 0.01 | 0.01 | 0.95 | 224 |
| Vendor | 0.01 | 0.58 | 0.10 | < 0.005 | < 0.005 | 0.08 | 0.08 | < 0.005 | 0.02 | 0.02 | _ | 307 | 307 | < 0.005 | 0.05 | 0.77 | 321 |
| Hauling | 0.02 | 1.90 | 0.12 | 0.01 | 0.02 | 0.22 | 0.24 | 0.02 | 0.06 | 0.08 | _ | 985 | 985 | < 0.005 | 0.16 | 1.61 | 1,034 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.14 | 0.17 | 1.59 | 0.00 | 0.00 | 0.20 | 0.20 | 0.00 | 0.05 | 0.05 | _ | 196 | 196 | 0.01 | 0.01 | 0.02 | 201 |
| Vendor | 0.01 | 0.61 | 0.11 | < 0.005 | < 0.005 | 0.08 | 0.08 | < 0.005 | 0.02 | 0.02 | _ | 307 | 307 | < 0.005 | 0.05 | 0.02 | 321 |
| Hauling | 0.02 | 2.01 | 0.13 | 0.01 | 0.02 | 0.22 | 0.24 | 0.02 | 0.06 | 0.08 | _ | 985 | 985 | < 0.005 | 0.16 | 0.04 | 1,032 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.04 | 0.05 | 0.52 | 0.00 | 0.00 | 0.06 | 0.06 | 0.00 | 0.01 | 0.01 | _ | 62.4 | 62.4 | < 0.005 | < 0.005 | 0.13 | 63.4 |
| Vendor | < 0.005 | 0.19 | 0.03 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | 0.01 | 0.01 | _ | 95.0 | 95.0 | < 0.005 | 0.01 | 0.10 | 99.5 |
| Hauling | 0.01 | 0.62 | 0.04 | < 0.005 | < 0.005 | 0.07 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 305 | 305 | < 0.005 | 0.05 | 0.22 | 320 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.01 | 0.01 | 0.09 | 0.00 | 0.00 | 0.01 | 0.01 | 0.00 | < 0.005 | < 0.005 | _ | 10.3 | 10.3 | < 0.005 | < 0.005 | 0.02 | 10.5 |
| Vendor | < 0.005 | 0.03 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 15.7 | 15.7 | < 0.005 | < 0.005 | 0.02 | 16.5 |
| Hauling | < 0.005 | 0.11 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 50.5 | 50.5 | < 0.005 | 0.01 | 0.04 | 52.9 |

3.44. P1 - Mobilization and access development (2025) - Mitigated

| Lo | ocation | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----|---------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| 0 | nsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|-------------------------------------|--------|------|------|------|------|---------|---------|------|---------|---------|---|------|------|------|------|------|------|
| Dust From Material Movemen | t | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | _ t | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.16 | 0.14 | 2.17 | 0.00 | 0.00 | 0.20 | 0.20 | 0.00 | 0.05 | 0.05 | _ | 221 | 221 | 0.01 | 0.01 | 0.95 | 224 |
|---------------------------|---------|------|------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|------|-------|
| Vendor | 0.01 | 0.58 | 0.10 | < 0.005 | < 0.005 | 0.08 | 0.08 | < 0.005 | 0.02 | 0.02 | _ | 307 | 307 | < 0.005 | 0.05 | 0.77 | 321 |
| Hauling | 0.02 | 1.90 | 0.12 | 0.01 | 0.02 | 0.22 | 0.24 | 0.02 | 0.06 | 0.08 | _ | 985 | 985 | < 0.005 | 0.16 | 1.61 | 1,034 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | |
| Worker | 0.14 | 0.17 | 1.59 | 0.00 | 0.00 | 0.20 | 0.20 | 0.00 | 0.05 | 0.05 | _ | 196 | 196 | 0.01 | 0.01 | 0.02 | 201 |
| Vendor | 0.01 | 0.61 | 0.11 | < 0.005 | < 0.005 | 0.08 | 0.08 | < 0.005 | 0.02 | 0.02 | _ | 307 | 307 | < 0.005 | 0.05 | 0.02 | 321 |
| Hauling | 0.02 | 2.01 | 0.13 | 0.01 | 0.02 | 0.22 | 0.24 | 0.02 | 0.06 | 0.08 | _ | 985 | 985 | < 0.005 | 0.16 | 0.04 | 1,032 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.04 | 0.05 | 0.52 | 0.00 | 0.00 | 0.06 | 0.06 | 0.00 | 0.01 | 0.01 | _ | 62.4 | 62.4 | < 0.005 | < 0.005 | 0.13 | 63.4 |
| Vendor | < 0.005 | 0.19 | 0.03 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | 0.01 | 0.01 | _ | 95.0 | 95.0 | < 0.005 | 0.01 | 0.10 | 99.5 |
| Hauling | 0.01 | 0.62 | 0.04 | < 0.005 | < 0.005 | 0.07 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 305 | 305 | < 0.005 | 0.05 | 0.22 | 320 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.01 | 0.01 | 0.09 | 0.00 | 0.00 | 0.01 | 0.01 | 0.00 | < 0.005 | < 0.005 | _ | 10.3 | 10.3 | < 0.005 | < 0.005 | 0.02 | 10.5 |
| Vendor | < 0.005 | 0.03 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 15.7 | 15.7 | < 0.005 | < 0.005 | 0.02 | 16.5 |
| Hauling | < 0.005 | 0.11 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 50.5 | 50.5 | < 0.005 | 0.01 | 0.04 | 52.9 |
| | | | | | | | | | | | | | | | | | |

3.45. P5 - Dam notch and tie-in chute (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| _ | | | | | | | | | | | | | | | | | |
|-------------------------------------|---------|------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Dust From Material Movemen | — t | _ | | _ | | 0.00 | 0.00 | | 0.00 | 0.00 | | _ | _ | _ | | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | 0.00 | 0.00 | _ | 0.00 | 0.00 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | 0.00 | 0.00 | _ | 0.00 | 0.00 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | - |
| Daily, Winter (Max) | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | - | _ |
| Worker | 0.08 | 0.10 | 0.89 | 0.00 | 0.00 | 0.12 | 0.12 | 0.00 | 0.03 | 0.03 | _ | 116 | 116 | 0.01 | 0.01 | 0.01 | 117 |
| Vendor | < 0.005 | 0.11 | 0.02 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | < 0.005 | _ | 60.5 | 60.5 | < 0.005 | 0.01 | < 0.005 | 63.2 |
| Hauling | 0.02 | 1.27 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 0.03 | 676 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.01 | 0.01 | 0.15 | 0.00 | 0.00 | 0.02 | 0.02 | 0.00 | < 0.005 | < 0.005 | _ | 19.0 | 19.0 | < 0.005 | < 0.005 | 0.04 | 19.3 |
| Vendor | < 0.005 | 0.02 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 9.66 | 9.66 | < 0.005 | < 0.005 | 0.01 | 10.1 |

| Hauling | < 0.005 | 0.20 | 0.01 | < 0.005 | < 0.005 | 0.02 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 103 | 103 | < 0.005 | 0.02 | 0.07 | 108 |
|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | 0.03 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | < 0.005 | < 0.005 | _ | 3.15 | 3.15 | < 0.005 | < 0.005 | 0.01 | 3.20 |
| Vendor | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 1.60 | 1.60 | < 0.005 | < 0.005 | < 0.005 | 1.67 |
| Hauling | < 0.005 | 0.04 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 17.1 | 17.1 | < 0.005 | < 0.005 | 0.01 | 17.9 |

3.46. P5 - Dam notch and tie-in chute (2026) - Mitigated

| | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|-------------------------------------|----------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | <u> </u> | _ | _ | _ | _ | 0.00 | 0.00 | _ | 0.00 | 0.00 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | - |
| Dust From Material Movemen | t | | _ | _ | _ | 0.00 | 0.00 | _ | 0.00 | 0.00 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Dust From Material Movemen | t | _ | _ | _ | _ | 0.00 | 0.00 | _ | 0.00 | 0.00 | _ | _ | | _ | _ | | _ |
|-------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | - | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.08 | 0.10 | 0.89 | 0.00 | 0.00 | 0.12 | 0.12 | 0.00 | 0.03 | 0.03 | _ | 116 | 116 | 0.01 | 0.01 | 0.01 | 117 |
| Vendor | < 0.005 | 0.11 | 0.02 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | < 0.005 | _ | 60.5 | 60.5 | < 0.005 | 0.01 | < 0.005 | 63.2 |
| Hauling | 0.02 | 1.27 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 0.03 | 676 |
| Average Daily | _ | _ | _ | _ | | _ | _ | _ | _ | | _ | | _ | _ | _ | | _ |
| Worker | 0.01 | 0.01 | 0.15 | 0.00 | 0.00 | 0.02 | 0.02 | 0.00 | < 0.005 | < 0.005 | _ | 19.0 | 19.0 | < 0.005 | < 0.005 | 0.04 | 19.3 |
| Vendor | < 0.005 | 0.02 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 9.66 | 9.66 | < 0.005 | < 0.005 | 0.01 | 10.1 |
| Hauling | < 0.005 | 0.20 | 0.01 | < 0.005 | < 0.005 | 0.02 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 103 | 103 | < 0.005 | 0.02 | 0.07 | 108 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | 0.03 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | < 0.005 | < 0.005 | _ | 3.15 | 3.15 | < 0.005 | < 0.005 | 0.01 | 3.20 |
| Vendor | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 1.60 | 1.60 | < 0.005 | < 0.005 | < 0.005 | 1.67 |
| Hauling | < 0.005 | 0.04 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 17.1 | 17.1 | < 0.005 | < 0.005 | 0.01 | 17.9 |

3.47. P5 - Dam notch and tie-in chute (2027) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|-------------------------------------|----------|------|------|---------|---------|------|------|---------|---------|---------|---|------|------|---------|------|---------|------|
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | <u> </u> | _ | _ | _ | _ | 0.00 | 0.00 | _ | 0.00 | 0.00 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | 0.00 | 0.00 | _ | 0.00 | 0.00 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | 0.00 | 0.00 | _ | 0.00 | 0.00 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.07 | 0.09 | 0.83 | 0.00 | 0.00 | 0.12 | 0.12 | 0.00 | 0.03 | 0.03 | _ | 114 | 114 | 0.01 | 0.01 | 0.01 | 116 |
| Vendor | < 0.005 | 0.11 | 0.02 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | < 0.005 | _ | 59.4 | 59.4 | < 0.005 | 0.01 | < 0.005 | 62.1 |

| Hauling | 0.01 | 1.21 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 634 | 634 | < 0.005 | 0.10 | 0.02 | 664 |
|------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | 0.04 | 0.00 | 0.00 | 0.01 | 0.01 | 0.00 | < 0.005 | < 0.005 | _ | 5.22 | 5.22 | < 0.005 | < 0.005 | 0.01 | 5.30 |
| Vendor | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 2.65 | 2.65 | < 0.005 | < 0.005 | < 0.005 | 2.77 |
| Hauling | < 0.005 | 0.05 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 28.3 | 28.3 | < 0.005 | < 0.005 | 0.02 | 29.6 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | 0.01 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | < 0.005 | < 0.005 | _ | 0.86 | 0.86 | < 0.005 | < 0.005 | < 0.005 | 0.88 |
| Vendor | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.44 | 0.44 | < 0.005 | < 0.005 | < 0.005 | 0.46 |
| Hauling | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 4.68 | 4.68 | < 0.005 | < 0.005 | < 0.005 | 4.90 |

3.48. P5 - Dam notch and tie-in chute (2027) - Mitigated

| | | 110 (1.07 0.0 | ., c.c. | ,,, | | 0.00. | | 1.07 0.01 | | . , | | | | | | | |
|-------------------------------------|--------|---------------|---------|------|-------|-------|-------|-----------|--------|--------|------|-------|------|------|------|------|------|
| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | :t | _ | _ | _ | _ | 0.00 | 0.00 | _ | 0.00 | 0.00 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | 0.00 | 0.00 | _ | 0.00 | 0.00 | _ | _ | _ | _ | _ | _ | _ |

| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|-------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | | _ | _ | _ | _ | 0.00 | 0.00 | _ | 0.00 | 0.00 | _ | _ | - | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.07 | 0.09 | 0.83 | 0.00 | 0.00 | 0.12 | 0.12 | 0.00 | 0.03 | 0.03 | _ | 114 | 114 | 0.01 | 0.01 | 0.01 | 116 |
| Vendor | < 0.005 | 0.11 | 0.02 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | < 0.005 | _ | 59.4 | 59.4 | < 0.005 | 0.01 | < 0.005 | 62.1 |
| Hauling | 0.01 | 1.21 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 634 | 634 | < 0.005 | 0.10 | 0.02 | 664 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | - |
| Worker | < 0.005 | < 0.005 | 0.04 | 0.00 | 0.00 | 0.01 | 0.01 | 0.00 | < 0.005 | < 0.005 | _ | 5.22 | 5.22 | < 0.005 | < 0.005 | 0.01 | 5.30 |
| Vendor | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 2.65 | 2.65 | < 0.005 | < 0.005 | < 0.005 | 2.77 |
| Hauling | < 0.005 | 0.05 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 28.3 | 28.3 | < 0.005 | < 0.005 | 0.02 | 29.6 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | 0.01 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | < 0.005 | < 0.005 | _ | 0.86 | 0.86 | < 0.005 | < 0.005 | < 0.005 | 0.88 |
| Vendor | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.44 | 0.44 | < 0.005 | < 0.005 | < 0.005 | 0.46 |
| Hauling | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 4.68 | 4.68 | < 0.005 | < 0.005 | < 0.005 | 4.90 |

3.49. P5.1 - Demolition (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|

| Onsite | | | | | | | | | | | | | | | | | |
|---------------------------|---------|---------|---------|---------|---------|------|---------|---------|------|---------|---|------|------|---------|---------|---------|------|
| | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | | | | _ | _ | | _ | | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 3.01 | 3.66 | 0.01 | 0.09 | _ | 0.09 | 0.09 | - | 0.09 | _ | 854 | 854 | 0.03 | 0.01 | _ | 857 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.08 | 0.10 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 23.4 | 23.4 | < 0.005 | < 0.005 | _ | 23.5 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.36 | 0.36 | < 0.005 | 0.04 | 0.04 | _ | 1.13 | 1.13 | < 0.005 | < 0.005 | < 0.005 | 1.18 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.02 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 3.87 | 3.87 | < 0.005 | < 0.005 | _ | 3.89 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.07 | 0.07 | < 0.005 | 0.01 | 0.01 | _ | 0.19 | 0.19 | < 0.005 | < 0.005 | < 0.005 | 0.20 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | - | _ | _ | - | _ | _ | _ | _ | _ | _ | - | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.50. P5.1 - Demolition (2026) - Mitigated

| | | _ ` | 1 | | | | | | | | | | | | | | |
|---------------------------|---------|---------|---------|---------|---------|-------|---------|---------|--------|---------|------|-------|------|---------|---------|---------|------|
| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | СО2Т | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 3.01 | 3.66 | 0.01 | 0.09 | _ | 0.09 | 0.09 | _ | 0.09 | _ | 854 | 854 | 0.03 | 0.01 | _ | 857 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.08 | 0.10 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 23.4 | 23.4 | < 0.005 | < 0.005 | _ | 23.5 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.09 | 0.09 | < 0.005 | 0.01 | 0.01 | _ | 1.13 | 1.13 | < 0.005 | < 0.005 | < 0.005 | 1.18 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.02 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 3.87 | 3.87 | < 0.005 | < 0.005 | _ | 3.89 |

| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | < 0.005 | _ | 0.19 | 0.19 | < 0.005 | < 0.005 | < 0.005 | 0.20 |
|---------------------------|---------|---------|---------|---------|---------|------|------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | - | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | - | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.51. P5.2 - Excavation, Subgrade (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Off-Road Equipmen | | 3.01 | 3.66 | 0.01 | 0.09 | _ | 0.09 | 0.09 | _ | 0.09 | _ | 854 | 854 | 0.03 | 0.01 | _ | 857 |
|---------------------------|---------|---------|---------|---------|---------|------|---------|---------|------|---------|---|------|------|---------|---------|---------|------|
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | - | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Off-Road Equipmen | | 0.11 | 0.13 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | - | 30.4 | 30.4 | < 0.005 | < 0.005 | _ | 30.5 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.47 | 0.47 | < 0.005 | 0.05 | 0.05 | _ | 1.46 | 1.46 | < 0.005 | < 0.005 | < 0.005 | 1.53 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.02 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | - | 5.04 | 5.04 | < 0.005 | < 0.005 | - | 5.05 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.09 | 0.09 | < 0.005 | 0.01 | 0.01 | _ | 0.24 | 0.24 | < 0.005 | < 0.005 | < 0.005 | 0.25 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| 3 | | | | 1 | | | | | | | | | | | | | |

3.52. P5.2 - Excavation, Subgrade (2026) - Mitigated

| Onsite Daily, Summer | ROG — — | NOx — | CO — | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | DMOCE | D000 | NIDOGG | ОООТ | 0114 | N2O | R | 0000 |
|--------------------------|---------------|----------|---------|---------|---------|-------|----------|----------|----------|---------|------|--------|------|---------|---------|---------|------|
| Daily, | _ | _ | _ | | | | T WITO I | T-WIZ.JL | PIVIZ.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2U | K | CO2e |
| | _ | | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Max) | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Vinter Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmer | | 3.01 | 3.66 | 0.01 | 0.09 | _ | 0.09 | 0.09 | _ | 0.09 | _ | 854 | 854 | 0.03 | 0.01 | _ | 857 |
| Onsite ruck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmer | | 0.11 | 0.13 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 30.4 | 30.4 | < 0.005 | < 0.005 | _ | 30.5 |
| Onsite ruck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.12 | 0.12 | < 0.005 | 0.01 | 0.01 | _ | 1.46 | 1.46 | < 0.005 | < 0.005 | < 0.005 | 1.53 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmer | | 0.02 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 5.04 | 5.04 | < 0.005 | < 0.005 | _ | 5.05 |
| Onsite ruck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | < 0.005 | _ | 0.24 | 0.24 | < 0.005 | < 0.005 | < 0.005 | 0.25 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Vinter Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|------------------|------|------|------|------|------|------|------|----------|------|------|---|------|------|------|------|------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.53. P5.3 - Form and Pour Concrete (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|------|------|---------|---------|-------|-------|---------|--------|--------|------|-------|-------|---------|---------|---------|-------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 4.96 | 4.95 | 0.01 | 0.19 | _ | 0.19 | 0.17 | _ | 0.17 | _ | 1,157 | 1,157 | 0.05 | 0.01 | _ | 1,161 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.45 | 0.45 | < 0.005 | 0.02 | _ | 0.02 | 0.02 | _ | 0.02 | _ | 105 | 105 | < 0.005 | < 0.005 | _ | 105 |

| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 1.19 | 1.19 | < 0.005 | 0.12 | 0.12 | _ | 3.72 | 3.72 | < 0.005 | < 0.005 | < 0.005 | 3.89 |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.08 | 0.08 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 17.3 | 17.3 | < 0.005 | < 0.005 | _ | 17.4 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.22 | 0.22 | < 0.005 | 0.02 | 0.02 | _ | 0.62 | 0.62 | < 0.005 | < 0.005 | < 0.005 | 0.64 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.04 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 6.72 | 6.72 | < 0.005 | < 0.005 | < 0.005 | 7.03 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.61 | 0.61 | < 0.005 | < 0.005 | < 0.005 | 0.64 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.10 | 0.10 | < 0.005 | < 0.005 | < 0.005 | 0.11 |

3.54. P5.3 - Form and Pour Concrete (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | | _ | | _ | _ | | _ | _ | | | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|-------|-------|---------|---------|---------|-------|
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 4.96 | 4.95 | 0.01 | 0.19 | _ | 0.19 | 0.17 | _ | 0.17 | _ | 1,157 | 1,157 | 0.05 | 0.01 | _ | 1,161 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.45 | 0.45 | < 0.005 | 0.02 | _ | 0.02 | 0.02 | _ | 0.02 | _ | 105 | 105 | < 0.005 | < 0.005 | _ | 105 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.30 | 0.30 | < 0.005 | 0.03 | 0.03 | _ | 3.72 | 3.72 | < 0.005 | < 0.005 | < 0.005 | 3.89 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.08 | 0.08 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 17.3 | 17.3 | < 0.005 | < 0.005 | _ | 17.4 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.05 | 0.05 | < 0.005 | 0.01 | 0.01 | _ | 0.62 | 0.62 | < 0.005 | < 0.005 | < 0.005 | 0.64 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | - | _ | - | - | _ | - | - | _ | _ | _ | _ | _ | _ | _ | - | - |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.04 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 6.72 | 6.72 | < 0.005 | < 0.005 | < 0.005 | 7.03 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.61 | 0.61 | < 0.005 | < 0.005 | < 0.005 | 0.64 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.10 | 0.10 | < 0.005 | < 0.005 | < 0.005 | 0.11 |

3.55. P5.4 - Install Footbridge (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|--------------|---------|---------|---------|---------|-------|---------|----------|---------|---------|------|----------|-------|----------|---------|---------|-------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ | <u> </u> | _ | <u> </u> | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 4.96 | 4.95 | 0.01 | 0.19 | _ | 0.19 | 0.17 | _ | 0.17 | _ | 1,157 | 1,157 | 0.05 | 0.01 | _ | 1,161 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.02 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 5.43 | 5.43 | < 0.005 | < 0.005 | _ | 5.45 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.06 | 0.06 | < 0.005 | 0.01 | 0.01 | _ | 0.19 | 0.19 | < 0.005 | < 0.005 | < 0.005 | 0.20 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | < 0.005 t | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 0.90 | 0.90 | < 0.005 | < 0.005 | _ | 0.90 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 0.03 | 0.03 | < 0.005 | < 0.005 | < 0.005 | 0.03 |

| Offsite | _ | _ | _ | <u> </u> | <u> </u> | _ | _ | <u> </u> | _ | <u> </u> | <u> </u> | _ | _ | _ | _ | _ | <u> </u> |
|---------------------------|------|------|------|----------|----------|------|------|----------|------|----------|----------|------|------|------|------|------|----------|
| Daily, Summer (Max) | _ | - | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.56. P5.4 - Install Footbridge (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|-------|------|------|---|-------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 4.96 | 4.95 | 0.01 | 0.19 | _ | 0.19 | 0.17 | _ | 0.17 | _ | 1,157 | 1,157 | 0.05 | 0.01 | _ | 1,161 |

| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|----------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | - | - | _ | _ | - | - | - |
| Off-Road Equipmer | | 0.02 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | - | < 0.005 | _ | 5.43 | 5.43 | < 0.005 | < 0.005 | _ | 5.45 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | < 0.005 | - | 0.19 | 0.19 | < 0.005 | < 0.005 | < 0.005 | 0.20 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmer | | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 0.90 | 0.90 | < 0.005 | < 0.005 | _ | 0.90 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.03 | 0.03 | < 0.005 | < 0.005 | < 0.005 | 0.03 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> |
| Daily, Summer (Max) | _ | - | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | - | _ | - | - | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | - | _ | _ | _ | - | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.57. P5.4 - Install Footbridge (2027) - Unmitigated

| | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|--------------|--------------|---------|---------|-------|---------|----------|-----------|-----------|------|-------|-------|---------|---------|---------|-------|
| | | | | | | | | I WIZ.JL | T IVIZ.OD | T IVIZ.51 | | | 0021 | OH | IVZO | IX. | |
| Onsite | _ | - | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | | | | _ | | _ | | | | | | _ | | _ | | |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 4.80 | 4.93 | 0.01 | 0.18 | _ | 0.18 | 0.16 | _ | 0.16 | _ | 1,157 | 1,157 | 0.05 | 0.01 | _ | 1,161 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 40.3 | 40.3 | < 0.005 | 0.01 | < 0.005 | 42.2 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.21 | 0.22 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 51.6 | 51.6 | < 0.005 | < 0.005 | _ | 51.8 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.59 | 0.59 | < 0.005 | 0.06 | 0.06 | _ | 1.80 | 1.80 | < 0.005 | < 0.005 | < 0.005 | 1.89 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.04 | 0.04 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 8.55 | 8.55 | < 0.005 | < 0.005 | _ | 8.58 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.11 | 0.11 | < 0.005 | 0.01 | 0.01 | _ | 0.30 | 0.30 | < 0.005 | < 0.005 | < 0.005 | 0.31 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | | | | _ | | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.58. P5.4 - Install Footbridge (2027) - Mitigated

| | Onditon | (107 00 | y ioi da. | y, toy. | 101 01111 | | | nor day 10 | r dany, i | 11.17 J. 10. | ariildai | / | | | | | |
|---------------------------|---------|---------|-----------|---------|-----------|-------|-------|------------|-----------|--------------|----------|-------|-------|---------|---------|---------|-------|
| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 4.80 | 4.93 | 0.01 | 0.18 | _ | 0.18 | 0.16 | _ | 0.16 | _ | 1,157 | 1,157 | 0.05 | 0.01 | _ | 1,161 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 40.3 | 40.3 | < 0.005 | 0.01 | < 0.005 | 42.2 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.21 | 0.22 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 51.6 | 51.6 | < 0.005 | < 0.005 | _ | 51.8 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.15 | 0.15 | < 0.005 | 0.01 | 0.01 | _ | 1.80 | 1.80 | < 0.005 | < 0.005 | < 0.005 | 1.89 |

| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | <u> </u> | _ | _ | _ | _ |
|---------------------------|---------|---------|---------|---------|---------|------|---------|---------|---------|---------|---|------|----------|---------|---------|---------|------|
| Off-Road Equipmen | | 0.04 | 0.04 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 8.55 | 8.55 | < 0.005 | < 0.005 | _ | 8.58 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | < 0.005 | < 0.005 | _ | 0.30 | 0.30 | < 0.005 | < 0.005 | < 0.005 | 0.31 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.59. P6 - Plunge pool (2026) - Unmitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | | _ | _ | _ | | | _ | _ | | | | _ | _ | | _ | _ |
|-------------------------------------|--------|------|------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|------|------|
| Dust From Material Movemen | — t | _ | _ | _ | _ | 0.01 | 0.01 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | - | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | - | - | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | - | - | _ | _ | - | - | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.09 | 0.08 | 1.23 | 0.00 | 0.00 | 0.12 | 0.12 | 0.00 | 0.03 | 0.03 | _ | 130 | 130 | 0.01 | < 0.005 | 0.53 | 132 |
| Vendor | 0.01 | 0.43 | 0.08 | < 0.005 | < 0.005 | 0.06 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 242 | 242 | < 0.005 | 0.04 | 0.54 | 253 |
| Hauling | 0.02 | 1.20 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 1.02 | 677 |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.01 | 0.01 | 0.09 | 0.00 | 0.00 | 0.01 | 0.01 | 0.00 | < 0.005 | < 0.005 | _ | 11.7 | 11.7 | < 0.005 | < 0.005 | 0.02 | 11.9 |
| Vendor | < 0.005 | 0.04 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 23.9 | 23.9 | < 0.005 | < 0.005 | 0.02 | 24.9 |
| Hauling | < 0.005 | 0.12 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.02 | < 0.005 | < 0.005 | 0.01 | _ | 63.7 | 63.7 | < 0.005 | 0.01 | 0.04 | 66.7 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | 0.02 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | < 0.005 | < 0.005 | _ | 1.94 | 1.94 | < 0.005 | < 0.005 | < 0.005 | 1.97 |
| Vendor | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 3.95 | 3.95 | < 0.005 | < 0.005 | < 0.005 | 4.13 |
| Hauling | < 0.005 | 0.02 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 10.6 | 10.6 | < 0.005 | < 0.005 | 0.01 | 11.0 |

3.60. P6 - Plunge pool (2026) - Mitigated

| | | | o., . o. o.o. | ,, | | , | ' | | | , | | | | | | _ | _ |
|-------------------------------------|----------|------|---------------|------|-------|---|-------|--------|---------|---------|------|-------|------|------|------|------|------|
| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ |
| Dust From Material Movemen | <u> </u> | _ | _ | _ | _ | 0.01 | 0.01 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Dust From Material Movemen | t | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
|-------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | - | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.09 | 0.08 | 1.23 | 0.00 | 0.00 | 0.12 | 0.12 | 0.00 | 0.03 | 0.03 | _ | 130 | 130 | 0.01 | < 0.005 | 0.53 | 132 |
| Vendor | 0.01 | 0.43 | 0.08 | < 0.005 | < 0.005 | 0.06 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 242 | 242 | < 0.005 | 0.04 | 0.54 | 253 |
| Hauling | 0.02 | 1.20 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 1.02 | 677 |
| Daily, Winter (Max) | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.01 | 0.01 | 0.09 | 0.00 | 0.00 | 0.01 | 0.01 | 0.00 | < 0.005 | < 0.005 | _ | 11.7 | 11.7 | < 0.005 | < 0.005 | 0.02 | 11.9 |
| Vendor | < 0.005 | 0.04 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 23.9 | 23.9 | < 0.005 | < 0.005 | 0.02 | 24.9 |
| Hauling | < 0.005 | 0.12 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.02 | < 0.005 | < 0.005 | 0.01 | _ | 63.7 | 63.7 | < 0.005 | 0.01 | 0.04 | 66.7 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | 0.02 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | < 0.005 | < 0.005 | _ | 1.94 | 1.94 | < 0.005 | < 0.005 | < 0.005 | 1.97 |
| Vendor | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 3.95 | 3.95 | < 0.005 | < 0.005 | < 0.005 | 4.13 |
| Hauling | < 0.005 | 0.02 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 10.6 | 10.6 | < 0.005 | < 0.005 | 0.01 | 11.0 |

3.61. P6.1 - Flow bypass (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|---------|---------|---------|-------|---------|---------|--------|---------|------|-------|------|---------|---------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Off-Road Equipmen | | 2.37 | 1.57 | < 0.005 | 0.10 | _ | 0.10 | 0.09 | _ | 0.09 | _ | 312 | 312 | 0.01 | < 0.005 | _ | 313 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.04 | 0.03 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 5.12 | 5.12 | < 0.005 | < 0.005 | _ | 5.14 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 0.85 | 0.85 | < 0.005 | < 0.005 | _ | 0.85 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.62. P6.1 - Flow bypass (2026) - Mitigated

| | | | ĺ | | | dai) and | <u> </u> | i i | | | | | | | | | |
|---------------------------|------|------|------|---------|---------|----------|----------|---------|--------|---------|------|-------|------|---------|---------|------|------|
| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 2.37 | 1.57 | < 0.005 | 0.10 | _ | 0.10 | 0.09 | _ | 0.09 | _ | 312 | 312 | 0.01 | < 0.005 | _ | 313 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.04 | 0.03 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 5.12 | 5.12 | < 0.005 | < 0.005 | | 5.14 |

| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|------|------|---------|---------|---------|------|---------|---------|------|---------|---|------|------|---------|---------|------|------|
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmer | | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 0.85 | 0.85 | < 0.005 | < 0.005 | _ | 0.85 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.63. P6.2 - Excavation (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, | _ | _ | _ | | _ | | _ | _ | | | _ | _ | _ | | _ | | |
|---------------------------|---------|---------|---------|---------|---------|------|------|---------|------|------|---|-------|-------|---------|---------|---------|-------|
| Summer (Max) | | | | | | | | | | | | | | | | | |
| Off-Road Equipmen | | 16.0 | 15.5 | 0.04 | 0.64 | _ | 0.64 | 0.59 | _ | 0.59 | - | 4,668 | 4,668 | 0.19 | 0.04 | _ | 4,684 |
| Onsite truck | < 0.005 | 0.37 | 0.02 | < 0.005 | < 0.005 | 73.6 | 73.6 | < 0.005 | 7.35 | 7.35 | _ | 200 | 200 | < 0.005 | 0.03 | 0.32 | 210 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 1.10 | 1.06 | < 0.005 | 0.04 | _ | 0.04 | 0.04 | _ | 0.04 | _ | 320 | 320 | 0.01 | < 0.005 | _ | 321 |
| Onsite truck | < 0.005 | 0.03 | < 0.005 | < 0.005 | < 0.005 | 4.51 | 4.51 | < 0.005 | 0.45 | 0.45 | _ | 13.7 | 13.7 | < 0.005 | < 0.005 | 0.01 | 14.3 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.20 | 0.19 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | - | 52.9 | 52.9 | < 0.005 | < 0.005 | _ | 53.1 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.82 | 0.82 | < 0.005 | 0.08 | 0.08 | - | 2.27 | 2.27 | < 0.005 | < 0.005 | < 0.005 | 2.38 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.64. P6.2 - Excavation (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|---------|---------|---------|----------|-------|-------|----------|--------|--------|------|----------|-------|----------|---------|---------|-------|
| Onsite | _ | _ | _ | _ | <u> </u> | _ | _ | <u> </u> | _ | _ | _ | <u> </u> | _ | <u> </u> | _ | _ | _ |
| Daily, Summer (Max) | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 16.0 | 15.5 | 0.04 | 0.64 | _ | 0.64 | 0.59 | _ | 0.59 | _ | 4,668 | 4,668 | 0.19 | 0.04 | _ | 4,684 |
| Onsite truck | < 0.005 | 0.37 | 0.02 | < 0.005 | < 0.005 | 18.6 | 18.6 | < 0.005 | 1.85 | 1.86 | _ | 200 | 200 | < 0.005 | 0.03 | 0.32 | 210 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 1.10 | 1.06 | < 0.005 | 0.04 | _ | 0.04 | 0.04 | _ | 0.04 | _ | 320 | 320 | 0.01 | < 0.005 | _ | 321 |
| Onsite truck | < 0.005 | 0.03 | < 0.005 | < 0.005 | < 0.005 | 1.14 | 1.14 | < 0.005 | 0.11 | 0.11 | _ | 13.7 | 13.7 | < 0.005 | < 0.005 | 0.01 | 14.3 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.20 | 0.19 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 52.9 | 52.9 | < 0.005 | < 0.005 | _ | 53.1 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.21 | 0.21 | < 0.005 | 0.02 | 0.02 | _ | 2.27 | 2.27 | < 0.005 | < 0.005 | < 0.005 | 2.38 |

| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.65. P6.3 - Slope protection (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|------|------|---------|---------|-------|-------|---------|--------|--------|------|-------|------|---------|---------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 1.14 | 1.76 | < 0.005 | 0.03 | _ | 0.03 | 0.03 | _ | 0.03 | _ | 291 | 291 | 0.01 | < 0.005 | _ | 292 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | 0.06 | 43.1 |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|---------|---------|---------|---------|------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Average Daily | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmer | | 0.02 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 3.99 | 3.99 | < 0.005 | < 0.005 | _ | 4.00 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.18 | 0.18 | < 0.005 | 0.02 | 0.02 | _ | 0.56 | 0.56 | < 0.005 | < 0.005 | < 0.005 | 0.59 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmer | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 0.66 | 0.66 | < 0.005 | < 0.005 | _ | 0.66 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | < 0.005 | < 0.005 | _ | 0.09 | 0.09 | < 0.005 | < 0.005 | < 0.005 | 0.10 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | - | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.66. P6.3 - Slope protection (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|---------|---------|---------|---------|-------|---------|---------|---------|---------|------|-------|------|---------|---------|---------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 1.14 | 1.76 | < 0.005 | 0.03 | _ | 0.03 | 0.03 | _ | 0.03 | _ | 291 | 291 | 0.01 | < 0.005 | _ | 292 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | 0.06 | 43.1 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.02 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 3.99 | 3.99 | < 0.005 | < 0.005 | _ | 4.00 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.05 | 0.05 | < 0.005 | < 0.005 | < 0.005 | _ | 0.56 | 0.56 | < 0.005 | < 0.005 | < 0.005 | 0.59 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 0.66 | 0.66 | < 0.005 | < 0.005 | _ | 0.66 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 0.09 | 0.09 | < 0.005 | < 0.005 | < 0.005 | 0.10 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.67. P7 - Remaining Work Scope (2026) - Unmitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Offsite | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> |
|---------------------------|---------|----------|----------|----------|----------|----------|---------|---------|---------|---------|---|------|------|---------|---------|---------|----------|
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.13 | 0.16 | 1.49 | 0.00 | 0.00 | 0.20 | 0.20 | 0.00 | 0.05 | 0.05 | _ | 193 | 193 | 0.01 | 0.01 | 0.02 | 196 |
| Vendor | 0.01 | 0.34 | 0.06 | < 0.005 | < 0.005 | 0.05 | 0.05 | < 0.005 | 0.01 | 0.01 | _ | 181 | 181 | < 0.005 | 0.03 | 0.01 | 189 |
| Hauling | 0.02 | 1.27 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 0.03 | 676 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | 0.01 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | < 0.005 | < 0.005 | _ | 1.40 | 1.40 | < 0.005 | < 0.005 | < 0.005 | 1.42 |
| Vendor | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 1.28 | 1.28 | < 0.005 | < 0.005 | < 0.005 | 1.34 |
| Hauling | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 4.55 | 4.55 | < 0.005 | < 0.005 | < 0.005 | 4.77 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | < 0.005 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | < 0.005 | < 0.005 | _ | 0.23 | 0.23 | < 0.005 | < 0.005 | < 0.005 | 0.23 |
| Vendor | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.21 | 0.21 | < 0.005 | < 0.005 | < 0.005 | 0.22 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.75 | 0.75 | < 0.005 | < 0.005 | < 0.005 | 0.79 |

3.68. P7 - Remaining Work Scope (2026) - Mitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.13 | 0.16 | 1.49 | 0.00 | 0.00 | 0.20 | 0.20 | 0.00 | 0.05 | 0.05 | _ | 193 | 193 | 0.01 | 0.01 | 0.02 | 196 |
| Vendor | 0.01 | 0.34 | 0.06 | < 0.005 | < 0.005 | 0.05 | 0.05 | < 0.005 | 0.01 | 0.01 | _ | 181 | 181 | < 0.005 | 0.03 | 0.01 | 189 |
| Hauling | 0.02 | 1.27 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 0.03 | 676 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Worker | < 0.005 | < 0.005 | 0.01 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | < 0.005 | < 0.005 | _ | 1.40 | 1.40 | < 0.005 | < 0.005 | < 0.005 | 1.42 |
| Vendor | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 1.28 | 1.28 | < 0.005 | < 0.005 | < 0.005 | 1.34 |
| Hauling | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 4.55 | 4.55 | < 0.005 | < 0.005 | < 0.005 | 4.77 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | < 0.005 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | < 0.005 | < 0.005 | _ | 0.23 | 0.23 | < 0.005 | < 0.005 | < 0.005 | 0.23 |
| Vendor | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.21 | 0.21 | < 0.005 | < 0.005 | < 0.005 | 0.22 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.75 | 0.75 | < 0.005 | < 0.005 | < 0.005 | 0.79 |

3.69. P7 - Remaining Work Scope (2027) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| D - 11 | | | | | | | | | | | | | | | | | |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Daily, Summer (Max) | _ | | _ | _ | | | _ | | _ | | _ | | | _ | | | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.12 | 0.15 | 1.39 | 0.00 | 0.00 | 0.20 | 0.20 | 0.00 | 0.05 | 0.05 | _ | 190 | 190 | 0.01 | 0.01 | 0.02 | 193 |
| Vendor | 0.01 | 0.32 | 0.06 | < 0.005 | < 0.005 | 0.05 | 0.05 | < 0.005 | 0.01 | 0.01 | _ | 178 | 178 | < 0.005 | 0.03 | 0.01 | 186 |
| Hauling | 0.01 | 1.21 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 634 | 634 | < 0.005 | 0.10 | 0.02 | 664 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.02 | 0.02 | 0.19 | 0.00 | 0.00 | 0.03 | 0.03 | 0.00 | 0.01 | 0.01 | _ | 25.2 | 25.2 | < 0.005 | < 0.005 | 0.05 | 25.6 |
| Vendor | < 0.005 | 0.04 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 23.0 | 23.0 | < 0.005 | < 0.005 | 0.02 | 24.1 |
| Hauling | < 0.005 | 0.15 | 0.01 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | 0.01 | 0.01 | _ | 81.8 | 81.8 | < 0.005 | 0.01 | 0.05 | 85.8 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | 0.03 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | < 0.005 | < 0.005 | _ | 4.17 | 4.17 | < 0.005 | < 0.005 | 0.01 | 4.24 |
| Vendor | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 3.81 | 3.81 | < 0.005 | < 0.005 | < 0.005 | 3.99 |

| | | | 0.005 | | 0.005 | | | | | | | | 40.5 | | | | 1 |
|-------------|---------|------|---------|---------|---------|---------|---------|---------|---------|---------|---|-------|------|---------|---------|------|------|
| Hauling | < 0.005 | 0.03 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 13.5 | 13.5 | < 0.005 | < 0.005 | 0.01 | 14.2 |
| i iaaiii ig | 1 0.000 | 0.00 | 1 0.000 | 1 0.000 | 1 0.000 | 1 0.000 | 1 0.000 | 1 0.000 | 1 0.000 | 1 0.000 | | . 0.0 | .0.0 | 1 0.000 | 1 0.000 | 0.0. | |

3.70. P7 - Remaining Work Scope (2027) - Mitigated

| | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|---------|---------|-------|-------|---------|----------|----------|------|-------|------|---------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | | - WIZ.OB | - WIZ.01 | _ | _ | _ | _ | _ | | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Worker | 0.12 | 0.15 | 1.39 | 0.00 | 0.00 | 0.20 | 0.20 | 0.00 | 0.05 | 0.05 | _ | 190 | 190 | 0.01 | 0.01 | 0.02 | 193 |
| Vendor | 0.01 | 0.32 | 0.06 | < 0.005 | < 0.005 | 0.05 | 0.05 | < 0.005 | 0.01 | 0.01 | _ | 178 | 178 | < 0.005 | 0.03 | 0.01 | 186 |
| Hauling | 0.01 | 1.21 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 634 | 634 | < 0.005 | 0.10 | 0.02 | 664 |
| Average Daily | _ | _ | _ | _ | - | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.02 | 0.02 | 0.19 | 0.00 | 0.00 | 0.03 | 0.03 | 0.00 | 0.01 | 0.01 | _ | 25.2 | 25.2 | < 0.005 | < 0.005 | 0.05 | 25.6 |
|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Vendor | < 0.005 | 0.04 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 23.0 | 23.0 | < 0.005 | < 0.005 | 0.02 | 24.1 |
| Hauling | < 0.005 | 0.15 | 0.01 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | 0.01 | 0.01 | _ | 81.8 | 81.8 | < 0.005 | 0.01 | 0.05 | 85.8 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | 0.03 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | < 0.005 | < 0.005 | _ | 4.17 | 4.17 | < 0.005 | < 0.005 | 0.01 | 4.24 |
| Vendor | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 3.81 | 3.81 | < 0.005 | < 0.005 | < 0.005 | 3.99 |
| Hauling | < 0.005 | 0.03 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 13.5 | 13.5 | < 0.005 | < 0.005 | 0.01 | 14.2 |

3.71. P7.1 - Cofferdam removal (2027) - Unmitigated

| OTITOTIC | Onatai | <u> </u> | ty for dai | | ioi aiiii | daij aria | | | | | armaar | | | | | | |
|---------------------------|--------|----------|------------|---------|-----------|-----------|---------|---------|--------|---------|--------|-------|------|---------|---------|------|------|
| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 2.93 | 3.07 | 0.01 | 0.12 | _ | 0.12 | 0.11 | _ | 0.11 | _ | 857 | 857 | 0.03 | 0.01 | _ | 860 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.06 | 0.06 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 16.4 | 16.4 | < 0.005 | < 0.005 | _ | 16.5 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.01 | 0.01 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 2.72 | 2.72 | < 0.005 | < 0.005 | _ | 2.73 |

| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | - | _ | _ | - | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.72. P7.1 - Cofferdam removal (2027) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Off-Road Equipmen | | 2.93 | 3.07 | 0.01 | 0.12 | _ | 0.12 | 0.11 | _ | 0.11 | _ | 857 | 857 | 0.03 | 0.01 | _ | 860 |
|---------------------------|------|------|------|---------|---------|------|---------|---------|------|---------|---|------|------|---------|---------|------|------|
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.06 | 0.06 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 16.4 | 16.4 | < 0.005 | < 0.005 | _ | 16.5 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.01 | 0.01 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 2.72 | 2.72 | < 0.005 | < 0.005 | _ | 2.73 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| 3 | | | | 1 | | | | | | | | | | | | | |

3.73. P7.2 - Lighting (2027) - Unmitigated

| Location | | | | | | | | | | | r annual | | | | | | |
|---------------------------|---------|---------|---------|---------|---------|-------|---------|---------|--------|---------|----------|-------|------|---------|---------|---------|------|
| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmer | | 0.47 | 0.77 | < 0.005 | 0.02 | _ | 0.02 | 0.02 | _ | 0.02 | _ | 114 | 114 | < 0.005 | < 0.005 | _ | 115 |
| Onsite truck | < 0.005 | 0.10 | 0.01 | < 0.005 | < 0.005 | 18.4 | 18.4 | < 0.005 | 1.84 | 1.84 | _ | 50.1 | 50.1 | < 0.005 | 0.01 | < 0.005 | 52.4 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmer | | 0.03 | 0.04 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 6.27 | 6.27 | < 0.005 | < 0.005 | _ | 6.29 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.90 | 0.90 | < 0.005 | 0.09 | 0.09 | _ | 2.74 | 2.74 | < 0.005 | < 0.005 | < 0.005 | 2.88 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmer | | < 0.005 | 0.01 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 1.04 | 1.04 | < 0.005 | < 0.005 | _ | 1.04 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.16 | 0.16 | < 0.005 | 0.02 | 0.02 | _ | 0.45 | 0.45 | < 0.005 | < 0.005 | < 0.005 | 0.48 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.74. P7.2 - Lighting (2027) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|------|------|---------|---------|-------|---------|---------|--------|---------|------|-------|------|---------|---------|---------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.47 | 0.77 | < 0.005 | 0.02 | _ | 0.02 | 0.02 | _ | 0.02 | _ | 114 | 114 | < 0.005 | < 0.005 | _ | 115 |
| Onsite truck | < 0.005 | 0.10 | 0.01 | < 0.005 | < 0.005 | 4.64 | 4.64 | < 0.005 | 0.46 | 0.46 | _ | 50.1 | 50.1 | < 0.005 | 0.01 | < 0.005 | 52.4 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.03 | 0.04 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 6.27 | 6.27 | < 0.005 | < 0.005 | _ | 6.29 |

| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.23 | 0.23 | < 0.005 | 0.02 | 0.02 | _ | 2.74 | 2.74 | < 0.005 | < 0.005 | < 0.005 | 2.88 |
|---------------------------|---------|---------|---------|---------|---------|------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmer | | < 0.005 | 0.01 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | - | < 0.005 | _ | 1.04 | 1.04 | < 0.005 | < 0.005 | _ | 1.04 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.04 | 0.04 | < 0.005 | < 0.005 | < 0.005 | _ | 0.45 | 0.45 | < 0.005 | < 0.005 | < 0.005 | 0.48 |
| Offsite | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.75. P7.3 - Log boom (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | | _ | _ | _ | _ | _ |
|---------------------------|------|---------|---------|---------|---------|------|---------|---------|------|---------|---|------|------|---------|---------|------|------|
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.82 | 1.02 | < 0.005 | 0.02 | _ | 0.02 | 0.02 | _ | 0.02 | _ | 142 | 142 | 0.01 | < 0.005 | _ | 142 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.01 | 0.01 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 1.00 | 1.00 | < 0.005 | < 0.005 | _ | 1.00 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 0.17 | 0.17 | < 0.005 | < 0.005 | _ | 0.17 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | - | _ | - | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.76. P7.3 - Log boom (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|--------------|---------|---------|---------|---------|-------|---------|---------|--------|---------|------|-------|------|---------|---------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.82 | 1.02 | < 0.005 | 0.02 | _ | 0.02 | 0.02 | _ | 0.02 | _ | 142 | 142 | 0.01 | < 0.005 | _ | 142 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.01 | 0.01 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 1.00 | 1.00 | < 0.005 | < 0.005 | _ | 1.00 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | < 0.005 t | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 0.17 | 0.17 | < 0.005 | < 0.005 | _ | 0.17 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Daily, Summer (Max) | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.77. P7.3 - Log boom (2027) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|------|------|---------|-------|-------|-------|--------|--------|--------|------|-------|------|------|---------|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.81 | 1.02 | < 0.005 | 0.02 | _ | 0.02 | 0.02 | _ | 0.02 | _ | 142 | 142 | 0.01 | < 0.005 | _ | 142 |

| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|------|---------|---------|---------|---------|------|---------|---------|------|---------|---|------|------|---------|---------|------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ |
| Off-Road Equipmer | | 0.02 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 3.00 | 3.00 | < 0.005 | < 0.005 | _ | 3.01 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmer | | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 0.50 | 0.50 | < 0.005 | < 0.005 | _ | 0.50 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | - | - | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | - | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | - | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.78. P7.3 - Log boom (2027) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|---------|---------|---------|---------|-------|---------|---------|--------|---------|------|-------|------|---------|---------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.81 | 1.02 | < 0.005 | 0.02 | _ | 0.02 | 0.02 | _ | 0.02 | _ | 142 | 142 | 0.01 | < 0.005 | _ | 142 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Off-Road Equipmen | | 0.02 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 3.00 | 3.00 | < 0.005 | < 0.005 | - | 3.01 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 0.50 | 0.50 | < 0.005 | < 0.005 | _ | 0.50 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | - | - | _ | _ | _ | _ | - | - | _ | _ | _ | _ | _ | _ | - | _ | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.79. P7.4 - Restoration (2027) - Unmitigated

| | Onara | (10) (10) | y ror dan | .y, te.,y. | TOT CITIT | daily dirid | 01100 (| nor day 10 | i dany, i | vi i , y i . i . | ariiluai | | | | | | |
|---------------------------|---------|-----------|-----------|------------|-----------|-------------|---------|------------|-----------|------------------|----------|-------|------|---------|---------|------|------|
| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 1.99 | 3.29 | < 0.005 | 0.06 | _ | 0.06 | 0.06 | _ | 0.06 | _ | 509 | 509 | 0.02 | < 0.005 | _ | 511 |
| Onsite truck | < 0.005 | 0.46 | 0.03 | < 0.005 | < 0.005 | 92.0 | 92.0 | < 0.005 | 9.18 | 9.19 | _ | 245 | 245 | < 0.005 | 0.04 | 0.01 | 256 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.09 | 0.14 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 22.3 | 22.3 | < 0.005 | < 0.005 | _ | 22.4 |
| Onsite truck | < 0.005 | 0.02 | < 0.005 | < 0.005 | < 0.005 | 3.61 | 3.61 | < 0.005 | 0.36 | 0.36 | _ | 10.7 | 10.7 | < 0.005 | < 0.005 | 0.01 | 11.2 |

| Annual | _ | _ | - | - | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|---------|---------|---------|---------|------|---------|---------|------|---------|---|------|------|---------|---------|---------|------|
| Off-Road Equipmen | | 0.02 | 0.03 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 3.69 | 3.69 | < 0.005 | < 0.005 | _ | 3.71 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.66 | 0.66 | < 0.005 | 0.07 | 0.07 | - | 1.78 | 1.78 | < 0.005 | < 0.005 | < 0.005 | 1.86 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.80. P7.4 - Restoration (2027) - Mitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | _ | _ | | | _ | _ | _ | | _ | _ | _ | _ | _ | | _ | _ |
|---------------------------|---------|---------|---------|---------|----------|------|---------|---------|------|---------|---|------|------|---------|---------|---------|------|
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 1.99 | 3.29 | < 0.005 | 0.06 | _ | 0.06 | 0.06 | _ | 0.06 | _ | 509 | 509 | 0.02 | < 0.005 | _ | 511 |
| Onsite truck | < 0.005 | 0.46 | 0.03 | < 0.005 | < 0.005 | 23.2 | 23.2 | < 0.005 | 2.32 | 2.32 | _ | 245 | 245 | < 0.005 | 0.04 | 0.01 | 256 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.09 | 0.14 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 22.3 | 22.3 | < 0.005 | < 0.005 | _ | 22.4 |
| Onsite truck | < 0.005 | 0.02 | < 0.005 | < 0.005 | < 0.005 | 0.91 | 0.91 | < 0.005 | 0.09 | 0.09 | _ | 10.7 | 10.7 | < 0.005 | < 0.005 | 0.01 | 11.2 |
| Annual | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.02 | 0.03 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 3.69 | 3.69 | < 0.005 | < 0.005 | _ | 3.71 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.17 | 0.17 | < 0.005 | 0.02 | 0.02 | _ | 1.78 | 1.78 | < 0.005 | < 0.005 | < 0.005 | 1.86 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | - | _ | - | _ | _ | _ | - | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | - | - | _ | _ | _ | - | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.81. P7.5 - Demobilization (2027) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|---------|---------|---------|----------|-------|---------|---------|--------|---------|------|-------|------|---------|---------|---------|------|
| Onsite | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 1.99 | 3.29 | < 0.005 | 0.06 | _ | 0.06 | 0.06 | _ | 0.06 | _ | 509 | 509 | 0.02 | < 0.005 | _ | 511 |
| Onsite truck | < 0.005 | 0.46 | 0.03 | < 0.005 | < 0.005 | 92.0 | 92.0 | < 0.005 | 9.18 | 9.19 | _ | 245 | 245 | < 0.005 | 0.04 | 0.01 | 256 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.07 | 0.11 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 16.7 | 16.7 | < 0.005 | < 0.005 | _ | 16.8 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 2.71 | 2.71 | < 0.005 | 0.27 | 0.27 | _ | 8.05 | 8.05 | < 0.005 | < 0.005 | 0.01 | 8.44 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.01 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 2.77 | 2.77 | < 0.005 | < 0.005 | _ | 2.78 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.49 | 0.49 | < 0.005 | 0.05 | 0.05 | _ | 1.33 | 1.33 | < 0.005 | < 0.005 | < 0.005 | 1.40 |

| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.82. P7.5 - Demobilization (2027) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|------|------|---------|-------|-------|-------|--------|--------|--------|------|-------|------|------|---------|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 1.99 | 3.29 | < 0.005 | 0.06 | _ | 0.06 | 0.06 | _ | 0.06 | _ | 509 | 509 | 0.02 | < 0.005 | _ | 511 |

| Onsite truck | < 0.005 | 0.46 | 0.03 | < 0.005 | < 0.005 | 23.2 | 23.2 | < 0.005 | 2.32 | 2.32 | _ | 245 | 245 | < 0.005 | 0.04 | 0.01 | 256 |
|---------------------------|---------|---------|---------|---------|---------|------|---------|---------|------|---------|---|------|------|---------|---------|---------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmer | | 0.07 | 0.11 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 16.7 | 16.7 | < 0.005 | < 0.005 | _ | 16.8 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.68 | 0.68 | < 0.005 | 0.07 | 0.07 | _ | 8.05 | 8.05 | < 0.005 | < 0.005 | 0.01 | 8.44 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ |
| Off-Road Equipmer | | 0.01 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | - | 2.77 | 2.77 | < 0.005 | < 0.005 | _ | 2.78 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.12 | 0.12 | < 0.005 | 0.01 | 0.01 | _ | 1.33 | 1.33 | < 0.005 | < 0.005 | < 0.005 | 1.40 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.83. P8 - Spillway abandonment (2027) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|------|---------|---------|---------|---------|---------|---------|---------|---------|------|-------|------|---------|---------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | - | _ | _ | - | _ |
| Worker | 0.09 | 0.07 | 1.14 | 0.00 | 0.00 | 0.12 | 0.12 | 0.00 | 0.03 | 0.03 | _ | 128 | 128 | 0.01 | < 0.005 | 0.50 | 130 |
| Vendor | < 0.005 | 0.21 | 0.04 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 119 | 119 | < 0.005 | 0.02 | 0.24 | 124 |
| Hauling | 0.01 | 1.13 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 634 | 634 | < 0.005 | 0.10 | 0.95 | 664 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | 0.01 | 0.06 | 0.00 | 0.00 | 0.01 | 0.01 | 0.00 | < 0.005 | < 0.005 | _ | 7.70 | 7.70 | < 0.005 | < 0.005 | 0.01 | 7.82 |
| Vendor | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 7.81 | 7.81 | < 0.005 | < 0.005 | 0.01 | 8.17 |

| Hauling | < 0.005 | 0.08 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 41.7 | 41.7 | < 0.005 | 0.01 | 0.03 | 43.7 |
|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | 0.01 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | < 0.005 | < 0.005 | _ | 1.27 | 1.27 | < 0.005 | < 0.005 | < 0.005 | 1.29 |
| Vendor | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 1.29 | 1.29 | < 0.005 | < 0.005 | < 0.005 | 1.35 |
| Hauling | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 6.90 | 6.90 | < 0.005 | < 0.005 | < 0.005 | 7.23 |

3.84. P8 - Spillway abandonment (2027) - Mitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | СО2Т | CH4 | N2O | R | CO2 |
|---------------------------|---------|------|------|---------|---------|-------|-------|---------|--------|--------|------|-------|------|---------|---------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.09 | 0.07 | 1.14 | 0.00 | 0.00 | 0.12 | 0.12 | 0.00 | 0.03 | 0.03 | _ | 128 | 128 | 0.01 | < 0.005 | 0.50 | 130 |
| Vendor | < 0.005 | 0.21 | 0.04 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 119 | 119 | < 0.005 | 0.02 | 0.24 | 124 |
| Hauling | 0.01 | 1.13 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 634 | 634 | < 0.005 | 0.10 | 0.95 | 664 |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | 0.01 | 0.06 | 0.00 | 0.00 | 0.01 | 0.01 | 0.00 | < 0.005 | < 0.005 | _ | 7.70 | 7.70 | < 0.005 | < 0.005 | 0.01 | 7.82 |
| Vendor | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 7.81 | 7.81 | < 0.005 | < 0.005 | 0.01 | 8.17 |
| Hauling | < 0.005 | 0.08 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 41.7 | 41.7 | < 0.005 | 0.01 | 0.03 | 43.7 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | 0.01 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | < 0.005 | < 0.005 | _ | 1.27 | 1.27 | < 0.005 | < 0.005 | < 0.005 | 1.29 |
| Vendor | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 1.29 | 1.29 | < 0.005 | < 0.005 | < 0.005 | 1.35 |
| Hauling | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 6.90 | 6.90 | < 0.005 | < 0.005 | < 0.005 | 7.23 |

3.85. P8.1 - Remove Cofferdam (2027) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | | | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|------|------|---------|---------|-------|---------|---------|------|---------|------|-------|------|---------|---------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 2.93 | 3.07 | 0.01 | 0.12 | _ | 0.12 | 0.11 | _ | 0.11 | _ | 857 | 857 | 0.03 | 0.01 | _ | 860 |
| Onsite truck | < 0.005 | 0.08 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 40.3 | 40.3 | < 0.005 | 0.01 | 0.06 | 42.3 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.08 | 0.08 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 23.5 | 23.5 | < 0.005 | < 0.005 | _ | 23.6 |

| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.36 | 0.36 | < 0.005 | 0.04 | 0.04 | - | 1.10 | 1.10 | < 0.005 | < 0.005 | < 0.005 | 1.16 |
|---------------------------|---------|---------|---------|---------|---------|------|---------|---------|------|---------|---|------|------|---------|---------|---------|------|
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.01 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 3.89 | 3.89 | < 0.005 | < 0.005 | _ | 3.90 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.07 | 0.07 | < 0.005 | 0.01 | 0.01 | - | 0.18 | 0.18 | < 0.005 | < 0.005 | < 0.005 | 0.19 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | - | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.86. P8.1 - Remove Cofferdam (2027) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Doily | | | | | | | | | | | | | | | | | |
|---------------------------|---------|---------|---------|---------|---------|------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Daily, Summer (Max) | _ | | | | _ | | | | | | | _ | _ | | | | _ |
| Off-Road Equipmen | | 2.93 | 3.07 | 0.01 | 0.12 | _ | 0.12 | 0.11 | _ | 0.11 | _ | 857 | 857 | 0.03 | 0.01 | _ | 860 |
| Onsite truck | < 0.005 | 0.08 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 40.3 | 40.3 | < 0.005 | 0.01 | 0.06 | 42.3 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.08 | 0.08 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 23.5 | 23.5 | < 0.005 | < 0.005 | _ | 23.6 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.09 | 0.09 | < 0.005 | 0.01 | 0.01 | _ | 1.10 | 1.10 | < 0.005 | < 0.005 | < 0.005 | 1.16 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.01 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 3.89 | 3.89 | < 0.005 | < 0.005 | _ | 3.90 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | < 0.005 | _ | 0.18 | 0.18 | < 0.005 | < 0.005 | < 0.005 | 0.19 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.87. P8.2 - Canal Side Channel (2027) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|--------------|---------|---------|---------|----------|-------|---------|----------|--------|---------|------|----------|-------|----------|---------|---------|-------|
| Onsite | _ | _ | _ | _ | <u> </u> | _ | _ | <u> </u> | _ | _ | _ | <u> </u> | _ | <u> </u> | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 4.13 | 4.10 | 0.01 | 0.17 | _ | 0.17 | 0.16 | _ | 0.16 | _ | 1,155 | 1,155 | 0.05 | 0.01 | _ | 1,159 |
| Onsite truck | < 0.005 | 0.08 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 40.3 | 40.3 | < 0.005 | 0.01 | 0.06 | 42.3 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.14 | 0.13 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 38.0 | 38.0 | < 0.005 | < 0.005 | _ | 38.1 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.43 | 0.43 | < 0.005 | 0.04 | 0.04 | _ | 1.33 | 1.33 | < 0.005 | < 0.005 | < 0.005 | 1.39 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | < 0.005 t | 0.02 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 6.29 | 6.29 | < 0.005 | < 0.005 | _ | 6.31 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.08 | 0.08 | < 0.005 | 0.01 | 0.01 | _ | 0.22 | 0.22 | < 0.005 | < 0.005 | < 0.005 | 0.23 |

| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.88. P8.2 - Canal Side Channel (2027) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|------|------|---------|---------|-------|-------|---------|--------|--------|------|-------|-------|---------|------|------|-------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 4.13 | 4.10 | 0.01 | 0.17 | _ | 0.17 | 0.16 | _ | 0.16 | _ | 1,155 | 1,155 | 0.05 | 0.01 | _ | 1,159 |
| Onsite truck | < 0.005 | 0.08 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 40.3 | 40.3 | < 0.005 | 0.01 | 0.06 | 42.3 |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|---------|---------|---------|---------|------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.14 | 0.13 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 38.0 | 38.0 | < 0.005 | < 0.005 | _ | 38.1 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.11 | 0.11 | < 0.005 | 0.01 | 0.01 | _ | 1.33 | 1.33 | < 0.005 | < 0.005 | < 0.005 | 1.39 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.02 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 6.29 | 6.29 | < 0.005 | < 0.005 | _ | 6.31 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | < 0.005 | _ | 0.22 | 0.22 | < 0.005 | < 0.005 | < 0.005 | 0.23 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.89. P8.3 - Cover Bathtub (2027) - Unmitigated

| | ROG | NOx | co ca | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|-------|---------|---------|-------|---------|---------|--------|---------|------|-------|-------|---------|---------|------|-------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 4.13 | 4.10 | 0.01 | 0.17 | _ | 0.17 | 0.16 | _ | 0.16 | _ | 1,155 | 1,155 | 0.05 | 0.01 | _ | 1,159 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.14 | 0.13 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 38.0 | 38.0 | < 0.005 | < 0.005 | _ | 38.1 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.02 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 6.29 | 6.29 | < 0.005 | < 0.005 | _ | 6.31 |
| Onsite ruck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | - | - | - | _ | _ | _ | _ | - | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.90. P8.3 - Cover Bathtub (2027) - Mitigated

| | | | | J, J | | | | | J , | | | | | | | | |
|---------------------------|------|------|------|---------|-------|-------|-------|--------|------------|--------|------|-------|-------|---------|---------|------|-------|
| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 4.13 | 4.10 | 0.01 | 0.17 | _ | 0.17 | 0.16 | _ | 0.16 | _ | 1,155 | 1,155 | 0.05 | 0.01 | _ | 1,159 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.14 | 0.13 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 38.0 | 38.0 | < 0.005 | < 0.005 | _ | 38.1 |

| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|------|------|------|---------|---------|------|---------|---------|------|---------|---|------|------|---------|---------|------|------|
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmer | | 0.02 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 6.29 | 6.29 | < 0.005 | < 0.005 | _ | 6.31 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.91. P9 - Batch Plant Equip (2025) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Summer (Max) | | | | | | | | | | | | | | | | | |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | | _ | _ | | _ | _ | _ | _ | _ | | _ | _ | _ | | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|-----------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| riadiling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| | | | | | | | | | | | | | | | | | |

3.92. P9 - Batch Plant Equip (2025) - Mitigated

| | | | | | | | | lb/day fo | | | | | | | | | |
|---------------------------|------|------|------|------|-------|-------|-------|-----------|--------|--------|------|-------|------|------|------|------|------|
| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.93. P9 - Batch Plant Equip (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|----------|------|----------|----------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | <u> </u> | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.94. P9 - Batch Plant Equip (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| ١ | /endor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| F | Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

4. Operations Emissions Details

4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

| Vegetatio n | ROG | | СО | | | | PM10T | PM2.5E | | | | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|---|----|---|---|---|-------|--------|---|---|----------|-------|------|-----|-----|---|------|
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Total | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Total | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Total | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

| Land Use | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Total | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Total | _ | _ | _ | _ | _ | | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Total | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

| | ROG | NOx | со | SO2 | PM10E | | PM10T | PM2.5E | | | BCO2 | | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|-----|-------|---|-------|--------|----------|---|------|---|------|-----|-----|---|------|
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Avoided | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Sequest ered | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Remove d | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Avoided | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Sequest ered | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Remove d | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|--------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ |
| Avoided | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Sequest ered | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Remove d | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

4.10.4. Soil Carbon Accumulation By Vegetation Type - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

| Vegetatio n | ROG | NOx | | SO2 | | | | | PM2.5D | | | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|---|-----|---|---|---|---|--------|---|---|-------|------|-----|-----|---|------|
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Total | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Total | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Total | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

4.10.5. Above and Belowground Carbon Accumulation by Land Use Type - Mitigated

| Land Use | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Total | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Total | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Total | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

4.10.6. Avoided and Sequestered Emissions by Species - Mitigated

| | | | , | J. J | | | | | . . | | | | | | | | |
|---------------------------|-----|-----|----|------|-------|-------|-------|--------|------------|--------|------|-------|------|-----|-----|---|------|
| Species | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Daily, Summer (Max) | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Avoided | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Sequest ered | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Remove d | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | | _ | _ | | _ | | _ | _ | _ | _ | _ | _ | _ | | _ |
| Avoided | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|--------------|---|---|---|----------|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Sequest ered | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Remove d | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ |
| Annual | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Avoided | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Sequest ered | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Remove d | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

5. Activity Data

5.1. Construction Schedule

| Phase Name | Phase Type | Start Date | End Date | Days Per Week | Work Days per Phase | Phase Description |
|--------------------------------------|------------|------------|------------|---------------|---------------------|-------------------|
| P4.2 - Crest form and pour concrete | Grading | 5/30/2026 | 10/24/2026 | 6.00 | 127 | _ |
| P4.1 - Crest excavation/ subgrade | Grading | 4/21/2026 | 5/29/2026 | 6.00 | 34.0 | _ |
| P4 - Crest structure | Grading | 4/21/2026 | 10/24/2026 | 6.00 | 161 | _ |
| P3.6 - Trench Cutoff Concrete 3 | Grading | 4/14/2026 | 4/14/2026 | 2.00 | 1.00 | _ |

| P3.5 - Trench Cutoff | Grading | 4/7/2026 | 4/7/2026 | 2.00 | 1.00 | _ |
|--|---------|------------|------------|------|------|---|
| Concrete 2 | | | | | | |
| P3.4 - Trench Cutoff Concrete 1 | Grading | 3/31/2026 | 3/31/2026 | 2.00 | 1.00 | _ |
| P3.3 - Place piles, sheets, and concrete | Grading | 3/27/2026 | 4/18/2026 | 6.00 | 20.0 | _ |
| P3.1 - Mass concrete | Grading | 11/16/2025 | 12/20/2025 | 6.00 | 30.0 | _ |
| P3 - Cofferdam | Grading | 11/16/2025 | 4/18/2026 | 6.00 | 132 | _ |
| P2.3 - Drains, Cleanouts, and Backfill | Grading | 4/28/2026 | 5/19/2026 | 6.00 | 19.0 | _ |
| P2.2 - Spillway form and pour concrete | Grading | 11/16/2025 | 4/25/2026 | 6.00 | 138 | _ |
| P2.1 - Spillway excavation/subgrade | Grading | 9/7/2025 | 11/9/2025 | 6.00 | 54.0 | _ |
| P2 - Spillway chute and flip bucket | Grading | 9/7/2025 | 5/19/2026 | 6.00 | 218 | _ |
| P1.4 - Access road construction | Grading | 8/22/2025 | 11/16/2025 | 6.00 | 74.0 | _ |
| P3.2 - Excavate cofferdam | Grading | 3/18/2026 | 3/26/2026 | 6.00 | 8.00 | _ |
| P1.3 - Laydown area development | Grading | 8/22/2025 | 8/28/2025 | 6.00 | 6.00 | _ |
| P1.2 - Mobilization | Grading | 8/5/2025 | 8/21/2025 | 6.00 | 15.0 | _ |
| P1.1 - Tree removal | Grading | 7/8/2025 | 8/17/2025 | 6.00 | 35.0 | _ |
| P1 - Mobilization and access development | Grading | 7/8/2025 | 11/16/2025 | 6.00 | 113 | _ |
| P5 - Dam notch and tie-in chute | Grading | 10/25/2026 | 1/19/2027 | 6.00 | 74.0 | _ |
| P5.1 - Demolition | Grading | 10/25/2026 | 11/5/2026 | 6.00 | 10.0 | _ |
| P5.2 - Excavation, Subgrade | Grading | 11/6/2026 | 11/20/2026 | 6.00 | 13.0 | _ |
| P5.3 - Form and Pour Concrete | Grading | 11/21/2026 | 12/29/2026 | 6.00 | 33.0 | _ |
| P5.4 - Install Footbridge | Grading | 12/30/2026 | 1/19/2027 | 6.00 | 18.0 | _ |

| P6 - Plunge pool | Grading | 8/5/2026 | 9/15/2026 | 6.00 | 36.0 | _ |
|------------------------------|---------|------------|------------|------|------|---|
| P6.1 - Flow bypass | Grading | 8/5/2026 | 8/11/2026 | 6.00 | 6.00 | _ |
| P6.2 - Excavation | Grading | 8/12/2026 | 9/9/2026 | 6.00 | 25.0 | _ |
| P6.3 - Slope protection | Grading | 9/10/2026 | 9/15/2026 | 6.00 | 5.00 | _ |
| P7 - Remaining Work Scope | Grading | 12/29/2026 | 2/24/2027 | 6.00 | 50.0 | _ |
| P7.1 - Cofferdam removal | Grading | 1/9/2027 | 1/16/2027 | 6.00 | 7.00 | _ |
| P7.2 - Lighting | Grading | 1/19/2027 | 2/10/2027 | 6.00 | 20.0 | _ |
| P7.3 - Log boom | Grading | 12/29/2026 | 1/9/2027 | 6.00 | 11.0 | _ |
| P7.4 - Restoration | Grading | 1/16/2027 | 2/3/2027 | 6.00 | 16.0 | _ |
| P7.5 - Demobilization | Grading | 2/11/2027 | 2/24/2027 | 6.00 | 12.0 | _ |
| P8 - Spillway abandonment | Grading | 4/9/2027 | 5/6/2027 | 6.00 | 24.0 | _ |
| P8.1 - Remove Cofferdam | Grading | 4/9/2027 | 4/20/2027 | 6.00 | 10.0 | _ |
| P8.2 - Canal Side Channel | Grading | 4/9/2027 | 4/22/2027 | 6.00 | 12.0 | _ |
| P8.3 - Cover Bathtub | Grading | 4/23/2027 | 5/6/2027 | 6.00 | 12.0 | _ |
| P9 - Batch Plant Equip | Grading | 11/1/2025 | 12/31/2026 | 3.00 | 183 | _ |

5.2. Off-Road Equipment

5.2.1. Unmitigated

| Phase Name | Equipment Type | Fuel Type | Engine Tier | Number per Day | Hours Per Day | Horsepower | Load Factor |
|-------------------------------------|-----------------|-----------|-------------|----------------|---------------|------------|-------------|
| P4.2 - Crest form and pour concrete | Pumps | Diesel | Average | 1.00 | 5.00 | 11.0 | 0.74 |
| P4.2 - Crest form and pour concrete | Air Compressors | Diesel | Average | 1.00 | 5.00 | 37.0 | 0.48 |
| P4.2 - Crest form and pour concrete | Cranes | Diesel | Average | 1.00 | 6.00 | 367 | 0.29 |
| P4.2 - Crest form and pour concrete | Generator Sets | Diesel | Average | 1.00 | 10.0 | 14.0 | 0.74 |

| P4.2 - Crest form and pour concrete | Skid Steer Loaders | Diesel | Average | 1.00 | 5.00 | 71.0 | 0.37 |
|--------------------------------------|---------------------|--------|---------|------|------|------|------|
| P4.1 - Crest excavation/ subgrade | Rubber Tired Dozers | Diesel | Average | 1.00 | 8.00 | 367 | 0.40 |
| P4.1 - Crest excavation/ subgrade | Off-Highway Trucks | Diesel | Average | 4.00 | 9.00 | 376 | 0.38 |
| P4.1 - Crest excavation/ subgrade | Excavators | Diesel | Average | 1.00 | 9.00 | 36.0 | 0.38 |
| P4.1 - Crest excavation/ subgrade | Bore/Drill Rigs | Diesel | Average | 1.00 | 5.00 | 83.0 | 0.50 |
| P3.6 - Trench Cutoff Concrete 3 | Pumps | Diesel | Average | 1.00 | 8.00 | 11.0 | 0.74 |
| P3.6 - Trench Cutoff Concrete 3 | Skid Steer Loaders | Diesel | Average | 1.00 | 5.00 | 71.0 | 0.37 |
| P3.6 - Trench Cutoff Concrete 3 | Generator Sets | Diesel | Average | 1.00 | 10.0 | 14.0 | 0.74 |
| P3.6 - Trench Cutoff Concrete 3 | Forklifts | Diesel | Average | 1.00 | 6.00 | 82.0 | 0.20 |
| P3.5 - Trench Cutoff Concrete 2 | Pumps | Diesel | Average | 1.00 | 8.00 | 11.0 | 0.74 |
| P3.5 - Trench Cutoff Concrete 2 | Skid Steer Loaders | Diesel | Average | 1.00 | 5.00 | 71.0 | 0.37 |
| P3.5 - Trench Cutoff Concrete 2 | Generator Sets | Diesel | Average | 1.00 | 10.0 | 14.0 | 0.74 |
| P3.5 - Trench Cutoff Concrete 2 | Forklifts | Diesel | Average | 1.00 | 6.00 | 82.0 | 0.20 |
| P3.4 - Trench Cutoff Concrete 1 | Pumps | Diesel | Average | 1.00 | 8.00 | 11.0 | 0.74 |
| P3.4 - Trench Cutoff Concrete 1 | Skid Steer Loaders | Diesel | Average | 1.00 | 5.00 | 71.0 | 0.37 |
| P3.4 - Trench Cutoff Concrete 1 | Generator Sets | Diesel | Average | 1.00 | 10.0 | 14.0 | 0.74 |
| P3.4 - Trench Cutoff Concrete 1 | Forklifts | Diesel | Average | 1.00 | 6.00 | 82.0 | 0.20 |

| P3.3 - Place piles, sheets, and concrete | Forklifts | Diesel | Average | 1.00 | 6.00 | 82.0 | 0.20 |
|---|---------------------|--------|---------|------|------|------|------|
| P3.3 - Place piles, sheets, and concrete | Excavators | Diesel | Average | 1.00 | 5.00 | 36.0 | 0.38 |
| P3.3 - Place piles, sheets, and concrete | Cranes | Diesel | Average | 1.00 | 6.00 | 367 | 0.29 |
| P3.1 - Mass concrete | Forklifts | Diesel | Average | 1.00 | 6.00 | 82.0 | 0.20 |
| P3.1 - Mass concrete | Excavators | Diesel | Average | 1.00 | 5.00 | 36.0 | 0.38 |
| P3.1 - Mass concrete | Cranes | Diesel | Average | 1.00 | 6.00 | 367 | 0.29 |
| P2.2 - Spillway form and pour concrete | Pumps | Diesel | Average | 1.00 | 5.00 | 11.0 | 0.74 |
| P2.2 - Spillway form and pour concrete | Air Compressors | Diesel | Average | 1.00 | 5.00 | 37.0 | 0.48 |
| P2.2 - Spillway form and pour concrete | Cranes | Diesel | Average | 1.00 | 6.00 | 367 | 0.29 |
| P2.2 - Spillway form and pour concrete | Generator Sets | Diesel | Average | 1.00 | 10.0 | 14.0 | 0.74 |
| P2.2 - Spillway form and pour concrete | Skid Steer Loaders | Diesel | Average | 1.00 | 5.00 | 71.0 | 0.37 |
| P2.1 - Spillway excavation/subgrade | Rubber Tired Dozers | Diesel | Average | 1.00 | 8.00 | 367 | 0.40 |
| P2.1 - Spillway excavation/subgrade | Off-Highway Trucks | Diesel | Average | 4.00 | 9.00 | 376 | 0.38 |
| P2.1 - Spillway excavation/subgrade | Excavators | Diesel | Average | 1.00 | 9.00 | 36.0 | 0.38 |
| P2.1 - Spillway excavation/subgrade | Skid Steer Loaders | Diesel | Average | 1.00 | 5.00 | 71.0 | 0.37 |
| P2.1 - Spillway excavation/subgrade | Bore/Drill Rigs | Diesel | Average | 1.00 | 5.00 | 83.0 | 0.50 |
| P1.4 - Access road construction | Rubber Tired Dozers | Diesel | Average | 1.00 | 8.00 | 367 | 0.40 |
| P1.4 - Access road construction | Off-Highway Trucks | Diesel | Average | 4.00 | 9.00 | 376 | 0.38 |

| P1.4 - Access road construction | Excavators | Diesel | Average | 1.00 | 9.00 | 36.0 | 0.38 |
|------------------------------------|--------------------------------------|--------|---------|------|------|------|------|
| P1.4 - Access road construction | Rollers | Diesel | Average | 1.00 | 10.0 | 36.0 | 0.38 |
| P3.2 - Excavate cofferdam | Forklifts | Diesel | Average | 1.00 | 6.00 | 82.0 | 0.20 |
| P3.2 - Excavate cofferdam | Excavators | Diesel | Average | 1.00 | 5.00 | 36.0 | 0.38 |
| P3.2 - Excavate cofferdam | Cranes | Diesel | Average | 1.00 | 6.00 | 367 | 0.29 |
| P1.3 - Laydown area development | Rubber Tired Dozers | Diesel | Average | 1.00 | 8.00 | 367 | 0.40 |
| P1.3 - Laydown area development | Forklifts | Diesel | Average | 1.00 | 6.00 | 82.0 | 0.20 |
| P1.3 - Laydown area development | Rubber Tired Loaders | Diesel | Average | 1.00 | 6.00 | 150 | 0.36 |
| P1.1 - Tree removal | Other Construction Equipment | Diesel | Average | 3.00 | 8.00 | 82.0 | 0.42 |
| P1.1 - Tree removal | Rubber Tired Loaders | Diesel | Average | 1.00 | 6.00 | 150 | 0.36 |
| P1.1 - Tree removal | Skid Steer Loaders | Diesel | Average | 1.00 | 8.00 | 71.0 | 0.37 |
| P1.1 - Tree removal | Skid Steer Loaders | Diesel | Average | 1.00 | 6.00 | 71.0 | 0.37 |
| P1.1 - Tree removal | Other Construction Equipment | Diesel | Average | 1.00 | 6.00 | 82.0 | 0.42 |
| P1.1 - Tree removal | Other Material Handling Equipment | Diesel | Average | 3.00 | 8.00 | 93.0 | 0.40 |
| P5.1 - Demolition | Excavators | Diesel | Average | 2.00 | 10.0 | 36.0 | 0.38 |
| P5.1 - Demolition | Off-Highway Trucks | Diesel | Average | 1.00 | 3.00 | 376 | 0.38 |
| P5.2 - Excavation, Subgrade | Excavators | Diesel | Average | 2.00 | 10.0 | 36.0 | 0.38 |
| P5.2 - Excavation, Subgrade | Off-Highway Trucks | Diesel | Average | 1.00 | 3.00 | 376 | 0.38 |
| P5.3 - Form and Pour Concrete | Pumps | Diesel | Average | 1.00 | 2.00 | 11.0 | 0.74 |

| P5.3 - Form and Pour Concrete | Air Compressors | Diesel | Average | 1.00 | 5.00 | 37.0 | 0.48 |
|----------------------------------|---------------------|--------|---------|------|------|------|------|
| P5.3 - Form and Pour Concrete | Cranes | Diesel | Average | 1.00 | 6.00 | 367 | 0.29 |
| P5.3 - Form and Pour Concrete | Generator Sets | Diesel | Average | 1.00 | 10.0 | 14.0 | 0.74 |
| P5.3 - Form and Pour Concrete | Skid Steer Loaders | Diesel | Average | 1.00 | 5.00 | 71.0 | 0.37 |
| P5.4 - Install Footbridge | Pumps | Diesel | Average | 1.00 | 2.00 | 11.0 | 0.74 |
| P5.4 - Install Footbridge | Air Compressors | Diesel | Average | 1.00 | 5.00 | 37.0 | 0.48 |
| P5.4 - Install Footbridge | Cranes | Diesel | Average | 1.00 | 6.00 | 367 | 0.29 |
| P5.4 - Install Footbridge | Generator Sets | Diesel | Average | 1.00 | 10.0 | 14.0 | 0.74 |
| P5.4 - Install Footbridge | Skid Steer Loaders | Diesel | Average | 1.00 | 5.00 | 71.0 | 0.37 |
| P6.1 - Flow bypass | Generator Sets | Diesel | Average | 1.00 | 24.0 | 14.0 | 0.74 |
| P6.2 - Excavation | Generator Sets | Diesel | Average | 1.00 | 10.0 | 14.0 | 0.74 |
| P6.2 - Excavation | Rubber Tired Dozers | Diesel | Average | 1.00 | 8.00 | 367 | 0.40 |
| P6.2 - Excavation | Off-Highway Trucks | Diesel | Average | 2.00 | 9.00 | 376 | 0.38 |
| P6.2 - Excavation | Excavators | Diesel | Average | 1.00 | 9.00 | 36.0 | 0.38 |
| P6.3 - Slope protection | Bore/Drill Rigs | Diesel | Average | 1.00 | 5.00 | 83.0 | 0.50 |
| P6.3 - Slope protection | Pumps | Diesel | Average | 1.00 | 5.00 | 11.0 | 0.74 |
| P7.1 - Cofferdam removal | Forklifts | Diesel | Average | 1.00 | 6.00 | 82.0 | 0.20 |
| P7.1 - Cofferdam removal | Cranes | Diesel | Average | 1.00 | 6.00 | 367 | 0.29 |
| P7.2 - Lighting | Forklifts | Diesel | Average | 1.00 | 6.00 | 82.0 | 0.20 |
| P7.3 - Log boom | Excavators | Diesel | Average | 1.00 | 8.00 | 36.0 | 0.38 |

| P7.4 - Restoration | Skid Steer Loaders | Diesel | Average | 1.00 | 10.0 | 71.0 | 0.37 |
|------------------------------|--------------------|--------|---------|------|------|------|------|
| P7.4 - Restoration | Excavators | Diesel | Average | 1.00 | 5.00 | 36.0 | 0.38 |
| P7.4 - Restoration | Forklifts | Diesel | Average | 1.00 | 6.00 | 82.0 | 0.20 |
| P7.5 - Demobilization | Skid Steer Loaders | Diesel | Average | 1.00 | 10.0 | 71.0 | 0.37 |
| P7.5 - Demobilization | Excavators | Diesel | Average | 1.00 | 5.00 | 36.0 | 0.38 |
| P7.5 - Demobilization | Forklifts | Diesel | Average | 1.00 | 6.00 | 82.0 | 0.20 |
| P8.1 - Remove Cofferdam | Forklifts | Diesel | Average | 1.00 | 6.00 | 82.0 | 0.20 |
| P8.1 - Remove Cofferdam | Cranes | Diesel | Average | 1.00 | 6.00 | 367 | 0.29 |
| P8.2 - Canal Side Channel | Cranes | Diesel | Average | 1.00 | 8.00 | 367 | 0.29 |
| P8.2 - Canal Side Channel | Forklifts | Diesel | Average | 1.00 | 6.00 | 82.0 | 0.20 |
| P8.2 - Canal Side Channel | Pumps | Diesel | Average | 1.00 | 5.00 | 11.0 | 0.74 |
| P8.3 - Cover Bathtub | Cranes | Diesel | Average | 1.00 | 8.00 | 367 | 0.29 |
| P8.3 - Cover Bathtub | Forklifts | Diesel | Average | 1.00 | 6.00 | 82.0 | 0.20 |
| P8.3 - Cover Bathtub | Pumps | Diesel | Average | 1.00 | 5.00 | 11.0 | 0.74 |

5.3. Construction Vehicles

5.3.1. Unmitigated

| Phase Name | Trip Type | One-Way Trips per Day | Miles per Trip | Vehicle Mix |
|--|-----------|-----------------------|----------------|---------------|
| P1 - Mobilization and access development | _ | _ | _ | _ |
| P1 - Mobilization and access development | Worker | 20.0 | 14.1 | LDA,LDT1,LDT2 |
| P1 - Mobilization and access development | Vendor | 10.0 | 8.98 | HHDT,MHDT |
| P1 - Mobilization and access development | Hauling | 6.00 | 40.3 | HHDT |

| P1 - Mobilization and access development | Onsite truck | 0.00 | 0.00 | HHDT |
|--|--------------|------|------|---------------|
| P1.1 - Tree removal | _ | _ | _ | _ |
| P1.1 - Tree removal | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P1.1 - Tree removal | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P1.1 - Tree removal | Hauling | 20.0 | 40.3 | HHDT |
| P1.1 - Tree removal | Onsite truck | 1.00 | 52.5 | HHDT |
| P1.2 - Mobilization | _ | _ | _ | _ |
| P1.2 - Mobilization | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P1.2 - Mobilization | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P1.2 - Mobilization | Hauling | 12.0 | 40.3 | HHDT |
| P1.2 - Mobilization | Onsite truck | 0.00 | 0.00 | HHDT |
| P1.3 - Laydown area development | _ | _ | _ | _ |
| P1.3 - Laydown area development | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P1.3 - Laydown area development | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P1.3 - Laydown area development | Hauling | 0.00 | 20.0 | HHDT |
| P1.3 - Laydown area development | Onsite truck | 1.00 | 47.5 | HHDT |
| P1.4 - Access road construction | _ | _ | _ | _ |
| P1.4 - Access road construction | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P1.4 - Access road construction | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P1.4 - Access road construction | Hauling | 0.00 | 20.0 | HHDT |
| P1.4 - Access road construction | Onsite truck | 1.00 | 60.0 | HHDT |
| P2 - Spillway chute and flip bucket | _ | _ | _ | _ |
| P2 - Spillway chute and flip bucket | Worker | 40.0 | 14.1 | LDA,LDT1,LDT2 |
| P2 - Spillway chute and flip bucket | Vendor | 8.00 | 8.98 | HHDT,MHDT |
| P2 - Spillway chute and flip bucket | Hauling | 4.00 | 40.3 | HHDT |
| P2 - Spillway chute and flip bucket | Onsite truck | 0.00 | 0.00 | HHDT |
| P4.2 - Crest form and pour concrete | _ | _ | _ | _ |
| P4.2 - Crest form and pour concrete | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |

| P4.2 - Crest form and pour concrete | Vendor | 0.00 | 8.98 | HHDT,MHDT |
|-------------------------------------|--------------|------|------|---------------|
| P4.2 - Crest form and pour concrete | Hauling | 3.00 | 0.50 | HHDT |
| P4.2 - Crest form and pour concrete | Onsite truck | 1.00 | 10.0 | HHDT |
| P4.1 - Crest excavation/ subgrade | _ | _ | _ | _ |
| P4.1 - Crest excavation/ subgrade | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P4.1 - Crest excavation/ subgrade | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P4.1 - Crest excavation/ subgrade | Hauling | 0.00 | 20.0 | HHDT |
| P4.1 - Crest excavation/ subgrade | Onsite truck | 1.00 | 60.0 | HHDT |
| P4 - Crest structure | _ | _ | _ | _ |
| P4 - Crest structure | Worker | 40.0 | 14.1 | LDA,LDT1,LDT2 |
| P4 - Crest structure | Vendor | 8.00 | 8.98 | HHDT,MHDT |
| P4 - Crest structure | Hauling | 4.00 | 40.3 | HHDT |
| P4 - Crest structure | Onsite truck | 0.00 | 0.00 | HHDT |
| P3.6 - Trench Cutoff Concrete 3 | _ | _ | _ | _ |
| P3.6 - Trench Cutoff Concrete 3 | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P3.6 - Trench Cutoff Concrete 3 | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P3.6 - Trench Cutoff Concrete 3 | Hauling | 40.0 | 0.50 | HHDT |
| P3.6 - Trench Cutoff Concrete 3 | Onsite truck | 1.00 | 10.0 | HHDT |
| P3.5 - Trench Cutoff Concrete 2 | _ | _ | _ | _ |
| P3.5 - Trench Cutoff Concrete 2 | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P3.5 - Trench Cutoff Concrete 2 | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P3.5 - Trench Cutoff Concrete 2 | Hauling | 40.0 | 0.50 | HHDT |
| P3.5 - Trench Cutoff Concrete 2 | Onsite truck | 1.00 | 10.0 | HHDT |
| P3.4 - Trench Cutoff Concrete 1 | _ | _ | _ | _ |
| P3.4 - Trench Cutoff Concrete 1 | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P3.4 - Trench Cutoff Concrete 1 | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P3.4 - Trench Cutoff Concrete 1 | Hauling | 40.0 | 0.50 | HHDT |
| P3.4 - Trench Cutoff Concrete 1 | Onsite truck | 1.00 | 10.0 | HHDT |

| P3.3 - Place piles, sheets, and concrete | _ | _ | _ | _ |
|--|--------------|------|------|---------------|
| P3.3 - Place piles, sheets, and concrete | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P3.3 - Place piles, sheets, and concrete | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P3.3 - Place piles, sheets, and concrete | Hauling | 0.00 | 20.0 | ннот |
| P3.3 - Place piles, sheets, and concrete | Onsite truck | 1.00 | 10.0 | HHDT |
| P3.1 - Mass concrete | _ | _ | _ | _ |
| P3.1 - Mass concrete | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P3.1 - Mass concrete | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P3.1 - Mass concrete | Hauling | 0.00 | 20.0 | HHDT |
| P3.1 - Mass concrete | Onsite truck | 1.00 | 10.0 | HHDT |
| P3 - Cofferdam | _ | _ | _ | _ |
| P3 - Cofferdam | Worker | 12.0 | 14.1 | LDA,LDT1,LDT2 |
| P3 - Cofferdam | Vendor | 4.00 | 8.98 | HHDT,MHDT |
| P3 - Cofferdam | Hauling | 4.00 | 40.3 | HHDT |
| P3 - Cofferdam | Onsite truck | 0.00 | 0.00 | HHDT |
| P2.3 - Drains, Cleanouts, and Backfill | _ | _ | _ | _ |
| P2.3 - Drains, Cleanouts, and Backfill | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P2.3 - Drains, Cleanouts, and Backfill | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P2.3 - Drains, Cleanouts, and Backfill | Hauling | 0.00 | 20.0 | HHDT |
| P2.3 - Drains, Cleanouts, and Backfill | Onsite truck | 0.00 | 0.00 | HHDT |
| P2.2 - Spillway form and pour concrete | _ | _ | _ | _ |
| P2.2 - Spillway form and pour concrete | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P2.2 - Spillway form and pour concrete | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| | | | | |

| P2.2 - Spillway form and pour concrete | Hauling | 3.00 | 0.50 | HHDT |
|--|--------------|------|------|---------------|
| P2.2 - Spillway form and pour concrete | Onsite truck | 1.00 | 10.0 | HHDT |
| P2.1 - Spillway excavation/subgrade | _ | _ | _ | _ |
| P2.1 - Spillway excavation/subgrade | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P2.1 - Spillway excavation/subgrade | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P2.1 - Spillway excavation/subgrade | Hauling | 0.00 | 20.0 | HHDT |
| P2.1 - Spillway excavation/subgrade | Onsite truck | 1.00 | 50.0 | HHDT |
| P3.2 - Excavate cofferdam | _ | _ | _ | _ |
| P3.2 - Excavate cofferdam | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P3.2 - Excavate cofferdam | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P3.2 - Excavate cofferdam | Hauling | 0.00 | 20.0 | HHDT |
| P3.2 - Excavate cofferdam | Onsite truck | 1.00 | 10.0 | HHDT |
| P5 - Dam notch and tie-in chute | _ | _ | _ | _ |
| P5 - Dam notch and tie-in chute | Worker | 12.0 | 14.1 | LDA,LDT1,LDT2 |
| P5 - Dam notch and tie-in chute | Vendor | 2.00 | 8.98 | HHDT,MHDT |
| P5 - Dam notch and tie-in chute | Hauling | 4.00 | 40.3 | HHDT |
| P5 - Dam notch and tie-in chute | Onsite truck | 0.00 | 0.00 | HHDT |
| P5.1 - Demolition | _ | _ | _ | _ |
| P5.1 - Demolition | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P5.1 - Demolition | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P5.1 - Demolition | Hauling | 0.00 | 20.0 | HHDT |
| P5.1 - Demolition | Onsite truck | 1.00 | 10.0 | HHDT |
| P5.2 - Excavation, Subgrade | _ | _ | _ | _ |
| P5.2 - Excavation, Subgrade | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P5.2 - Excavation, Subgrade | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P5.2 - Excavation, Subgrade | Hauling | 0.00 | 20.0 | HHDT |
| P5.2 - Excavation, Subgrade | Onsite truck | 1.00 | 10.0 | HHDT |
| | | | | |

| P5.3 - Form and Pour Concrete | _ | _ | _ | _ |
|-------------------------------|--------------|------|------|---------------|
| P5.3 - Form and Pour Concrete | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P5.3 - Form and Pour Concrete | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P5.3 - Form and Pour Concrete | Hauling | 2.00 | 0.50 | HHDT |
| P5.3 - Form and Pour Concrete | Onsite truck | 1.00 | 10.0 | HHDT |
| P5.4 - Install Footbridge | _ | _ | _ | _ |
| P5.4 - Install Footbridge | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P5.4 - Install Footbridge | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P5.4 - Install Footbridge | Hauling | 0.00 | 20.0 | HHDT |
| P5.4 - Install Footbridge | Onsite truck | 1.00 | 10.0 | HHDT |
| P6 - Plunge pool | _ | _ | _ | _ |
| P6 - Plunge pool | Worker | 12.0 | 14.1 | LDA,LDT1,LDT2 |
| P6 - Plunge pool | Vendor | 8.00 | 8.98 | HHDT,MHDT |
| P6 - Plunge pool | Hauling | 4.00 | 40.3 | HHDT |
| P6 - Plunge pool | Onsite truck | 0.00 | 0.00 | HHDT |
| P6.1 - Flow bypass | _ | _ | _ | _ |
| P6.1 - Flow bypass | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P6.1 - Flow bypass | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P6.1 - Flow bypass | Hauling | 0.00 | 20.0 | HHDT |
| P6.1 - Flow bypass | Onsite truck | 0.00 | 0.00 | HHDT |
| P6.2 - Excavation | _ | _ | _ | _ |
| P6.2 - Excavation | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P6.2 - Excavation | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P6.2 - Excavation | Hauling | 0.00 | 20.0 | HHDT |
| P6.2 - Excavation | Onsite truck | 1.00 | 50.0 | HHDT |
| P6.3 - Slope protection | _ | _ | _ | _ |
| P6.3 - Slope protection | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P6.3 - Slope protection | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| | | | | |

| P6.3 - Slope protection | Hauling | 0.00 | 20.0 | HHDT |
|---------------------------|--------------|------|------|---------------|
| P6.3 - Slope protection | Onsite truck | 1.00 | 10.0 | ннот |
| P7 - Remaining Work Scope | _ | _ | _ | _ |
| P7 - Remaining Work Scope | Worker | 20.0 | 14.1 | LDA,LDT1,LDT2 |
| P7 - Remaining Work Scope | Vendor | 6.00 | 8.98 | ннот,мнот |
| P7 - Remaining Work Scope | Hauling | 4.00 | 40.3 | HHDT |
| P7 - Remaining Work Scope | Onsite truck | 0.00 | 0.00 | HHDT |
| P7.1 - Cofferdam removal | _ | _ | _ | _ |
| P7.1 - Cofferdam removal | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P7.1 - Cofferdam removal | Vendor | 0.00 | 8.98 | ннот,мнот |
| P7.1 - Cofferdam removal | Hauling | 0.00 | 20.0 | HHDT |
| P7.1 - Cofferdam removal | Onsite truck | 0.00 | 0.00 | HHDT |
| P7.2 - Lighting | _ | _ | _ | _ |
| P7.2 - Lighting | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P7.2 - Lighting | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P7.2 - Lighting | Hauling | 0.00 | 20.0 | HHDT |
| P7.2 - Lighting | Onsite truck | 1.00 | 12.5 | HHDT |
| P7.3 - Log boom | _ | _ | _ | _ |
| P7.3 - Log boom | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P7.3 - Log boom | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P7.3 - Log boom | Hauling | 0.00 | 20.0 | HHDT |
| P7.3 - Log boom | Onsite truck | 0.00 | 0.00 | HHDT |
| P7.4 - Restoration | _ | _ | _ | _ |
| P7.4 - Restoration | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P7.4 - Restoration | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P7.4 - Restoration | Hauling | 0.00 | 20.0 | HHDT |
| P7.4 - Restoration | Onsite truck | 1.00 | 62.5 | HHDT |
| P7.5 - Demobilization | _ | _ | _ | _ |
| | | | | |

| P7.5 - Demobilization P7.5 - Demobilization P7.5 - Demobilization | Vendor Hauling Onsite truck | 0.00 | 8.98 | HHDT,MHDT |
|---|-----------------------------|------|------|---------------|
| | | 0.00 | | |
| D7.5 Demobilization | Onsite truck | | 20.0 | HHDT |
| P7.5 - Demodilization | Official track | 1.00 | 62.5 | HHDT |
| P8 - Spillway abandonment | _ | _ | _ | _ |
| P8 - Spillway abandonment | Worker | 12.0 | 14.1 | LDA,LDT1,LDT2 |
| P8 - Spillway abandonment | Vendor | 4.00 | 8.98 | HHDT,MHDT |
| P8 - Spillway abandonment | Hauling | 4.00 | 40.3 | HHDT |
| P8 - Spillway abandonment | Onsite truck | 0.00 | 0.00 | HHDT |
| P8.1 - Remove Cofferdam | _ | _ | _ | _ |
| P8.1 - Remove Cofferdam | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P8.1 - Remove Cofferdam | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P8.1 - Remove Cofferdam | Hauling | 0.00 | 20.0 | HHDT |
| P8.1 - Remove Cofferdam | Onsite truck | 1.00 | 10.0 | HHDT |
| P8.2 - Canal Side Channel | _ | _ | _ | _ |
| P8.2 - Canal Side Channel | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P8.2 - Canal Side Channel | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P8.2 - Canal Side Channel | Hauling | 0.00 | 20.0 | HHDT |
| P8.2 - Canal Side Channel | Onsite truck | 1.00 | 10.0 | HHDT |
| P8.3 - Cover Bathtub | _ | _ | _ | _ |
| P8.3 - Cover Bathtub | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P8.3 - Cover Bathtub | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P8.3 - Cover Bathtub | Hauling | 0.00 | 20.0 | HHDT |
| P8.3 - Cover Bathtub | Onsite truck | 0.00 | 0.00 | HHDT |
| P9 - Batch Plant Equip | _ | _ | _ | _ |
| P9 - Batch Plant Equip | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P9 - Batch Plant Equip | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P9 - Batch Plant Equip | Hauling | 0.00 | 20.0 | HHDT |

| P9 - Batch Plant Equip | Onsite truck | 0.00 | 0.00 | HHDT |
|------------------------|--------------|------|------|------|
| | | | | |

5.3.2. Mitigated

| Phase Name | Trip Type | One-Way Trips per Day | Miles per Trip | Vehicle Mix |
|--|--------------|-----------------------|----------------|---------------|
| P1 - Mobilization and access development | _ | _ | _ | _ |
| P1 - Mobilization and access development | Worker | 20.0 | 14.1 | LDA,LDT1,LDT2 |
| P1 - Mobilization and access development | Vendor | 10.0 | 8.98 | HHDT,MHDT |
| P1 - Mobilization and access development | Hauling | 6.00 | 40.3 | HHDT |
| P1 - Mobilization and access development | Onsite truck | 0.00 | 0.00 | HHDT |
| P1.1 - Tree removal | _ | _ | _ | _ |
| P1.1 - Tree removal | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P1.1 - Tree removal | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P1.1 - Tree removal | Hauling | 20.0 | 40.3 | HHDT |
| P1.1 - Tree removal | Onsite truck | 1.00 | 52.5 | HHDT |
| P1.2 - Mobilization | _ | _ | _ | _ |
| P1.2 - Mobilization | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P1.2 - Mobilization | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P1.2 - Mobilization | Hauling | 12.0 | 40.3 | HHDT |
| P1.2 - Mobilization | Onsite truck | 0.00 | 0.00 | HHDT |
| P1.3 - Laydown area development | _ | _ | _ | _ |
| P1.3 - Laydown area development | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P1.3 - Laydown area development | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P1.3 - Laydown area development | Hauling | 0.00 | 20.0 | HHDT |
| P1.3 - Laydown area development | Onsite truck | 1.00 | 47.5 | HHDT |
| P1.4 - Access road construction | _ | _ | _ | _ |

| P1.4 - Access road construction | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
|-------------------------------------|--------------|------|------|---------------|
| P1.4 - Access road construction | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P1.4 - Access road construction | Hauling | 0.00 | 20.0 | HHDT |
| P1.4 - Access road construction | Onsite truck | 1.00 | 60.0 | HHDT |
| P2 - Spillway chute and flip bucket | _ | _ | _ | _ |
| P2 - Spillway chute and flip bucket | Worker | 40.0 | 14.1 | LDA,LDT1,LDT2 |
| P2 - Spillway chute and flip bucket | Vendor | 8.00 | 8.98 | HHDT,MHDT |
| P2 - Spillway chute and flip bucket | Hauling | 4.00 | 40.3 | HHDT |
| P2 - Spillway chute and flip bucket | Onsite truck | 0.00 | 0.00 | HHDT |
| P4.2 - Crest form and pour concrete | _ | _ | _ | _ |
| P4.2 - Crest form and pour concrete | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P4.2 - Crest form and pour concrete | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P4.2 - Crest form and pour concrete | Hauling | 3.00 | 0.50 | HHDT |
| P4.2 - Crest form and pour concrete | Onsite truck | 1.00 | 10.0 | HHDT |
| P4.1 - Crest excavation/ subgrade | _ | _ | _ | _ |
| P4.1 - Crest excavation/ subgrade | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P4.1 - Crest excavation/ subgrade | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P4.1 - Crest excavation/ subgrade | Hauling | 0.00 | 20.0 | HHDT |
| P4.1 - Crest excavation/ subgrade | Onsite truck | 1.00 | 60.0 | HHDT |
| P4 - Crest structure | _ | _ | _ | _ |
| P4 - Crest structure | Worker | 40.0 | 14.1 | LDA,LDT1,LDT2 |
| P4 - Crest structure | Vendor | 8.00 | 8.98 | HHDT,MHDT |
| P4 - Crest structure | Hauling | 4.00 | 40.3 | HHDT |
| P4 - Crest structure | Onsite truck | 0.00 | 0.00 | HHDT |
| P3.6 - Trench Cutoff Concrete 3 | _ | _ | _ | _ |
| P3.6 - Trench Cutoff Concrete 3 | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P3.6 - Trench Cutoff Concrete 3 | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P3.6 - Trench Cutoff Concrete 3 | Hauling | 40.0 | 0.50 | HHDT |
| | | | | |

| P3.6 - Trench Cutoff Concrete 3 | Onsite truck | 1.00 | 10.0 | HHDT |
|--|--------------|------|------|---------------|
| P3.5 - Trench Cutoff Concrete 2 | _ | _ | _ | _ |
| P3.5 - Trench Cutoff Concrete 2 | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P3.5 - Trench Cutoff Concrete 2 | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P3.5 - Trench Cutoff Concrete 2 | Hauling | 40.0 | 0.50 | HHDT |
| P3.5 - Trench Cutoff Concrete 2 | Onsite truck | 1.00 | 10.0 | HHDT |
| P3.4 - Trench Cutoff Concrete 1 | _ | _ | _ | _ |
| P3.4 - Trench Cutoff Concrete 1 | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P3.4 - Trench Cutoff Concrete 1 | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P3.4 - Trench Cutoff Concrete 1 | Hauling | 40.0 | 0.50 | HHDT |
| P3.4 - Trench Cutoff Concrete 1 | Onsite truck | 1.00 | 10.0 | HHDT |
| P3.3 - Place piles, sheets, and concrete | _ | _ | _ | _ |
| P3.3 - Place piles, sheets, and concrete | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P3.3 - Place piles, sheets, and concrete | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P3.3 - Place piles, sheets, and concrete | Hauling | 0.00 | 20.0 | HHDT |
| P3.3 - Place piles, sheets, and concrete | Onsite truck | 1.00 | 10.0 | HHDT |
| P3.1 - Mass concrete | _ | _ | _ | _ |
| P3.1 - Mass concrete | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P3.1 - Mass concrete | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P3.1 - Mass concrete | Hauling | 0.00 | 20.0 | HHDT |
| P3.1 - Mass concrete | Onsite truck | 1.00 | 10.0 | HHDT |
| P3 - Cofferdam | _ | _ | _ | _ |
| P3 - Cofferdam | Worker | 12.0 | 14.1 | LDA,LDT1,LDT2 |
| P3 - Cofferdam | Vendor | 4.00 | 8.98 | HHDT,MHDT |
| P3 - Cofferdam | Hauling | 4.00 | 40.3 | HHDT |

| P3 - Cofferdam | Onsite truck | 0.00 | 0.00 | HHDT |
|--|--------------|------|------|---------------|
| P2.3 - Drains, Cleanouts, and Backfill | _ | _ | _ | _ |
| P2.3 - Drains, Cleanouts, and Backfill | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P2.3 - Drains, Cleanouts, and Backfill | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P2.3 - Drains, Cleanouts, and Backfill | Hauling | 0.00 | 20.0 | HHDT |
| P2.3 - Drains, Cleanouts, and Backfill | Onsite truck | 0.00 | 0.00 | HHDT |
| P2.2 - Spillway form and pour concrete | _ | _ | _ | _ |
| P2.2 - Spillway form and pour concrete | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P2.2 - Spillway form and pour concrete | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P2.2 - Spillway form and pour concrete | Hauling | 3.00 | 0.50 | HHDT |
| P2.2 - Spillway form and pour concrete | Onsite truck | 1.00 | 10.0 | HHDT |
| P2.1 - Spillway excavation/subgrade | _ | _ | _ | _ |
| P2.1 - Spillway excavation/subgrade | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P2.1 - Spillway excavation/subgrade | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P2.1 - Spillway excavation/subgrade | Hauling | 0.00 | 20.0 | HHDT |
| P2.1 - Spillway excavation/subgrade | Onsite truck | 1.00 | 50.0 | HHDT |
| P3.2 - Excavate cofferdam | _ | _ | _ | _ |
| P3.2 - Excavate cofferdam | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P3.2 - Excavate cofferdam | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P3.2 - Excavate cofferdam | Hauling | 0.00 | 20.0 | HHDT |
| P3.2 - Excavate cofferdam | Onsite truck | 1.00 | 10.0 | HHDT |
| P5 - Dam notch and tie-in chute | _ | _ | _ | _ |
| P5 - Dam notch and tie-in chute | Worker | 12.0 | 14.1 | LDA,LDT1,LDT2 |
| P5 - Dam notch and tie-in chute | Vendor | 2.00 | 8.98 | HHDT,MHDT |
| P5 - Dam notch and tie-in chute | Hauling | 4.00 | 40.3 | HHDT |

| P5 - Dam notch and tie-in chute | Onsite truck | 0.00 | 0.00 | HHDT |
|---------------------------------|--------------|------|------|---------------|
| P5.1 - Demolition | _ | _ | _ | _ |
| P5.1 - Demolition | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P5.1 - Demolition | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P5.1 - Demolition | Hauling | 0.00 | 20.0 | HHDT |
| P5.1 - Demolition | Onsite truck | 1.00 | 10.0 | HHDT |
| P5.2 - Excavation, Subgrade | _ | _ | _ | _ |
| P5.2 - Excavation, Subgrade | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P5.2 - Excavation, Subgrade | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P5.2 - Excavation, Subgrade | Hauling | 0.00 | 20.0 | HHDT |
| P5.2 - Excavation, Subgrade | Onsite truck | 1.00 | 10.0 | HHDT |
| P5.3 - Form and Pour Concrete | _ | _ | _ | _ |
| P5.3 - Form and Pour Concrete | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P5.3 - Form and Pour Concrete | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P5.3 - Form and Pour Concrete | Hauling | 2.00 | 0.50 | HHDT |
| P5.3 - Form and Pour Concrete | Onsite truck | 1.00 | 10.0 | HHDT |
| P5.4 - Install Footbridge | _ | _ | _ | _ |
| P5.4 - Install Footbridge | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P5.4 - Install Footbridge | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P5.4 - Install Footbridge | Hauling | 0.00 | 20.0 | HHDT |
| P5.4 - Install Footbridge | Onsite truck | 1.00 | 10.0 | HHDT |
| P6 - Plunge pool | _ | _ | _ | _ |
| P6 - Plunge pool | Worker | 12.0 | 14.1 | LDA,LDT1,LDT2 |
| P6 - Plunge pool | Vendor | 8.00 | 8.98 | HHDT,MHDT |
| P6 - Plunge pool | Hauling | 4.00 | 40.3 | HHDT |
| P6 - Plunge pool | Onsite truck | 0.00 | 0.00 | HHDT |
| P6.1 - Flow bypass | _ | _ | _ | _ |
| P6.1 - Flow bypass | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |

| P6.1 - Flow bypass | Vendor | 0.00 | 8.98 | HHDT,MHDT |
|---------------------------|--------------|------|------|---------------|
| P6.1 - Flow bypass | Hauling | 0.00 | 20.0 | HHDT |
| P6.1 - Flow bypass | Onsite truck | 0.00 | 0.00 | HHDT |
| P6.2 - Excavation | _ | _ | _ | _ |
| P6.2 - Excavation | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P6.2 - Excavation | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P6.2 - Excavation | Hauling | 0.00 | 20.0 | HHDT |
| P6.2 - Excavation | Onsite truck | 1.00 | 50.0 | HHDT |
| P6.3 - Slope protection | _ | _ | _ | _ |
| P6.3 - Slope protection | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P6.3 - Slope protection | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P6.3 - Slope protection | Hauling | 0.00 | 20.0 | HHDT |
| P6.3 - Slope protection | Onsite truck | 1.00 | 10.0 | HHDT |
| P7 - Remaining Work Scope | _ | _ | _ | _ |
| P7 - Remaining Work Scope | Worker | 20.0 | 14.1 | LDA,LDT1,LDT2 |
| P7 - Remaining Work Scope | Vendor | 6.00 | 8.98 | HHDT,MHDT |
| P7 - Remaining Work Scope | Hauling | 4.00 | 40.3 | HHDT |
| P7 - Remaining Work Scope | Onsite truck | 0.00 | 0.00 | HHDT |
| P7.1 - Cofferdam removal | _ | _ | _ | _ |
| P7.1 - Cofferdam removal | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P7.1 - Cofferdam removal | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P7.1 - Cofferdam removal | Hauling | 0.00 | 20.0 | HHDT |
| P7.1 - Cofferdam removal | Onsite truck | 0.00 | 0.00 | HHDT |
| P7.2 - Lighting | _ | _ | _ | _ |
| P7.2 - Lighting | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P7.2 - Lighting | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P7.2 - Lighting | Hauling | 0.00 | 20.0 | HHDT |
| P7.2 - Lighting | Onsite truck | 1.00 | 12.5 | HHDT |

| P7.3 - Log boom | _ | _ | _ | _ |
|---------------------------|--------------|------|------|---------------|
| P7.3 - Log boom | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P7.3 - Log boom | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P7.3 - Log boom | Hauling | 0.00 | 20.0 | HHDT |
| P7.3 - Log boom | Onsite truck | 0.00 | 0.00 | HHDT |
| P7.4 - Restoration | _ | _ | _ | _ |
| P7.4 - Restoration | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P7.4 - Restoration | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P7.4 - Restoration | Hauling | 0.00 | 20.0 | HHDT |
| P7.4 - Restoration | Onsite truck | 1.00 | 62.5 | HHDT |
| P7.5 - Demobilization | _ | _ | _ | _ |
| P7.5 - Demobilization | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P7.5 - Demobilization | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P7.5 - Demobilization | Hauling | 0.00 | 20.0 | HHDT |
| P7.5 - Demobilization | Onsite truck | 1.00 | 62.5 | HHDT |
| P8 - Spillway abandonment | _ | _ | _ | _ |
| P8 - Spillway abandonment | Worker | 12.0 | 14.1 | LDA,LDT1,LDT2 |
| P8 - Spillway abandonment | Vendor | 4.00 | 8.98 | HHDT,MHDT |
| P8 - Spillway abandonment | Hauling | 4.00 | 40.3 | HHDT |
| P8 - Spillway abandonment | Onsite truck | 0.00 | 0.00 | HHDT |
| P8.1 - Remove Cofferdam | _ | _ | _ | _ |
| P8.1 - Remove Cofferdam | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P8.1 - Remove Cofferdam | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P8.1 - Remove Cofferdam | Hauling | 0.00 | 20.0 | ннот |
| P8.1 - Remove Cofferdam | Onsite truck | 1.00 | 10.0 | HHDT |
| P8.2 - Canal Side Channel | _ | _ | _ | _ |
| P8.2 - Canal Side Channel | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P8.2 - Canal Side Channel | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| | | | | |

| P8.2 - Canal Side Channel | Hauling | 0.00 | 20.0 | HHDT |
|---------------------------|--------------|------|------|---------------|
| P8.2 - Canal Side Channel | Onsite truck | 1.00 | 10.0 | HHDT |
| P8.3 - Cover Bathtub | _ | _ | _ | _ |
| P8.3 - Cover Bathtub | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P8.3 - Cover Bathtub | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P8.3 - Cover Bathtub | Hauling | 0.00 | 20.0 | HHDT |
| P8.3 - Cover Bathtub | Onsite truck | 0.00 | 0.00 | HHDT |
| P9 - Batch Plant Equip | _ | _ | _ | _ |
| P9 - Batch Plant Equip | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P9 - Batch Plant Equip | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P9 - Batch Plant Equip | Hauling | 0.00 | 20.0 | HHDT |
| P9 - Batch Plant Equip | Onsite truck | 0.00 | 0.00 | HHDT |

5.4. Vehicles

5.4.1. Construction Vehicle Control Strategies

Non-applicable. No control strategies activated by user.

5.5. Architectural Coatings

| Phase Name | Residential Interior Area Coated (sq ft) | Residential Exterior Area Coated (sq ft) | Non-Residential Interior Area Coated (sq ft) | Non-Residential Exterior Area Coated (sq ft) | Parking Area Coated (sq ft) |
|-------------------------------------|---|---|---|---|-----------------------------|
| P2 - Spillway chute and flip bucket | 0.00 | 0.00 | 0.00 | 0.00 | _ |

5.6. Dust Mitigation

5.6.1. Construction Earthmoving Activities

| Phase Name | Material Imported (Cubic Yards) | Material Exported (Cubic Yards) | Acres Graded (acres) | Material Demolished (sq. ft.) | Acres Paved (acres) |
|----------------|------------------------------------|------------------------------------|----------------------|-------------------------------|---------------------|
| P3 - Cofferdam | _ | _ | 0.00 | 0.00 | _ |

| P2 - Spillway chute and flip bucket | 20,000 | 0.00 | 2.00 | 0.00 | _ |
|--|--------|------|------|------|---|
| P1.4 - Access road construction | 16,000 | 0.00 | 3.00 | 0.00 | _ |
| P1 - Mobilization and access development | 5,000 | 0.00 | 10.0 | 0.00 | _ |
| P5 - Dam notch and tie-in chute | _ | _ | 0.00 | 0.00 | _ |
| P6 - Plunge pool | 9,000 | 0.00 | 0.20 | 0.00 | _ |

5.6.2. Construction Earthmoving Control Strategies

Non-applicable. No control strategies activated by user.

5.7. Construction Paving

| Land Use | Area Paved (acres) | % Asphalt |
|-------------------------|--------------------|-----------|
| User Defined Industrial | 0.00 | 0% |

5.8. Construction Electricity Consumption and Emissions Factors

kWh per Year and Emission Factor (lb/MWh)

| Year | kWh per Year | CO2 | CH4 | N2O |
|------|--------------|-----|------|---------|
| 2025 | 5,750 | 204 | 0.03 | < 0.005 |
| 2026 | 19,750 | 204 | 0.03 | < 0.005 |
| 2027 | 2,500 | 204 | 0.03 | < 0.005 |

8. User Changes to Default Data

| Screen | Justification |
|-----------------------------------|--|
| Land Use | n/a - Dam upgrades |
| Construction: Construction Phases | All modeled as grading - no defaults used. |
| Construction: Off-Road Equipment | From PG&E |

| Construction: Dust From Material Movement | Per PG&E |
|---|--|
| Construction: Demolition | Per PG&E |
| Construction: Trips and VMT | Per PG&E onsite truck mileage is total for all vehicles (light-duty trucks modeled as heavy). Hauling miles for AAD. Annual trips. |
| Construction: Electricity | Trailer and batch plant |
| Construction: Off-Road Equipment EF | Other Material Equipment = Chainsaw (EFs from User Guide Table G-26) |

Tiger Creek Const Custom Report

Table of Contents

- 1. Basic Project Information
 - 1.1. Basic Project Information
 - 1.2. Land Use Types
 - 1.3. User-Selected Emission Reduction Measures by Emissions Sector
- 2. Emissions Summary
 - 2.1. Construction Emissions Compared Against Thresholds
 - 2.2. Construction Emissions by Year, Unmitigated
 - 2.3. Construction Emissions by Year, Mitigated
- 3. Construction Emissions Details
 - 3.1. P4.2 Crest form and pour concrete (2026) Unmitigated
 - 3.2. P4.2 Crest form and pour concrete (2026) Mitigated
 - 3.3. P4.1 Crest excavation/ subgrade (2026) Unmitigated
 - 3.4. P4.1 Crest excavation/ subgrade (2026) Mitigated
 - 3.5. P4 Crest structure (2026) Unmitigated
 - 3.6. P4 Crest structure (2026) Mitigated

- 3.7. P3.6 Trench Cutoff Concrete 3 (2026) Unmitigated
- 3.8. P3.6 Trench Cutoff Concrete 3 (2026) Mitigated
- 3.9. P3.5 Trench Cutoff Concrete 2 (2026) Unmitigated
- 3.10. P3.5 Trench Cutoff Concrete 2 (2026) Mitigated
- 3.11. P3.4 Trench Cutoff Concrete 1 (2026) Unmitigated
- 3.12. P3.4 Trench Cutoff Concrete 1 (2026) Mitigated
- 3.13. P3.3 Place piles, sheets, and concrete (2026) Unmitigated
- 3.14. P3.3 Place piles, sheets, and concrete (2026) Mitigated
- 3.15. P3.1 Mass concrete (2025) Unmitigated
- 3.16. P3.1 Mass concrete (2025) Mitigated
- 3.17. P3 Cofferdam (2025) Unmitigated
- 3.18. P3 Cofferdam (2025) Mitigated
- 3.19. P3 Cofferdam (2026) Unmitigated
- 3.20. P3 Cofferdam (2026) Mitigated
- 3.21. P2.3 Drains, Cleanouts, and Backfill (2026) Unmitigated
- 3.22. P2.3 Drains, Cleanouts, and Backfill (2026) Mitigated
- 3.23. P2.2 Spillway form and pour concrete (2025) Unmitigated
- 3.24. P2.2 Spillway form and pour concrete (2025) Mitigated

- 3.25. P2.2 Spillway form and pour concrete (2026) Unmitigated
- 3.26. P2.2 Spillway form and pour concrete (2026) Mitigated
- 3.27. P2.1 Spillway excavation/subgrade (2025) Unmitigated
- 3.28. P2.1 Spillway excavation/subgrade (2025) Mitigated
- 3.29. P2 Spillway chute and flip bucket (2025) Unmitigated
- 3.30. P2 Spillway chute and flip bucket (2025) Mitigated
- 3.31. P2 Spillway chute and flip bucket (2026) Unmitigated
- 3.32. P2 Spillway chute and flip bucket (2026) Mitigated
- 3.33. P1.4 Access road construction (2025) Unmitigated
- 3.34. P1.4 Access road construction (2025) Mitigated
- 3.35. P3.2 Excavate cofferdam (2026) Unmitigated
- 3.36. P3.2 Excavate cofferdam (2026) Mitigated
- 3.37. P1.3 Laydown area development (2025) Unmitigated
- 3.38. P1.3 Laydown area development (2025) Mitigated
- 3.39. P1.2 Mobilization (2025) Unmitigated
- 3.40. P1.2 Mobilization (2025) Mitigated
- 3.41. P1.1 Tree removal (2025) Unmitigated
- 3.42. P1.1 Tree removal (2025) Mitigated

- 3.43. P1 Mobilization and access development (2025) Unmitigated
- 3.44. P1 Mobilization and access development (2025) Mitigated
- 3.45. P5 Dam notch and tie-in chute (2026) Unmitigated
- 3.46. P5 Dam notch and tie-in chute (2026) Mitigated
- 3.47. P5 Dam notch and tie-in chute (2027) Unmitigated
- 3.48. P5 Dam notch and tie-in chute (2027) Mitigated
- 3.49. P5.1 Demolition (2026) Unmitigated
- 3.50. P5.1 Demolition (2026) Mitigated
- 3.51. P5.2 Excavation, Subgrade (2026) Unmitigated
- 3.52. P5.2 Excavation, Subgrade (2026) Mitigated
- 3.53. P5.3 Form and Pour Concrete (2026) Unmitigated
- 3.54. P5.3 Form and Pour Concrete (2026) Mitigated
- 3.55. P5.4 Install Footbridge (2026) Unmitigated
- 3.56. P5.4 Install Footbridge (2026) Mitigated
- 3.57. P5.4 Install Footbridge (2027) Unmitigated
- 3.58. P5.4 Install Footbridge (2027) Mitigated
- 3.59. P6 Plunge pool (2026) Unmitigated
- 3.60. P6 Plunge pool (2026) Mitigated

- 3.61. P6.1 Flow bypass (2026) Unmitigated
- 3.62. P6.1 Flow bypass (2026) Mitigated
- 3.63. P6.2 Excavation (2026) Unmitigated
- 3.64. P6.2 Excavation (2026) Mitigated
- 3.65. P6.3 Slope protection (2026) Unmitigated
- 3.66. P6.3 Slope protection (2026) Mitigated
- 3.67. P7 Remaining Work Scope (2026) Unmitigated
- 3.68. P7 Remaining Work Scope (2026) Mitigated
- 3.69. P7 Remaining Work Scope (2027) Unmitigated
- 3.70. P7 Remaining Work Scope (2027) Mitigated
- 3.71. P7.1 Cofferdam removal (2027) Unmitigated
- 3.72. P7.1 Cofferdam removal (2027) Mitigated
- 3.73. P7.2 Lighting (2027) Unmitigated
- 3.74. P7.2 Lighting (2027) Mitigated
- 3.75. P7.3 Log boom (2026) Unmitigated
- 3.76. P7.3 Log boom (2026) Mitigated
- 3.77. P7.3 Log boom (2027) Unmitigated
- 3.78. P7.3 Log boom (2027) Mitigated

- 3.79. P7.4 Restoration (2027) Unmitigated
- 3.80. P7.4 Restoration (2027) Mitigated
- 3.81. P7.5 Demobilization (2027) Unmitigated
- 3.82. P7.5 Demobilization (2027) Mitigated
- 3.83. P8 Spillway abandonment (2027) Unmitigated
- 3.84. P8 Spillway abandonment (2027) Mitigated
- 3.85. P8.1 Remove Cofferdam (2027) Unmitigated
- 3.86. P8.1 Remove Cofferdam (2027) Mitigated
- 3.87. P8.2 Canal Side Channel (2027) Unmitigated
- 3.88. P8.2 Canal Side Channel (2027) Mitigated
- 3.89. P8.3 Cover Bathtub (2027) Unmitigated
- 3.90. P8.3 Cover Bathtub (2027) Mitigated
- 3.91. P9 Batch Plant Equip (2025) Unmitigated
- 3.92. P9 Batch Plant Equip (2025) Mitigated
- 3.93. P9 Batch Plant Equip (2026) Unmitigated
- 3.94. P9 Batch Plant Equip (2026) Mitigated
- 4. Operations Emissions Details
 - 4.10. Soil Carbon Accumulation By Vegetation Type

- 4.10.1. Soil Carbon Accumulation By Vegetation Type Unmitigated
- 4.10.2. Above and Belowground Carbon Accumulation by Land Use Type Unmitigated
- 4.10.3. Avoided and Sequestered Emissions by Species Unmitigated
- 4.10.4. Soil Carbon Accumulation By Vegetation Type Mitigated
- 4.10.5. Above and Belowground Carbon Accumulation by Land Use Type Mitigated
- 4.10.6. Avoided and Sequestered Emissions by Species Mitigated
- 5. Activity Data
 - 5.1. Construction Schedule
 - 5.2. Off-Road Equipment
 - 5.2.1. Unmitigated
 - 5.3. Construction Vehicles
 - 5.3.1. Unmitigated
 - 5.3.2. Mitigated
 - 5.4. Vehicles
 - 5.4.1. Construction Vehicle Control Strategies
 - 5.5. Architectural Coatings
 - 5.6. Dust Mitigation
 - 5.6.1. Construction Earthmoving Activities

- 5.6.2. Construction Earthmoving Control Strategies
- 5.7. Construction Paving
- 5.8. Construction Electricity Consumption and Emissions Factors
- 8. User Changes to Default Data

1. Basic Project Information

1.1. Basic Project Information

| Data Field | Value |
|-----------------------------|--------------------------------------|
| Project Name | Tiger Creek Const |
| Construction Start Date | 7/8/2024 |
| Lead Agency | _ |
| Land Use Scale | Project/site |
| Analysis Level for Defaults | County |
| Windspeed (m/s) | 2.70 |
| Precipitation (days) | 38.2 |
| Location | 38.477123683429426, -120.45229072675 |
| County | Amador |
| City | Unincorporated |
| Air District | Amador County APCD |
| Air Basin | Mountain Counties |
| TAZ | 3002 |
| EDFZ | 4 |
| Electric Utility | Pacific Gas & Electric Company |
| Gas Utility | Pacific Gas & Electric |
| App Version | 2022.1.1.26 |

1.2. Land Use Types

| Land Use Subtype | Size | Unit | Lot Acreage | Building Area (sq ft) | Landscape Area (sq ft) | Special Landscape Area (sq ft) | Population | Description |
|-------------------------|------|-------------------|-------------|-----------------------|---------------------------|-----------------------------------|------------|-------------|
| User Defined Industrial | 1.00 | User Defined Unit | 1.00 | 0.00 | 1.00 | 1.00 | _ | _ |

1.3. User-Selected Emission Reduction Measures by Emissions Sector

| Sector | # | Measure Title |
|--------------|--------|---------------------------------------|
| Construction | C-10-A | Water Exposed Surfaces |
| Construction | C-10-C | Water Unpaved Construction Roads |
| Construction | C-11 | Limit Vehicle Speeds on Unpaved Roads |

2. Emissions Summary

2.1. Construction Emissions Compared Against Thresholds

| Ontona | i Ollatai | 110 (15) 40 | ., | iy, toinyi | i ioi aiiii | adij dila | 01100 | 1.0, 0.0. | or adiry, i | | | 7 | _ | | | | |
|---------------------------|-----------|-------------|------|------------|-------------|-----------|-------|-----------|-------------|--------|------|--------|--------|------|------|------|--------|
| Un/Mit. | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Unmit. | 94.7 | 52.6 | 270 | 0.17 | 1.86 | 170 | 171 | 1.71 | 19.8 | 21.5 | _ | 18,938 | 18,938 | 0.67 | 1.11 | 12.3 | 19,130 |
| Mit. | 94.7 | 52.6 | 270 | 0.17 | 1.86 | 44.5 | 46.4 | 1.71 | 5.68 | 7.39 | _ | 18,938 | 18,938 | 0.67 | 1.11 | 12.3 | 19,130 |
| % Reduced | _ | _ | _ | _ | _ | 74% | 73% | _ | 71% | 66% | - | _ | _ | - | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Unmit. | 6.93 | 53.0 | 52.8 | 0.17 | 1.86 | 170 | 171 | 1.71 | 19.8 | 21.5 | _ | 18,864 | 18,864 | 0.67 | 0.67 | 0.25 | 19,056 |
| Mit. | 6.93 | 53.0 | 52.8 | 0.17 | 1.86 | 44.5 | 46.4 | 1.71 | 5.68 | 7.39 | _ | 18,864 | 18,864 | 0.67 | 0.67 | 0.25 | 19,056 |
| % Reduced | _ | _ | _ | _ | _ | 74% | 73% | _ | 71% | 66% | _ | _ | _ | _ | _ | _ | _ |
| Average Daily (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Unmit. | 10.5 | 13.2 | 36.7 | 0.04 | 0.53 | 37.7 | 38.3 | 0.47 | 4.38 | 4.86 | _ | 4,728 | 4,728 | 0.15 | 0.23 | 1.60 | 4,802 |
| Mit. | 10.5 | 13.2 | 36.7 | 0.04 | 0.53 | 10.0 | 10.6 | 0.47 | 1.28 | 1.76 | _ | 4,728 | 4,728 | 0.15 | 0.23 | 1.60 | 4,802 |

| % Reduced | _ | _ | _ | _ | _ | 73% | 72% | _ | 71% | 64% | _ | _ | _ | _ | _ | _ | _ |
|-----------------|------|------|------|------|------|------|------|------|------|------|---|-----|-----|------|------|------|-----|
| Annual (Max) | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | | | _ | _ | | _ |
| Unmit. | 1.91 | 2.41 | 6.70 | 0.01 | 0.10 | 6.88 | 6.98 | 0.09 | 0.80 | 0.89 | _ | 783 | 783 | 0.02 | 0.04 | 0.26 | 795 |
| Mit. | 1.91 | 2.41 | 6.70 | 0.01 | 0.10 | 1.83 | 1.93 | 0.09 | 0.23 | 0.32 | _ | 783 | 783 | 0.02 | 0.04 | 0.26 | 795 |
| % Reduced | _ | _ | | _ | _ | 73% | 72% | _ | 71% | 64% | _ | _ | _ | _ | _ | _ | _ |

2.2. Construction Emissions by Year, Unmitigated

| | | | | <u> </u> | | | _ | ` | | | | <i>'</i> | _ | _ | | _ | |
|----------------------------|------|------|------|----------|-------|-------|-------|--------|--------|--------|------|----------|--------|------|------|------|--------|
| Year | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Daily - Summer (Max) | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| 2025 | 94.7 | 52.6 | 270 | 0.17 | 1.86 | 170 | 171 | 1.71 | 19.8 | 21.5 | _ | 18,938 | 18,938 | 0.67 | 1.11 | 12.3 | 19,130 |
| 2026 | 4.35 | 31.6 | 36.9 | 0.11 | 1.05 | 104 | 105 | 0.97 | 10.6 | 11.6 | _ | 11,996 | 11,996 | 0.41 | 0.44 | 7.20 | 12,144 |
| 2027 | 0.90 | 8.64 | 8.44 | 0.03 | 0.31 | 29.7 | 30.0 | 0.28 | 3.02 | 3.30 | _ | 2,976 | 2,976 | 0.09 | 0.15 | 1.80 | 3,025 |
| Daily - Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| 2025 | 6.93 | 53.0 | 52.8 | 0.17 | 1.86 | 170 | 171 | 1.71 | 19.8 | 21.5 | _ | 18,864 | 18,864 | 0.67 | 0.67 | 0.25 | 19,056 |
| 2026 | 1.72 | 16.8 | 16.3 | 0.05 | 0.48 | 45.1 | 45.6 | 0.44 | 4.65 | 5.09 | _ | 5,131 | 5,131 | 0.14 | 0.35 | 0.14 | 5,240 |
| 2027 | 1.29 | 13.3 | 13.8 | 0.04 | 0.39 | 126 | 126 | 0.36 | 12.7 | 12.9 | _ | 4,619 | 4,619 | 0.12 | 0.32 | 0.11 | 4,716 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| 2025 | 10.5 | 13.2 | 36.7 | 0.04 | 0.53 | 37.7 | 38.3 | 0.47 | 4.38 | 4.86 | _ | 4,731 | 4,731 | 0.15 | 0.23 | 1.32 | 4,806 |
| 2026 | 1.21 | 10.3 | 10.7 | 0.03 | 0.30 | 24.0 | 24.3 | 0.28 | 2.49 | 2.77 | _ | 3,634 | 3,634 | 0.11 | 0.22 | 1.60 | 3,704 |
| 2027 | 0.12 | 1.24 | 1.27 | < 0.005 | 0.03 | 8.69 | 8.72 | 0.03 | 0.88 | 0.91 | _ | 466 | 466 | 0.01 | 0.04 | 0.21 | 478 |
| Annual | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| 2025 | 1.91 | 2.41 | 6.70 | 0.01 | 0.10 | 6.88 | 6.98 | 0.09 | 0.80 | 0.89 | _ | 783 | 783 | 0.02 | 0.04 | 0.22 | 796 |

| 2026 | 0.22 | 1.88 | 1.95 | 0.01 | 0.05 | 4.39 | 4.44 | 0.05 | 0.45 | 0.51 | _ | 602 | 602 | 0.02 | 0.04 | 0.26 | 613 |
|------|------|------|------|---------|------|------|------|------|------|------|---|------|------|---------|------|------|------|
| 2027 | 0.02 | 0.23 | 0.23 | < 0.005 | 0.01 | 1.59 | 1.59 | 0.01 | 0.16 | 0.17 | _ | 77.2 | 77.2 | < 0.005 | 0.01 | 0.04 | 79.1 |

2.3. Construction Emissions by Year, Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

| Year | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------------------------|------|------|------|---------|-------|-------|-------|--------|--------|--------|------|--------|--------|---------|------|------|--------|
| Daily - Summer (Max) | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| 2025 | 94.7 | 52.6 | 270 | 0.17 | 1.86 | 44.5 | 46.4 | 1.71 | 5.68 | 7.39 | _ | 18,938 | 18,938 | 0.67 | 1.11 | 12.3 | 19,130 |
| 2026 | 4.35 | 31.6 | 36.9 | 0.11 | 1.05 | 27.2 | 28.3 | 0.97 | 2.90 | 3.87 | _ | 11,996 | 11,996 | 0.41 | 0.44 | 7.20 | 12,144 |
| 2027 | 0.90 | 8.64 | 8.44 | 0.03 | 0.31 | 7.72 | 8.03 | 0.28 | 0.82 | 1.10 | _ | 2,976 | 2,976 | 0.09 | 0.15 | 1.80 | 3,025 |
| Daily - Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| 2025 | 6.93 | 53.0 | 52.8 | 0.17 | 1.86 | 44.5 | 46.4 | 1.71 | 5.68 | 7.39 | _ | 18,864 | 18,864 | 0.67 | 0.67 | 0.25 | 19,056 |
| 2026 | 1.72 | 16.8 | 16.3 | 0.05 | 0.48 | 12.1 | 12.6 | 0.44 | 1.35 | 1.79 | _ | 5,131 | 5,131 | 0.14 | 0.35 | 0.14 | 5,240 |
| 2027 | 1.29 | 13.3 | 13.8 | 0.04 | 0.39 | 32.2 | 32.5 | 0.36 | 3.33 | 3.59 | _ | 4,619 | 4,619 | 0.12 | 0.32 | 0.11 | 4,716 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| 2025 | 10.5 | 13.2 | 36.7 | 0.04 | 0.53 | 10.0 | 10.6 | 0.47 | 1.28 | 1.76 | _ | 4,731 | 4,731 | 0.15 | 0.23 | 1.32 | 4,806 |
| 2026 | 1.21 | 10.3 | 10.7 | 0.03 | 0.30 | 6.52 | 6.82 | 0.28 | 0.75 | 1.02 | _ | 3,634 | 3,634 | 0.11 | 0.22 | 1.60 | 3,704 |
| 2027 | 0.12 | 1.24 | 1.27 | < 0.005 | 0.03 | 2.25 | 2.29 | 0.03 | 0.24 | 0.27 | _ | 466 | 466 | 0.01 | 0.04 | 0.21 | 478 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| 2025 | 1.91 | 2.41 | 6.70 | 0.01 | 0.10 | 1.83 | 1.93 | 0.09 | 0.23 | 0.32 | _ | 783 | 783 | 0.02 | 0.04 | 0.22 | 796 |
| 2026 | 0.22 | 1.88 | 1.95 | 0.01 | 0.05 | 1.19 | 1.25 | 0.05 | 0.14 | 0.19 | _ | 602 | 602 | 0.02 | 0.04 | 0.26 | 613 |
| 2027 | 0.02 | 0.23 | 0.23 | < 0.005 | 0.01 | 0.41 | 0.42 | 0.01 | 0.04 | 0.05 | _ | 77.2 | 77.2 | < 0.005 | 0.01 | 0.04 | 79.1 |

3. Construction Emissions Details

3.1. P4.2 - Crest form and pour concrete (2026) - Unmitigated

| | ROG | NOx | co | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|------|---------|---------|---------|---------|---------|----------|----------|----------|------|-------|-------|---------|---------|---------|-------|
| | | NUX | CO | 302 | PIVITUE | PIVITUD | PIVITUT | PIVIZ.5E | PIVIZ.5D | PIVIZ.51 | BCU2 | NBCU2 | CO21 | СП4 | INZU | K | COZe |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 5.20 | 5.11 | 0.01 | 0.20 | _ | 0.20 | 0.18 | _ | 0.18 | _ | 1,188 | 1,188 | 0.05 | 0.01 | _ | 1,192 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | 0.06 | 43.1 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 5.20 | 5.11 | 0.01 | 0.20 | _ | 0.20 | 0.18 | _ | 0.18 | _ | 1,188 | 1,188 | 0.05 | 0.01 | _ | 1,192 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 1.81 | 1.78 | < 0.005 | 0.07 | _ | 0.07 | 0.06 | _ | 0.06 | _ | 413 | 413 | 0.02 | < 0.005 | _ | 415 |
| Onsite truck | < 0.005 | 0.03 | < 0.005 | < 0.005 | < 0.005 | 4.59 | 4.59 | < 0.005 | 0.46 | 0.46 | _ | 14.3 | 14.3 | < 0.005 | < 0.005 | 0.01 | 15.0 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.33 | 0.32 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | - | 0.01 | - | 68.4 | 68.4 | < 0.005 | < 0.005 | _ | 68.7 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.84 | 0.84 | < 0.005 | 0.08 | 0.08 | _ | 2.37 | 2.37 | < 0.005 | < 0.005 | < 0.005 | 2.48 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | - | _ | _ | _ | - | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|---------|------|------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.02 | 0.60 | 0.20 | < 0.005 | < 0.005 | 0.01 | 0.02 | < 0.005 | < 0.005 | 0.01 | _ | 101 | 101 | < 0.005 | 0.02 | 0.09 | 106 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.02 | 0.61 | 0.22 | < 0.005 | < 0.005 | 0.01 | 0.02 | < 0.005 | < 0.005 | 0.01 | _ | 101 | 101 | < 0.005 | 0.02 | < 0.005 | 105 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.21 | 0.07 | < 0.005 | < 0.005 | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 35.1 | 35.1 | < 0.005 | 0.01 | 0.01 | 36.8 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.04 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 5.82 | 5.82 | < 0.005 | < 0.005 | < 0.005 | 6.09 |

3.2. P4.2 - Crest form and pour concrete (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|------|------|---------|---------|-------|-------|---------|--------|--------|------|-------|-------|---------|------|------|-------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 5.20 | 5.11 | 0.01 | 0.20 | _ | 0.20 | 0.18 | _ | 0.18 | _ | 1,188 | 1,188 | 0.05 | 0.01 | _ | 1,192 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | 0.06 | 43.1 |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|------|---------|---------|---------|------|------|---------|---------|------|---|-------|-------|---------|---------|---------|-------|
| Off-Road Equipment | | 5.20 | 5.11 | 0.01 | 0.20 | _ | 0.20 | 0.18 | _ | 0.18 | _ | 1,188 | 1,188 | 0.05 | 0.01 | _ | 1,192 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | - | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | - | _ | - | _ | - |
| Off-Road Equipment | | 1.81 | 1.78 | < 0.005 | 0.07 | _ | 0.07 | 0.06 | _ | 0.06 | - | 413 | 413 | 0.02 | < 0.005 | - | 415 |
| Onsite truck | < 0.005 | 0.03 | < 0.005 | < 0.005 | < 0.005 | 1.16 | 1.16 | < 0.005 | 0.12 | 0.12 | _ | 14.3 | 14.3 | < 0.005 | < 0.005 | 0.01 | 15.0 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipment | | 0.33 | 0.32 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 68.4 | 68.4 | < 0.005 | < 0.005 | _ | 68.7 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.21 | 0.21 | < 0.005 | 0.02 | 0.02 | - | 2.37 | 2.37 | < 0.005 | < 0.005 | < 0.005 | 2.48 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.02 | 0.60 | 0.20 | < 0.005 | < 0.005 | 0.01 | 0.02 | < 0.005 | < 0.005 | 0.01 | _ | 101 | 101 | < 0.005 | 0.02 | 0.09 | 106 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.02 | 0.61 | 0.22 | < 0.005 | < 0.005 | 0.01 | 0.02 | < 0.005 | < 0.005 | 0.01 | _ | 101 | 101 | < 0.005 | 0.02 | < 0.005 | 105 |
| Average Daily | _ | - | - | _ | - | - | _ | _ | _ | _ | - | - | _ | _ | - | - | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|---------|------|------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Hauling | 0.01 | 0.21 | 0.07 | < 0.005 | < 0.005 | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 35.1 | 35.1 | < 0.005 | 0.01 | 0.01 | 36.8 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.04 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 5.82 | 5.82 | < 0.005 | < 0.005 | < 0.005 | 6.09 |

3.3. P4.1 - Crest excavation/ subgrade (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|------|----------|----------|---------|-------|-------|----------|--------|--------|------|-------|-------|----------|---------|---------|-------|
| Onsite | _ | _ | <u> </u> | <u> </u> | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 21.5 | 23.1 | 0.07 | 0.82 | _ | 0.82 | 0.75 | _ | 0.75 | _ | 7,779 | 7,779 | 0.32 | 0.06 | _ | 7,806 |
| Onsite truck | 0.01 | 0.44 | 0.03 | < 0.005 | < 0.005 | 88.3 | 88.3 | < 0.005 | 8.82 | 8.82 | _ | 240 | 240 | < 0.005 | 0.04 | 0.38 | 251 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 2.00 | 2.15 | 0.01 | 0.08 | _ | 0.08 | 0.07 | _ | 0.07 | _ | 725 | 725 | 0.03 | 0.01 | _ | 727 |
| Onsite truck | < 0.005 | 0.04 | < 0.005 | < 0.005 | < 0.005 | 7.37 | 7.37 | < 0.005 | 0.74 | 0.74 | _ | 22.3 | 22.3 | < 0.005 | < 0.005 | 0.02 | 23.4 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.37 | 0.39 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 120 | 120 | < 0.005 | < 0.005 | _ | 120 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 1.34 | 1.34 | < 0.005 | 0.13 | 0.13 | _ | 3.70 | 3.70 | < 0.005 | < 0.005 | < 0.005 | 3.87 |

| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|----------|---|------|------|------|------|------|------|
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.4. P4.1 - Crest excavation/ subgrade (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|---------|---------|-------|-------|---------|--------|--------|------|-------|-------|---------|------|------|-------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 21.5 | 23.1 | 0.07 | 0.82 | _ | 0.82 | 0.75 | _ | 0.75 | _ | 7,779 | 7,779 | 0.32 | 0.06 | _ | 7,806 |
| Onsite truck | 0.01 | 0.44 | 0.03 | < 0.005 | < 0.005 | 22.3 | 22.3 | < 0.005 | 2.23 | 2.23 | _ | 240 | 240 | < 0.005 | 0.04 | 0.38 | 251 |

| Daily, Winter (Max) | _ | _ | _ | | | _ | _ | _ | _ | _ | _ | _ | _ | | _ | | _ |
|---------------------------|---------|------|---------|---------|---------|------|------|---------|------|------|---|------|------|---------|---------|---------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmer | | 2.00 | 2.15 | 0.01 | 0.08 | _ | 0.08 | 0.07 | _ | 0.07 | _ | 725 | 725 | 0.03 | 0.01 | _ | 727 |
| Onsite truck | < 0.005 | 0.04 | < 0.005 | < 0.005 | < 0.005 | 1.86 | 1.86 | < 0.005 | 0.19 | 0.19 | _ | 22.3 | 22.3 | < 0.005 | < 0.005 | 0.02 | 23.4 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmer | | 0.37 | 0.39 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 120 | 120 | < 0.005 | < 0.005 | _ | 120 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.34 | 0.34 | < 0.005 | 0.03 | 0.03 | _ | 3.70 | 3.70 | < 0.005 | < 0.005 | < 0.005 | 3.87 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | - | _ | _ | _ | _ | - | _ | - | _ | _ | _ | | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | - | _ | - | _ | _ | _ | | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.5. P4 - Crest structure (2026) - Unmitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|---------|---------|-------|-------|---------|--------|--------|------|-------|------|---------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.30 | 0.25 | 4.08 | 0.00 | 0.00 | 0.40 | 0.40 | 0.00 | 0.09 | 0.09 | _ | 434 | 434 | 0.02 | 0.02 | 1.78 | 441 |
| Vendor | 0.01 | 0.43 | 0.08 | < 0.005 | < 0.005 | 0.06 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 242 | 242 | < 0.005 | 0.04 | 0.54 | 253 |
| Hauling | 0.02 | 1.20 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 1.02 | 677 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.27 | 0.32 | 2.98 | 0.00 | 0.00 | 0.40 | 0.40 | 0.00 | 0.09 | 0.09 | _ | 386 | 386 | 0.03 | 0.02 | 0.05 | 391 |
| Vendor | 0.01 | 0.46 | 0.08 | < 0.005 | < 0.005 | 0.06 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 242 | 242 | < 0.005 | 0.04 | 0.01 | 253 |

| Hauling | 0.02 | 1.27 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 0.03 | 676 |
|------------------|---------|------|------|---------|---------|---------|------|---------|---------|---------|---|------|------|---------|---------|------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.12 | 0.13 | 1.39 | 0.00 | 0.00 | 0.17 | 0.17 | 0.00 | 0.04 | 0.04 | _ | 175 | 175 | 0.01 | 0.01 | 0.34 | 178 |
| Vendor | < 0.005 | 0.20 | 0.03 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 107 | 107 | < 0.005 | 0.02 | 0.10 | 112 |
| Hauling | 0.01 | 0.56 | 0.04 | < 0.005 | < 0.005 | 0.06 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 285 | 285 | < 0.005 | 0.04 | 0.19 | 298 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.02 | 0.02 | 0.25 | 0.00 | 0.00 | 0.03 | 0.03 | 0.00 | 0.01 | 0.01 | _ | 29.0 | 29.0 | < 0.005 | < 0.005 | 0.06 | 29.4 |
| Vendor | < 0.005 | 0.04 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 17.7 | 17.7 | < 0.005 | < 0.005 | 0.02 | 18.5 |
| Hauling | < 0.005 | 0.10 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 47.2 | 47.2 | < 0.005 | 0.01 | 0.03 | 49.4 |

3.6. P4 - Crest structure (2026) - Mitigated

| | ROG | NOx | со | SO2 | PM10E | | PM10T | PM2.5E | | | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|------|-------|--------|------|------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ |
|---------------------------|---------|------|------|---------|---------|---------|------|---------|---------|---------|---|------|------|---------|---------|------|------|
| Daily, Summer (Max) | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.30 | 0.25 | 4.08 | 0.00 | 0.00 | 0.40 | 0.40 | 0.00 | 0.09 | 0.09 | _ | 434 | 434 | 0.02 | 0.02 | 1.78 | 441 |
| Vendor | 0.01 | 0.43 | 0.08 | < 0.005 | < 0.005 | 0.06 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 242 | 242 | < 0.005 | 0.04 | 0.54 | 253 |
| Hauling | 0.02 | 1.20 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 1.02 | 677 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.27 | 0.32 | 2.98 | 0.00 | 0.00 | 0.40 | 0.40 | 0.00 | 0.09 | 0.09 | _ | 386 | 386 | 0.03 | 0.02 | 0.05 | 391 |
| Vendor | 0.01 | 0.46 | 0.08 | < 0.005 | < 0.005 | 0.06 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 242 | 242 | < 0.005 | 0.04 | 0.01 | 253 |
| Hauling | 0.02 | 1.27 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 0.03 | 676 |
| Average Daily | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ |
| Worker | 0.12 | 0.13 | 1.39 | 0.00 | 0.00 | 0.17 | 0.17 | 0.00 | 0.04 | 0.04 | _ | 175 | 175 | 0.01 | 0.01 | 0.34 | 178 |
| Vendor | < 0.005 | 0.20 | 0.03 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 107 | 107 | < 0.005 | 0.02 | 0.10 | 112 |
| Hauling | 0.01 | 0.56 | 0.04 | < 0.005 | < 0.005 | 0.06 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 285 | 285 | < 0.005 | 0.04 | 0.19 | 298 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.02 | 0.02 | 0.25 | 0.00 | 0.00 | 0.03 | 0.03 | 0.00 | 0.01 | 0.01 | _ | 29.0 | 29.0 | < 0.005 | < 0.005 | 0.06 | 29.4 |
| Vendor | < 0.005 | 0.04 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 17.7 | 17.7 | < 0.005 | < 0.005 | 0.02 | 18.5 |
| Hauling | < 0.005 | 0.10 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 47.2 | 47.2 | < 0.005 | 0.01 | 0.03 | 49.4 |

3.7. P3.6 - Trench Cutoff Concrete 3 (2026) - Unmitigated

| | | | , | <i>J</i> , | | | | | | | | | | | | | |
|-----------------|-----|-----|----|------------|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Summer (Max) | | | | | | | | | | | | | | | | | |

| Off-Road Equipmen | | 2.64 | 2.80 | 0.01 | 0.10 | _ | 0.10 | 0.10 | _ | 0.10 | _ | 479 | 479 | 0.02 | < 0.005 | _ | 480 |
|---------------------------|--------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | 0.06 | 43.1 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | < 0.005 t | 0.01 | 0.01 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 1.31 | 1.31 | < 0.005 | < 0.005 | _ | 1.32 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.04 | 0.04 | < 0.005 | < 0.005 | < 0.005 | _ | 0.11 | 0.11 | < 0.005 | < 0.005 | < 0.005 | 0.12 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | < 0.005 t | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | - | < 0.005 | - | 0.22 | 0.22 | < 0.005 | < 0.005 | _ | 0.22 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 0.02 | 0.02 | < 0.005 | < 0.005 | < 0.005 | 0.02 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.02 | 0.80 | 0.27 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | 0.01 | 0.01 | _ | 135 | 135 | < 0.005 | 0.02 | 0.13 | 141 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.37 | 0.37 | < 0.005 | < 0.005 | < 0.005 | 0.39 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.06 | 0.06 | < 0.005 | < 0.005 | < 0.005 | 0.06 |

3.8. P3.6 - Trench Cutoff Concrete 3 (2026) - Mitigated

| | | | 1 | | | | | | | | | | | | | | |
|---------------------------|--------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|------|-------|------|---------|---------|---------|------|
| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 2.64 | 2.80 | 0.01 | 0.10 | _ | 0.10 | 0.10 | _ | 0.10 | _ | 479 | 479 | 0.02 | < 0.005 | _ | 480 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | 0.06 | 43.1 |
| Daily, Winter (Max) | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.01 | 0.01 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 1.31 | 1.31 | < 0.005 | < 0.005 | _ | 1.32 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 0.11 | 0.11 | < 0.005 | < 0.005 | < 0.005 | 0.12 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | < 0.005 t | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 0.22 | 0.22 | < 0.005 | < 0.005 | _ | 0.22 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.02 | 0.02 | < 0.005 | < 0.005 | < 0.005 | 0.02 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.02 | 0.80 | 0.27 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | 0.01 | 0.01 | _ | 135 | 135 | < 0.005 | 0.02 | 0.13 | 141 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.37 | 0.37 | < 0.005 | < 0.005 | < 0.005 | 0.39 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.06 | 0.06 | < 0.005 | < 0.005 | < 0.005 | 0.06 |

3.9. P3.5 - Trench Cutoff Concrete 2 (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|------|------|---------|---------|-------|-------|----------|--------|--------|------|-------|------|---------|---------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 2.64 | 2.80 | 0.01 | 0.10 | _ | 0.10 | 0.10 | _ | 0.10 | _ | 479 | 479 | 0.02 | < 0.005 | _ | 480 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | 0.06 | 43.1 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ |

| Off-Road Equipmer | | 0.01 | 0.01 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 1.31 | 1.31 | < 0.005 | < 0.005 | _ | 1.32 |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.04 | 0.04 | < 0.005 | < 0.005 | < 0.005 | _ | 0.11 | 0.11 | < 0.005 | < 0.005 | < 0.005 | 0.12 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmer | | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 0.22 | 0.22 | < 0.005 | < 0.005 | _ | 0.22 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 0.02 | 0.02 | < 0.005 | < 0.005 | < 0.005 | 0.02 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.02 | 0.80 | 0.27 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | 0.01 | 0.01 | _ | 135 | 135 | < 0.005 | 0.02 | 0.13 | 141 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.37 | 0.37 | < 0.005 | < 0.005 | < 0.005 | 0.39 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.06 | 0.06 | < 0.005 | < 0.005 | < 0.005 | 0.06 |

3.10. P3.5 - Trench Cutoff Concrete 2 (2026) - Mitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|------|-------|------|---------|---------|---------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | - | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | - | _ |
| Off-Road Equipmen | | 2.64 | 2.80 | 0.01 | 0.10 | _ | 0.10 | 0.10 | _ | 0.10 | _ | 479 | 479 | 0.02 | < 0.005 | _ | 480 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | 0.06 | 43.1 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | - | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Off-Road Equipmen | | 0.01 | 0.01 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 1.31 | 1.31 | < 0.005 | < 0.005 | _ | 1.32 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 0.11 | 0.11 | < 0.005 | < 0.005 | < 0.005 | 0.12 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 0.22 | 0.22 | < 0.005 | < 0.005 | _ | 0.22 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.02 | 0.02 | < 0.005 | < 0.005 | < 0.005 | 0.02 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | - | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.02 | 0.80 | 0.27 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | 0.01 | 0.01 | _ | 135 | 135 | < 0.005 | 0.02 | 0.13 | 141 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.37 | 0.37 | < 0.005 | < 0.005 | < 0.005 | 0.39 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.06 | 0.06 | < 0.005 | < 0.005 | < 0.005 | 0.06 |

3.11. P3.4 - Trench Cutoff Concrete 1 (2026) - Unmitigated

| | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | | | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|---------|---------|---------|---------|-------|---------|---------|---------|---------|------|-------|------|---------|---------|---------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 2.64 | 2.80 | 0.01 | 0.10 | _ | 0.10 | 0.10 | _ | 0.10 | _ | 479 | 479 | 0.02 | < 0.005 | _ | 480 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.01 | 0.01 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 1.31 | 1.31 | < 0.005 | < 0.005 | _ | 1.32 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.04 | 0.04 | < 0.005 | < 0.005 | < 0.005 | _ | 0.11 | 0.11 | < 0.005 | < 0.005 | < 0.005 | 0.12 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Off-Road Equipmen | | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 0.22 | 0.22 | < 0.005 | < 0.005 | _ | 0.22 |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 0.02 | 0.02 | < 0.005 | < 0.005 | < 0.005 | 0.02 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.02 | 0.81 | 0.29 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | 0.01 | 0.01 | _ | 134 | 134 | < 0.005 | 0.02 | < 0.005 | 141 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.37 | 0.37 | < 0.005 | < 0.005 | < 0.005 | 0.39 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.06 | 0.06 | < 0.005 | < 0.005 | < 0.005 | 0.06 |

3.12. P3.4 - Trench Cutoff Concrete 1 (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|----------|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | | _ |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Off-Road Equipmen | | 2.64 | 2.80 | 0.01 | 0.10 | _ | 0.10 | 0.10 | _ | 0.10 | _ | 479 | 479 | 0.02 | < 0.005 | _ | 480 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | - | _ | _ |
| Off-Road Equipmen | | 0.01 | 0.01 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | - | 1.31 | 1.31 | < 0.005 | < 0.005 | _ | 1.32 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | - | 0.11 | 0.11 | < 0.005 | < 0.005 | < 0.005 | 0.12 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | < 0.005 | < 0.005 | < 0.005 | < 0.005 | - | < 0.005 | < 0.005 | _ | < 0.005 | - | 0.22 | 0.22 | < 0.005 | < 0.005 | _ | 0.22 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | - | 0.02 | 0.02 | < 0.005 | < 0.005 | < 0.005 | 0.02 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | - | _ | - | _ | _ | - | _ | _ | - | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.02 | 0.81 | 0.29 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | 0.01 | 0.01 | _ | 134 | 134 | < 0.005 | 0.02 | < 0.005 | 141 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.37 | 0.37 | < 0.005 | < 0.005 | < 0.005 | 0.39 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.06 | 0.06 | < 0.005 | < 0.005 | < 0.005 | 0.06 |

3.13. P3.3 - Place piles, sheets, and concrete (2026) - Unmitigated

| | | _ ` | | ·· J , ··· · J | | , | | | | | | | | | | | _ |
|---------------------------|---------|---------|---------|-----------------------|---------|-------|---------|---------|--------|---------|------|-------|------|---------|---------|---------|------|
| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipment | | 3.61 | 3.72 | 0.01 | 0.15 | _ | 0.15 | 0.13 | _ | 0.13 | _ | 945 | 945 | 0.04 | 0.01 | _ | 949 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | 0.06 | 43.1 |
| Daily, Winter (Max) | _ | _ | _ | | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipment | | 3.61 | 3.72 | 0.01 | 0.15 | _ | 0.15 | 0.13 | _ | 0.13 | _ | 945 | 945 | 0.04 | 0.01 | _ | 949 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipment | | 0.20 | 0.20 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 51.8 | 51.8 | < 0.005 | < 0.005 | _ | 52.0 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.72 | 0.72 | < 0.005 | 0.07 | 0.07 | _ | 2.25 | 2.25 | < 0.005 | < 0.005 | < 0.005 | 2.36 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipment | | 0.04 | 0.04 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 8.58 | 8.58 | < 0.005 | < 0.005 | _ | 8.61 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.13 | 0.13 | < 0.005 | 0.01 | 0.01 | _ | 0.37 | 0.37 | < 0.005 | < 0.005 | < 0.005 | 0.39 |

| Offsite | _ | _ | _ | - | - | _ | _ | _ | _ | _ | - | _ | - | - | _ | _ | |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.14. P3.3 - Place piles, sheets, and concrete (2026) - Mitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ |

| Off-Road | 0.39 | 3.61 | 3.72 | 0.01 | 0.15 | _ | 0.15 | 0.13 | _ | 0.13 | _ | 945 | 945 | 0.04 | 0.01 | _ | 949 |
|---------------------------|---------|---------|---------|---------|---------|------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Equipmen | t | | | | | | | | | | | | | | | | |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | 0.06 | 43.1 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 3.61 | 3.72 | 0.01 | 0.15 | _ | 0.15 | 0.13 | _ | 0.13 | _ | 945 | 945 | 0.04 | 0.01 | _ | 949 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.20 | 0.20 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 51.8 | 51.8 | < 0.005 | < 0.005 | _ | 52.0 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.18 | 0.18 | < 0.005 | 0.02 | 0.02 | _ | 2.25 | 2.25 | < 0.005 | < 0.005 | < 0.005 | 2.36 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.04 | 0.04 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 8.58 | 8.58 | < 0.005 | < 0.005 | _ | 8.61 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | < 0.005 | < 0.005 | _ | 0.37 | 0.37 | < 0.005 | < 0.005 | < 0.005 | 0.39 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | - | _ | _ | - | _ | _ | _ | - | _ | _ | _ | | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.15. P3.1 - Mass concrete (2025) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|------|---------|----------|---------|-------|-------|---------|--------|--------|------|-------|------|---------|----------|---------|------|
| Onsite | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 3.82 | 3.76 | 0.01 | 0.16 | _ | 0.16 | 0.14 | _ | 0.14 | _ | 946 | 946 | 0.04 | 0.01 | _ | 949 |
| Onsite truck | < 0.005 | 0.10 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 41.8 | 41.8 | < 0.005 | 0.01 | < 0.005 | 43.8 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.31 | 0.31 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 77.7 | 77.7 | < 0.005 | < 0.005 | _ | 78.0 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 1.08 | 1.08 | < 0.005 | 0.11 | 0.11 | _ | 3.44 | 3.44 | < 0.005 | < 0.005 | < 0.005 | 3.60 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Off-Road Equipmer | | 0.06 | 0.06 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | - | 12.9 | 12.9 | < 0.005 | < 0.005 | _ | 12.9 |
|---------------------------|---------|---------|---------|---------|---------|------|---------|---------|------|---------|---|------|------|---------|---------|---------|------|
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.20 | 0.20 | < 0.005 | 0.02 | 0.02 | - | 0.57 | 0.57 | < 0.005 | < 0.005 | < 0.005 | 0.60 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.16. P3.1 - Mass concrete (2025) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Winter (Max) | _ | _ | _ | | _ | | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ |
|---------------------------|---------|---------|---------|---------|---------|------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Off-Road Equipmen | | 3.82 | 3.76 | 0.01 | 0.16 | _ | 0.16 | 0.14 | _ | 0.14 | _ | 946 | 946 | 0.04 | 0.01 | _ | 949 |
| Onsite truck | < 0.005 | 0.10 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 41.8 | 41.8 | < 0.005 | 0.01 | < 0.005 | 43.8 |
| Average Daily | _ | _ | _ | _ | _ | - | _ | _ | - | _ | - | _ | _ | _ | _ | _ | - |
| Off-Road Equipmen | | 0.31 | 0.31 | < 0.005 | 0.01 | - | 0.01 | 0.01 | - | 0.01 | _ | 77.7 | 77.7 | < 0.005 | < 0.005 | _ | 78.0 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.27 | 0.27 | < 0.005 | 0.03 | 0.03 | - | 3.44 | 3.44 | < 0.005 | < 0.005 | < 0.005 | 3.60 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.06 | 0.06 | < 0.005 | < 0.005 | - | < 0.005 | < 0.005 | _ | < 0.005 | - | 12.9 | 12.9 | < 0.005 | < 0.005 | _ | 12.9 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.05 | 0.05 | < 0.005 | < 0.005 | < 0.005 | _ | 0.57 | 0.57 | < 0.005 | < 0.005 | < 0.005 | 0.60 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | - | _ | - | _ | - | _ | - | - | _ | _ | - |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | - | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.17. P3 - Cofferdam (2025) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|------|------|---------|---------|-------|-------|---------|--------|--------|------|-------|------|---------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.08 | 0.10 | 0.95 | 0.00 | 0.00 | 0.12 | 0.12 | 0.00 | 0.03 | 0.03 | _ | 118 | 118 | 0.01 | 0.01 | 0.01 | 120 |
| Vendor | < 0.005 | 0.24 | 0.04 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 123 | 123 | < 0.005 | 0.02 | 0.01 | 128 |

| Hauling | 0.02 | 1.34 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 657 | 657 | < 0.005 | 0.10 | 0.03 | 688 |
|------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.01 | 0.01 | 0.11 | 0.00 | 0.00 | 0.01 | 0.01 | 0.00 | < 0.005 | < 0.005 | _ | 13.1 | 13.1 | < 0.005 | < 0.005 | 0.03 | 13.3 |
| Vendor | < 0.005 | 0.03 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 13.3 | 13.3 | < 0.005 | < 0.005 | 0.01 | 13.9 |
| Hauling | < 0.005 | 0.14 | 0.01 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | 0.01 | _ | 71.0 | 71.0 | < 0.005 | 0.01 | 0.05 | 74.4 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | 0.02 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | < 0.005 | < 0.005 | _ | 2.16 | 2.16 | < 0.005 | < 0.005 | < 0.005 | 2.20 |
| Vendor | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 2.20 | 2.20 | < 0.005 | < 0.005 | < 0.005 | 2.30 |
| Hauling | < 0.005 | 0.03 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 11.7 | 11.7 | < 0.005 | < 0.005 | 0.01 | 12.3 |

3.18. P3 - Cofferdam (2025) - Mitigated

| | | | | iny, torry | | | | | | | | | ОООТ | 0114 | Noo | | 000 |
|---------------------------|------|------|------|------------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.08 | 0.10 | 0.95 | 0.00 | 0.00 | 0.12 | 0.12 | 0.00 | 0.03 | 0.03 | _ | 118 | 118 | 0.01 | 0.01 | 0.01 | 120 |
| Vendor | < 0.005 | 0.24 | 0.04 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 123 | 123 | < 0.005 | 0.02 | 0.01 | 128 |
| Hauling | 0.02 | 1.34 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 657 | 657 | < 0.005 | 0.10 | 0.03 | 688 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.01 | 0.01 | 0.11 | 0.00 | 0.00 | 0.01 | 0.01 | 0.00 | < 0.005 | < 0.005 | _ | 13.1 | 13.1 | < 0.005 | < 0.005 | 0.03 | 13.3 |
| Vendor | < 0.005 | 0.03 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 13.3 | 13.3 | < 0.005 | < 0.005 | 0.01 | 13.9 |
| Hauling | < 0.005 | 0.14 | 0.01 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | 0.01 | _ | 71.0 | 71.0 | < 0.005 | 0.01 | 0.05 | 74.4 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | 0.02 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | < 0.005 | < 0.005 | _ | 2.16 | 2.16 | < 0.005 | < 0.005 | < 0.005 | 2.20 |
| Vendor | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 2.20 | 2.20 | < 0.005 | < 0.005 | < 0.005 | 2.30 |
| Hauling | < 0.005 | 0.03 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 11.7 | 11.7 | < 0.005 | < 0.005 | 0.01 | 12.3 |

3.19. P3 - Cofferdam (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.09 | 0.08 | 1.23 | 0.00 | 0.00 | 0.12 | 0.12 | 0.00 | 0.03 | 0.03 | _ | 130 | 130 | 0.01 | < 0.005 | 0.53 | 132 |
| Vendor | < 0.005 | 0.22 | 0.04 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 121 | 121 | < 0.005 | 0.02 | 0.27 | 127 |
| Hauling | 0.02 | 1.20 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 1.02 | 677 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.08 | 0.10 | 0.89 | 0.00 | 0.00 | 0.12 | 0.12 | 0.00 | 0.03 | 0.03 | _ | 116 | 116 | 0.01 | 0.01 | 0.01 | 117 |
| Vendor | < 0.005 | 0.23 | 0.04 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 121 | 121 | < 0.005 | 0.02 | 0.01 | 126 |
| Hauling | 0.02 | 1.27 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 0.03 | 676 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.02 | 0.02 | 0.24 | 0.00 | 0.00 | 0.03 | 0.03 | 0.00 | 0.01 | 0.01 | _ | 30.2 | 30.2 | < 0.005 | < 0.005 | 0.06 | 30.7 |
| Vendor | < 0.005 | 0.06 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 30.7 | 30.7 | < 0.005 | < 0.005 | 0.03 | 32.1 |
| Hauling | < 0.005 | 0.32 | 0.02 | < 0.005 | < 0.005 | 0.04 | 0.04 | < 0.005 | 0.01 | 0.01 | _ | 164 | 164 | < 0.005 | 0.03 | 0.11 | 172 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | 0.04 | 0.00 | 0.00 | 0.01 | 0.01 | 0.00 | < 0.005 | < 0.005 | _ | 5.00 | 5.00 | < 0.005 | < 0.005 | 0.01 | 5.08 |
| Vendor | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 5.08 | 5.08 | < 0.005 | < 0.005 | < 0.005 | 5.31 |
| Hauling | < 0.005 | 0.06 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 27.1 | 27.1 | < 0.005 | < 0.005 | 0.02 | 28.4 |

3.20. P3 - Cofferdam (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|------|------|---------|---------|-------|-------|---------|--------|--------|------|-------|------|---------|---------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.09 | 0.08 | 1.23 | 0.00 | 0.00 | 0.12 | 0.12 | 0.00 | 0.03 | 0.03 | _ | 130 | 130 | 0.01 | < 0.005 | 0.53 | 132 |
| Vendor | < 0.005 | 0.22 | 0.04 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 121 | 121 | < 0.005 | 0.02 | 0.27 | 127 |
| Hauling | 0.02 | 1.20 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 1.02 | 677 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.08 | 0.10 | 0.89 | 0.00 | 0.00 | 0.12 | 0.12 | 0.00 | 0.03 | 0.03 | _ | 116 | 116 | 0.01 | 0.01 | 0.01 | 117 |
| Vendor | < 0.005 | 0.23 | 0.04 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 121 | 121 | < 0.005 | 0.02 | 0.01 | 126 |

| Hauling | 0.02 | 1.27 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 0.03 | 676 |
|------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.02 | 0.02 | 0.24 | 0.00 | 0.00 | 0.03 | 0.03 | 0.00 | 0.01 | 0.01 | _ | 30.2 | 30.2 | < 0.005 | < 0.005 | 0.06 | 30.7 |
| Vendor | < 0.005 | 0.06 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 30.7 | 30.7 | < 0.005 | < 0.005 | 0.03 | 32.1 |
| Hauling | < 0.005 | 0.32 | 0.02 | < 0.005 | < 0.005 | 0.04 | 0.04 | < 0.005 | 0.01 | 0.01 | _ | 164 | 164 | < 0.005 | 0.03 | 0.11 | 172 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | 0.04 | 0.00 | 0.00 | 0.01 | 0.01 | 0.00 | < 0.005 | < 0.005 | _ | 5.00 | 5.00 | < 0.005 | < 0.005 | 0.01 | 5.08 |
| Vendor | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 5.08 | 5.08 | < 0.005 | < 0.005 | < 0.005 | 5.31 |
| Hauling | < 0.005 | 0.06 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 27.1 | 27.1 | < 0.005 | < 0.005 | 0.02 | 28.4 |

3.21. P2.3 - Drains, Cleanouts, and Backfill (2026) - Unmitigated

| | | | | | | | | · | | | | | | | | | |
|---------------------------|------|------|------|------|----------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|----------|------|------|------|---|------|------|------|------|------|------|
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.22. P2.3 - Drains, Cleanouts, and Backfill (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.23. P2.2 - Spillway form and pour concrete (2025) - Unmitigated

| Loca | ition | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|------|-------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsi | te | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|---------|---------|---------|----------|------|---------|---------|---------|---------|---|-------|----------|---------|---------|---------|-------|
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 5.40 | 5.16 | 0.01 | 0.21 | _ | 0.21 | 0.19 | _ | 0.19 | _ | 1,188 | 1,188 | 0.05 | 0.01 | _ | 1,192 |
| Onsite truck | < 0.005 | 0.10 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 41.8 | 41.8 | < 0.005 | 0.01 | < 0.005 | 43.8 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.58 | 0.56 | < 0.005 | 0.02 | _ | 0.02 | 0.02 | _ | 0.02 | _ | 128 | 128 | 0.01 | < 0.005 | _ | 129 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 1.42 | 1.42 | < 0.005 | 0.14 | 0.14 | _ | 4.52 | 4.52 | < 0.005 | < 0.005 | < 0.005 | 4.73 |
| Annual | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.11 | 0.10 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 21.2 | 21.2 | < 0.005 | < 0.005 | _ | 21.3 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.26 | 0.26 | < 0.005 | 0.03 | 0.03 | _ | 0.75 | 0.75 | < 0.005 | < 0.005 | < 0.005 | 0.78 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.02 | 0.62 | 0.22 | < 0.005 | < 0.005 | 0.01 | 0.02 | < 0.005 | < 0.005 | 0.01 | _ | 102 | 102 | < 0.005 | 0.02 | < 0.005 | 107 |
| Average Daily | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|---------|------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Hauling | < 0.005 | 0.07 | 0.02 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 11.1 | 11.1 | < 0.005 | < 0.005 | < 0.005 | 11.6 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 1.83 | 1.83 | < 0.005 | < 0.005 | < 0.005 | 1.92 |

3.24. P2.2 - Spillway form and pour concrete (2025) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|---------|---------|---------|----------|-------|---------|---------|--------------|---------|------|-------|-------|---------|---------|---------|-------|
| Onsite | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 5.40 | 5.16 | 0.01 | 0.21 | _ | 0.21 | 0.19 | _ | 0.19 | _ | 1,188 | 1,188 | 0.05 | 0.01 | _ | 1,192 |
| Onsite truck | < 0.005 | 0.10 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 41.8 | 41.8 | < 0.005 | 0.01 | < 0.005 | 43.8 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.58 | 0.56 | < 0.005 | 0.02 | _ | 0.02 | 0.02 | _ | 0.02 | _ | 128 | 128 | 0.01 | < 0.005 | _ | 129 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.36 | 0.36 | < 0.005 | 0.04 | 0.04 | _ | 4.52 | 4.52 | < 0.005 | < 0.005 | < 0.005 | 4.73 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.11 | 0.10 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 21.2 | 21.2 | < 0.005 | < 0.005 | _ | 21.3 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.07 | 0.07 | < 0.005 | 0.01 | 0.01 | _ | 0.75 | 0.75 | < 0.005 | < 0.005 | < 0.005 | 0.78 |

| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.02 | 0.62 | 0.22 | < 0.005 | < 0.005 | 0.01 | 0.02 | < 0.005 | < 0.005 | 0.01 | _ | 102 | 102 | < 0.005 | 0.02 | < 0.005 | 107 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.07 | 0.02 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 11.1 | 11.1 | < 0.005 | < 0.005 | < 0.005 | 11.6 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 1.83 | 1.83 | < 0.005 | < 0.005 | < 0.005 | 1.92 |

3.25. P2.2 - Spillway form and pour concrete (2026) - Unmitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|------|------|---------|---------|-------|-------|---------|--------|--------|------|-------|-------|---------|------|------|-------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 5.20 | 5.11 | 0.01 | 0.20 | _ | 0.20 | 0.18 | _ | 0.18 | _ | 1,188 | 1,188 | 0.05 | 0.01 | _ | 1,192 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | 0.06 | 43.1 |

| Daily, Winter (Max) | _ | _ | | _ | | | | _ | | _ | _ | _ | _ | _ | | | _ |
|---------------------------|---------|---------|---------|---------|---------|------|------|---------|---------|------|---|-------|-------|---------|---------|---------|-------|
| Off-Road Equipmen | | 5.20 | 5.11 | 0.01 | 0.20 | _ | 0.20 | 0.18 | _ | 0.18 | _ | 1,188 | 1,188 | 0.05 | 0.01 | _ | 1,192 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Off-Road Equipmen | | 1.40 | 1.38 | < 0.005 | 0.05 | _ | 0.05 | 0.05 | _ | 0.05 | _ | 321 | 321 | 0.01 | < 0.005 | _ | 322 |
| Onsite truck | < 0.005 | 0.02 | < 0.005 | < 0.005 | < 0.005 | 3.56 | 3.56 | < 0.005 | 0.36 | 0.36 | _ | 11.1 | 11.1 | < 0.005 | < 0.005 | 0.01 | 11.6 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.26 | 0.25 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | - | 53.1 | 53.1 | < 0.005 | < 0.005 | _ | 53.3 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.65 | 0.65 | < 0.005 | 0.06 | 0.06 | _ | 1.84 | 1.84 | < 0.005 | < 0.005 | < 0.005 | 1.93 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | | _ | _ | _ | _ | _ | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.02 | 0.60 | 0.20 | < 0.005 | < 0.005 | 0.01 | 0.02 | < 0.005 | < 0.005 | 0.01 | _ | 101 | 101 | < 0.005 | 0.02 | 0.09 | 106 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.02 | 0.61 | 0.22 | < 0.005 | < 0.005 | 0.01 | 0.02 | < 0.005 | < 0.005 | 0.01 | _ | 101 | 101 | < 0.005 | 0.02 | < 0.005 | 105 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|---------|------|------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Hauling | < 0.005 | 0.16 | 0.06 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 27.3 | 27.3 | < 0.005 | < 0.005 | 0.01 | 28.6 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.03 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 4.52 | 4.52 | < 0.005 | < 0.005 | < 0.005 | 4.73 |

3.26. P2.2 - Spillway form and pour concrete (2026) - Mitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|------|---------|---------|---------|-------|-------|---------|--------|--------|------|-------|-------|---------|---------|---------|-------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 5.20 | 5.11 | 0.01 | 0.20 | _ | 0.20 | 0.18 | _ | 0.18 | _ | 1,188 | 1,188 | 0.05 | 0.01 | _ | 1,192 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | 0.06 | 43.1 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 5.20 | 5.11 | 0.01 | 0.20 | _ | 0.20 | 0.18 | _ | 0.18 | _ | 1,188 | 1,188 | 0.05 | 0.01 | _ | 1,192 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 1.40 | 1.38 | < 0.005 | 0.05 | _ | 0.05 | 0.05 | _ | 0.05 | _ | 321 | 321 | 0.01 | < 0.005 | _ | 322 |
| Onsite truck | < 0.005 | 0.02 | < 0.005 | < 0.005 | < 0.005 | 0.90 | 0.90 | < 0.005 | 0.09 | 0.09 | _ | 11.1 | 11.1 | < 0.005 | < 0.005 | 0.01 | 11.6 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Off-Road Equipmen | | 0.26 | 0.25 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 53.1 | 53.1 | < 0.005 | < 0.005 | _ | 53.3 |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|----------|---------|---------|---------|------|
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.16 | 0.16 | < 0.005 | 0.02 | 0.02 | _ | 1.84 | 1.84 | < 0.005 | < 0.005 | < 0.005 | 1.93 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.02 | 0.60 | 0.20 | < 0.005 | < 0.005 | 0.01 | 0.02 | < 0.005 | < 0.005 | 0.01 | _ | 101 | 101 | < 0.005 | 0.02 | 0.09 | 106 |
| Daily, Winter (Max) | _ | _ | _ | _ | - | _ | - | _ | _ | _ | _ | _ | - | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.02 | 0.61 | 0.22 | < 0.005 | < 0.005 | 0.01 | 0.02 | < 0.005 | < 0.005 | 0.01 | _ | 101 | 101 | < 0.005 | 0.02 | < 0.005 | 105 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.16 | 0.06 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 27.3 | 27.3 | < 0.005 | < 0.005 | 0.01 | 28.6 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.03 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 4.52 | 4.52 | < 0.005 | < 0.005 | < 0.005 | 4.73 |

3.27. P2.1 - Spillway excavation/subgrade (2025) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | | _ | _ | | | _ | _ | _ | _ | _ | _ | _ | _ | _ | | | _ |
|---------------------------|---------|------|---------|---------|---------|------|------|---------|------|------|---|-------|-------|---------|---------|---------|-------|
| Off-Road Equipmen | | 23.7 | 24.4 | 0.07 | 0.90 | _ | 0.90 | 0.83 | _ | 0.83 | _ | 7,923 | 7,923 | 0.32 | 0.06 | _ | 7,951 |
| Onsite truck | < 0.005 | 0.39 | 0.02 | < 0.005 | < 0.005 | 73.6 | 73.6 | < 0.005 | 7.35 | 7.35 | _ | 203 | 203 | < 0.005 | 0.03 | 0.33 | 213 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 23.7 | 24.4 | 0.07 | 0.90 | _ | 0.90 | 0.83 | _ | 0.83 | _ | 7,923 | 7,923 | 0.32 | 0.06 | _ | 7,951 |
| Onsite truck | < 0.005 | 0.41 | 0.02 | < 0.005 | < 0.005 | 73.6 | 73.6 | < 0.005 | 7.35 | 7.35 | _ | 203 | 203 | < 0.005 | 0.03 | 0.01 | 213 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 3.50 | 3.61 | 0.01 | 0.13 | _ | 0.13 | 0.12 | _ | 0.12 | _ | 1,172 | 1,172 | 0.05 | 0.01 | _ | 1,176 |
| Onsite truck | < 0.005 | 0.06 | < 0.005 | < 0.005 | < 0.005 | 9.75 | 9.75 | < 0.005 | 0.97 | 0.97 | _ | 30.1 | 30.1 | < 0.005 | < 0.005 | 0.02 | 31.5 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.64 | 0.66 | < 0.005 | 0.02 | _ | 0.02 | 0.02 | _ | 0.02 | _ | 194 | 194 | 0.01 | < 0.005 | _ | 195 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 1.78 | 1.78 | < 0.005 | 0.18 | 0.18 | _ | 4.98 | 4.98 | < 0.005 | < 0.005 | < 0.005 | 5.22 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.28. P2.1 - Spillway excavation/subgrade (2025) - Mitigated

| | | | | J. J | | | | | | | | | | | | | _ |
|---------------------------|---------|------|------|---------|---------|-------|-------|---------|--------|--------|------|-------|-------|---------|------|------|-------|
| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 23.7 | 24.4 | 0.07 | 0.90 | _ | 0.90 | 0.83 | _ | 0.83 | _ | 7,923 | 7,923 | 0.32 | 0.06 | _ | 7,951 |
| Onsite truck | < 0.005 | 0.39 | 0.02 | < 0.005 | < 0.005 | 18.6 | 18.6 | < 0.005 | 1.85 | 1.86 | _ | 203 | 203 | < 0.005 | 0.03 | 0.33 | 213 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 23.7 | 24.4 | 0.07 | 0.90 | _ | 0.90 | 0.83 | _ | 0.83 | _ | 7,923 | 7,923 | 0.32 | 0.06 | _ | 7,951 |
| Onsite truck | < 0.005 | 0.41 | 0.02 | < 0.005 | < 0.005 | 18.6 | 18.6 | < 0.005 | 1.85 | 1.86 | _ | 203 | 203 | < 0.005 | 0.03 | 0.01 | 213 |

| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|------|---------|---------|---------|------|------|---------|------|------|---|-------|-------|---------|---------|---------|-------|
| Off-Road Equipmen | | 3.50 | 3.61 | 0.01 | 0.13 | _ | 0.13 | 0.12 | _ | 0.12 | _ | 1,172 | 1,172 | 0.05 | 0.01 | _ | 1,176 |
| Onsite truck | < 0.005 | 0.06 | < 0.005 | < 0.005 | < 0.005 | 2.46 | 2.46 | < 0.005 | 0.25 | 0.25 | _ | 30.1 | 30.1 | < 0.005 | < 0.005 | 0.02 | 31.5 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.64 | 0.66 | < 0.005 | 0.02 | _ | 0.02 | 0.02 | _ | 0.02 | _ | 194 | 194 | 0.01 | < 0.005 | _ | 195 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.45 | 0.45 | < 0.005 | 0.04 | 0.04 | _ | 4.98 | 4.98 | < 0.005 | < 0.005 | < 0.005 | 5.22 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Hau | ılina 📗 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|-----|---------|------|------|------|------|------|------|------|------|------|------|----------|------|------|------|------|------|
| | g | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.29. P2 - Spillway chute and flip bucket (2025) - Unmitigated

| oriteria | Pollutar | its (Ib/da | y for dai | iy, ton/yr | for annu | ual) and | GHGS (| lb/day fo | or daily, I | VII/yr for | annual) | | | | | | |
|-------------------------------------|----------|------------|-----------|------------|----------|----------|--------|-----------|-------------|------------|---------|-------|------|------|------|------|------|
| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | 0.01 | 0.01 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | 0.01 | 0.01 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| . | | | | | | 0.00- | 0.00- | | 0.00- | 0.00- | | | | | | | |
|-------------------------------------|-------|------|------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|------|------|
| Dust From Material Movemen | t | | _ | _ | | < 0.005 | < 0.005 | | < 0.005 | < 0.005 | | _ | | | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.32 | 0.28 | 4.35 | 0.00 | 0.00 | 0.40 | 0.40 | 0.00 | 0.09 | 0.09 | _ | 441 | 441 | 0.02 | 0.02 | 1.90 | 448 |
| Vendor | 0.01 | 0.46 | 0.08 | < 0.005 | < 0.005 | 0.06 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 246 | 246 | < 0.005 | 0.04 | 0.61 | 257 |
| Hauling | 0.02 | 1.26 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 657 | 657 | < 0.005 | 0.10 | 1.07 | 689 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.28 | 0.35 | 3.17 | 0.00 | 0.00 | 0.40 | 0.40 | 0.00 | 0.09 | 0.09 | _ | 392 | 392 | 0.03 | 0.03 | 0.05 | 402 |
| Vendor | 0.01 | 0.49 | 0.09 | < 0.005 | < 0.005 | 0.06 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 245 | 245 | < 0.005 | 0.04 | 0.02 | 257 |
| Hauling | 0.02 | 1.34 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 657 | 657 | < 0.005 | 0.10 | 0.03 | 688 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.08 | 0.09 | 0.91 | 0.00 | 0.00 | 0.11 | 0.11 | 0.00 | 0.02 | 0.02 | _ | 110 | 110 | 0.01 | < 0.005 | 0.22 | 112 |

| Vendor | < 0.005 | 0.13 | 0.02 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | 0.01 | _ | 66.9 | 66.9 | < 0.005 | 0.01 | 0.07 | 70.0 |
|---------|---------|------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|------|------|
| Hauling | < 0.005 | 0.36 | 0.02 | < 0.005 | < 0.005 | 0.04 | 0.04 | < 0.005 | 0.01 | 0.01 | _ | 179 | 179 | < 0.005 | 0.03 | 0.13 | 188 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.01 | 0.02 | 0.17 | 0.00 | 0.00 | 0.02 | 0.02 | 0.00 | < 0.005 | < 0.005 | _ | 18.2 | 18.2 | < 0.005 | < 0.005 | 0.04 | 18.5 |
| Vendor | < 0.005 | 0.02 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 11.1 | 11.1 | < 0.005 | < 0.005 | 0.01 | 11.6 |
| Hauling | < 0.005 | 0.07 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 29.6 | 29.6 | < 0.005 | < 0.005 | 0.02 | 31.0 |

3.30. P2 - Spillway chute and flip bucket (2025) - Mitigated

| | | (1.07 0.0. | , | . j, te , j. | | , | (| | | , | J | | | | | | |
|-------------------------------------|----------|------------|------|--------------|-------|---------|---------|--------|---------|---------|------|-------|------|------|------|------|------|
| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | <u> </u> | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | <u> </u> | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|-------------------------------------|-------|------|------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|------|------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | - | - |
| Dust From Material Movemen | t | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | - | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | - | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | - | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.32 | 0.28 | 4.35 | 0.00 | 0.00 | 0.40 | 0.40 | 0.00 | 0.09 | 0.09 | _ | 441 | 441 | 0.02 | 0.02 | 1.90 | 448 |
| Vendor | 0.01 | 0.46 | 0.08 | < 0.005 | < 0.005 | 0.06 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 246 | 246 | < 0.005 | 0.04 | 0.61 | 257 |
| Hauling | 0.02 | 1.26 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 657 | 657 | < 0.005 | 0.10 | 1.07 | 689 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.28 | 0.35 | 3.17 | 0.00 | 0.00 | 0.40 | 0.40 | 0.00 | 0.09 | 0.09 | _ | 392 | 392 | 0.03 | 0.03 | 0.05 | 402 |
| Vendor | 0.01 | 0.49 | 0.09 | < 0.005 | < 0.005 | 0.06 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 245 | 245 | < 0.005 | 0.04 | 0.02 | 257 |

| Hauling | 0.02 | 1.34 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 657 | 657 | < 0.005 | 0.10 | 0.03 | 688 |
|------------------|---------|------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.08 | 0.09 | 0.91 | 0.00 | 0.00 | 0.11 | 0.11 | 0.00 | 0.02 | 0.02 | _ | 110 | 110 | 0.01 | < 0.005 | 0.22 | 112 |
| Vendor | < 0.005 | 0.13 | 0.02 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | 0.01 | _ | 66.9 | 66.9 | < 0.005 | 0.01 | 0.07 | 70.0 |
| Hauling | < 0.005 | 0.36 | 0.02 | < 0.005 | < 0.005 | 0.04 | 0.04 | < 0.005 | 0.01 | 0.01 | _ | 179 | 179 | < 0.005 | 0.03 | 0.13 | 188 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.01 | 0.02 | 0.17 | 0.00 | 0.00 | 0.02 | 0.02 | 0.00 | < 0.005 | < 0.005 | _ | 18.2 | 18.2 | < 0.005 | < 0.005 | 0.04 | 18.5 |
| Vendor | < 0.005 | 0.02 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 11.1 | 11.1 | < 0.005 | < 0.005 | 0.01 | 11.6 |
| Hauling | < 0.005 | 0.07 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 29.6 | 29.6 | < 0.005 | < 0.005 | 0.02 | 31.0 |

3.31. P2 - Spillway chute and flip bucket (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|-------------------------------------|-------|------|------|------|-------|-------|-------|--------|---------|---------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | 0.01 | 0.01 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Dust From Material Movemen | — t | _ | _ | _ | _ | 0.01 | 0.01 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
|-------------------------------------|--------|------|------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|------|------|------|
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.30 | 0.25 | 4.08 | 0.00 | 0.00 | 0.40 | 0.40 | 0.00 | 0.09 | 0.09 | _ | 434 | 434 | 0.02 | 0.02 | 1.78 | 441 |
| Vendor | 0.01 | 0.43 | 0.08 | < 0.005 | < 0.005 | 0.06 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 242 | 242 | < 0.005 | 0.04 | 0.54 | 253 |

| Hauling | 0.02 | 1.20 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 1.02 | 677 |
|---------------------------|---------|------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|----------|---------|---------|------|------|
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.27 | 0.32 | 2.98 | 0.00 | 0.00 | 0.40 | 0.40 | 0.00 | 0.09 | 0.09 | _ | 386 | 386 | 0.03 | 0.02 | 0.05 | 391 |
| Vendor | 0.01 | 0.46 | 0.08 | < 0.005 | < 0.005 | 0.06 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 242 | 242 | < 0.005 | 0.04 | 0.01 | 253 |
| Hauling | 0.02 | 1.27 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 0.03 | 676 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.09 | 0.10 | 1.03 | 0.00 | 0.00 | 0.13 | 0.13 | 0.00 | 0.03 | 0.03 | _ | 130 | 130 | 0.01 | 0.01 | 0.25 | 132 |
| Vendor | < 0.005 | 0.15 | 0.03 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | 0.01 | 0.01 | _ | 79.0 | 79.0 | < 0.005 | 0.01 | 0.08 | 82.5 |
| Hauling | 0.01 | 0.41 | 0.03 | < 0.005 | < 0.005 | 0.05 | 0.05 | < 0.005 | 0.01 | 0.02 | _ | 211 | 211 | < 0.005 | 0.03 | 0.14 | 221 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ |
| Worker | 0.02 | 0.02 | 0.19 | 0.00 | 0.00 | 0.02 | 0.02 | 0.00 | 0.01 | 0.01 | _ | 21.4 | 21.4 | < 0.005 | < 0.005 | 0.04 | 21.8 |
| Vendor | < 0.005 | 0.03 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 13.1 | 13.1 | < 0.005 | < 0.005 | 0.01 | 13.7 |
| Hauling | < 0.005 | 0.08 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 34.9 | 34.9 | < 0.005 | 0.01 | 0.02 | 36.6 |

3.32. P2 - Spillway chute and flip bucket (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|-------------------------------------|--------|-----|----|-----|-------|---------|---------|--------|---------|---------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | :t | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|--------------------------------------|------|------|------|------|------|---------|---------|------|---------|---------|---|------|------|------|------|------|------|
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movement | _ | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | - | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movement | _ | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movement | _ | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|------|------|
| Worker | 0.30 | 0.25 | 4.08 | 0.00 | 0.00 | 0.40 | 0.40 | 0.00 | 0.09 | 0.09 | _ | 434 | 434 | 0.02 | 0.02 | 1.78 | 441 |
| Vendor | 0.01 | 0.43 | 0.08 | < 0.005 | < 0.005 | 0.06 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 242 | 242 | < 0.005 | 0.04 | 0.54 | 253 |
| Hauling | 0.02 | 1.20 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 1.02 | 677 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.27 | 0.32 | 2.98 | 0.00 | 0.00 | 0.40 | 0.40 | 0.00 | 0.09 | 0.09 | _ | 386 | 386 | 0.03 | 0.02 | 0.05 | 391 |
| Vendor | 0.01 | 0.46 | 0.08 | < 0.005 | < 0.005 | 0.06 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 242 | 242 | < 0.005 | 0.04 | 0.01 | 253 |
| Hauling | 0.02 | 1.27 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 0.03 | 676 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.09 | 0.10 | 1.03 | 0.00 | 0.00 | 0.13 | 0.13 | 0.00 | 0.03 | 0.03 | _ | 130 | 130 | 0.01 | 0.01 | 0.25 | 132 |
| Vendor | < 0.005 | 0.15 | 0.03 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | 0.01 | 0.01 | _ | 79.0 | 79.0 | < 0.005 | 0.01 | 0.08 | 82.5 |
| Hauling | 0.01 | 0.41 | 0.03 | < 0.005 | < 0.005 | 0.05 | 0.05 | < 0.005 | 0.01 | 0.02 | _ | 211 | 211 | < 0.005 | 0.03 | 0.14 | 221 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.02 | 0.02 | 0.19 | 0.00 | 0.00 | 0.02 | 0.02 | 0.00 | 0.01 | 0.01 | _ | 21.4 | 21.4 | < 0.005 | < 0.005 | 0.04 | 21.8 |
| Vendor | < 0.005 | 0.03 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 13.1 | 13.1 | < 0.005 | < 0.005 | 0.01 | 13.7 |
| Hauling | < 0.005 | 0.08 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 34.9 | 34.9 | < 0.005 | 0.01 | 0.02 | 36.6 |

3.33. P1.4 - Access road construction (2025) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|-------|------|------|---|-------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 23.4 | 23.2 | 0.07 | 0.91 | _ | 0.91 | 0.84 | _ | 0.84 | _ | 7,708 | 7,708 | 0.31 | 0.06 | _ | 7,735 |

| From Material Movement | | | | | | | | | | | | | | | | | | |
|--|--------------------------------------|---------|------|---------|---------|---------|------|------|---------|------|------|---|-------|-------|---------|---------|------|-------|
| Daily Daily Daily Difference Daily Daily Difference Daily Daily Difference Daily Difference Daily Difference Daily Daily Daily Difference Daily Daily Daily Difference Daily D | Dust From Material Movement | _ t | _ | _ | _ | _ | 6.56 | 6.56 | _ | 3.37 | 3.37 | _ | _ | _ | _ | _ | _ | _ |
| Window | Onsite truck | 0.01 | 0.46 | 0.03 | < 0.005 | < 0.005 | 88.3 | 88.3 | < 0.005 | 8.82 | 8.82 | _ | 244 | 244 | < 0.005 | 0.04 | 0.40 | 256 |
| Dust From Material Movement | Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| From Material Movement | | | 23.4 | 23.2 | 0.07 | 0.91 | _ | 0.91 | 0.84 | _ | 0.84 | _ | 7,708 | 7,708 | 0.31 | 0.06 | _ | 7,735 |
| truck Image: Contract of Equipment Image: Contract of Equ | Dust From Material Movement | | _ | _ | _ | _ | 6.56 | 6.56 | _ | 3.37 | 3.37 | _ | _ | _ | _ | _ | _ | _ |
| Daily Coff-Road 0.66 4.75 4.71 0.01 0.19 0.19 0.17 0.17 1.563 1.563 0.06 0.01 1.568 Equipment 0.005 0.10 0.01 0.005 0.005 16.0 16.0 0.005 0.005 0.10 0.12 0.87 0.86 0.005 0.005 0.005 0.02 0.005 0.005 0.005 0.005 0.29 0.29 0.29 8.18 8.18 0.005 0.005 0.01 0.01 0.02 0.01 0.03 0.01 0.01 0.005 0.01 0.01 0.005 0.005 0.01 0.005 0.01 0.005 | Onsite truck | 0.01 | 0.49 | 0.03 | < 0.005 | < 0.005 | 88.3 | 88.3 | < 0.005 | 8.82 | 8.82 | _ | 244 | 244 | < 0.005 | 0.04 | 0.01 | 255 |
| Equipment | Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| From Material Movement | | | 4.75 | 4.71 | 0.01 | 0.19 | _ | 0.19 | 0.17 | _ | 0.17 | _ | 1,563 | 1,563 | 0.06 | 0.01 | - | 1,568 |
| truck | Dust From Material Movemen | | _ | - | _ | - | 1.33 | 1.33 | _ | 0.68 | 0.68 | _ | _ | _ | _ | _ | _ | _ |
| Off-Road 0.12 | Onsite truck | < 0.005 | 0.10 | 0.01 | < 0.005 | < 0.005 | 16.0 | 16.0 | < 0.005 | 1.60 | 1.60 | _ | 49.4 | 49.4 | < 0.005 | 0.01 | 0.03 | 51.8 |
| Equipment | Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| From Material Movement | | | 0.87 | 0.86 | < 0.005 | 0.03 | _ | 0.03 | 0.03 | _ | 0.03 | _ | 259 | 259 | 0.01 | < 0.005 | _ | 260 |
| truck | Dust From Material Movement | | _ | _ | _ | _ | 0.24 | 0.24 | _ | 0.12 | 0.12 | _ | _ | _ | _ | _ | _ | _ |
| Offsite — — — — — — — — — — — — — — — — — — — | Onsite truck | < 0.005 | 0.02 | < 0.005 | < 0.005 | < 0.005 | 2.93 | 2.93 | < 0.005 | 0.29 | 0.29 | _ | 8.18 | 8.18 | < 0.005 | < 0.005 | 0.01 | 8.58 |
| | Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.34. P1.4 - Access road construction (2025) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|-------|------|------|---|-------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 23.4 | 23.2 | 0.07 | 0.91 | _ | 0.91 | 0.84 | _ | 0.84 | _ | 7,708 | 7,708 | 0.31 | 0.06 | _ | 7,735 |

| From Material Movement | | | | | | | | | | | | | | | | | | |
|--|--------------------------------------|---------|------|---------|---------|---------|------|------|---------|------|------|---|-------|-------|---------|---------|------|-------|
| Dally, Winter (Max) OII-Road 3.25 0.34 2.3.4 2.3.2 0.07 0.91 0.91 0.84 0.84 0.84 0.84 0.84 0.708 7,708 7,708 0.31 0.06 7,735 7,735 1.31 1.31 1.31 1.41 1.3 | Dust From Material Movement | _ t | _ | _ | _ | _ | 2.56 | 2.56 | _ | 1.31 | 1.31 | _ | _ | _ | _ | _ | _ | _ |
| Without Max Section Se | Onsite truck | 0.01 | 0.46 | 0.03 | < 0.005 | < 0.005 | 22.3 | 22.3 | < 0.005 | 2.23 | 2.23 | _ | 244 | 244 | < 0.005 | 0.04 | 0.40 | 256 |
| Dust From Moterial Movement | Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| From Material Movement | | | 23.4 | 23.2 | 0.07 | 0.91 | _ | 0.91 | 0.84 | _ | 0.84 | _ | 7,708 | 7,708 | 0.31 | 0.06 | _ | 7,735 |
| truck Image: Continuous Co | Dust From Material Movement | | _ | _ | _ | _ | 2.56 | 2.56 | _ | 1.31 | 1.31 | _ | _ | _ | _ | _ | _ | _ |
| Daily Coff-Road 0.66 4.75 4.71 0.01 0.19 0.19 0.17 0.17 1.563 1.563 0.06 0.01 1.568 Equipment 0.005 0.10 0.01 0.005 | Onsite truck | 0.01 | 0.49 | 0.03 | < 0.005 | < 0.005 | 22.3 | 22.3 | < 0.005 | 2.23 | 2.23 | _ | 244 | 244 | < 0.005 | 0.04 | 0.01 | 255 |
| Equipment | Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| From Material Movement: Solution Consiste Consis | | | 4.75 | 4.71 | 0.01 | 0.19 | _ | 0.19 | 0.17 | _ | 0.17 | _ | 1,563 | 1,563 | 0.06 | 0.01 | _ | 1,568 |
| truck | Dust From Material Movement | | _ | - | _ | _ | 0.52 | 0.52 | _ | 0.27 | 0.27 | _ | _ | _ | _ | _ | _ | _ |
| Off-Road 0.12 | Onsite truck | < 0.005 | 0.10 | 0.01 | < 0.005 | < 0.005 | 4.04 | 4.04 | < 0.005 | 0.40 | 0.40 | _ | 49.4 | 49.4 | < 0.005 | 0.01 | 0.03 | 51.8 |
| Equipment | Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| From Material Movement: Onsite truck One of the truck One of the truck of the tr | | | 0.87 | 0.86 | < 0.005 | 0.03 | _ | 0.03 | 0.03 | _ | 0.03 | _ | 259 | 259 | 0.01 | < 0.005 | _ | 260 |
| truck | Dust From Material Movement | | _ | _ | _ | _ | 0.09 | 0.09 | _ | 0.05 | 0.05 | _ | _ | _ | _ | _ | _ | _ |
| Offsite — — — — — — — — — — — — — — — — — — — | Onsite truck | < 0.005 | 0.02 | < 0.005 | < 0.005 | < 0.005 | 0.74 | 0.74 | < 0.005 | 0.07 | 0.07 | _ | 8.18 | 8.18 | < 0.005 | < 0.005 | 0.01 | 8.58 |
| | Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.35. P3.2 - Excavate cofferdam (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|---------|---------|---------|---------|------|---------|---------|------|---------|---|------|------|---------|---------|---------|------|
| Off-Road Equipmen | | 3.61 | 3.72 | 0.01 | 0.15 | _ | 0.15 | 0.13 | _ | 0.13 | _ | 945 | 945 | 0.04 | 0.01 | _ | 949 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | - | _ | - | _ |
| Off-Road Equipmen | | 0.08 | 0.08 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 20.7 | 20.7 | < 0.005 | < 0.005 | _ | 20.8 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.29 | 0.29 | < 0.005 | 0.03 | 0.03 | _ | 0.90 | 0.90 | < 0.005 | < 0.005 | < 0.005 | 0.94 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.01 | 0.01 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | - | < 0.005 | - | 3.43 | 3.43 | < 0.005 | < 0.005 | - | 3.44 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.05 | 0.05 | < 0.005 | 0.01 | 0.01 | _ | 0.15 | 0.15 | < 0.005 | < 0.005 | < 0.005 | 0.16 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | - | _ | _ | - | _ | - | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.36. P3.2 - Excavate cofferdam (2026) - Mitigated

| | | | 1 | | | | | | | | | | | | | | |
|---------------------------|---------|---------|---------|---------|---------|-------|---------|---------|---------|---------|------|-------|------|---------|---------|---------|------|
| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 3.61 | 3.72 | 0.01 | 0.15 | _ | 0.15 | 0.13 | _ | 0.13 | _ | 945 | 945 | 0.04 | 0.01 | _ | 949 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.08 | 0.08 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 20.7 | 20.7 | < 0.005 | < 0.005 | _ | 20.8 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.07 | 0.07 | < 0.005 | 0.01 | 0.01 | _ | 0.90 | 0.90 | < 0.005 | < 0.005 | < 0.005 | 0.94 |
| Annual | _ | | | _ | | _ | _ | _ | _ | _ | | _ | _ | _ | | _ | _ |
| Off-Road Equipmen | | 0.01 | 0.01 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 3.43 | 3.43 | < 0.005 | < 0.005 | _ | 3.44 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 0.15 | 0.15 | < 0.005 | < 0.005 | < 0.005 | 0.16 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|----------|------|------|------|------|------|------|---|------|----------|------|------|------|------|
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.37. P1.3 - Laydown area development (2025) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|------|------|---------|---------|-------|-------|---------|--------|--------|------|-------|-------|---------|------|------|-------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 10.8 | 10.6 | 0.02 | 0.49 | _ | 0.49 | 0.45 | _ | 0.45 | _ | 1,868 | 1,868 | 0.08 | 0.02 | _ | 1,874 |
| Onsite truck | < 0.005 | 0.37 | 0.02 | < 0.005 | < 0.005 | 69.9 | 69.9 | < 0.005 | 6.98 | 6.98 | _ | 193 | 193 | < 0.005 | 0.03 | 0.32 | 203 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Off-Road Equipmen | | 0.18 | 0.17 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 30.7 | 30.7 | < 0.005 | < 0.005 | _ | 30.8 |
|---------------------------|---------|---------|---------|---------|---------|------|---------|---------|------|---------|---|------|------|---------|---------|---------|------|
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 1.03 | 1.03 | < 0.005 | 0.10 | 0.10 | | 3.18 | 3.18 | < 0.005 | < 0.005 | < 0.005 | 3.33 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.03 | 0.03 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 5.08 | 5.08 | < 0.005 | < 0.005 | _ | 5.10 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.19 | 0.19 | < 0.005 | 0.02 | 0.02 | _ | 0.53 | 0.53 | < 0.005 | < 0.005 | < 0.005 | 0.55 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.38. P1.3 - Laydown area development (2025) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|---------|---------|---------|---------|-------|---------|---------|---------|---------|------|-------|-------|---------|---------|---------|-------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | - | - | _ | _ | _ | - | - | _ | _ | _ | _ | - | _ |
| Off-Road Equipmer | | 10.8 | 10.6 | 0.02 | 0.49 | _ | 0.49 | 0.45 | _ | 0.45 | _ | 1,868 | 1,868 | 0.08 | 0.02 | _ | 1,874 |
| Onsite truck | < 0.005 | 0.37 | 0.02 | < 0.005 | < 0.005 | 17.6 | 17.6 | < 0.005 | 1.76 | 1.77 | _ | 193 | 193 | < 0.005 | 0.03 | 0.32 | 203 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | - | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmer | | 0.18 | 0.17 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 30.7 | 30.7 | < 0.005 | < 0.005 | _ | 30.8 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.26 | 0.26 | < 0.005 | 0.03 | 0.03 | _ | 3.18 | 3.18 | < 0.005 | < 0.005 | < 0.005 | 3.33 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmer | | 0.03 | 0.03 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 5.08 | 5.08 | < 0.005 | < 0.005 | _ | 5.10 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.05 | 0.05 | < 0.005 | < 0.005 | < 0.005 | _ | 0.53 | 0.53 | < 0.005 | < 0.005 | < 0.005 | 0.55 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | - | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.39. P1.2 - Mobilization (2025) - Unmitigated

| | | | , | · • · · · · · · · · · · · · · · · · · · | | | | | , | | | | | | | | |
|---------------------------|------|------|------|---|-------|-------|-------|--------|----------|--------|------|-------|------|------|------|------|------|
| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | СО2Т | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|------|---------|---------|---------|---------|---------|---------|---------|---------|---|-------|-------|---------|---------|------|-------|
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.05 | 3.79 | 0.25 | 0.02 | 0.03 | 0.45 | 0.48 | 0.03 | 0.12 | 0.15 | _ | 1,971 | 1,971 | < 0.005 | 0.31 | 3.22 | 2,067 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.16 | 0.01 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | 0.01 | _ | 81.0 | 81.0 | < 0.005 | 0.01 | 0.06 | 84.9 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.03 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 13.4 | 13.4 | < 0.005 | < 0.005 | 0.01 | 14.1 |

3.40. P1.2 - Mobilization (2025) - Mitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|------|---------|---------|---------|---------|---------|---------|---------|---------|---|-------|-------|---------|---------|------|-------|
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.05 | 3.79 | 0.25 | 0.02 | 0.03 | 0.45 | 0.48 | 0.03 | 0.12 | 0.15 | _ | 1,971 | 1,971 | < 0.005 | 0.31 | 3.22 | 2,067 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | - |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.16 | 0.01 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | 0.01 | _ | 81.0 | 81.0 | < 0.005 | 0.01 | 0.06 | 84.9 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.03 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 13.4 | 13.4 | < 0.005 | < 0.005 | 0.01 | 14.1 |

3.41. P1.1 - Tree removal (2025) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | _ | _ | | | _ | _ | _ | _ | _ | _ | _ | | _ | | | _ |
|---------------------------|---------|------|---------|---------|---------|------|------|---------|------|------|----------|-------|-------|---------|---------|---------|-------|
| Off-Road Equipmen | | 12.1 | 267 | 0.04 | 1.58 | _ | 1.58 | 1.27 | _ | 1.27 | _ | 3,366 | 3,366 | 0.14 | 0.04 | _ | 3,380 |
| Onsite truck | 0.01 | 0.41 | 0.03 | < 0.005 | < 0.005 | 77.3 | 77.3 | < 0.005 | 7.72 | 7.72 | <u> </u> | 214 | 214 | < 0.005 | 0.03 | 0.35 | 224 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 1.16 | 25.6 | < 0.005 | 0.15 | _ | 0.15 | 0.12 | _ | 0.12 | _ | 323 | 323 | 0.01 | < 0.005 | _ | 324 |
| Onsite truck | < 0.005 | 0.04 | < 0.005 | < 0.005 | < 0.005 | 6.64 | 6.64 | < 0.005 | 0.66 | 0.66 | _ | 20.5 | 20.5 | < 0.005 | < 0.005 | 0.01 | 21.5 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.21 | 4.67 | < 0.005 | 0.03 | _ | 0.03 | 0.02 | _ | 0.02 | _ | 53.4 | 53.4 | < 0.005 | < 0.005 | _ | 53.7 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 1.21 | 1.21 | < 0.005 | 0.12 | 0.12 | _ | 3.39 | 3.39 | < 0.005 | < 0.005 | < 0.005 | 3.55 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.08 | 6.32 | 0.42 | 0.04 | 0.05 | 0.75 | 0.80 | 0.05 | 0.20 | 0.26 | _ | 3,285 | 3,285 | < 0.005 | 0.52 | 5.36 | 3,445 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | - | _ | _ | _ | - | _ | _ | - | - | - | _ | - | _ | _ | - | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|---------|------|------|---------|---------|------|------|---------|---------|---------|---|------|------|---------|------|------|------|
| Hauling | 0.01 | 0.64 | 0.04 | < 0.005 | 0.01 | 0.07 | 0.08 | 0.01 | 0.02 | 0.02 | _ | 315 | 315 | < 0.005 | 0.05 | 0.22 | 330 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.12 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 52.1 | 52.1 | < 0.005 | 0.01 | 0.04 | 54.6 |

3.42. P1.1 - Tree removal (2025) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|------|---------|----------|---------|-------|-------|----------|--------|--------|------|-------|-------|----------|---------|---------|-------|
| Onsite | _ | _ | _ | <u> </u> | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 12.1 | 267 | 0.04 | 1.58 | _ | 1.58 | 1.27 | _ | 1.27 | _ | 3,366 | 3,366 | 0.14 | 0.04 | _ | 3,380 |
| Onsite truck | 0.01 | 0.41 | 0.03 | < 0.005 | < 0.005 | 19.5 | 19.5 | < 0.005 | 1.95 | 1.95 | _ | 214 | 214 | < 0.005 | 0.03 | 0.35 | 224 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 1.16 | 25.6 | < 0.005 | 0.15 | _ | 0.15 | 0.12 | _ | 0.12 | _ | 323 | 323 | 0.01 | < 0.005 | _ | 324 |
| Onsite truck | < 0.005 | 0.04 | < 0.005 | < 0.005 | < 0.005 | 1.67 | 1.67 | < 0.005 | 0.17 | 0.17 | _ | 20.5 | 20.5 | < 0.005 | < 0.005 | 0.01 | 21.5 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.21 | 4.67 | < 0.005 | 0.03 | _ | 0.03 | 0.02 | _ | 0.02 | _ | 53.4 | 53.4 | < 0.005 | < 0.005 | _ | 53.7 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.31 | 0.31 | < 0.005 | 0.03 | 0.03 | _ | 3.39 | 3.39 | < 0.005 | < 0.005 | < 0.005 | 3.55 |

| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> | <u> </u> | _ | _ | _ |
|---------------------------|---------|------|------|---------|---------|------|------|---------|---------|---------|---|-------|----------|----------|------|------|-------|
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.08 | 6.32 | 0.42 | 0.04 | 0.05 | 0.75 | 0.80 | 0.05 | 0.20 | 0.26 | _ | 3,285 | 3,285 | < 0.005 | 0.52 | 5.36 | 3,445 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.64 | 0.04 | < 0.005 | 0.01 | 0.07 | 0.08 | 0.01 | 0.02 | 0.02 | _ | 315 | 315 | < 0.005 | 0.05 | 0.22 | 330 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.12 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 52.1 | 52.1 | < 0.005 | 0.01 | 0.04 | 54.6 |

3.43. P1 - Mobilization and access development (2025) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|-------------------------------------|-----|-----|----|-----|-------|---------|---------|--------|---------|---------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |

| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|-------------------------------------|-------|------|------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|------|------|-------|
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | - |
| Worker | 0.16 | 0.14 | 2.17 | 0.00 | 0.00 | 0.20 | 0.20 | 0.00 | 0.05 | 0.05 | _ | 221 | 221 | 0.01 | 0.01 | 0.95 | 224 |
| Vendor | 0.01 | 0.58 | 0.10 | < 0.005 | < 0.005 | 0.08 | 0.08 | < 0.005 | 0.02 | 0.02 | _ | 307 | 307 | < 0.005 | 0.05 | 0.77 | 321 |
| Hauling | 0.02 | 1.90 | 0.12 | 0.01 | 0.02 | 0.22 | 0.24 | 0.02 | 0.06 | 0.08 | _ | 985 | 985 | < 0.005 | 0.16 | 1.61 | 1,034 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.14 | 0.17 | 1.59 | 0.00 | 0.00 | 0.20 | 0.20 | 0.00 | 0.05 | 0.05 | _ | 196 | 196 | 0.01 | 0.01 | 0.02 | 201 |
|------------------|---------|------|------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|------|-------|
| | | - | | | | | | | | | | | | | 1 | | + |
| Vendor | 0.01 | 0.61 | 0.11 | < 0.005 | < 0.005 | 0.08 | 0.08 | < 0.005 | 0.02 | 0.02 | _ | 307 | 307 | < 0.005 | 0.05 | 0.02 | 321 |
| Hauling | 0.02 | 2.01 | 0.13 | 0.01 | 0.02 | 0.22 | 0.24 | 0.02 | 0.06 | 0.08 | _ | 985 | 985 | < 0.005 | 0.16 | 0.04 | 1,032 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.04 | 0.05 | 0.52 | 0.00 | 0.00 | 0.06 | 0.06 | 0.00 | 0.01 | 0.01 | _ | 62.4 | 62.4 | < 0.005 | < 0.005 | 0.13 | 63.4 |
| Vendor | < 0.005 | 0.19 | 0.03 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | 0.01 | 0.01 | _ | 95.0 | 95.0 | < 0.005 | 0.01 | 0.10 | 99.5 |
| Hauling | 0.01 | 0.62 | 0.04 | < 0.005 | < 0.005 | 0.07 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 305 | 305 | < 0.005 | 0.05 | 0.22 | 320 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.01 | 0.01 | 0.09 | 0.00 | 0.00 | 0.01 | 0.01 | 0.00 | < 0.005 | < 0.005 | _ | 10.3 | 10.3 | < 0.005 | < 0.005 | 0.02 | 10.5 |
| Vendor | < 0.005 | 0.03 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 15.7 | 15.7 | < 0.005 | < 0.005 | 0.02 | 16.5 |
| Hauling | < 0.005 | 0.11 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 50.5 | 50.5 | < 0.005 | 0.01 | 0.04 | 52.9 |

3.44. P1 - Mobilization and access development (2025) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|-------------------------------------|-------|------|------|------|-------|---------|---------|--------|---------|---------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | - | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |

| Dust | _ | _ | | | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | | _ | _ | _ | _ | | |
|-------------------------------------|-------|------|------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|------|------|-------|
| From Material Movemen | t | | | | | V 0.000 | 1 0.000 | | . 0.000 | V 0.000 | | | | | | | |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | - | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Worker | 0.16 | 0.14 | 2.17 | 0.00 | 0.00 | 0.20 | 0.20 | 0.00 | 0.05 | 0.05 | _ | 221 | 221 | 0.01 | 0.01 | 0.95 | 224 |
| Vendor | 0.01 | 0.58 | 0.10 | < 0.005 | < 0.005 | 0.08 | 0.08 | < 0.005 | 0.02 | 0.02 | _ | 307 | 307 | < 0.005 | 0.05 | 0.77 | 321 |
| Hauling | 0.02 | 1.90 | 0.12 | 0.01 | 0.02 | 0.22 | 0.24 | 0.02 | 0.06 | 0.08 | _ | 985 | 985 | < 0.005 | 0.16 | 1.61 | 1,034 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.14 | 0.17 | 1.59 | 0.00 | 0.00 | 0.20 | 0.20 | 0.00 | 0.05 | 0.05 | _ | 196 | 196 | 0.01 | 0.01 | 0.02 | 201 |
| Vendor | 0.01 | 0.61 | 0.11 | < 0.005 | < 0.005 | 0.08 | 0.08 | < 0.005 | 0.02 | 0.02 | _ | 307 | 307 | < 0.005 | 0.05 | 0.02 | 321 |
| Hauling | 0.02 | 2.01 | 0.13 | 0.01 | 0.02 | 0.22 | 0.24 | 0.02 | 0.06 | 0.08 | _ | 985 | 985 | < 0.005 | 0.16 | 0.04 | 1,032 |

| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|------------------|---------|------|------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|------|------|
| Worker | 0.04 | 0.05 | 0.52 | 0.00 | 0.00 | 0.06 | 0.06 | 0.00 | 0.01 | 0.01 | _ | 62.4 | 62.4 | < 0.005 | < 0.005 | 0.13 | 63.4 |
| Vendor | < 0.005 | 0.19 | 0.03 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | 0.01 | 0.01 | _ | 95.0 | 95.0 | < 0.005 | 0.01 | 0.10 | 99.5 |
| Hauling | 0.01 | 0.62 | 0.04 | < 0.005 | < 0.005 | 0.07 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 305 | 305 | < 0.005 | 0.05 | 0.22 | 320 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.01 | 0.01 | 0.09 | 0.00 | 0.00 | 0.01 | 0.01 | 0.00 | < 0.005 | < 0.005 | _ | 10.3 | 10.3 | < 0.005 | < 0.005 | 0.02 | 10.5 |
| Vendor | < 0.005 | 0.03 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 15.7 | 15.7 | < 0.005 | < 0.005 | 0.02 | 16.5 |
| Hauling | < 0.005 | 0.11 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 50.5 | 50.5 | < 0.005 | 0.01 | 0.04 | 52.9 |

3.45. P5 - Dam notch and tie-in chute (2026) - Unmitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | - | _ | - | - | - | _ | _ | _ | - | _ | _ | - | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.08 | 0.10 | 0.89 | 0.00 | 0.00 | 0.12 | 0.12 | 0.00 | 0.03 | 0.03 | _ | 116 | 116 | 0.01 | 0.01 | 0.01 | 117 |
| Vendor | < 0.005 | 0.11 | 0.02 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | < 0.005 | _ | 60.5 | 60.5 | < 0.005 | 0.01 | < 0.005 | 63.2 |
| Hauling | 0.02 | 1.27 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 0.03 | 676 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.01 | 0.01 | 0.15 | 0.00 | 0.00 | 0.02 | 0.02 | 0.00 | < 0.005 | < 0.005 | _ | 19.0 | 19.0 | < 0.005 | < 0.005 | 0.04 | 19.3 |
| Vendor | < 0.005 | 0.02 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 9.66 | 9.66 | < 0.005 | < 0.005 | 0.01 | 10.1 |
| Hauling | < 0.005 | 0.20 | 0.01 | < 0.005 | < 0.005 | 0.02 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 103 | 103 | < 0.005 | 0.02 | 0.07 | 108 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | 0.03 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | < 0.005 | < 0.005 | _ | 3.15 | 3.15 | < 0.005 | < 0.005 | 0.01 | 3.20 |
| Vendor | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 1.60 | 1.60 | < 0.005 | < 0.005 | < 0.005 | 1.67 |
| Hauling | < 0.005 | 0.04 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 17.1 | 17.1 | < 0.005 | < 0.005 | 0.01 | 17.9 |

3.46. P5 - Dam notch and tie-in chute (2026) - Mitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.08 | 0.10 | 0.89 | 0.00 | 0.00 | 0.12 | 0.12 | 0.00 | 0.03 | 0.03 | _ | 116 | 116 | 0.01 | 0.01 | 0.01 | 117 |
| Vendor | < 0.005 | 0.11 | 0.02 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | < 0.005 | _ | 60.5 | 60.5 | < 0.005 | 0.01 | < 0.005 | 63.2 |
| Hauling | 0.02 | 1.27 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 0.03 | 676 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.01 | 0.01 | 0.15 | 0.00 | 0.00 | 0.02 | 0.02 | 0.00 | < 0.005 | < 0.005 | _ | 19.0 | 19.0 | < 0.005 | < 0.005 | 0.04 | 19.3 |
| Vendor | < 0.005 | 0.02 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 9.66 | 9.66 | < 0.005 | < 0.005 | 0.01 | 10.1 |
| Hauling | < 0.005 | 0.20 | 0.01 | < 0.005 | < 0.005 | 0.02 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 103 | 103 | < 0.005 | 0.02 | 0.07 | 108 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | 0.03 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | < 0.005 | < 0.005 | _ | 3.15 | 3.15 | < 0.005 | < 0.005 | 0.01 | 3.20 |
| Vendor | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 1.60 | 1.60 | < 0.005 | < 0.005 | < 0.005 | 1.67 |
| Hauling | < 0.005 | 0.04 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 17.1 | 17.1 | < 0.005 | < 0.005 | 0.01 | 17.9 |

3.47. P5 - Dam notch and tie-in chute (2027) - Unmitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Worker | 0.07 | 0.09 | 0.83 | 0.00 | 0.00 | 0.12 | 0.12 | 0.00 | 0.03 | 0.03 | _ | 114 | 114 | 0.01 | 0.01 | 0.01 | 116 |
| Vendor | < 0.005 | 0.11 | 0.02 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | < 0.005 | _ | 59.4 | 59.4 | < 0.005 | 0.01 | < 0.005 | 62.1 |
| Hauling | 0.01 | 1.21 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 634 | 634 | < 0.005 | 0.10 | 0.02 | 664 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Worker | < 0.005 | < 0.005 | 0.04 | 0.00 | 0.00 | 0.01 | 0.01 | 0.00 | < 0.005 | < 0.005 | _ | 5.22 | 5.22 | < 0.005 | < 0.005 | 0.01 | 5.30 |
| Vendor | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 2.65 | 2.65 | < 0.005 | < 0.005 | < 0.005 | 2.77 |
| Hauling | < 0.005 | 0.05 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 28.3 | 28.3 | < 0.005 | < 0.005 | 0.02 | 29.6 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | 0.01 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | < 0.005 | < 0.005 | _ | 0.86 | 0.86 | < 0.005 | < 0.005 | < 0.005 | 0.88 |
| Vendor | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.44 | 0.44 | < 0.005 | < 0.005 | < 0.005 | 0.46 |

| Hauling | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 4.68 | 4.68 | < 0.005 | < 0.005 | < 0.005 | 4.90 |
|---------|---------|------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| | | | | | | | | | | | | | | | | | |

3.48. P5 - Dam notch and tie-in chute (2027) - Mitigated

| Sriteria | Pollutan | its (ID/da | iy for dai | ily, ton/yi | for ann | ual) and | GHGS (| lb/day fo | or daily, i | VII/yr foi | r annual |) | | | | | |
|---------------------------|----------|------------|------------|-------------|---------|----------|--------|-----------|-------------|------------|----------|-------|------|---------|------|---------|------|
| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.07 | 0.09 | 0.83 | 0.00 | 0.00 | 0.12 | 0.12 | 0.00 | 0.03 | 0.03 | _ | 114 | 114 | 0.01 | 0.01 | 0.01 | 116 |
| Vendor | < 0.005 | 0.11 | 0.02 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | < 0.005 | _ | 59.4 | 59.4 | < 0.005 | 0.01 | < 0.005 | 62.1 |
| Hauling | 0.01 | 1.21 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 634 | 634 | < 0.005 | 0.10 | 0.02 | 664 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ |

| Worker | < 0.005 | < 0.005 | 0.04 | 0.00 | 0.00 | 0.01 | 0.01 | 0.00 | < 0.005 | < 0.005 | _ | 5.22 | 5.22 | < 0.005 | < 0.005 | 0.01 | 5.30 |
|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Vendor | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 2.65 | 2.65 | < 0.005 | < 0.005 | < 0.005 | 2.77 |
| Hauling | < 0.005 | 0.05 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 28.3 | 28.3 | < 0.005 | < 0.005 | 0.02 | 29.6 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | 0.01 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | < 0.005 | < 0.005 | _ | 0.86 | 0.86 | < 0.005 | < 0.005 | < 0.005 | 0.88 |
| Vendor | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.44 | 0.44 | < 0.005 | < 0.005 | < 0.005 | 0.46 |
| Hauling | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 4.68 | 4.68 | < 0.005 | < 0.005 | < 0.005 | 4.90 |

3.49. P5.1 - Demolition (2026) - Unmitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|---------|---------|---------|---------|-------|---------|---------|------|---------|------|-------|------|---------|---------|---------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 3.01 | 3.66 | 0.01 | 0.09 | _ | 0.09 | 0.09 | _ | 0.09 | _ | 854 | 854 | 0.03 | 0.01 | _ | 857 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.08 | 0.10 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 23.4 | 23.4 | < 0.005 | < 0.005 | _ | 23.5 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.36 | 0.36 | < 0.005 | 0.04 | 0.04 | _ | 1.13 | 1.13 | < 0.005 | < 0.005 | < 0.005 | 1.18 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.02 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 3.87 | 3.87 | < 0.005 | < 0.005 | _ | 3.89 |

| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.07 | 0.07 | < 0.005 | 0.01 | 0.01 | _ | 0.19 | 0.19 | < 0.005 | < 0.005 | < 0.005 | 0.20 |
|---------------------------|---------|---------|---------|---------|---------|------|------|---------|------|------|---|------|------|---------|---------|---------|------|
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | - | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.50. P5.1 - Demolition (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | |

| Off-Road Equipmen | | 3.01 | 3.66 | 0.01 | 0.09 | _ | 0.09 | 0.09 | _ | 0.09 | _ | 854 | 854 | 0.03 | 0.01 | _ | 857 |
|---------------------------|--------------|---------|---------|---------|---------|------|---------|---------|---------|---------|---|------|----------|---------|---------|---------|------|
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.08 | 0.10 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 23.4 | 23.4 | < 0.005 | < 0.005 | _ | 23.5 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.09 | 0.09 | < 0.005 | 0.01 | 0.01 | _ | 1.13 | 1.13 | < 0.005 | < 0.005 | < 0.005 | 1.18 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | < 0.005 t | 0.02 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 3.87 | 3.87 | < 0.005 | < 0.005 | _ | 3.89 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | < 0.005 | _ | 0.19 | 0.19 | < 0.005 | < 0.005 | < 0.005 | 0.20 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|-----------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| riadiling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| | | | | | | | | | | | | | | | | | |

3.51. P5.2 - Excavation, Subgrade (2026) - Unmitigated

| Onsite Daily, Summer | ROG — — | NOx — | co _ | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | DCC2 | NDCCC | COOT | CUA | N2O | R | CO2e |
|---------------------------|---------------|----------|---------|---------|---------|-------|---------|---------|----------|----------|------|-------|------|---------|---------|---------|------|
| Daily, Summer | _ | _ | _ | | | | | IVIZ.UL | FIVIZ.5D | PIVIZ.51 | BCO2 | NBCO2 | CO2T | CH4 | IN2U | T. | COZe |
| Summer | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| | | | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 3.01 | 3.66 | 0.01 | 0.09 | _ | 0.09 | 0.09 | _ | 0.09 | _ | 854 | 854 | 0.03 | 0.01 | _ | 857 |
| Onsite ruck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.11 | 0.13 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 30.4 | 30.4 | < 0.005 | < 0.005 | _ | 30.5 |
| Onsite ruck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.47 | 0.47 | < 0.005 | 0.05 | 0.05 | _ | 1.46 | 1.46 | < 0.005 | < 0.005 | < 0.005 | 1.53 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.02 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 5.04 | 5.04 | < 0.005 | < 0.005 | _ | 5.05 |
| Onsite ruck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.09 | 0.09 | < 0.005 | 0.01 | 0.01 | _ | 0.24 | 0.24 | < 0.005 | < 0.005 | < 0.005 | 0.25 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.52. P5.2 - Excavation, Subgrade (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|------|------|---------|---------|-------|---------|---------|--------|---------|------|-------|------|---------|---------|---------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 3.01 | 3.66 | 0.01 | 0.09 | _ | 0.09 | 0.09 | _ | 0.09 | _ | 854 | 854 | 0.03 | 0.01 | _ | 857 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.11 | 0.13 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 30.4 | 30.4 | < 0.005 | < 0.005 | _ | 30.5 |

| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.12 | 0.12 | < 0.005 | 0.01 | 0.01 | _ | 1.46 | 1.46 | < 0.005 | < 0.005 | < 0.005 | 1.53 |
|---------------------------|--------------|---------|---------|---------|---------|------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | < 0.005 t | 0.02 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 5.04 | 5.04 | < 0.005 | < 0.005 | _ | 5.05 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | < 0.005 | _ | 0.24 | 0.24 | < 0.005 | < 0.005 | < 0.005 | 0.25 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.53. P5.3 - Form and Pour Concrete (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|---------|---------|---------|---------|------|---------|---------|---------|---------|---|-------|-------|---------|---------|---------|-------|
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 4.96 | 4.95 | 0.01 | 0.19 | _ | 0.19 | 0.17 | _ | 0.17 | _ | 1,157 | 1,157 | 0.05 | 0.01 | _ | 1,161 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.45 | 0.45 | < 0.005 | 0.02 | _ | 0.02 | 0.02 | _ | 0.02 | _ | 105 | 105 | < 0.005 | < 0.005 | _ | 105 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 1.19 | 1.19 | < 0.005 | 0.12 | 0.12 | _ | 3.72 | 3.72 | < 0.005 | < 0.005 | < 0.005 | 3.89 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.08 | 0.08 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | - | 17.3 | 17.3 | < 0.005 | < 0.005 | _ | 17.4 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.22 | 0.22 | < 0.005 | 0.02 | 0.02 | _ | 0.62 | 0.62 | < 0.005 | < 0.005 | < 0.005 | 0.64 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.02 | 0.61 | 0.22 | < 0.005 | < 0.005 | 0.01 | 0.02 | < 0.005 | < 0.005 | 0.01 | _ | 101 | 101 | < 0.005 | 0.02 | < 0.005 | 105 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|---------|------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Hauling | < 0.005 | 0.05 | 0.02 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 9.13 | 9.13 | < 0.005 | < 0.005 | < 0.005 | 9.57 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 1.51 | 1.51 | < 0.005 | < 0.005 | < 0.005 | 1.58 |

3.54. P5.3 - Form and Pour Concrete (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|---------|---------|---------|---------|-------|---------|---------|--------|---------|------|-------|-------|---------|---------|---------|-------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 4.96 | 4.95 | 0.01 | 0.19 | _ | 0.19 | 0.17 | _ | 0.17 | _ | 1,157 | 1,157 | 0.05 | 0.01 | _ | 1,161 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.45 | 0.45 | < 0.005 | 0.02 | _ | 0.02 | 0.02 | _ | 0.02 | _ | 105 | 105 | < 0.005 | < 0.005 | _ | 105 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.30 | 0.30 | < 0.005 | 0.03 | 0.03 | _ | 3.72 | 3.72 | < 0.005 | < 0.005 | < 0.005 | 3.89 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.08 | 0.08 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 17.3 | 17.3 | < 0.005 | < 0.005 | _ | 17.4 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.05 | 0.05 | < 0.005 | 0.01 | 0.01 | _ | 0.62 | 0.62 | < 0.005 | < 0.005 | < 0.005 | 0.64 |

| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.02 | 0.61 | 0.22 | < 0.005 | < 0.005 | 0.01 | 0.02 | < 0.005 | < 0.005 | 0.01 | _ | 101 | 101 | < 0.005 | 0.02 | < 0.005 | 105 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.05 | 0.02 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 9.13 | 9.13 | < 0.005 | < 0.005 | < 0.005 | 9.57 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 1.51 | 1.51 | < 0.005 | < 0.005 | < 0.005 | 1.58 |

3.55. P5.4 - Install Footbridge (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|-------|------|------|---|-------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 4.96 | 4.95 | 0.01 | 0.19 | _ | 0.19 | 0.17 | _ | 0.17 | _ | 1,157 | 1,157 | 0.05 | 0.01 | _ | 1,161 |

| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
|---------------------------|---------|---------|---------|---------|---------|------|---------|---------|---------|---------|---|------|------|---------|---------|---------|----------|
| Average Daily | _ | - | - | _ | - | - | - | _ | - | - | - | - | _ | - | - | - | _ |
| Off-Road Equipmer | | 0.02 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | - | < 0.005 | _ | 5.43 | 5.43 | < 0.005 | < 0.005 | _ | 5.45 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.06 | 0.06 | < 0.005 | 0.01 | 0.01 | - | 0.19 | 0.19 | < 0.005 | < 0.005 | < 0.005 | 0.20 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmer | | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 0.90 | 0.90 | < 0.005 | < 0.005 | _ | 0.90 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 0.03 | 0.03 | < 0.005 | < 0.005 | < 0.005 | 0.03 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> |
| Daily, Summer (Max) | _ | - | _ | _ | - | - | _ | _ | _ | - | _ | _ | - | _ | - | - | _ |
| Daily, Winter (Max) | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | - | _ | _ | - | _ | - | _ | _ | _ | - | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.56. P5.4 - Install Footbridge (2026) - Mitigated

| | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | | VII/yr foi PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|----------------------|------|-------|-------|---------|---------|---------|-------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| (Max) Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 4.96 | 4.95 | 0.01 | 0.19 | _ | 0.19 | 0.17 | _ | 0.17 | _ | 1,157 | 1,157 | 0.05 | 0.01 | _ | 1,161 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | < 0.005 | 43.0 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.02 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 5.43 | 5.43 | < 0.005 | < 0.005 | _ | 5.45 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | < 0.005 | _ | 0.19 | 0.19 | < 0.005 | < 0.005 | < 0.005 | 0.20 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 0.90 | 0.90 | < 0.005 | < 0.005 | _ | 0.90 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.03 | 0.03 | < 0.005 | < 0.005 | < 0.005 | 0.03 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | - | - | - | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | - | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | - | - | _ | _ | _ | _ | - | - | _ | _ | _ | _ | _ | _ | - | _ | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.57. P5.4 - Install Footbridge (2027) - Unmitigated

| | Ondream | (107 00 | y ioi dai | 1,9, 10191 | 101 01111 | | | nor day 10 | i dany, i | · · · · · · · · · · · · · · · · · · · | ariildai | / | | | | | |
|---------------------------|---------|---------|-----------|------------|-----------|-------|-------|------------|-----------|---------------------------------------|----------|-------|-------|---------|---------|---------|-------|
| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 4.80 | 4.93 | 0.01 | 0.18 | _ | 0.18 | 0.16 | _ | 0.16 | _ | 1,157 | 1,157 | 0.05 | 0.01 | _ | 1,161 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 40.3 | 40.3 | < 0.005 | 0.01 | < 0.005 | 42.2 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.21 | 0.22 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 51.6 | 51.6 | < 0.005 | < 0.005 | _ | 51.8 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.59 | 0.59 | < 0.005 | 0.06 | 0.06 | _ | 1.80 | 1.80 | < 0.005 | < 0.005 | < 0.005 | 1.89 |

| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|--------------|---------|---------|---------|---------|------|---------|---------|------|---------|---|------|------|---------|---------|---------|------|
| Off-Road Equipmen | < 0.005 t | 0.04 | 0.04 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 8.55 | 8.55 | < 0.005 | < 0.005 | _ | 8.58 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.11 | 0.11 | < 0.005 | 0.01 | 0.01 | _ | 0.30 | 0.30 | < 0.005 | < 0.005 | < 0.005 | 0.31 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.58. P5.4 - Install Footbridge (2027) - Mitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | _ | _ | | | | _ | | _ | | | | | | _ | | |
|---------------------------|---------|---------|---------|---------|---------|------|---------|---------|---------|---------|---|-------|-------|---------|---------|---------|-------|
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 4.80 | 4.93 | 0.01 | 0.18 | _ | 0.18 | 0.16 | _ | 0.16 | _ | 1,157 | 1,157 | 0.05 | 0.01 | _ | 1,161 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 40.3 | 40.3 | < 0.005 | 0.01 | < 0.005 | 42.2 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.21 | 0.22 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 51.6 | 51.6 | < 0.005 | < 0.005 | _ | 51.8 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.15 | 0.15 | < 0.005 | 0.01 | 0.01 | _ | 1.80 | 1.80 | < 0.005 | < 0.005 | < 0.005 | 1.89 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.04 | 0.04 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 8.55 | 8.55 | < 0.005 | < 0.005 | _ | 8.58 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | < 0.005 | < 0.005 | _ | 0.30 | 0.30 | < 0.005 | < 0.005 | < 0.005 | 0.31 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.59. P6 - Plunge pool (2026) - Unmitigated

| | | | , | J. J | | | , | | , | | | | | | | | |
|-------------------------------------|-------|------|------|------|----------|---------|----------|----------|---------|---------|------|-------|------|------|----------|------|------|
| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | <u> </u> | _ | <u> </u> | <u> </u> | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | 0.01 | 0.01 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Dust From Material Movemen | t | _ | | _ | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
|-------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.09 | 0.08 | 1.23 | 0.00 | 0.00 | 0.12 | 0.12 | 0.00 | 0.03 | 0.03 | _ | 130 | 130 | 0.01 | < 0.005 | 0.53 | 132 |
| Vendor | 0.01 | 0.43 | 0.08 | < 0.005 | < 0.005 | 0.06 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 242 | 242 | < 0.005 | 0.04 | 0.54 | 253 |
| Hauling | 0.02 | 1.20 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 1.02 | 677 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.01 | 0.01 | 0.09 | 0.00 | 0.00 | 0.01 | 0.01 | 0.00 | < 0.005 | < 0.005 | _ | 11.7 | 11.7 | < 0.005 | < 0.005 | 0.02 | 11.9 |
| Vendor | < 0.005 | 0.04 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 23.9 | 23.9 | < 0.005 | < 0.005 | 0.02 | 24.9 |
| Hauling | < 0.005 | 0.12 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.02 | < 0.005 | < 0.005 | 0.01 | _ | 63.7 | 63.7 | < 0.005 | 0.01 | 0.04 | 66.7 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | 0.02 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | < 0.005 | < 0.005 | _ | 1.94 | 1.94 | < 0.005 | < 0.005 | < 0.005 | 1.97 |
| Vendor | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 3.95 | 3.95 | < 0.005 | < 0.005 | < 0.005 | 4.13 |
| Hauling | < 0.005 | 0.02 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 10.6 | 10.6 | < 0.005 | < 0.005 | 0.01 | 11.0 |

3.60. P6 - Plunge pool (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | | _ | _ | _ | | | _ | _ | | | | _ | _ | | _ | _ |
|-------------------------------------|--------|------|------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|------|------|
| Dust From Material Movemen | — t | _ | _ | _ | _ | 0.01 | 0.01 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | _ | - | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Dust From Material Movemen | t | _ | - | - | _ | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | - | - | _ | _ | - | - | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.09 | 0.08 | 1.23 | 0.00 | 0.00 | 0.12 | 0.12 | 0.00 | 0.03 | 0.03 | _ | 130 | 130 | 0.01 | < 0.005 | 0.53 | 132 |
| Vendor | 0.01 | 0.43 | 0.08 | < 0.005 | < 0.005 | 0.06 | 0.07 | < 0.005 | 0.02 | 0.02 | _ | 242 | 242 | < 0.005 | 0.04 | 0.54 | 253 |
| Hauling | 0.02 | 1.20 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 1.02 | 677 |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.01 | 0.01 | 0.09 | 0.00 | 0.00 | 0.01 | 0.01 | 0.00 | < 0.005 | < 0.005 | _ | 11.7 | 11.7 | < 0.005 | < 0.005 | 0.02 | 11.9 |
| Vendor | < 0.005 | 0.04 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 23.9 | 23.9 | < 0.005 | < 0.005 | 0.02 | 24.9 |
| Hauling | < 0.005 | 0.12 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.02 | < 0.005 | < 0.005 | 0.01 | _ | 63.7 | 63.7 | < 0.005 | 0.01 | 0.04 | 66.7 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | 0.02 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | < 0.005 | < 0.005 | _ | 1.94 | 1.94 | < 0.005 | < 0.005 | < 0.005 | 1.97 |
| Vendor | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 3.95 | 3.95 | < 0.005 | < 0.005 | < 0.005 | 4.13 |
| Hauling | < 0.005 | 0.02 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 10.6 | 10.6 | < 0.005 | < 0.005 | 0.01 | 11.0 |

3.61. P6.1 - Flow bypass (2026) - Unmitigated

| | | <u> </u> | i | <i>J</i> , <i>J</i> | | | | | J / | | | | | | | | |
|---------------------------|------|----------|------|---------------------|---------|-------|---------|---------|--------|---------|------|-------|------|---------|---------|------|------|
| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 2.37 | 1.57 | < 0.005 | 0.10 | _ | 0.10 | 0.09 | _ | 0.09 | _ | 312 | 312 | 0.01 | < 0.005 | _ | 313 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.04 | 0.03 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 5.12 | 5.12 | < 0.005 | < 0.005 | _ | 5.14 |

| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|------|------|---------|---------|---------|------|---------|---------|------|---------|---|------|------|---------|---------|------|------|
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 0.85 | 0.85 | < 0.005 | < 0.005 | _ | 0.85 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.62. P6.1 - Flow bypass (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | _ | _ | | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|--------------|------|---------|---------|---------|------|---------|---------|------|---------|---|------|------|---------|---------|------|------|
| Off-Road Equipmen | | 2.37 | 1.57 | < 0.005 | 0.10 | _ | 0.10 | 0.09 | _ | 0.09 | _ | 312 | 312 | 0.01 | < 0.005 | _ | 313 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | < 0.005 t | 0.04 | 0.03 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | - | 5.12 | 5.12 | < 0.005 | < 0.005 | _ | 5.14 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | < 0.005 t | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 0.85 | 0.85 | < 0.005 | < 0.005 | _ | 0.85 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | - | - | - | _ | _ | _ |
| Average Daily | _ | _ | _ | - | _ | - | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.63. P6.2 - Excavation (2026) - Unmitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|---------|---------|---------|---------|-------|-------|---------|--------|--------|------|-------|-------|---------|---------|---------|-------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | - | - | _ | - | _ | _ | - | _ | - | - | - | _ | _ |
| Off-Road Equipmen | | 16.0 | 15.5 | 0.04 | 0.64 | _ | 0.64 | 0.59 | _ | 0.59 | _ | 4,668 | 4,668 | 0.19 | 0.04 | _ | 4,684 |
| Onsite truck | < 0.005 | 0.37 | 0.02 | < 0.005 | < 0.005 | 73.6 | 73.6 | < 0.005 | 7.35 | 7.35 | _ | 200 | 200 | < 0.005 | 0.03 | 0.32 | 210 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 1.10 | 1.06 | < 0.005 | 0.04 | _ | 0.04 | 0.04 | _ | 0.04 | _ | 320 | 320 | 0.01 | < 0.005 | _ | 321 |
| Onsite truck | < 0.005 | 0.03 | < 0.005 | < 0.005 | < 0.005 | 4.51 | 4.51 | < 0.005 | 0.45 | 0.45 | _ | 13.7 | 13.7 | < 0.005 | < 0.005 | 0.01 | 14.3 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.20 | 0.19 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 52.9 | 52.9 | < 0.005 | < 0.005 | _ | 53.1 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.82 | 0.82 | < 0.005 | 0.08 | 0.08 | _ | 2.27 | 2.27 | < 0.005 | < 0.005 | < 0.005 | 2.38 |

| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.64. P6.2 - Excavation (2026) - Mitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|------|------|---------|---------|-------|-------|---------|--------|--------|------|-------|-------|---------|------|------|-------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 16.0 | 15.5 | 0.04 | 0.64 | _ | 0.64 | 0.59 | _ | 0.59 | _ | 4,668 | 4,668 | 0.19 | 0.04 | _ | 4,684 |
| Onsite truck | < 0.005 | 0.37 | 0.02 | < 0.005 | < 0.005 | 18.6 | 18.6 | < 0.005 | 1.85 | 1.86 | _ | 200 | 200 | < 0.005 | 0.03 | 0.32 | 210 |

| Daily, Winter (Max) | _ | _ | _ | | | _ | _ | _ | _ | _ | | _ | _ | _ | _ | | _ |
|---------------------------|---------|---------|---------|---------|---------|------|------|---------|------|------|---|------|------|---------|---------|---------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmer | | 1.10 | 1.06 | < 0.005 | 0.04 | _ | 0.04 | 0.04 | _ | 0.04 | _ | 320 | 320 | 0.01 | < 0.005 | _ | 321 |
| Onsite truck | < 0.005 | 0.03 | < 0.005 | < 0.005 | < 0.005 | 1.14 | 1.14 | < 0.005 | 0.11 | 0.11 | _ | 13.7 | 13.7 | < 0.005 | < 0.005 | 0.01 | 14.3 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmer | | 0.20 | 0.19 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 52.9 | 52.9 | < 0.005 | < 0.005 | _ | 53.1 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.21 | 0.21 | < 0.005 | 0.02 | 0.02 | _ | 2.27 | 2.27 | < 0.005 | < 0.005 | < 0.005 | 2.38 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | - | - | _ | - | _ | _ | _ | _ | _ | _ | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.65. P6.3 - Slope protection (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | СО2Т | CH4 | N2O | R | CO2e |
|---------------------------|---------|---------|---------|---------|---------|-------|---------|---------|---------|---------|------|-------|------|---------|---------|---------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | - | _ | - | _ | - | _ | - |
| Off-Road Equipmen | | 1.14 | 1.76 | < 0.005 | 0.03 | _ | 0.03 | 0.03 | _ | 0.03 | _ | 291 | 291 | 0.01 | < 0.005 | _ | 292 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | 0.06 | 43.1 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.02 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 3.99 | 3.99 | < 0.005 | < 0.005 | _ | 4.00 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.18 | 0.18 | < 0.005 | 0.02 | 0.02 | _ | 0.56 | 0.56 | < 0.005 | < 0.005 | < 0.005 | 0.59 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 0.66 | 0.66 | < 0.005 | < 0.005 | _ | 0.66 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | < 0.005 | < 0.005 | _ | 0.09 | 0.09 | < 0.005 | < 0.005 | < 0.005 | 0.10 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.66. P6.3 - Slope protection (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | | PM10D | | PM2.5E | | | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|------|------|---------|---------|-------|---------|---------|------|---------|------|-------|------|---------|---------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 1.14 | 1.76 | < 0.005 | 0.03 | _ | 0.03 | 0.03 | _ | 0.03 | _ | 291 | 291 | 0.01 | < 0.005 | _ | 292 |
| Onsite truck | < 0.005 | 0.09 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 41.1 | 41.1 | < 0.005 | 0.01 | 0.06 | 43.1 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.02 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 3.99 | 3.99 | < 0.005 | < 0.005 | _ | 4.00 |

| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.05 | 0.05 | < 0.005 | < 0.005 | < 0.005 | _ | 0.56 | 0.56 | < 0.005 | < 0.005 | < 0.005 | 0.59 |
|---------------------------|---------|---------|---------|---------|---------|------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmer | | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 0.66 | 0.66 | < 0.005 | < 0.005 | _ | 0.66 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 0.09 | 0.09 | < 0.005 | < 0.005 | < 0.005 | 0.10 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.67. P7 - Remaining Work Scope (2026) - Unmitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | - | - | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | - | _ | _ |
| Worker | 0.13 | 0.16 | 1.49 | 0.00 | 0.00 | 0.20 | 0.20 | 0.00 | 0.05 | 0.05 | _ | 193 | 193 | 0.01 | 0.01 | 0.02 | 196 |
| Vendor | 0.01 | 0.34 | 0.06 | < 0.005 | < 0.005 | 0.05 | 0.05 | < 0.005 | 0.01 | 0.01 | _ | 181 | 181 | < 0.005 | 0.03 | 0.01 | 189 |
| Hauling | 0.02 | 1.27 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 0.03 | 676 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Worker | < 0.005 | < 0.005 | 0.01 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | < 0.005 | < 0.005 | _ | 1.40 | 1.40 | < 0.005 | < 0.005 | < 0.005 | 1.42 |
| Vendor | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 1.28 | 1.28 | < 0.005 | < 0.005 | < 0.005 | 1.34 |
| Hauling | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 4.55 | 4.55 | < 0.005 | < 0.005 | < 0.005 | 4.77 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | < 0.005 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | < 0.005 | < 0.005 | _ | 0.23 | 0.23 | < 0.005 | < 0.005 | < 0.005 | 0.23 |
| Vendor | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.21 | 0.21 | < 0.005 | < 0.005 | < 0.005 | 0.22 |

| | 0.00= | 0.00= | 0.00= | 0.00= | 0.005 | | | 0.005 | 0.00= | | | | | | | - 0.005 | 0.70 |
|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.75 | 0.75 | < 0.005 | < 0.005 | < 0.005 | 0.79 |
| | | | | | | | | | | | | | | | | | |

3.68. P7 - Remaining Work Scope (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|---------|---------|-------|-------|---------|--------|--------|------|-------|------|---------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.13 | 0.16 | 1.49 | 0.00 | 0.00 | 0.20 | 0.20 | 0.00 | 0.05 | 0.05 | _ | 193 | 193 | 0.01 | 0.01 | 0.02 | 196 |
| Vendor | 0.01 | 0.34 | 0.06 | < 0.005 | < 0.005 | 0.05 | 0.05 | < 0.005 | 0.01 | 0.01 | _ | 181 | 181 | < 0.005 | 0.03 | 0.01 | 189 |
| Hauling | 0.02 | 1.27 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 646 | 646 | < 0.005 | 0.10 | 0.03 | 676 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | < 0.005 | < 0.005 | 0.01 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | < 0.005 | < 0.005 | _ | 1.40 | 1.40 | < 0.005 | < 0.005 | < 0.005 | 1.42 |
|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Vendor | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 1.28 | 1.28 | < 0.005 | < 0.005 | < 0.005 | 1.34 |
| Hauling | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 4.55 | 4.55 | < 0.005 | < 0.005 | < 0.005 | 4.77 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | < 0.005 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | < 0.005 | < 0.005 | _ | 0.23 | 0.23 | < 0.005 | < 0.005 | < 0.005 | 0.23 |
| Vendor | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.21 | 0.21 | < 0.005 | < 0.005 | < 0.005 | 0.22 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.75 | 0.75 | < 0.005 | < 0.005 | < 0.005 | 0.79 |

3.69. P7 - Remaining Work Scope (2027) - Unmitigated

| | | | i e | | | 1 | | | | | annual | | | | | | |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|--------|-------|------|------|------|------|------|
| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Worker | 0.12 | 0.15 | 1.39 | 0.00 | 0.00 | 0.20 | 0.20 | 0.00 | 0.05 | 0.05 | _ | 190 | 190 | 0.01 | 0.01 | 0.02 | 193 |
| Vendor | 0.01 | 0.32 | 0.06 | < 0.005 | < 0.005 | 0.05 | 0.05 | < 0.005 | 0.01 | 0.01 | _ | 178 | 178 | < 0.005 | 0.03 | 0.01 | 186 |
| Hauling | 0.01 | 1.21 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 634 | 634 | < 0.005 | 0.10 | 0.02 | 664 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.02 | 0.02 | 0.19 | 0.00 | 0.00 | 0.03 | 0.03 | 0.00 | 0.01 | 0.01 | _ | 25.2 | 25.2 | < 0.005 | < 0.005 | 0.05 | 25.6 |
| Vendor | < 0.005 | 0.04 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 23.0 | 23.0 | < 0.005 | < 0.005 | 0.02 | 24.1 |
| Hauling | < 0.005 | 0.15 | 0.01 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | 0.01 | 0.01 | _ | 81.8 | 81.8 | < 0.005 | 0.01 | 0.05 | 85.8 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | 0.03 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | < 0.005 | < 0.005 | _ | 4.17 | 4.17 | < 0.005 | < 0.005 | 0.01 | 4.24 |
| Vendor | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 3.81 | 3.81 | < 0.005 | < 0.005 | < 0.005 | 3.99 |
| Hauling | < 0.005 | 0.03 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 13.5 | 13.5 | < 0.005 | < 0.005 | 0.01 | 14.2 |

3.70. P7 - Remaining Work Scope (2027) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | СО2Т | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| A I | | | | | | | | | | | | | | | | | |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.12 | 0.15 | 1.39 | 0.00 | 0.00 | 0.20 | 0.20 | 0.00 | 0.05 | 0.05 | _ | 190 | 190 | 0.01 | 0.01 | 0.02 | 193 |
| Vendor | 0.01 | 0.32 | 0.06 | < 0.005 | < 0.005 | 0.05 | 0.05 | < 0.005 | 0.01 | 0.01 | _ | 178 | 178 | < 0.005 | 0.03 | 0.01 | 186 |
| Hauling | 0.01 | 1.21 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 634 | 634 | < 0.005 | 0.10 | 0.02 | 664 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.02 | 0.02 | 0.19 | 0.00 | 0.00 | 0.03 | 0.03 | 0.00 | 0.01 | 0.01 | _ | 25.2 | 25.2 | < 0.005 | < 0.005 | 0.05 | 25.6 |
| Vendor | < 0.005 | 0.04 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 23.0 | 23.0 | < 0.005 | < 0.005 | 0.02 | 24.1 |
| Hauling | < 0.005 | 0.15 | 0.01 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | 0.01 | 0.01 | _ | 81.8 | 81.8 | < 0.005 | 0.01 | 0.05 | 85.8 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | 0.03 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | < 0.005 | < 0.005 | _ | 4.17 | 4.17 | < 0.005 | < 0.005 | 0.01 | 4.24 |
| Vendor | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 3.81 | 3.81 | < 0.005 | < 0.005 | < 0.005 | 3.99 |
| Hauling | < 0.005 | 0.03 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 13.5 | 13.5 | < 0.005 | < 0.005 | 0.01 | 14.2 |

3.71. P7.1 - Cofferdam removal (2027) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| | | | _ | | | | _ | | | | | | | | | | |
|---------------------------|------|------|------|---------|---------|------|---------|---------|------|---------|---|------|------|---------|---------|------|------|
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 2.93 | 3.07 | 0.01 | 0.12 | _ | 0.12 | 0.11 | _ | 0.11 | _ | 857 | 857 | 0.03 | 0.01 | _ | 860 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | - | _ | _ | _ | - | - | - | _ | _ | _ | - | _ | _ | _ |
| Off-Road Equipmen | | 0.06 | 0.06 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 16.4 | 16.4 | < 0.005 | < 0.005 | _ | 16.5 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.01 | 0.01 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 2.72 | 2.72 | < 0.005 | < 0.005 | _ | 2.73 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | - | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | - | - | - | _ | - | _ | _ | - | - | - | - | _ | - | - | - | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.72. P7.1 - Cofferdam removal (2027) - Mitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|---------|---------|-------|---------|---------|--------|---------|------|-------|------|---------|---------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 2.93 | 3.07 | 0.01 | 0.12 | _ | 0.12 | 0.11 | _ | 0.11 | _ | 857 | 857 | 0.03 | 0.01 | _ | 860 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.06 | 0.06 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 16.4 | 16.4 | < 0.005 | < 0.005 | _ | 16.5 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.01 | 0.01 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 2.72 | 2.72 | < 0.005 | < 0.005 | _ | 2.73 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|----------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | <u> </u> | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.73. P7.2 - Lighting (2027) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|------|------|---------|---------|-------|-------|---------|--------|--------|------|-------|------|---------|---------|---------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.47 | 0.77 | < 0.005 | 0.02 | _ | 0.02 | 0.02 | _ | 0.02 | _ | 114 | 114 | < 0.005 | < 0.005 | _ | 115 |
| Onsite truck | < 0.005 | 0.10 | 0.01 | < 0.005 | < 0.005 | 18.4 | 18.4 | < 0.005 | 1.84 | 1.84 | _ | 50.1 | 50.1 | < 0.005 | 0.01 | < 0.005 | 52.4 |
| Average Daily | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Off-Road Equipmer | | 0.03 | 0.04 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 6.27 | 6.27 | < 0.005 | < 0.005 | _ | 6.29 |
|---------------------------|---------|---------|---------|---------|---------|------|---------|---------|------|---------|---|------|------|---------|---------|---------|------|
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.90 | 0.90 | < 0.005 | 0.09 | 0.09 | _ | 2.74 | 2.74 | < 0.005 | < 0.005 | < 0.005 | 2.88 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmer | | < 0.005 | 0.01 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 1.04 | 1.04 | < 0.005 | < 0.005 | _ | 1.04 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.16 | 0.16 | < 0.005 | 0.02 | 0.02 | _ | 0.45 | 0.45 | < 0.005 | < 0.005 | < 0.005 | 0.48 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ |
| Daily, Winter (Max) | _ | _ | - | _ | - | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | - | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.74. P7.2 - Lighting (2027) - Mitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|---------|---------|---------|---------|-------|---------|---------|---------|---------|------|-------|------|---------|---------|---------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.47 | 0.77 | < 0.005 | 0.02 | _ | 0.02 | 0.02 | _ | 0.02 | _ | 114 | 114 | < 0.005 | < 0.005 | _ | 115 |
| Onsite truck | < 0.005 | 0.10 | 0.01 | < 0.005 | < 0.005 | 4.64 | 4.64 | < 0.005 | 0.46 | 0.46 | _ | 50.1 | 50.1 | < 0.005 | 0.01 | < 0.005 | 52.4 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.03 | 0.04 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 6.27 | 6.27 | < 0.005 | < 0.005 | _ | 6.29 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.23 | 0.23 | < 0.005 | 0.02 | 0.02 | _ | 2.74 | 2.74 | < 0.005 | < 0.005 | < 0.005 | 2.88 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | < 0.005 | 0.01 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 1.04 | 1.04 | < 0.005 | < 0.005 | _ | 1.04 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.04 | 0.04 | < 0.005 | < 0.005 | < 0.005 | _ | 0.45 | 0.45 | < 0.005 | < 0.005 | < 0.005 | 0.48 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.75. P7.3 - Log boom (2026) - Unmitigated

| | | (, | , | ., | | | (| ,, | | | | | | | | | |
|---------------------------|------|------|------|----------|---------|-------|---------|---------|----------|----------|------|-------|------|---------|---------|------|------|
| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | <u> </u> | _ | _ | _ | _ | <u> </u> | <u> </u> | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.82 | 1.02 | < 0.005 | 0.02 | _ | 0.02 | 0.02 | _ | 0.02 | _ | 142 | 142 | 0.01 | < 0.005 | _ | 142 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.01 | 0.01 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 1.00 | 1.00 | < 0.005 | < 0.005 | _ | 1.00 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Off-Road Equipmer | | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 0.17 | 0.17 | < 0.005 | < 0.005 | _ | 0.17 |
|---------------------------|------|---------|---------|---------|---------|------|---------|---------|------|---------|---|------|------|---------|---------|------|------|
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.76. P7.3 - Log boom (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| D - 11. | | | | | | | | | | | | | | | | | |
|---------------------------|--------------|---------|---------|---------|---------|------|---------|---------|------|---------|---|------|------|---------|---------|------|------|
| Daily, Winter (Max) | _ | _ | _ | | _ | _ | | _ | _ | _ | | _ | _ | _ | _ | _ | |
| Off-Road Equipmen | | 0.82 | 1.02 | < 0.005 | 0.02 | _ | 0.02 | 0.02 | _ | 0.02 | _ | 142 | 142 | 0.01 | < 0.005 | _ | 142 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.01 | 0.01 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 1.00 | 1.00 | < 0.005 | < 0.005 | _ | 1.00 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | < 0.005 t | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 0.17 | 0.17 | < 0.005 | < 0.005 | _ | 0.17 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | |
| Daily, Winter (Max) | _ | _ | _ | _ | - | - | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.77. P7.3 - Log boom (2027) - Unmitigated

| | Oliatai | 110 (10) 00 | ., | iiy, toi <i>ii</i> y i | 101 41111 | , | 000 | ib, day ic | i daliy, i | vi i / y i i O | arii iaai, | - | | | | | |
|---------------------------|---------|-------------|---------|------------------------|-----------|---|---------|------------|------------|----------------|------------|-------|------|---------|---------|------|------|
| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.81 | 1.02 | < 0.005 | 0.02 | _ | 0.02 | 0.02 | _ | 0.02 | _ | 142 | 142 | 0.01 | < 0.005 | _ | 142 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.02 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 3.00 | 3.00 | < 0.005 | < 0.005 | _ | 3.01 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 0.50 | 0.50 | < 0.005 | < 0.005 | _ | 0.50 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|----------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | <u> </u> | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.78. P7.3 - Log boom (2027) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|---------|-------|-------|-------|--------|--------|--------|------|-------|------|------|---------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.81 | 1.02 | < 0.005 | 0.02 | _ | 0.02 | 0.02 | _ | 0.02 | _ | 142 | 142 | 0.01 | < 0.005 | _ | 142 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Off-Road Equipmen | | 0.02 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 3.00 | 3.00 | < 0.005 | < 0.005 | _ | 3.01 |
|---------------------------|--------------|---------|---------|---------|---------|------|---------|---------|------|---------|---|------|------|----------|---------|------|------|
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ |
| Off-Road Equipmen | < 0.005 t | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 0.50 | 0.50 | < 0.005 | < 0.005 | _ | 0.50 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | - | _ | _ | - |
| Daily, Summer (Max) | _ | - | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ |
| Daily, Winter (Max) | _ | - | - | _ | _ | _ | _ | - | _ | _ | _ | | - | _ | _ | - | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.79. P7.4 - Restoration (2027) - Unmitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|---------|---------|---------|---------|-------|---------|---------|--------|---------|------|-------|------|---------|---------|---------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 1.99 | 3.29 | < 0.005 | 0.06 | _ | 0.06 | 0.06 | _ | 0.06 | _ | 509 | 509 | 0.02 | < 0.005 | _ | 511 |
| Onsite truck | < 0.005 | 0.46 | 0.03 | < 0.005 | < 0.005 | 92.0 | 92.0 | < 0.005 | 9.18 | 9.19 | _ | 245 | 245 | < 0.005 | 0.04 | 0.01 | 256 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.09 | 0.14 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 22.3 | 22.3 | < 0.005 | < 0.005 | _ | 22.4 |
| Onsite truck | < 0.005 | 0.02 | < 0.005 | < 0.005 | < 0.005 | 3.61 | 3.61 | < 0.005 | 0.36 | 0.36 | _ | 10.7 | 10.7 | < 0.005 | < 0.005 | 0.01 | 11.2 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.02 | 0.03 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 3.69 | 3.69 | < 0.005 | < 0.005 | _ | 3.71 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.66 | 0.66 | < 0.005 | 0.07 | 0.07 | _ | 1.78 | 1.78 | < 0.005 | < 0.005 | < 0.005 | 1.86 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.80. P7.4 - Restoration (2027) - Mitigated

| | | <u> </u> | | | | | <u> </u> | ib/day ic | | | | | | | | | |
|---------------------------|---------|----------|---------|---------|---------|-------|----------|-----------|--------|---------|------|-------|------|---------|---------|------|------|
| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 1.99 | 3.29 | < 0.005 | 0.06 | _ | 0.06 | 0.06 | _ | 0.06 | _ | 509 | 509 | 0.02 | < 0.005 | _ | 511 |
| Onsite truck | < 0.005 | 0.46 | 0.03 | < 0.005 | < 0.005 | 23.2 | 23.2 | < 0.005 | 2.32 | 2.32 | _ | 245 | 245 | < 0.005 | 0.04 | 0.01 | 256 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.09 | 0.14 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 22.3 | 22.3 | < 0.005 | < 0.005 | _ | 22.4 |
| Onsite truck | < 0.005 | 0.02 | < 0.005 | < 0.005 | < 0.005 | 0.91 | 0.91 | < 0.005 | 0.09 | 0.09 | _ | 10.7 | 10.7 | < 0.005 | < 0.005 | 0.01 | 11.2 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Off-Road Equipmer | | 0.02 | 0.03 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | - | 3.69 | 3.69 | < 0.005 | < 0.005 | _ | 3.71 |
|---------------------------|---------|---------|---------|---------|---------|------|---------|---------|------|---------|---|------|------|---------|---------|---------|------|
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.17 | 0.17 | < 0.005 | 0.02 | 0.02 | - | 1.78 | 1.78 | < 0.005 | < 0.005 | < 0.005 | 1.86 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.81. P7.5 - Demobilization (2027) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|---------|---------|---------|---------|------|---------|---------|------|---------|---|------|------|---------|---------|---------|------|
| Off-Road Equipmen | | 1.99 | 3.29 | < 0.005 | 0.06 | _ | 0.06 | 0.06 | _ | 0.06 | _ | 509 | 509 | 0.02 | < 0.005 | _ | 511 |
| Onsite truck | < 0.005 | 0.46 | 0.03 | < 0.005 | < 0.005 | 92.0 | 92.0 | < 0.005 | 9.18 | 9.19 | _ | 245 | 245 | < 0.005 | 0.04 | 0.01 | 256 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | - | _ |
| Off-Road Equipmen | | 0.07 | 0.11 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | - | < 0.005 | _ | 16.7 | 16.7 | < 0.005 | < 0.005 | - | 16.8 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 2.71 | 2.71 | < 0.005 | 0.27 | 0.27 | _ | 8.05 | 8.05 | < 0.005 | < 0.005 | 0.01 | 8.44 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.01 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 2.77 | 2.77 | < 0.005 | < 0.005 | _ | 2.78 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.49 | 0.49 | < 0.005 | 0.05 | 0.05 | _ | 1.33 | 1.33 | < 0.005 | < 0.005 | < 0.005 | 1.40 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | - | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | - | _ | - | _ | _ | _ | _ | - | _ | - | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.82. P7.5 - Demobilization (2027) - Mitigated

| | | _ | | J. J | | | | | | | | | | | | | |
|---------------------------|---------|---------|---------|---------|---------|-------|---------|---------|--------|---------|------|-------|------|---------|---------|---------|------|
| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 1.99 | 3.29 | < 0.005 | 0.06 | _ | 0.06 | 0.06 | _ | 0.06 | _ | 509 | 509 | 0.02 | < 0.005 | _ | 511 |
| Onsite truck | < 0.005 | 0.46 | 0.03 | < 0.005 | < 0.005 | 23.2 | 23.2 | < 0.005 | 2.32 | 2.32 | _ | 245 | 245 | < 0.005 | 0.04 | 0.01 | 256 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.07 | 0.11 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 16.7 | 16.7 | < 0.005 | < 0.005 | _ | 16.8 |
| Onsite truck | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.68 | 0.68 | < 0.005 | 0.07 | 0.07 | _ | 8.05 | 8.05 | < 0.005 | < 0.005 | 0.01 | 8.44 |
| Annual | _ | | _ | | | | | _ | _ | _ | | _ | _ | _ | | | _ |
| Off-Road Equipmen | | 0.01 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 2.77 | 2.77 | < 0.005 | < 0.005 | _ | 2.78 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.12 | 0.12 | < 0.005 | 0.01 | 0.01 | _ | 1.33 | 1.33 | < 0.005 | < 0.005 | < 0.005 | 1.40 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | - | _ | - | - | _ | _ | _ | _ | _ | - | _ | _ | _ | - | _ | _ |

| Daily, Winter (Max) | _ | _ | - | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.83. P8 - Spillway abandonment (2027) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.09 | 0.07 | 1.14 | 0.00 | 0.00 | 0.12 | 0.12 | 0.00 | 0.03 | 0.03 | _ | 128 | 128 | 0.01 | < 0.005 | 0.50 | 130 |
| Vendor | < 0.005 | 0.21 | 0.04 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 119 | 119 | < 0.005 | 0.02 | 0.24 | 124 |
| Hauling | 0.01 | 1.13 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 634 | 634 | < 0.005 | 0.10 | 0.95 | 664 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Worker | < 0.005 | 0.01 | 0.06 | 0.00 | 0.00 | 0.01 | 0.01 | 0.00 | < 0.005 | < 0.005 | _ | 7.70 | 7.70 | < 0.005 | < 0.005 | 0.01 | 7.82 |
| Vendor | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 7.81 | 7.81 | < 0.005 | < 0.005 | 0.01 | 8.17 |
| Hauling | < 0.005 | 0.08 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 41.7 | 41.7 | < 0.005 | 0.01 | 0.03 | 43.7 |
| Annual | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | 0.01 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | < 0.005 | < 0.005 | _ | 1.27 | 1.27 | < 0.005 | < 0.005 | < 0.005 | 1.29 |
| Vendor | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 1.29 | 1.29 | < 0.005 | < 0.005 | < 0.005 | 1.35 |
| Hauling | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 6.90 | 6.90 | < 0.005 | < 0.005 | < 0.005 | 7.23 |

3.84. P8 - Spillway abandonment (2027) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | - | _ | _ | - | _ | _ | _ | _ | - | _ | _ | _ | _ | - | _ | _ | - |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.09 | 0.07 | 1.14 | 0.00 | 0.00 | 0.12 | 0.12 | 0.00 | 0.03 | 0.03 | _ | 128 | 128 | 0.01 | < 0.005 | 0.50 | 130 |
| Vendor | < 0.005 | 0.21 | 0.04 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 119 | 119 | < 0.005 | 0.02 | 0.24 | 124 |
| Hauling | 0.01 | 1.13 | 0.08 | 0.01 | 0.01 | 0.15 | 0.16 | 0.01 | 0.04 | 0.05 | _ | 634 | 634 | < 0.005 | 0.10 | 0.95 | 664 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Worker | < 0.005 | 0.01 | 0.06 | 0.00 | 0.00 | 0.01 | 0.01 | 0.00 | < 0.005 | < 0.005 | _ | 7.70 | 7.70 | < 0.005 | < 0.005 | 0.01 | 7.82 |
| Vendor | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 7.81 | 7.81 | < 0.005 | < 0.005 | 0.01 | 8.17 |
| Hauling | < 0.005 | 0.08 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 41.7 | 41.7 | < 0.005 | 0.01 | 0.03 | 43.7 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | < 0.005 | < 0.005 | 0.01 | 0.00 | 0.00 | < 0.005 | < 0.005 | 0.00 | < 0.005 | < 0.005 | _ | 1.27 | 1.27 | < 0.005 | < 0.005 | < 0.005 | 1.29 |
| Vendor | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 1.29 | 1.29 | < 0.005 | < 0.005 | < 0.005 | 1.35 |
| Hauling | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 6.90 | 6.90 | < 0.005 | < 0.005 | < 0.005 | 7.23 |

3.85. P8.1 - Remove Cofferdam (2027) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|---------|---------|---------|---------|-------|---------|---------|--------|---------|------|-------|------|---------|---------|---------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 2.93 | 3.07 | 0.01 | 0.12 | _ | 0.12 | 0.11 | _ | 0.11 | _ | 857 | 857 | 0.03 | 0.01 | _ | 860 |
| Onsite truck | < 0.005 | 0.08 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | _ | 40.3 | 40.3 | < 0.005 | 0.01 | 0.06 | 42.3 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Off-Road Equipmen | | 0.08 | 0.08 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 23.5 | 23.5 | < 0.005 | < 0.005 | _ | 23.6 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.36 | 0.36 | < 0.005 | 0.04 | 0.04 | _ | 1.10 | 1.10 | < 0.005 | < 0.005 | < 0.005 | 1.16 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.01 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 3.89 | 3.89 | < 0.005 | < 0.005 | _ | 3.90 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.07 | 0.07 | < 0.005 | 0.01 | 0.01 | _ | 0.18 | 0.18 | < 0.005 | < 0.005 | < 0.005 | 0.19 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.86. P8.1 - Remove Cofferdam (2027) - Mitigated

| | | | | | | | | ib/uay ic | | | | | | | | | |
|---------------------------|---------|------|------|---------|---------|-------|---------|-----------|--------|---------|------|-------|------|---------|---------|------|------|
| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 2.93 | 3.07 | 0.01 | 0.12 | _ | 0.12 | 0.11 | _ | 0.11 | _ | 857 | 857 | 0.03 | 0.01 | _ | 860 |
| Onsite truck | < 0.005 | 0.08 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 40.3 | 40.3 | < 0.005 | 0.01 | 0.06 | 42.3 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.08 | 0.08 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 23.5 | 23.5 | < 0.005 | < 0.005 | _ | 23.6 |

| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.09 | 0.09 | < 0.005 | 0.01 | 0.01 | _ | 1.10 | 1.10 | < 0.005 | < 0.005 | < 0.005 | 1.16 |
|---------------------------|---------|---------|---------|---------|---------|------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.01 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | - | < 0.005 | _ | 3.89 | 3.89 | < 0.005 | < 0.005 | _ | 3.90 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | < 0.005 | - | 0.18 | 0.18 | < 0.005 | < 0.005 | < 0.005 | 0.19 |
| Offsite | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.87. P8.2 - Canal Side Channel (2027) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | _ | | | | _ | _ | | _ | _ | _ | _ | | _ | | | _ |
|---------------------------|---------|---------|---------|---------|---------|------|---------|---------|------|---------|---|-------|----------|---------|---------|---------|-------|
| Off-Road Equipmen | | 4.13 | 4.10 | 0.01 | 0.17 | _ | 0.17 | 0.16 | _ | 0.16 | _ | 1,155 | 1,155 | 0.05 | 0.01 | _ | 1,159 |
| Onsite truck | < 0.005 | 0.08 | 0.01 | < 0.005 | < 0.005 | 14.7 | 14.7 | < 0.005 | 1.47 | 1.47 | - | 40.3 | 40.3 | < 0.005 | 0.01 | 0.06 | 42.3 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.14 | 0.13 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | - | 38.0 | 38.0 | < 0.005 | < 0.005 | _ | 38.1 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.43 | 0.43 | < 0.005 | 0.04 | 0.04 | - | 1.33 | 1.33 | < 0.005 | < 0.005 | < 0.005 | 1.39 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipment | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | - | 6.29 | 6.29 | < 0.005 | < 0.005 | _ | 6.31 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.08 | 0.08 | < 0.005 | 0.01 | 0.01 | - | 0.22 | 0.22 | < 0.005 | < 0.005 | < 0.005 | 0.23 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | - | - | _ | _ | _ | _ | _ | _ | - | _ | - | _ | _ | - | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.88. P8.2 - Canal Side Channel (2027) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|--------------|---------|---------|---------|----------|-------|---------|----------|---------|---------|------|----------|-------|----------|---------|---------|-------|
| Onsite | _ | _ | _ | _ | <u> </u> | _ | _ | <u> </u> | _ | _ | _ | <u> </u> | _ | <u> </u> | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 4.13 | 4.10 | 0.01 | 0.17 | _ | 0.17 | 0.16 | _ | 0.16 | _ | 1,155 | 1,155 | 0.05 | 0.01 | _ | 1,159 |
| Onsite truck | < 0.005 | 0.08 | 0.01 | < 0.005 | < 0.005 | 3.71 | 3.71 | < 0.005 | 0.37 | 0.37 | _ | 40.3 | 40.3 | < 0.005 | 0.01 | 0.06 | 42.3 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.14 | 0.13 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 38.0 | 38.0 | < 0.005 | < 0.005 | _ | 38.1 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.11 | 0.11 | < 0.005 | 0.01 | 0.01 | _ | 1.33 | 1.33 | < 0.005 | < 0.005 | < 0.005 | 1.39 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | < 0.005 t | 0.02 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 6.29 | 6.29 | < 0.005 | < 0.005 | _ | 6.31 |
| Onsite truck | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | < 0.005 | _ | 0.22 | 0.22 | < 0.005 | < 0.005 | < 0.005 | 0.23 |

| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.89. P8.3 - Cover Bathtub (2027) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|-------|------|------|------|-------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 4.13 | 4.10 | 0.01 | 0.17 | _ | 0.17 | 0.16 | _ | 0.16 | _ | 1,155 | 1,155 | 0.05 | 0.01 | _ | 1,159 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | | _ | | _ | _ | | _ | _ | _ | _ | _ | _ |
|---------------------------|--------------|------|------|---------|---------|------|---------|---------|------|---------|---|------|------|---------|---------|------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.14 | 0.13 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 38.0 | 38.0 | < 0.005 | < 0.005 | _ | 38.1 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | < 0.005 t | 0.02 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 6.29 | 6.29 | < 0.005 | < 0.005 | - | 6.31 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | - | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | - | | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | - | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.90. P8.3 - Cover Bathtub (2027) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|---------|---------|-------|---------|---------|--------|---------|------|-------|-------|---------|---------|------|-------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 4.13 | 4.10 | 0.01 | 0.17 | _ | 0.17 | 0.16 | _ | 0.16 | _ | 1,155 | 1,155 | 0.05 | 0.01 | _ | 1,159 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.14 | 0.13 | < 0.005 | 0.01 | _ | 0.01 | 0.01 | _ | 0.01 | _ | 38.0 | 38.0 | < 0.005 | < 0.005 | _ | 38.1 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Off-Road Equipmen | | 0.02 | 0.02 | < 0.005 | < 0.005 | _ | < 0.005 | < 0.005 | _ | < 0.005 | _ | 6.29 | 6.29 | < 0.005 | < 0.005 | _ | 6.31 |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.91. P9 - Batch Plant Equip (2025) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Offsite | _ | _ | _ | <u> </u> | <u> </u> | _ | _ | <u> </u> | _ | <u> </u> | <u> </u> | _ | _ | _ | _ | _ | <u> </u> |
|---------------------------|------|------|------|----------|----------|------|------|----------|------|----------|----------|------|------|------|------|------|----------|
| Daily, Summer (Max) | _ | - | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.92. P9 - Batch Plant Equip (2025) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.93. P9 - Batch Plant Equip (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, | | | | | | | | | | | | | | | | | |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Summer (Max) | _ | _ | _ | _ | _ | _ | | | | _ | | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|----------|------|------|---|------|------|------|------|------|------|
| Annual | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.94. P9 - Batch Plant Equip (2026) - Mitigated

| | · Ollatai | 100 (107 00 | , | ,, .c.,, y | i ioi aiiii | | 01100 | ib/ady it | | vi i / y i i O i | ailiaai | | | | | | |
|---------------------------|-----------|-------------|------|------------|-------------|-------|-------|-----------|--------|------------------|---------|-------|------|------|------|------|------|
| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

4. Operations Emissions Details

4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

| Vegetatio n | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Total | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Total | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Total | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

| | ROG | | со | | | PM10D | | PM2.5E | | | | | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|---|----|---|---|-------|---|--------|---|---|---|---|------|-----|-----|---|------|
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Total | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Total | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Total | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

| Species | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Avoided | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Sequest ered | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---|----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Remove d | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Avoided | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Sequest ered | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Remove d | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Avoided | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Sequest ered | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Remove d | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

4.10.4. Soil Carbon Accumulation By Vegetation Type - Mitigated

| Vegetatio n | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | СО2Т | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Total | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Total | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Total | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

4.10.5. Above and Belowground Carbon Accumulation by Land Use Type - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

| Land Use | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|-----|-------|-------|-------|----------|--------|--------|------|-------|------|-----|-----|---|------|
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Total | _ | | _ | _ | _ | _ | _ | <u> </u> | _ | | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Total | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Total | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

4.10.6. Avoided and Sequestered Emissions by Species - Mitigated

| Species | IROG I | NOx | ICO | ISO2 | IPM10E | IPM10D | IPM10T | PM2.5E | PM2.5D | IPM2.5T | IBCO2 | INBCO2 | ICO2T | ICH4 | IN2O | IR I | CO2e |
|---------|--------|-----|-----|------|--------|--------|--------|--------|--------|---------|-------|--------|-------|------|------|------|------|
| - 1 | | | | | | | | | | | | | | | | 4 | |

| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Avoided | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Sequest ered | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Remove d | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Avoided | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Sequest ered | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Remove d | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Avoided | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Sequest ered | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Remove d | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

5. Activity Data

5.1. Construction Schedule

| Phase Name | Phase Type | Start Date | End Date | Days Per Week | Work Days per Phase | Phase Description |
|---|------------|------------|------------|---------------|---------------------|-------------------|
| P4.2 - Crest form and pour concrete | Grading | 5/30/2026 | 10/24/2026 | 6.00 | 127 | _ |
| P4.1 - Crest excavation/ subgrade | Grading | 4/21/2026 | 5/29/2026 | 6.00 | 34.0 | _ |
| P4 - Crest structure | Grading | 4/21/2026 | 10/24/2026 | 6.00 | 161 | _ |
| P3.6 - Trench Cutoff Concrete 3 | Grading | 4/14/2026 | 4/14/2026 | 2.00 | 1.00 | _ |
| P3.5 - Trench Cutoff Concrete 2 | Grading | 4/7/2026 | 4/7/2026 | 2.00 | 1.00 | _ |
| P3.4 - Trench Cutoff Concrete 1 | Grading | 3/31/2026 | 3/31/2026 | 2.00 | 1.00 | _ |
| P3.3 - Place piles, sheets, and concrete | Grading | 3/27/2026 | 4/18/2026 | 6.00 | 20.0 | _ |
| P3.1 - Mass concrete | Grading | 11/16/2025 | 12/20/2025 | 6.00 | 30.0 | _ |
| ⊇3 - Cofferdam | Grading | 11/16/2025 | 4/18/2026 | 6.00 | 132 | _ |
| P2.3 - Drains, Cleanouts, and Backfill | Grading | 4/28/2026 | 5/19/2026 | 6.00 | 19.0 | _ |
| P2.2 - Spillway form and cour concrete | Grading | 11/16/2025 | 4/25/2026 | 6.00 | 138 | _ |
| P2.1 - Spillway excavation/subgrade | Grading | 9/7/2025 | 11/9/2025 | 6.00 | 54.0 | _ |
| P2 - Spillway chute and lip bucket | Grading | 9/7/2025 | 5/19/2026 | 6.00 | 218 | _ |
| P1.4 - Access road construction | Grading | 8/22/2025 | 11/16/2025 | 6.00 | 74.0 | _ |

| P3.2 - Excavate | Grading | 3/18/2026 | 3/26/2026 | 6.00 | 8.00 | _ |
|--|---------|------------|------------|------|------|---|
| cofferdam | | | | | | |
| P1.3 - Laydown area development | Grading | 8/22/2025 | 8/28/2025 | 6.00 | 6.00 | _ |
| P1.2 - Mobilization | Grading | 8/5/2025 | 8/21/2025 | 6.00 | 15.0 | _ |
| P1.1 - Tree removal | Grading | 7/8/2025 | 8/17/2025 | 6.00 | 35.0 | _ |
| P1 - Mobilization and access development | Grading | 7/8/2025 | 11/16/2025 | 6.00 | 113 | _ |
| P5 - Dam notch and tie-in chute | Grading | 10/25/2026 | 1/19/2027 | 6.00 | 74.0 | _ |
| P5.1 - Demolition | Grading | 10/25/2026 | 11/5/2026 | 6.00 | 10.0 | _ |
| P5.2 - Excavation, Subgrade | Grading | 11/6/2026 | 11/20/2026 | 6.00 | 13.0 | _ |
| P5.3 - Form and Pour Concrete | Grading | 11/21/2026 | 12/29/2026 | 6.00 | 33.0 | _ |
| P5.4 - Install Footbridge | Grading | 12/30/2026 | 1/19/2027 | 6.00 | 18.0 | _ |
| P6 - Plunge pool | Grading | 8/5/2026 | 9/15/2026 | 6.00 | 36.0 | _ |
| P6.1 - Flow bypass | Grading | 8/5/2026 | 8/11/2026 | 6.00 | 6.00 | _ |
| P6.2 - Excavation | Grading | 8/12/2026 | 9/9/2026 | 6.00 | 25.0 | _ |
| P6.3 - Slope protection | Grading | 9/10/2026 | 9/15/2026 | 6.00 | 5.00 | _ |
| P7 - Remaining Work Scope | Grading | 12/29/2026 | 2/24/2027 | 6.00 | 50.0 | _ |
| P7.1 - Cofferdam removal | Grading | 1/9/2027 | 1/16/2027 | 6.00 | 7.00 | _ |
| P7.2 - Lighting | Grading | 1/19/2027 | 2/10/2027 | 6.00 | 20.0 | _ |
| P7.3 - Log boom | Grading | 12/29/2026 | 1/9/2027 | 6.00 | 11.0 | _ |
| P7.4 - Restoration | Grading | 1/16/2027 | 2/3/2027 | 6.00 | 16.0 | _ |
| P7.5 - Demobilization | Grading | 2/11/2027 | 2/24/2027 | 6.00 | 12.0 | _ |
| P8 - Spillway abandonment | Grading | 4/9/2027 | 5/6/2027 | 6.00 | 24.0 | _ |
| P8.1 - Remove Cofferdam | Grading | 4/9/2027 | 4/20/2027 | 6.00 | 10.0 | _ |
| P8.2 - Canal Side Channel | Grading | 4/9/2027 | 4/22/2027 | 6.00 | 12.0 | _ |

| P8.3 - Cover Bathtub | Grading | 4/23/2027 | 5/6/2027 | 6.00 | 12.0 | _ |
|------------------------|---------|-----------|------------|------|------|---|
| P9 - Batch Plant Equip | Grading | 11/1/2025 | 12/31/2026 | 3.00 | 183 | _ |

5.2. Off-Road Equipment

5.2.1. Unmitigated

| Phase Name | Equipment Type | Fuel Type | Engine Tier | Number per Day | Hours Per Day | Horsepower | Load Factor |
|--------------------------------------|---------------------|-----------|-------------|----------------|---------------|------------|-------------|
| P4.2 - Crest form and pour concrete | Pumps | Diesel | Average | 1.00 | 5.00 | 11.0 | 0.74 |
| P4.2 - Crest form and pour concrete | Air Compressors | Diesel | Average | 1.00 | 5.00 | 37.0 | 0.48 |
| P4.2 - Crest form and pour concrete | Cranes | Diesel | Average | 1.00 | 6.00 | 367 | 0.29 |
| P4.2 - Crest form and pour concrete | Generator Sets | Diesel | Average | 1.00 | 10.0 | 14.0 | 0.74 |
| P4.2 - Crest form and pour concrete | Skid Steer Loaders | Diesel | Average | 1.00 | 5.00 | 71.0 | 0.37 |
| P4.1 - Crest excavation/ subgrade | Rubber Tired Dozers | Diesel | Average | 1.00 | 8.00 | 367 | 0.40 |
| P4.1 - Crest excavation/ subgrade | Off-Highway Trucks | Diesel | Average | 4.00 | 9.00 | 376 | 0.38 |
| P4.1 - Crest excavation/ subgrade | Excavators | Diesel | Average | 1.00 | 9.00 | 36.0 | 0.38 |
| P4.1 - Crest excavation/ subgrade | Bore/Drill Rigs | Diesel | Average | 1.00 | 5.00 | 83.0 | 0.50 |
| P3.6 - Trench Cutoff Concrete 3 | Pumps | Diesel | Average | 1.00 | 8.00 | 11.0 | 0.74 |
| P3.6 - Trench Cutoff Concrete 3 | Skid Steer Loaders | Diesel | Average | 1.00 | 5.00 | 71.0 | 0.37 |
| P3.6 - Trench Cutoff Concrete 3 | Generator Sets | Diesel | Average | 1.00 | 10.0 | 14.0 | 0.74 |
| P3.6 - Trench Cutoff Concrete 3 | Forklifts | Diesel | Average | 1.00 | 6.00 | 82.0 | 0.20 |

| P3.5 - Trench Cutoff Concrete 2 | Pumps | Diesel | Average | 1.00 | 8.00 | 11.0 | 0.74 |
|---|--------------------|--------|---------|------|------|------|------|
| P3.5 - Trench Cutoff Concrete 2 | Skid Steer Loaders | Diesel | Average | 1.00 | 5.00 | 71.0 | 0.37 |
| P3.5 - Trench Cutoff Concrete 2 | Generator Sets | Diesel | Average | 1.00 | 10.0 | 14.0 | 0.74 |
| P3.5 - Trench Cutoff Concrete 2 | Forklifts | Diesel | Average | 1.00 | 6.00 | 82.0 | 0.20 |
| P3.4 - Trench Cutoff Concrete 1 | Pumps | Diesel | Average | 1.00 | 8.00 | 11.0 | 0.74 |
| P3.4 - Trench Cutoff Concrete 1 | Skid Steer Loaders | Diesel | Average | 1.00 | 5.00 | 71.0 | 0.37 |
| P3.4 - Trench Cutoff Concrete 1 | Generator Sets | Diesel | Average | 1.00 | 10.0 | 14.0 | 0.74 |
| P3.4 - Trench Cutoff Concrete 1 | Forklifts | Diesel | Average | 1.00 | 6.00 | 82.0 | 0.20 |
| P3.3 - Place piles, sheets, and concrete | Forklifts | Diesel | Average | 1.00 | 6.00 | 82.0 | 0.20 |
| P3.3 - Place piles, sheets, and concrete | Excavators | Diesel | Average | 1.00 | 5.00 | 36.0 | 0.38 |
| P3.3 - Place piles, sheets, and concrete | Cranes | Diesel | Average | 1.00 | 6.00 | 367 | 0.29 |
| P3.1 - Mass concrete | Forklifts | Diesel | Average | 1.00 | 6.00 | 82.0 | 0.20 |
| P3.1 - Mass concrete | Excavators | Diesel | Average | 1.00 | 5.00 | 36.0 | 0.38 |
| P3.1 - Mass concrete | Cranes | Diesel | Average | 1.00 | 6.00 | 367 | 0.29 |
| P2.2 - Spillway form and pour concrete | Pumps | Diesel | Average | 1.00 | 5.00 | 11.0 | 0.74 |
| P2.2 - Spillway form and pour concrete | Air Compressors | Diesel | Average | 1.00 | 5.00 | 37.0 | 0.48 |
| P2.2 - Spillway form and pour concrete | Cranes | Diesel | Average | 1.00 | 6.00 | 367 | 0.29 |
| P2.2 - Spillway form and pour concrete | Generator Sets | Diesel | Average | 1.00 | 10.0 | 14.0 | 0.74 |

| P2.2 - Spillway form and pour concrete | Skid Steer Loaders | Diesel | Average | 1.00 | 5.00 | 71.0 | 0.37 |
|--|---------------------------------|--------|---------|------|------|------|------|
| P2.1 - Spillway excavation/subgrade | Rubber Tired Dozers | Diesel | Average | 1.00 | 8.00 | 367 | 0.40 |
| P2.1 - Spillway excavation/subgrade | Off-Highway Trucks | Diesel | Average | 4.00 | 9.00 | 376 | 0.38 |
| P2.1 - Spillway excavation/subgrade | Excavators | Diesel | Average | 1.00 | 9.00 | 36.0 | 0.38 |
| P2.1 - Spillway excavation/subgrade | Skid Steer Loaders | Diesel | Average | 1.00 | 5.00 | 71.0 | 0.37 |
| P2.1 - Spillway excavation/subgrade | Bore/Drill Rigs | Diesel | Average | 1.00 | 5.00 | 83.0 | 0.50 |
| P1.4 - Access road construction | Rubber Tired Dozers | Diesel | Average | 1.00 | 8.00 | 367 | 0.40 |
| P1.4 - Access road construction | Off-Highway Trucks | Diesel | Average | 4.00 | 9.00 | 376 | 0.38 |
| P1.4 - Access road construction | Excavators | Diesel | Average | 1.00 | 9.00 | 36.0 | 0.38 |
| P1.4 - Access road construction | Rollers | Diesel | Average | 1.00 | 10.0 | 36.0 | 0.38 |
| P3.2 - Excavate cofferdam | Forklifts | Diesel | Average | 1.00 | 6.00 | 82.0 | 0.20 |
| P3.2 - Excavate cofferdam | Excavators | Diesel | Average | 1.00 | 5.00 | 36.0 | 0.38 |
| P3.2 - Excavate cofferdam | Cranes | Diesel | Average | 1.00 | 6.00 | 367 | 0.29 |
| P1.3 - Laydown area development | Rubber Tired Dozers | Diesel | Average | 1.00 | 8.00 | 367 | 0.40 |
| P1.3 - Laydown area development | Forklifts | Diesel | Average | 1.00 | 6.00 | 82.0 | 0.20 |
| P1.3 - Laydown area development | Rubber Tired Loaders | Diesel | Average | 1.00 | 6.00 | 150 | 0.36 |
| P1.1 - Tree removal | Other Construction Equipment | Diesel | Average | 3.00 | 8.00 | 82.0 | 0.42 |
| P1.1 - Tree removal | Rubber Tired Loaders | Diesel | Average | 1.00 | 6.00 | 150 | 0.36 |

| P1.1 - Tree removal | Skid Steer Loaders | Diesel | Average | 1.00 | 8.00 | 71.0 | 0.37 |
|----------------------------------|--------------------------------------|--------|---------|------|------|------|------|
| P1.1 - Tree removal | Skid Steer Loaders | Diesel | Average | 1.00 | 6.00 | 71.0 | 0.37 |
| P1.1 - Tree removal | Other Construction Equipment | Diesel | Average | 1.00 | 6.00 | 82.0 | 0.42 |
| P1.1 - Tree removal | Other Material Handling Equipment | Diesel | Average | 3.00 | 8.00 | 93.0 | 0.40 |
| P5.1 - Demolition | Excavators | Diesel | Average | 2.00 | 10.0 | 36.0 | 0.38 |
| P5.1 - Demolition | Off-Highway Trucks | Diesel | Average | 1.00 | 3.00 | 376 | 0.38 |
| P5.2 - Excavation, Subgrade | Excavators | Diesel | Average | 2.00 | 10.0 | 36.0 | 0.38 |
| P5.2 - Excavation, Subgrade | Off-Highway Trucks | Diesel | Average | 1.00 | 3.00 | 376 | 0.38 |
| P5.3 - Form and Pour Concrete | Pumps | Diesel | Average | 1.00 | 2.00 | 11.0 | 0.74 |
| P5.3 - Form and Pour Concrete | Air Compressors | Diesel | Average | 1.00 | 5.00 | 37.0 | 0.48 |
| P5.3 - Form and Pour Concrete | Cranes | Diesel | Average | 1.00 | 6.00 | 367 | 0.29 |
| P5.3 - Form and Pour Concrete | Generator Sets | Diesel | Average | 1.00 | 10.0 | 14.0 | 0.74 |
| P5.3 - Form and Pour Concrete | Skid Steer Loaders | Diesel | Average | 1.00 | 5.00 | 71.0 | 0.37 |
| P5.4 - Install Footbridge | Pumps | Diesel | Average | 1.00 | 2.00 | 11.0 | 0.74 |
| P5.4 - Install Footbridge | Air Compressors | Diesel | Average | 1.00 | 5.00 | 37.0 | 0.48 |
| P5.4 - Install Footbridge | Cranes | Diesel | Average | 1.00 | 6.00 | 367 | 0.29 |
| P5.4 - Install Footbridge | Generator Sets | Diesel | Average | 1.00 | 10.0 | 14.0 | 0.74 |
| P5.4 - Install Footbridge | Skid Steer Loaders | Diesel | Average | 1.00 | 5.00 | 71.0 | 0.37 |
| P6.1 - Flow bypass | Generator Sets | Diesel | Average | 1.00 | 24.0 | 14.0 | 0.74 |
| P6.2 - Excavation | Generator Sets | Diesel | Average | 1.00 | 10.0 | 14.0 | 0.74 |

| P6.2 - Excavation | Rubber Tired Dozers | Diesel | Average | 1.00 | 8.00 | 367 | 0.40 |
|------------------------------|---------------------|--------|---------|------|------|------|------|
| P6.2 - Excavation | Off-Highway Trucks | Diesel | Average | 2.00 | 9.00 | 376 | 0.38 |
| P6.2 - Excavation | Excavators | Diesel | Average | 1.00 | 9.00 | 36.0 | 0.38 |
| P6.3 - Slope protection | Bore/Drill Rigs | Diesel | Average | 1.00 | 5.00 | 83.0 | 0.50 |
| P6.3 - Slope protection | Pumps | Diesel | Average | 1.00 | 5.00 | 11.0 | 0.74 |
| P7.1 - Cofferdam removal | Forklifts | Diesel | Average | 1.00 | 6.00 | 82.0 | 0.20 |
| P7.1 - Cofferdam removal | Cranes | Diesel | Average | 1.00 | 6.00 | 367 | 0.29 |
| P7.2 - Lighting | Forklifts | Diesel | Average | 1.00 | 6.00 | 82.0 | 0.20 |
| P7.3 - Log boom | Excavators | Diesel | Average | 1.00 | 8.00 | 36.0 | 0.38 |
| P7.4 - Restoration | Skid Steer Loaders | Diesel | Average | 1.00 | 10.0 | 71.0 | 0.37 |
| P7.4 - Restoration | Excavators | Diesel | Average | 1.00 | 5.00 | 36.0 | 0.38 |
| P7.4 - Restoration | Forklifts | Diesel | Average | 1.00 | 6.00 | 82.0 | 0.20 |
| P7.5 - Demobilization | Skid Steer Loaders | Diesel | Average | 1.00 | 10.0 | 71.0 | 0.37 |
| P7.5 - Demobilization | Excavators | Diesel | Average | 1.00 | 5.00 | 36.0 | 0.38 |
| P7.5 - Demobilization | Forklifts | Diesel | Average | 1.00 | 6.00 | 82.0 | 0.20 |
| P8.1 - Remove Cofferdam | Forklifts | Diesel | Average | 1.00 | 6.00 | 82.0 | 0.20 |
| P8.1 - Remove Cofferdam | Cranes | Diesel | Average | 1.00 | 6.00 | 367 | 0.29 |
| P8.2 - Canal Side Channel | Cranes | Diesel | Average | 1.00 | 8.00 | 367 | 0.29 |
| P8.2 - Canal Side Channel | Forklifts | Diesel | Average | 1.00 | 6.00 | 82.0 | 0.20 |
| P8.2 - Canal Side Channel | Pumps | Diesel | Average | 1.00 | 5.00 | 11.0 | 0.74 |
| P8.3 - Cover Bathtub | Cranes | Diesel | Average | 1.00 | 8.00 | 367 | 0.29 |
| P8.3 - Cover Bathtub | Forklifts | Diesel | Average | 1.00 | 6.00 | 82.0 | 0.20 |
| P8.3 - Cover Bathtub | Pumps | Diesel | Average | 1.00 | 5.00 | 11.0 | 0.74 |

5.3. Construction Vehicles

5.3.1. Unmitigated

| Phase Name | Trip Type | One-Way Trips per Day | Miles per Trip | Vehicle Mix |
|--|--------------|-----------------------|----------------|---------------|
| P1 - Mobilization and access development | _ | _ | _ | _ |
| P1 - Mobilization and access development | Worker | 20.0 | 14.1 | LDA,LDT1,LDT2 |
| P1 - Mobilization and access development | Vendor | 10.0 | 8.98 | HHDT,MHDT |
| P1 - Mobilization and access development | Hauling | 6.00 | 40.3 | HHDT |
| P1 - Mobilization and access development | Onsite truck | 0.00 | 0.00 | HHDT |
| P1.1 - Tree removal | _ | _ | _ | _ |
| P1.1 - Tree removal | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P1.1 - Tree removal | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P1.1 - Tree removal | Hauling | 20.0 | 40.3 | HHDT |
| P1.1 - Tree removal | Onsite truck | 1.00 | 52.5 | HHDT |
| P1.2 - Mobilization | _ | _ | _ | _ |
| P1.2 - Mobilization | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P1.2 - Mobilization | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P1.2 - Mobilization | Hauling | 12.0 | 40.3 | HHDT |
| P1.2 - Mobilization | Onsite truck | 0.00 | 0.00 | HHDT |
| P1.3 - Laydown area development | _ | _ | _ | _ |
| P1.3 - Laydown area development | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P1.3 - Laydown area development | Vendor | 0.00 | 8.98 | ннот,мнот |
| P1.3 - Laydown area development | Hauling | 0.00 | 20.0 | HHDT |
| P1.3 - Laydown area development | Onsite truck | 1.00 | 47.5 | HHDT |
| P1.4 - Access road construction | _ | _ | _ | _ |

| P1.4 - Access road construction | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
|-------------------------------------|--------------|------|------|---------------|
| P1.4 - Access road construction | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P1.4 - Access road construction | Hauling | 0.00 | 20.0 | HHDT |
| P1.4 - Access road construction | Onsite truck | 1.00 | 60.0 | HHDT |
| P2 - Spillway chute and flip bucket | _ | _ | _ | _ |
| P2 - Spillway chute and flip bucket | Worker | 40.0 | 14.1 | LDA,LDT1,LDT2 |
| P2 - Spillway chute and flip bucket | Vendor | 8.00 | 8.98 | HHDT,MHDT |
| P2 - Spillway chute and flip bucket | Hauling | 4.00 | 40.3 | HHDT |
| P2 - Spillway chute and flip bucket | Onsite truck | 0.00 | 0.00 | HHDT |
| P4.2 - Crest form and pour concrete | _ | _ | _ | _ |
| P4.2 - Crest form and pour concrete | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P4.2 - Crest form and pour concrete | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P4.2 - Crest form and pour concrete | Hauling | 30.0 | 0.50 | HHDT |
| P4.2 - Crest form and pour concrete | Onsite truck | 1.00 | 10.0 | HHDT |
| P4.1 - Crest excavation/ subgrade | _ | _ | _ | _ |
| P4.1 - Crest excavation/ subgrade | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P4.1 - Crest excavation/ subgrade | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P4.1 - Crest excavation/ subgrade | Hauling | 0.00 | 20.0 | HHDT |
| P4.1 - Crest excavation/ subgrade | Onsite truck | 1.00 | 60.0 | HHDT |
| P4 - Crest structure | _ | _ | _ | _ |
| P4 - Crest structure | Worker | 40.0 | 14.1 | LDA,LDT1,LDT2 |
| P4 - Crest structure | Vendor | 8.00 | 8.98 | HHDT,MHDT |
| P4 - Crest structure | Hauling | 4.00 | 40.3 | HHDT |
| P4 - Crest structure | Onsite truck | 0.00 | 0.00 | HHDT |
| P3.6 - Trench Cutoff Concrete 3 | _ | _ | _ | _ |
| P3.6 - Trench Cutoff Concrete 3 | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P3.6 - Trench Cutoff Concrete 3 | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P3.6 - Trench Cutoff Concrete 3 | Hauling | 40.0 | 0.50 | HHDT |

| P3.6 - Trench Cutoff Concrete 3 | Onsite truck | 1.00 | 10.0 | HHDT |
|--|--------------|------|------|---------------|
| P3.5 - Trench Cutoff Concrete 2 | _ | _ | _ | _ |
| P3.5 - Trench Cutoff Concrete 2 | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P3.5 - Trench Cutoff Concrete 2 | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P3.5 - Trench Cutoff Concrete 2 | Hauling | 40.0 | 0.50 | HHDT |
| P3.5 - Trench Cutoff Concrete 2 | Onsite truck | 1.00 | 10.0 | HHDT |
| P3.4 - Trench Cutoff Concrete 1 | _ | _ | _ | _ |
| P3.4 - Trench Cutoff Concrete 1 | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P3.4 - Trench Cutoff Concrete 1 | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P3.4 - Trench Cutoff Concrete 1 | Hauling | 40.0 | 0.50 | HHDT |
| P3.4 - Trench Cutoff Concrete 1 | Onsite truck | 1.00 | 10.0 | HHDT |
| P3.3 - Place piles, sheets, and concrete | _ | _ | _ | _ |
| P3.3 - Place piles, sheets, and concrete | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P3.3 - Place piles, sheets, and concrete | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P3.3 - Place piles, sheets, and concrete | Hauling | 0.00 | 20.0 | HHDT |
| P3.3 - Place piles, sheets, and concrete | Onsite truck | 1.00 | 10.0 | HHDT |
| P3.1 - Mass concrete | _ | _ | _ | _ |
| P3.1 - Mass concrete | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P3.1 - Mass concrete | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P3.1 - Mass concrete | Hauling | 0.00 | 20.0 | HHDT |
| P3.1 - Mass concrete | Onsite truck | 1.00 | 10.0 | HHDT |
| P3 - Cofferdam | _ | _ | _ | _ |
| P3 - Cofferdam | Worker | 12.0 | 14.1 | LDA,LDT1,LDT2 |
| P3 - Cofferdam | Vendor | 4.00 | 8.98 | HHDT,MHDT |
| P3 - Cofferdam | Hauling | 4.00 | 40.3 | HHDT |

| P3 - Cofferdam | Onsite truck | 0.00 | 0.00 | HHDT |
|--|--------------|------|------|---------------|
| P2.3 - Drains, Cleanouts, and Backfill | _ | _ | _ | _ |
| P2.3 - Drains, Cleanouts, and Backfill | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P2.3 - Drains, Cleanouts, and Backfill | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P2.3 - Drains, Cleanouts, and Backfill | Hauling | 0.00 | 20.0 | HHDT |
| P2.3 - Drains, Cleanouts, and Backfill | Onsite truck | 0.00 | 0.00 | HHDT |
| P2.2 - Spillway form and pour concrete | _ | _ | _ | _ |
| P2.2 - Spillway form and pour concrete | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P2.2 - Spillway form and pour concrete | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P2.2 - Spillway form and pour concrete | Hauling | 30.0 | 0.50 | HHDT |
| P2.2 - Spillway form and pour concrete | Onsite truck | 1.00 | 10.0 | HHDT |
| P2.1 - Spillway excavation/subgrade | _ | _ | _ | _ |
| P2.1 - Spillway excavation/subgrade | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P2.1 - Spillway excavation/subgrade | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P2.1 - Spillway excavation/subgrade | Hauling | 0.00 | 20.0 | HHDT |
| P2.1 - Spillway excavation/subgrade | Onsite truck | 1.00 | 50.0 | HHDT |
| P3.2 - Excavate cofferdam | _ | _ | _ | _ |
| P3.2 - Excavate cofferdam | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P3.2 - Excavate cofferdam | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P3.2 - Excavate cofferdam | Hauling | 0.00 | 20.0 | HHDT |
| P3.2 - Excavate cofferdam | Onsite truck | 1.00 | 10.0 | HHDT |
| P5 - Dam notch and tie-in chute | _ | _ | _ | _ |
| P5 - Dam notch and tie-in chute | Worker | 12.0 | 14.1 | LDA,LDT1,LDT2 |
| P5 - Dam notch and tie-in chute | Vendor | 2.00 | 8.98 | HHDT,MHDT |
| P5 - Dam notch and tie-in chute | Hauling | 4.00 | 40.3 | HHDT |

| P5 - Dam notch and tie-in chute | Onsite truck | 0.00 | 0.00 | HHDT |
|---------------------------------|--------------|------|------|---------------|
| P5.1 - Demolition | _ | _ | _ | _ |
| P5.1 - Demolition | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P5.1 - Demolition | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P5.1 - Demolition | Hauling | 0.00 | 20.0 | HHDT |
| P5.1 - Demolition | Onsite truck | 1.00 | 10.0 | HHDT |
| P5.2 - Excavation, Subgrade | _ | _ | _ | _ |
| P5.2 - Excavation, Subgrade | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P5.2 - Excavation, Subgrade | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P5.2 - Excavation, Subgrade | Hauling | 0.00 | 20.0 | HHDT |
| P5.2 - Excavation, Subgrade | Onsite truck | 1.00 | 10.0 | HHDT |
| P5.3 - Form and Pour Concrete | _ | _ | _ | _ |
| P5.3 - Form and Pour Concrete | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P5.3 - Form and Pour Concrete | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P5.3 - Form and Pour Concrete | Hauling | 30.0 | 0.50 | HHDT |
| P5.3 - Form and Pour Concrete | Onsite truck | 1.00 | 10.0 | HHDT |
| P5.4 - Install Footbridge | _ | _ | _ | _ |
| P5.4 - Install Footbridge | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P5.4 - Install Footbridge | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P5.4 - Install Footbridge | Hauling | 0.00 | 20.0 | HHDT |
| P5.4 - Install Footbridge | Onsite truck | 1.00 | 10.0 | HHDT |
| P6 - Plunge pool | _ | _ | _ | _ |
| P6 - Plunge pool | Worker | 12.0 | 14.1 | LDA,LDT1,LDT2 |
| P6 - Plunge pool | Vendor | 8.00 | 8.98 | HHDT,MHDT |
| P6 - Plunge pool | Hauling | 4.00 | 40.3 | HHDT |
| P6 - Plunge pool | Onsite truck | 0.00 | 0.00 | HHDT |
| P6.1 - Flow bypass | _ | _ | _ | _ |
| P6.1 - Flow bypass | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |

| D0 4 E1 1 | ., . | 0.00 | 0.05 | |
|---------------------------|--------------|------|------|---------------|
| P6.1 - Flow bypass | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P6.1 - Flow bypass | Hauling | 0.00 | 20.0 | HHDT |
| P6.1 - Flow bypass | Onsite truck | 0.00 | 0.00 | HHDT |
| P6.2 - Excavation | _ | _ | _ | _ |
| P6.2 - Excavation | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P6.2 - Excavation | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P6.2 - Excavation | Hauling | 0.00 | 20.0 | HHDT |
| P6.2 - Excavation | Onsite truck | 1.00 | 50.0 | HHDT |
| P6.3 - Slope protection | _ | _ | _ | _ |
| P6.3 - Slope protection | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P6.3 - Slope protection | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P6.3 - Slope protection | Hauling | 0.00 | 20.0 | HHDT |
| P6.3 - Slope protection | Onsite truck | 1.00 | 10.0 | HHDT |
| P7 - Remaining Work Scope | _ | _ | _ | _ |
| P7 - Remaining Work Scope | Worker | 20.0 | 14.1 | LDA,LDT1,LDT2 |
| P7 - Remaining Work Scope | Vendor | 6.00 | 8.98 | HHDT,MHDT |
| P7 - Remaining Work Scope | Hauling | 4.00 | 40.3 | HHDT |
| P7 - Remaining Work Scope | Onsite truck | 0.00 | 0.00 | HHDT |
| P7.1 - Cofferdam removal | _ | _ | _ | _ |
| P7.1 - Cofferdam removal | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P7.1 - Cofferdam removal | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P7.1 - Cofferdam removal | Hauling | 0.00 | 20.0 | HHDT |
| P7.1 - Cofferdam removal | Onsite truck | 0.00 | 0.00 | HHDT |
| P7.2 - Lighting | _ | _ | _ | _ |
| P7.2 - Lighting | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P7.2 - Lighting | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P7.2 - Lighting | Hauling | 0.00 | 20.0 | HHDT |
| P7.2 - Lighting | Onsite truck | 1.00 | 12.5 | HHDT |

| P7.3 - Log boom | _ | _ | _ | _ |
|---------------------------|--------------|------|------|---------------|
| P7.3 - Log boom | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P7.3 - Log boom | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P7.3 - Log boom | Hauling | 0.00 | 20.0 | HHDT |
| P7.3 - Log boom | Onsite truck | 0.00 | 0.00 | HHDT |
| P7.4 - Restoration | _ | _ | _ | _ |
| P7.4 - Restoration | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P7.4 - Restoration | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P7.4 - Restoration | Hauling | 0.00 | 20.0 | HHDT |
| P7.4 - Restoration | Onsite truck | 1.00 | 62.5 | HHDT |
| P7.5 - Demobilization | _ | _ | _ | _ |
| P7.5 - Demobilization | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P7.5 - Demobilization | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P7.5 - Demobilization | Hauling | 0.00 | 20.0 | HHDT |
| P7.5 - Demobilization | Onsite truck | 1.00 | 62.5 | HHDT |
| P8 - Spillway abandonment | _ | _ | _ | _ |
| P8 - Spillway abandonment | Worker | 12.0 | 14.1 | LDA,LDT1,LDT2 |
| P8 - Spillway abandonment | Vendor | 4.00 | 8.98 | HHDT,MHDT |
| P8 - Spillway abandonment | Hauling | 4.00 | 40.3 | HHDT |
| P8 - Spillway abandonment | Onsite truck | 0.00 | 0.00 | HHDT |
| P8.1 - Remove Cofferdam | _ | _ | _ | _ |
| P8.1 - Remove Cofferdam | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P8.1 - Remove Cofferdam | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P8.1 - Remove Cofferdam | Hauling | 0.00 | 20.0 | ннот |
| P8.1 - Remove Cofferdam | Onsite truck | 1.00 | 10.0 | HHDT |
| P8.2 - Canal Side Channel | _ | _ | _ | _ |
| P8.2 - Canal Side Channel | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P8.2 - Canal Side Channel | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| | | | | |

| P8.2 - Canal Side Channel | Hauling | 0.00 | 20.0 | HHDT |
|---------------------------|--------------|------|------|---------------|
| P8.2 - Canal Side Channel | Onsite truck | 1.00 | 10.0 | HHDT |
| P8.3 - Cover Bathtub | _ | _ | _ | _ |
| P8.3 - Cover Bathtub | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P8.3 - Cover Bathtub | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P8.3 - Cover Bathtub | Hauling | 0.00 | 20.0 | HHDT |
| P8.3 - Cover Bathtub | Onsite truck | 0.00 | 0.00 | HHDT |
| P9 - Batch Plant Equip | _ | _ | _ | _ |
| P9 - Batch Plant Equip | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P9 - Batch Plant Equip | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P9 - Batch Plant Equip | Hauling | 0.00 | 20.0 | HHDT |
| P9 - Batch Plant Equip | Onsite truck | 0.00 | 0.00 | HHDT |

5.3.2. Mitigated

| Phase Name | Trip Type | One-Way Trips per Day | Miles per Trip | Vehicle Mix |
|--|--------------|-----------------------|----------------|---------------|
| P1 - Mobilization and access development | _ | _ | _ | _ |
| P1 - Mobilization and access development | Worker | 20.0 | 14.1 | LDA,LDT1,LDT2 |
| P1 - Mobilization and access development | Vendor | 10.0 | 8.98 | HHDT,MHDT |
| P1 - Mobilization and access development | Hauling | 6.00 | 40.3 | HHDT |
| P1 - Mobilization and access development | Onsite truck | 0.00 | 0.00 | HHDT |
| P1.1 - Tree removal | _ | _ | _ | _ |
| P1.1 - Tree removal | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P1.1 - Tree removal | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P1.1 - Tree removal | Hauling | 20.0 | 40.3 | HHDT |
| P1.1 - Tree removal | Onsite truck | 1.00 | 52.5 | HHDT |

| P1.2 - Mobilization | _ | _ | _ | _ |
|-------------------------------------|--------------|------|------|---------------|
| P1.2 - Mobilization | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P1.2 - Mobilization | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P1.2 - Mobilization | Hauling | 12.0 | 40.3 | HHDT |
| P1.2 - Mobilization | Onsite truck | 0.00 | 0.00 | HHDT |
| P1.3 - Laydown area development | _ | _ | _ | _ |
| P1.3 - Laydown area development | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P1.3 - Laydown area development | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P1.3 - Laydown area development | Hauling | 0.00 | 20.0 | HHDT |
| P1.3 - Laydown area development | Onsite truck | 1.00 | 47.5 | HHDT |
| P1.4 - Access road construction | _ | _ | _ | _ |
| P1.4 - Access road construction | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P1.4 - Access road construction | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P1.4 - Access road construction | Hauling | 0.00 | 20.0 | HHDT |
| P1.4 - Access road construction | Onsite truck | 1.00 | 60.0 | HHDT |
| P2 - Spillway chute and flip bucket | _ | _ | _ | _ |
| P2 - Spillway chute and flip bucket | Worker | 40.0 | 14.1 | LDA,LDT1,LDT2 |
| P2 - Spillway chute and flip bucket | Vendor | 8.00 | 8.98 | HHDT,MHDT |
| P2 - Spillway chute and flip bucket | Hauling | 4.00 | 40.3 | HHDT |
| P2 - Spillway chute and flip bucket | Onsite truck | 0.00 | 0.00 | HHDT |
| P4.2 - Crest form and pour concrete | _ | _ | _ | _ |
| P4.2 - Crest form and pour concrete | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P4.2 - Crest form and pour concrete | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P4.2 - Crest form and pour concrete | Hauling | 30.0 | 0.50 | HHDT |
| P4.2 - Crest form and pour concrete | Onsite truck | 1.00 | 10.0 | HHDT |
| P4.1 - Crest excavation/ subgrade | _ | _ | _ | _ |
| P4.1 - Crest excavation/ subgrade | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P4.1 - Crest excavation/ subgrade | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| | | | | |

| P4.1 - Crest excavation/ subgrade | Hauling | 0.00 | 20.0 | HHDT |
|--|--------------|------|------|---------------|
| P4.1 - Crest excavation/ subgrade | Onsite truck | 1.00 | 60.0 | HHDT |
| P4 - Crest structure | _ | _ | _ | _ |
| P4 - Crest structure | Worker | 40.0 | 14.1 | LDA,LDT1,LDT2 |
| P4 - Crest structure | Vendor | 8.00 | 8.98 | HHDT,MHDT |
| P4 - Crest structure | Hauling | 4.00 | 40.3 | HHDT |
| P4 - Crest structure | Onsite truck | 0.00 | 0.00 | HHDT |
| P3.6 - Trench Cutoff Concrete 3 | _ | _ | _ | _ |
| P3.6 - Trench Cutoff Concrete 3 | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P3.6 - Trench Cutoff Concrete 3 | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P3.6 - Trench Cutoff Concrete 3 | Hauling | 40.0 | 0.50 | HHDT |
| P3.6 - Trench Cutoff Concrete 3 | Onsite truck | 1.00 | 10.0 | HHDT |
| P3.5 - Trench Cutoff Concrete 2 | _ | _ | _ | _ |
| P3.5 - Trench Cutoff Concrete 2 | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P3.5 - Trench Cutoff Concrete 2 | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P3.5 - Trench Cutoff Concrete 2 | Hauling | 40.0 | 0.50 | HHDT |
| P3.5 - Trench Cutoff Concrete 2 | Onsite truck | 1.00 | 10.0 | HHDT |
| P3.4 - Trench Cutoff Concrete 1 | _ | _ | _ | _ |
| P3.4 - Trench Cutoff Concrete 1 | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P3.4 - Trench Cutoff Concrete 1 | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P3.4 - Trench Cutoff Concrete 1 | Hauling | 40.0 | 0.50 | HHDT |
| P3.4 - Trench Cutoff Concrete 1 | Onsite truck | 1.00 | 10.0 | HHDT |
| P3.3 - Place piles, sheets, and concrete | _ | _ | _ | _ |
| P3.3 - Place piles, sheets, and concrete | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P3.3 - Place piles, sheets, and concrete | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P3.3 - Place piles, sheets, and concrete | Hauling | 0.00 | 20.0 | ННОТ |
| | | | | |

| P3.3 - Place piles, sheets, and concrete | Onsite truck | 1.00 | 10.0 | HHDT |
|--|--------------|------|------|---------------|
| P3.1 - Mass concrete | _ | _ | _ | _ |
| P3.1 - Mass concrete | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P3.1 - Mass concrete | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P3.1 - Mass concrete | Hauling | 0.00 | 20.0 | HHDT |
| P3.1 - Mass concrete | Onsite truck | 1.00 | 10.0 | HHDT |
| P3 - Cofferdam | _ | _ | _ | _ |
| P3 - Cofferdam | Worker | 12.0 | 14.1 | LDA,LDT1,LDT2 |
| P3 - Cofferdam | Vendor | 4.00 | 8.98 | HHDT,MHDT |
| P3 - Cofferdam | Hauling | 4.00 | 40.3 | HHDT |
| P3 - Cofferdam | Onsite truck | 0.00 | 0.00 | HHDT |
| P2.3 - Drains, Cleanouts, and Backfill | _ | _ | _ | _ |
| P2.3 - Drains, Cleanouts, and Backfill | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P2.3 - Drains, Cleanouts, and Backfill | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P2.3 - Drains, Cleanouts, and Backfill | Hauling | 0.00 | 20.0 | HHDT |
| P2.3 - Drains, Cleanouts, and Backfill | Onsite truck | 0.00 | 0.00 | HHDT |
| P2.2 - Spillway form and pour concrete | _ | _ | _ | _ |
| P2.2 - Spillway form and pour concrete | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P2.2 - Spillway form and pour concrete | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P2.2 - Spillway form and pour concrete | Hauling | 30.0 | 0.50 | HHDT |
| P2.2 - Spillway form and pour concrete | Onsite truck | 1.00 | 10.0 | HHDT |
| P2.1 - Spillway excavation/subgrade | _ | _ | _ | _ |
| P2.1 - Spillway excavation/subgrade | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P2.1 - Spillway excavation/subgrade | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P2.1 - Spillway excavation/subgrade | Hauling | 0.00 | 20.0 | HHDT |

| P2.1 - Spillway excavation/subgrade | Onsite truck | 1.00 | 50.0 | HHDT |
|-------------------------------------|--------------|------|------|---------------|
| P3.2 - Excavate cofferdam | _ | _ | _ | _ |
| P3.2 - Excavate cofferdam | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P3.2 - Excavate cofferdam | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P3.2 - Excavate cofferdam | Hauling | 0.00 | 20.0 | HHDT |
| P3.2 - Excavate cofferdam | Onsite truck | 1.00 | 10.0 | HHDT |
| P5 - Dam notch and tie-in chute | _ | _ | _ | _ |
| P5 - Dam notch and tie-in chute | Worker | 12.0 | 14.1 | LDA,LDT1,LDT2 |
| P5 - Dam notch and tie-in chute | Vendor | 2.00 | 8.98 | HHDT,MHDT |
| P5 - Dam notch and tie-in chute | Hauling | 4.00 | 40.3 | HHDT |
| P5 - Dam notch and tie-in chute | Onsite truck | 0.00 | 0.00 | HHDT |
| P5.1 - Demolition | _ | _ | _ | _ |
| P5.1 - Demolition | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P5.1 - Demolition | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P5.1 - Demolition | Hauling | 0.00 | 20.0 | HHDT |
| P5.1 - Demolition | Onsite truck | 1.00 | 10.0 | HHDT |
| P5.2 - Excavation, Subgrade | _ | _ | _ | _ |
| P5.2 - Excavation, Subgrade | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P5.2 - Excavation, Subgrade | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P5.2 - Excavation, Subgrade | Hauling | 0.00 | 20.0 | HHDT |
| P5.2 - Excavation, Subgrade | Onsite truck | 1.00 | 10.0 | HHDT |
| P5.3 - Form and Pour Concrete | _ | _ | _ | _ |
| P5.3 - Form and Pour Concrete | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P5.3 - Form and Pour Concrete | Vendor | 0.00 | 8.98 | ннот,мнот |
| P5.3 - Form and Pour Concrete | Hauling | 30.0 | 0.50 | HHDT |
| P5.3 - Form and Pour Concrete | Onsite truck | 1.00 | 10.0 | HHDT |
| P5.4 - Install Footbridge | _ | _ | _ | _ |
| P5.4 - Install Footbridge | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |

| P5.4 - Install Footbridge | Vendor | 0.00 | 8.98 | ННОТ,МНОТ |
|---------------------------|--------------|------|------|---------------|
| P5.4 - Install Footbridge | Hauling | 0.00 | 20.0 | HHDT |
| P5.4 - Install Footbridge | Onsite truck | 1.00 | 10.0 | ННОТ |
| P6 - Plunge pool | _ | _ | _ | _ |
| P6 - Plunge pool | Worker | 12.0 | 14.1 | LDA,LDT1,LDT2 |
| P6 - Plunge pool | Vendor | 8.00 | 8.98 | ннот,мнот |
| P6 - Plunge pool | Hauling | 4.00 | 40.3 | HHDT |
| P6 - Plunge pool | Onsite truck | 0.00 | 0.00 | HHDT |
| P6.1 - Flow bypass | _ | _ | _ | _ |
| P6.1 - Flow bypass | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P6.1 - Flow bypass | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P6.1 - Flow bypass | Hauling | 0.00 | 20.0 | HHDT |
| P6.1 - Flow bypass | Onsite truck | 0.00 | 0.00 | HHDT |
| P6.2 - Excavation | _ | _ | _ | _ |
| P6.2 - Excavation | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P6.2 - Excavation | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P6.2 - Excavation | Hauling | 0.00 | 20.0 | HHDT |
| P6.2 - Excavation | Onsite truck | 1.00 | 50.0 | HHDT |
| P6.3 - Slope protection | _ | _ | _ | _ |
| P6.3 - Slope protection | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P6.3 - Slope protection | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P6.3 - Slope protection | Hauling | 0.00 | 20.0 | HHDT |
| P6.3 - Slope protection | Onsite truck | 1.00 | 10.0 | HHDT |
| P7 - Remaining Work Scope | _ | _ | _ | _ |
| P7 - Remaining Work Scope | Worker | 20.0 | 14.1 | LDA,LDT1,LDT2 |
| P7 - Remaining Work Scope | Vendor | 6.00 | 8.98 | HHDT,MHDT |
| P7 - Remaining Work Scope | Hauling | 4.00 | 40.3 | HHDT |
| P7 - Remaining Work Scope | Onsite truck | 0.00 | 0.00 | HHDT |

| P7.1 - Cofferdam removal | | _ | _ | |
|---------------------------|--------------|------|------|---------------|
| P7.1 - Cofferdam removal | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P7.1 - Cofferdam removal | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P7.1 - Cofferdam removal | Hauling | 0.00 | 20.0 | HHDT |
| P7.1 - Cofferdam removal | Onsite truck | 0.00 | 0.00 | HHDT |
| P7.2 - Lighting | _ | _ | _ | _ |
| P7.2 - Lighting | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P7.2 - Lighting | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P7.2 - Lighting | Hauling | 0.00 | 20.0 | HHDT |
| P7.2 - Lighting | Onsite truck | 1.00 | 12.5 | HHDT |
| P7.3 - Log boom | | 1.00 | | |
| P7.3 - Log boom | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| | | 0.00 | 8.98 | |
| P7.3 - Log boom | Vendor | | | HHDT,MHDT |
| P7.3 - Log boom | Hauling | 0.00 | 20.0 | HHDT |
| P7.3 - Log boom | Onsite truck | 0.00 | 0.00 | HHDT |
| P7.4 - Restoration | _ | _ | _ | - |
| P7.4 - Restoration | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P7.4 - Restoration | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P7.4 - Restoration | Hauling | 0.00 | 20.0 | HHDT |
| P7.4 - Restoration | Onsite truck | 1.00 | 62.5 | HHDT |
| P7.5 - Demobilization | _ | _ | _ | _ |
| P7.5 - Demobilization | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P7.5 - Demobilization | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P7.5 - Demobilization | Hauling | 0.00 | 20.0 | ннот |
| P7.5 - Demobilization | Onsite truck | 1.00 | 62.5 | ннот |
| P8 - Spillway abandonment | _ | _ | _ | _ |
| P8 - Spillway abandonment | Worker | 12.0 | 14.1 | LDA,LDT1,LDT2 |
| P8 - Spillway abandonment | Vendor | 4.00 | 8.98 | HHDT,MHDT |

| P8 - Spillway abandonment | Hauling | 4.00 | 40.3 | HHDT |
|---------------------------|--------------|------|------|---------------|
| P8 - Spillway abandonment | Onsite truck | 0.00 | 0.00 | HHDT |
| P8.1 - Remove Cofferdam | _ | _ | _ | _ |
| P8.1 - Remove Cofferdam | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P8.1 - Remove Cofferdam | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P8.1 - Remove Cofferdam | Hauling | 0.00 | 20.0 | HHDT |
| P8.1 - Remove Cofferdam | Onsite truck | 1.00 | 10.0 | HHDT |
| P8.2 - Canal Side Channel | _ | _ | _ | _ |
| P8.2 - Canal Side Channel | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P8.2 - Canal Side Channel | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P8.2 - Canal Side Channel | Hauling | 0.00 | 20.0 | HHDT |
| P8.2 - Canal Side Channel | Onsite truck | 1.00 | 10.0 | HHDT |
| P8.3 - Cover Bathtub | _ | _ | _ | _ |
| P8.3 - Cover Bathtub | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P8.3 - Cover Bathtub | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P8.3 - Cover Bathtub | Hauling | 0.00 | 20.0 | HHDT |
| P8.3 - Cover Bathtub | Onsite truck | 0.00 | 0.00 | HHDT |
| P9 - Batch Plant Equip | _ | _ | _ | _ |
| P9 - Batch Plant Equip | Worker | 0.00 | 14.1 | LDA,LDT1,LDT2 |
| P9 - Batch Plant Equip | Vendor | 0.00 | 8.98 | HHDT,MHDT |
| P9 - Batch Plant Equip | Hauling | 0.00 | 20.0 | HHDT |
| P9 - Batch Plant Equip | Onsite truck | 0.00 | 0.00 | HHDT |

5.4. Vehicles

5.4.1. Construction Vehicle Control Strategies

Non-applicable. No control strategies activated by user.

5.5. Architectural Coatings

| Phase Name | | | Non-Residential Interior Area Coated (sq ft) | Non-Residential Exterior Area Coated (sq ft) | Parking Area Coated (sq ft) |
|-------------------------------------|------|------|---|---|-----------------------------|
| P2 - Spillway chute and flip bucket | 0.00 | 0.00 | 0.00 | 0.00 | _ |

5.6. Dust Mitigation

5.6.1. Construction Earthmoving Activities

| Phase Name | Material Imported (Cubic Yards) | Material Exported (Cubic Yards) | Acres Graded (acres) | Material Demolished (sq. ft.) | Acres Paved (acres) |
|--|------------------------------------|---------------------------------|----------------------|-------------------------------|---------------------|
| P2 - Spillway chute and flip bucket | 20,000 | 0.00 | 2.00 | 0.00 | _ |
| P1.4 - Access road construction | , | | 3.00 | 0.00 | _ |
| P1 - Mobilization and access development | 5,000 | 0.00 | 10.0 | 0.00 | _ |
| P6 - Plunge pool | 9,000 | 0.00 | 0.20 | 0.00 | _ |

5.6.2. Construction Earthmoving Control Strategies

Non-applicable. No control strategies activated by user.

5.7. Construction Paving

| Land Use | Area Paved (acres) | % Asphalt |
|-------------------------|--------------------|-----------|
| User Defined Industrial | 0.00 | 0% |

5.8. Construction Electricity Consumption and Emissions Factors

kWh per Year and Emission Factor (lb/MWh)

| Year | kWh per Year | CO2 | CH4 | N2O |
|------|--------------|-----|------|---------|
| 2025 | 5,750 | 204 | 0.03 | < 0.005 |
| 2026 | 19,750 | 204 | 0.03 | < 0.005 |

| 2027 | 2,500 | 204 | 0.03 | < 0.005 |
|------|-------|-----|------|---------|
| | • | | | |

8. User Changes to Default Data

| Screen | Justification |
|---|--|
| Land Use | n/a - Dam upgrades |
| Construction: Construction Phases | All modeled as grading - no defaults used. |
| Construction: Off-Road Equipment | From PG&E |
| Construction: Dust From Material Movement | Per PG&E |
| Construction: Demolition | Per PG&E |
| Construction: Trips and VMT | Per PG&E onsite truck mileage is total for all vehicles (light-duty trucks modeled as heavy). Hauling miles for AAD. |
| Construction: Electricity | Trailer and batch plant |
| Construction: Off-Road Equipment EF | Other Material Equipment = Chainsaw (EFs from User Guide Table G-26) |

Tiger Creek Const v2 Custom Report

Table of Contents

- 1. Basic Project Information
 - 1.1. Basic Project Information
 - 1.2. Land Use Types
 - 1.3. User-Selected Emission Reduction Measures by Emissions Sector
- 2. Emissions Summary
 - 2.1. Construction Emissions Compared Against Thresholds
 - 2.2. Construction Emissions by Year, Unmitigated
 - 2.3. Construction Emissions by Year, Mitigated
- 3. Construction Emissions Details
 - 3.1. P4.2 Crest form and pour concrete (2026) Unmitigated
 - 3.2. P4.2 Crest form and pour concrete (2026) Mitigated
 - 3.3. P4.1 Crest excavation/ subgrade (2026) Unmitigated
 - 3.4. P4.1 Crest excavation/ subgrade (2026) Mitigated
 - 3.5. P4 Crest structure (2026) Unmitigated
 - 3.6. P4 Crest structure (2026) Mitigated

- 3.7. P3.6 Trench Cutoff Concrete 3 (2026) Unmitigated
- 3.8. P3.6 Trench Cutoff Concrete 3 (2026) Mitigated
- 3.9. P3.5 Trench Cutoff Concrete 2 (2026) Unmitigated
- 3.10. P3.5 Trench Cutoff Concrete 2 (2026) Mitigated
- 3.11. P3.4 Trench Cutoff Concrete 1 (2026) Unmitigated
- 3.12. P3.4 Trench Cutoff Concrete 1 (2026) Mitigated
- 3.13. P3.3 Place piles, sheets, and concrete (2026) Unmitigated
- 3.14. P3.3 Place piles, sheets, and concrete (2026) Mitigated
- 3.15. P3.1 Mass concrete (2025) Unmitigated
- 3.16. P3.1 Mass concrete (2025) Mitigated
- 3.17. P3 Cofferdam (2025) Unmitigated
- 3.18. P3 Cofferdam (2025) Mitigated
- 3.19. P3 Cofferdam (2026) Unmitigated
- 3.20. P3 Cofferdam (2026) Mitigated
- 3.21. P2.3 Drains, Cleanouts, and Backfill (2026) Unmitigated
- 3.22. P2.3 Drains, Cleanouts, and Backfill (2026) Mitigated
- 3.23. P2.2 Spillway form and pour concrete (2025) Unmitigated
- 3.24. P2.2 Spillway form and pour concrete (2025) Mitigated

- 3.25. P2.2 Spillway form and pour concrete (2026) Unmitigated
- 3.26. P2.2 Spillway form and pour concrete (2026) Mitigated
- 3.27. P2.1 Spillway excavation/subgrade (2025) Unmitigated
- 3.28. P2.1 Spillway excavation/subgrade (2025) Mitigated
- 3.29. P2 Spillway chute and flip bucket (2025) Unmitigated
- 3.30. P2 Spillway chute and flip bucket (2025) Mitigated
- 3.31. P2 Spillway chute and flip bucket (2026) Unmitigated
- 3.32. P2 Spillway chute and flip bucket (2026) Mitigated
- 3.33. P1.4 Access road construction (2025) Unmitigated
- 3.34. P1.4 Access road construction (2025) Mitigated
- 3.35. P3.2 Excavate cofferdam (2026) Unmitigated
- 3.36. P3.2 Excavate cofferdam (2026) Mitigated
- 3.37. P1.3 Laydown area development (2025) Unmitigated
- 3.38. P1.3 Laydown area development (2025) Mitigated
- 3.39. P1.2 Mobilization (2025) Unmitigated
- 3.40. P1.2 Mobilization (2025) Mitigated
- 3.41. P1.1 Tree removal (2025) Unmitigated
- 3.42. P1.1 Tree removal (2025) Mitigated

- 3.43. P1 Mobilization and access development (2025) Unmitigated
- 3.44. P1 Mobilization and access development (2025) Mitigated
- 3.45. P5 Dam notch and tie-in chute (2026) Unmitigated
- 3.46. P5 Dam notch and tie-in chute (2026) Mitigated
- 3.47. P5 Dam notch and tie-in chute (2027) Unmitigated
- 3.48. P5 Dam notch and tie-in chute (2027) Mitigated
- 3.49. P5.1 Demolition (2026) Unmitigated
- 3.50. P5.1 Demolition (2026) Mitigated
- 3.51. P5.2 Excavation, Subgrade (2026) Unmitigated
- 3.52. P5.2 Excavation, Subgrade (2026) Mitigated
- 3.53. P5.3 Form and Pour Concrete (2026) Unmitigated
- 3.54. P5.3 Form and Pour Concrete (2026) Mitigated
- 3.55. P5.4 Install Footbridge (2026) Unmitigated
- 3.56. P5.4 Install Footbridge (2026) Mitigated
- 3.57. P5.4 Install Footbridge (2027) Unmitigated
- 3.58. P5.4 Install Footbridge (2027) Mitigated
- 3.59. P6 Plunge pool (2026) Unmitigated
- 3.60. P6 Plunge pool (2026) Mitigated

- 3.61. P6.1 Flow bypass (2026) Unmitigated
- 3.62. P6.1 Flow bypass (2026) Mitigated
- 3.63. P6.2 Excavation (2026) Unmitigated
- 3.64. P6.2 Excavation (2026) Mitigated
- 3.65. P6.3 Slope protection (2026) Unmitigated
- 3.66. P6.3 Slope protection (2026) Mitigated
- 3.67. P7 Remaining Work Scope (2026) Unmitigated
- 3.68. P7 Remaining Work Scope (2026) Mitigated
- 3.69. P7 Remaining Work Scope (2027) Unmitigated
- 3.70. P7 Remaining Work Scope (2027) Mitigated
- 3.71. P7.1 Cofferdam removal (2027) Unmitigated
- 3.72. P7.1 Cofferdam removal (2027) Mitigated
- 3.73. P7.2 Lighting (2027) Unmitigated
- 3.74. P7.2 Lighting (2027) Mitigated
- 3.75. P7.3 Log boom (2026) Unmitigated
- 3.76. P7.3 Log boom (2026) Mitigated
- 3.77. P7.3 Log boom (2027) Unmitigated
- 3.78. P7.3 Log boom (2027) Mitigated

- 3.79. P7.4 Restoration (2027) Unmitigated
- 3.80. P7.4 Restoration (2027) Mitigated
- 3.81. P7.5 Demobilization (2027) Unmitigated
- 3.82. P7.5 Demobilization (2027) Mitigated
- 3.83. P8 Spillway abandonment (2027) Unmitigated
- 3.84. P8 Spillway abandonment (2027) Mitigated
- 3.85. P8.1 Remove Cofferdam (2027) Unmitigated
- 3.86. P8.1 Remove Cofferdam (2027) Mitigated
- 3.87. P8.2 Canal Side Channel (2027) Unmitigated
- 3.88. P8.2 Canal Side Channel (2027) Mitigated
- 3.89. P8.3 Cover Bathtub (2027) Unmitigated
- 3.90. P8.3 Cover Bathtub (2027) Mitigated
- 3.91. P9 Batch Plant Equip (2025) Unmitigated
- 3.92. P9 Batch Plant Equip (2025) Mitigated
- 3.93. P9 Batch Plant Equip (2026) Unmitigated
- 3.94. P9 Batch Plant Equip (2026) Mitigated
- 4. Operations Emissions Details
 - 4.10. Soil Carbon Accumulation By Vegetation Type

- 4.10.1. Soil Carbon Accumulation By Vegetation Type Unmitigated
- 4.10.2. Above and Belowground Carbon Accumulation by Land Use Type Unmitigated
- 4.10.3. Avoided and Sequestered Emissions by Species Unmitigated
- 4.10.4. Soil Carbon Accumulation By Vegetation Type Mitigated
- 4.10.5. Above and Belowground Carbon Accumulation by Land Use Type Mitigated
- 4.10.6. Avoided and Sequestered Emissions by Species Mitigated
- 5. Activity Data
 - 5.1. Construction Schedule
 - 5.2. Off-Road Equipment
 - 5.2.1. Unmitigated
 - 5.3. Construction Vehicles
 - 5.3.1. Unmitigated
 - 5.3.2. Mitigated
 - 5.4. Vehicles
 - 5.4.1. Construction Vehicle Control Strategies
 - 5.5. Architectural Coatings
 - 5.6. Dust Mitigation
 - 5.6.1. Construction Earthmoving Activities

- 5.6.2. Construction Earthmoving Control Strategies
- 5.7. Construction Paving
- 5.8. Construction Electricity Consumption and Emissions Factors
- 8. User Changes to Default Data

1. Basic Project Information

1.1. Basic Project Information

| Data Field | Value |
|-----------------------------|---------------------------------------|
| Project Name | Tiger Creek Const v2 |
| Construction Start Date | 7/8/2024 |
| Lead Agency | _ |
| Land Use Scale | Project/site |
| Analysis Level for Defaults | County |
| Windspeed (m/s) | 3.00 |
| Precipitation (days) | 36.4 |
| Location | Sacramento, CA, USA |
| County | Sacramento |
| City | Sacramento |
| Air District | Sacramento Metropolitan AQMD |
| Air Basin | Sacramento Valley |
| TAZ | 502 |
| EDFZ | 13 |
| Electric Utility | Sacramento Municipal Utility District |
| Gas Utility | Pacific Gas & Electric |
| App Version | 2022.1.1.26 |

1.2. Land Use Types

| Land Use Subtype | Size | Unit | Lot Acreage | Building Area (sq ft) | Landscape Area (sq ft) | Special Landscape Area (sq ft) | Population | Description |
|-------------------------|------|-------------------|-------------|-----------------------|---------------------------|-----------------------------------|------------|-------------|
| User Defined Industrial | 1.00 | User Defined Unit | 1.00 | 0.00 | 1.00 | 1.00 | _ | _ |

1.3. User-Selected Emission Reduction Measures by Emissions Sector

| Sector | # | Measure Title |
|--------------|--------|---------------------------------------|
| Construction | C-10-C | Water Unpaved Construction Roads |
| Construction | C-11 | Limit Vehicle Speeds on Unpaved Roads |

2. Emissions Summary

2.1. Construction Emissions Compared Against Thresholds

| Un/Mit. | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|---------|---------|---------|----------|----------|-----------|-----------|------|-------|-------|------|------|------|-------|
| | IXOU | IVOX | | 002 | TIVITOL | TIVITOD | T IVITOT | T WIZ.OL | T IVIZ.OD | 1 1012.01 | BOOZ | NBOOZ | 0021 | OH | INZO | TX . | 0020 |
| Daily, Summer (Max) | | _ | _ | _ | _ | _ | _ | _ | _ | | | _ | _ | | _ | _ | _ |
| Unmit. | 0.10 | 7.01 | 2.68 | 0.02 | 0.07 | 1.04 | 1.11 | 0.07 | 0.28 | 0.35 | | 4,013 | 4,013 | 0.38 | 0.64 | 8.49 | 4,220 |
| Mit. | 0.10 | 7.01 | 2.68 | 0.02 | 0.07 | 1.04 | 1.11 | 0.07 | 0.28 | 0.35 | _ | 4,013 | 4,013 | 0.38 | 0.64 | 8.49 | 4,220 |
| % Reduced | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Unmit. | 0.03 | 2.78 | 0.98 | 0.01 | 0.03 | 0.38 | 0.41 | 0.03 | 0.10 | 0.13 | _ | 1,478 | 1,478 | 0.14 | 0.23 | 0.08 | 1,551 |
| Mit. | 0.03 | 2.78 | 0.98 | 0.01 | 0.03 | 0.38 | 0.41 | 0.03 | 0.10 | 0.13 | _ | 1,478 | 1,478 | 0.14 | 0.23 | 0.08 | 1,551 |
| % Reduced | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Unmit. | 0.01 | 1.13 | 0.41 | < 0.005 | 0.01 | 0.15 | 0.17 | 0.01 | 0.04 | 0.05 | _ | 611 | 611 | 0.06 | 0.10 | 0.56 | 642 |
| Mit. | 0.01 | 1.13 | 0.41 | < 0.005 | 0.01 | 0.15 | 0.17 | 0.01 | 0.04 | 0.05 | _ | 611 | 611 | 0.06 | 0.10 | 0.56 | 642 |
| % Reduced | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Annual (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|-----------------|---------|------|------|---------|---------|------|------|---------|------|------|---|-----|-----|------|------|------|-----|
| Unmit. | < 0.005 | 0.21 | 0.07 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 101 | 101 | 0.01 | 0.02 | 0.09 | 106 |
| Mit. | < 0.005 | 0.21 | 0.07 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 101 | 101 | 0.01 | 0.02 | 0.09 | 106 |
| % Reduced | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

2.2. Construction Emissions by Year, Unmitigated

| Year | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------------------------|---------|------|------|---------|---------|---------|-------|---------|---------|---------|------|-------|-------|---------|---------|------|-------|
| Daily - Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| 2025 | 0.10 | 7.01 | 2.68 | 0.02 | 0.07 | 1.04 | 1.11 | 0.07 | 0.28 | 0.35 | _ | 4,013 | 4,013 | 0.38 | 0.64 | 8.49 | 4,220 |
| 2026 | 0.02 | 1.39 | 0.54 | 0.01 | 0.02 | 0.22 | 0.23 | 0.02 | 0.06 | 0.07 | _ | 827 | 827 | 0.07 | 0.13 | 1.69 | 870 |
| 2027 | 0.01 | 0.66 | 0.26 | < 0.005 | 0.01 | 0.11 | 0.12 | 0.01 | 0.03 | 0.04 | _ | 403 | 403 | 0.03 | 0.06 | 0.78 | 424 |
| Daily - Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| 2025 | 0.03 | 2.78 | 0.98 | 0.01 | 0.03 | 0.38 | 0.41 | 0.03 | 0.10 | 0.13 | _ | 1,478 | 1,478 | 0.14 | 0.23 | 0.08 | 1,551 |
| 2026 | 0.02 | 1.51 | 0.55 | 0.01 | 0.02 | 0.22 | 0.23 | 0.02 | 0.06 | 0.07 | _ | 827 | 827 | 0.07 | 0.13 | 0.04 | 868 |
| 2027 | 0.02 | 1.42 | 0.53 | 0.01 | 0.02 | 0.22 | 0.23 | 0.02 | 0.06 | 0.07 | _ | 807 | 807 | 0.07 | 0.13 | 0.04 | 847 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| 2025 | 0.01 | 1.13 | 0.41 | < 0.005 | 0.01 | 0.15 | 0.17 | 0.01 | 0.04 | 0.05 | _ | 611 | 611 | 0.06 | 0.10 | 0.56 | 642 |
| 2026 | 0.01 | 0.95 | 0.35 | < 0.005 | 0.01 | 0.14 | 0.15 | 0.01 | 0.04 | 0.05 | _ | 532 | 532 | 0.05 | 0.09 | 0.47 | 559 |
| 2027 | < 0.005 | 0.17 | 0.06 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 96.6 | 96.6 | 0.01 | 0.02 | 0.08 | 101 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| 2025 | < 0.005 | 0.21 | 0.07 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 101 | 101 | 0.01 | 0.02 | 0.09 | 106 |
| 2026 | < 0.005 | 0.17 | 0.06 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 88.0 | 88.0 | 0.01 | 0.01 | 0.08 | 92.6 |
| 2027 | < 0.005 | 0.03 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 16.0 | 16.0 | < 0.005 | < 0.005 | 0.01 | 16.8 |

2.3. Construction Emissions by Year, Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

| Year | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------------------------|---------|------|------|---------|---------|---------|-------|---------|---------|---------|------|-------|-------|---------|---------|------|-------|
| Daily - Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| 2025 | 0.10 | 7.01 | 2.68 | 0.02 | 0.07 | 1.04 | 1.11 | 0.07 | 0.28 | 0.35 | _ | 4,013 | 4,013 | 0.38 | 0.64 | 8.49 | 4,220 |
| 2026 | 0.02 | 1.39 | 0.54 | 0.01 | 0.02 | 0.22 | 0.23 | 0.02 | 0.06 | 0.07 | _ | 827 | 827 | 0.07 | 0.13 | 1.69 | 870 |
| 2027 | 0.01 | 0.66 | 0.26 | < 0.005 | 0.01 | 0.11 | 0.12 | 0.01 | 0.03 | 0.04 | _ | 403 | 403 | 0.03 | 0.06 | 0.78 | 424 |
| Daily - Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| 2025 | 0.03 | 2.78 | 0.98 | 0.01 | 0.03 | 0.38 | 0.41 | 0.03 | 0.10 | 0.13 | _ | 1,478 | 1,478 | 0.14 | 0.23 | 0.08 | 1,551 |
| 2026 | 0.02 | 1.51 | 0.55 | 0.01 | 0.02 | 0.22 | 0.23 | 0.02 | 0.06 | 0.07 | _ | 827 | 827 | 0.07 | 0.13 | 0.04 | 868 |
| 2027 | 0.02 | 1.42 | 0.53 | 0.01 | 0.02 | 0.22 | 0.23 | 0.02 | 0.06 | 0.07 | _ | 807 | 807 | 0.07 | 0.13 | 0.04 | 847 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| 2025 | 0.01 | 1.13 | 0.41 | < 0.005 | 0.01 | 0.15 | 0.17 | 0.01 | 0.04 | 0.05 | _ | 611 | 611 | 0.06 | 0.10 | 0.56 | 642 |
| 2026 | 0.01 | 0.95 | 0.35 | < 0.005 | 0.01 | 0.14 | 0.15 | 0.01 | 0.04 | 0.05 | _ | 532 | 532 | 0.05 | 0.09 | 0.47 | 559 |
| 2027 | < 0.005 | 0.17 | 0.06 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 96.6 | 96.6 | 0.01 | 0.02 | 0.08 | 101 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| 2025 | < 0.005 | 0.21 | 0.07 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 101 | 101 | 0.01 | 0.02 | 0.09 | 106 |
| 2026 | < 0.005 | 0.17 | 0.06 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 88.0 | 88.0 | 0.01 | 0.01 | 0.08 | 92.6 |
| 2027 | < 0.005 | 0.03 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 16.0 | 16.0 | < 0.005 | < 0.005 | 0.01 | 16.8 |

3. Construction Emissions Details

3.1. P4.2 - Crest form and pour concrete (2026) - Unmitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | - | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|----------|------|------|---|----------|------|------|------|------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.2. P4.2 - Crest form and pour concrete (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|----------|------|----------|----------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | <u> </u> | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.3. P4.1 - Crest excavation/ subgrade (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| D " | | | | | | | | | | | | | | | | | |
|---------------------------|------|------|------|------|----------|------|------|------|------|------|---|------|------|------|------|------|------|
| Daily, Winter (Max) | | _ | | | | | _ | _ | | | | | | | | | |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.4. P4.1 - Crest excavation/ subgrade (2026) - Mitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|----------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite ruck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Vinter Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | - | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite ruck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite ruck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| √endor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Average Daily | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Vorker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| /endor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.5. P4 - Crest structure (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|---------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | - | - | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.70 | 0.27 | < 0.005 | 0.01 | 0.11 | 0.12 | 0.01 | 0.03 | 0.04 | _ | 413 | 413 | 0.04 | 0.07 | 0.84 | 435 |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|------|------|---------|---------|------|------|---------|---------|---------|---|------|------|---------|---------|------|------|
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.75 | 0.27 | < 0.005 | 0.01 | 0.11 | 0.12 | 0.01 | 0.03 | 0.04 | _ | 413 | 413 | 0.04 | 0.07 | 0.02 | 434 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.33 | 0.12 | < 0.005 | < 0.005 | 0.05 | 0.05 | < 0.005 | 0.01 | 0.02 | _ | 182 | 182 | 0.02 | 0.03 | 0.16 | 192 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.06 | 0.02 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 30.2 | 30.2 | < 0.005 | < 0.005 | 0.03 | 31.7 |

3.6. P4 - Crest structure (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|---------|------|------|---------|---------|------|------|---------|---------|---------|---|------|------|---------|---------|------|------|
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.70 | 0.27 | < 0.005 | 0.01 | 0.11 | 0.12 | 0.01 | 0.03 | 0.04 | _ | 413 | 413 | 0.04 | 0.07 | 0.84 | 435 |
| Daily, Winter (Max) | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.75 | 0.27 | < 0.005 | 0.01 | 0.11 | 0.12 | 0.01 | 0.03 | 0.04 | _ | 413 | 413 | 0.04 | 0.07 | 0.02 | 434 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.33 | 0.12 | < 0.005 | < 0.005 | 0.05 | 0.05 | < 0.005 | 0.01 | 0.02 | _ | 182 | 182 | 0.02 | 0.03 | 0.16 | 192 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.06 | 0.02 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 30.2 | 30.2 | < 0.005 | < 0.005 | 0.03 | 31.7 |

3.7. P3.6 - Trench Cutoff Concrete 3 (2026) - Unmitigated

| | | Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|--|--|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
|--|--|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|

| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Daily, Summer (Max) | _ | _ | _ | - | - | - | _ | - | _ | _ | _ | _ | - | - | _ | - | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | - | _ | - | _ | _ | _ | - | _ | _ | _ | _ | _ | - | _ | - | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | - | - |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.8. P3.6 - Trench Cutoff Concrete 3 (2026) - Mitigated

| | | | | ally, ton/y | | | | | | | | | | | | | |
|---------------------------|------|------|------|-------------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ |
|------------------|------|------|------|----------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | <u> </u> | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.9. P3.5 - Trench Cutoff Concrete 2 (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|------|--------|--------|----------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.10. P3.5 - Trench Cutoff Concrete 2 (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.11. P3.4 - Trench Cutoff Concrete 1 (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Summer (Max) | | | | | | | | | | | | | | | | | |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | | _ | _ | | _ | _ | _ | _ | _ | | _ | _ | _ | | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Haulii | 00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|--------|----|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|

3.12. P3.4 - Trench Cutoff Concrete 1 (2026) - Mitigated

| | | | | | | | | lb/day fo | | | | | | | | | |
|---------------------------|------|------|------|------|-------|-------|-------|-----------|--------|--------|------|-------|------|------|------|------|------|
| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.13. P3.3 - Place piles, sheets, and concrete (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|----------|-------|-------|----------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | <u> </u> | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.14. P3.3 - Place piles, sheets, and concrete (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|----------|
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.15. P3.1 - Mass concrete (2025) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Vinter Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | - | _ | - | _ | - |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.16. P3.1 - Mass concrete (2025) - Mitigated

| | | | | J. J | | | | | | | | | | | | | _ |
|---------------------------|------|------|------|------|----------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.17. P3 - Cofferdam (2025) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | |
|---------------------------|---------|------|------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|------|------|
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.79 | 0.28 | < 0.005 | 0.01 | 0.11 | 0.12 | 0.01 | 0.03 | 0.04 | _ | 422 | 422 | 0.04 | 0.07 | 0.02 | 443 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.08 | 0.03 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 45.6 | 45.6 | < 0.005 | 0.01 | 0.04 | 47.9 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.02 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 7.55 | 7.55 | < 0.005 | < 0.005 | 0.01 | 7.94 |

3.18. P3 - Cofferdam (2025) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Dailu | | | | | | | | | | | | | | | | | |
|---------------------------|---------|------|------|---------|---------|------|------|---------|---------|---------|---|------|------|---------|------|------|------|
| Daily, Summer (Max) | _ | _ | | | _ | _ | | | | _ | | _ | | | _ | _ | |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | - | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ |
| Daily, Winter (Max) | _ | - | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.79 | 0.28 | < 0.005 | 0.01 | 0.11 | 0.12 | 0.01 | 0.03 | 0.04 | _ | 422 | 422 | 0.04 | 0.07 | 0.02 | 443 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.08 | 0.03 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 45.6 | 45.6 | < 0.005 | 0.01 | 0.04 | 47.9 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| | | | 0.04 | | | | | 4 O OOF | | | | 7.55 | | | | | |
|---------|---------|------|------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|------|------|
| Hauling | < 0.005 | 0.02 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 7.55 | 7.55 | < 0.005 | < 0.005 | 0.01 | 7.94 |
| 3 | | | | | | | | | | | | | | | | | - |

3.19. P3 - Cofferdam (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|---------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ |
| Onsite ruck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.70 | 0.27 | < 0.005 | 0.01 | 0.11 | 0.12 | 0.01 | 0.03 | 0.04 | _ | 413 | 413 | 0.04 | 0.07 | 0.84 | 435 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|------------------|---------|------|------|---------|---------|---------|------|---------|---------|---------|---|------|------|---------|---------|------|------|
| VVOIREI | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.75 | 0.27 | < 0.005 | 0.01 | 0.11 | 0.12 | 0.01 | 0.03 | 0.04 | _ | 413 | 413 | 0.04 | 0.07 | 0.02 | 434 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.19 | 0.07 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 105 | 105 | 0.01 | 0.02 | 0.09 | 110 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.03 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 17.4 | 17.4 | < 0.005 | < 0.005 | 0.02 | 18.2 |

3.20. P3 - Cofferdam (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|------|------|---------|---------|---------|------|---------|---------|---------|---|------|------|---------|---------|------|------|
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.70 | 0.27 | < 0.005 | 0.01 | 0.11 | 0.12 | 0.01 | 0.03 | 0.04 | _ | 413 | 413 | 0.04 | 0.07 | 0.84 | 435 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.75 | 0.27 | < 0.005 | 0.01 | 0.11 | 0.12 | 0.01 | 0.03 | 0.04 | _ | 413 | 413 | 0.04 | 0.07 | 0.02 | 434 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.19 | 0.07 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 105 | 105 | 0.01 | 0.02 | 0.09 | 110 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.03 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 17.4 | 17.4 | < 0.005 | < 0.005 | 0.02 | 18.2 |

3.21. P2.3 - Drains, Cleanouts, and Backfill (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer | _ | _ | - | _ | - | _ | _ | _ | _ | _ | _ | - | - | _ | - | _ | - |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|----------|------|------|------|
| (Max) | | | | | | | | | | | | | | | | | |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | - | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | | _ | _ | _ | _ | _ | _ | - | _ | _ | - | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | - | _ | _ | - | _ | _ | _ | _ | - | _ | _ | _ | - | - | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Haulii | 00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|--------|----|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|

3.22. P2.3 - Drains, Cleanouts, and Backfill (2026) - Mitigated

| Criteria | Pollutar | its (ib/aa | ay for dai | iy, ton/yr | for ann | uai) and | GHGS (| ib/day to | or daliy, i | vi i /yr foi | r annuai, |) | | | | | |
|---------------------------|----------|------------|------------|------------|---------|----------|--------|-----------|-------------|--------------|-----------|-------|------|------|------|------|------|
| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.23. P2.2 - Spillway form and pour concrete (2025) - Unmitigated

| | | | i e | | | 1 | | | | | annual | | | | | | |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|--------|-------|------|------|------|------|------|
| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|----------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.24. P2.2 - Spillway form and pour concrete (2025) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | СО2Т | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|----------|------|----------|------|------|------|---|------|------|------|------|------|------|
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | - | - | - | - | _ | _ | _ | - | _ | - | _ | _ | - | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.25. P2.2 - Spillway form and pour concrete (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Onsite | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.26. P2.2 - Spillway form and pour concrete (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|----------|------|------|------|------|------|------|---|------|----------|------|------|------|------|
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.27. P2.1 - Spillway excavation/subgrade (2025) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ |

| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | - | - | _ | _ | _ | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.28. P2.1 - Spillway excavation/subgrade (2025) - Mitigated

| | | Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|--|--|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
|--|--|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|

| Onsite | | _ | _ | _ | _ | _ | _ | - | _ | _ | - | - | - | _ | _ | _ | - |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Daily, Summer (Max) | _ | - | - | - | - | - | _ | _ | _ | - | _ | _ | _ | - | - | - | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | | _ | _ | _ | - | - | _ | _ | _ | _ | | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.29. P2 - Spillway chute and flip bucket (2025) - Unmitigated

| | | (1.07 0.0. | | .,, | | J. J | | | | , | J | | | | | | |
|-------------------------------|------|------------|------|----------|-------|--|-------|--------|----------|--------|------|-------|------|------|------|------|------|
| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | <u> </u> | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|-------------------------------|---------|------|------|---------|---------|------|------|---------|---------|---------|---|------|------|---------|---------|------|------|
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.74 | 0.28 | < 0.005 | 0.01 | 0.11 | 0.12 | 0.01 | 0.03 | 0.04 | _ | 422 | 422 | 0.04 | 0.07 | 0.89 | 444 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.79 | 0.28 | < 0.005 | 0.01 | 0.11 | 0.12 | 0.01 | 0.03 | 0.04 | _ | 422 | 422 | 0.04 | 0.07 | 0.02 | 443 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | - | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.21 | 0.08 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 115 | 115 | 0.01 | 0.02 | 0.11 | 121 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.04 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 19.0 | 19.0 | < 0.005 | < 0.005 | 0.02 | 20.0 |

3.30. P2 - Spillway chute and flip bucket (2025) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|-------------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|------|------|---------|---------|------|------|---------|---------|---------|---|------|------|---------|---------|------|------|
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.74 | 0.28 | < 0.005 | 0.01 | 0.11 | 0.12 | 0.01 | 0.03 | 0.04 | _ | 422 | 422 | 0.04 | 0.07 | 0.89 | 444 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.79 | 0.28 | < 0.005 | 0.01 | 0.11 | 0.12 | 0.01 | 0.03 | 0.04 | _ | 422 | 422 | 0.04 | 0.07 | 0.02 | 443 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.21 | 0.08 | < 0.005 | < 0.005 | 0.03 | 0.03 | < 0.005 | 0.01 | 0.01 | _ | 115 | 115 | 0.01 | 0.02 | 0.11 | 121 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.04 | 0.01 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 19.0 | 19.0 | < 0.005 | < 0.005 | 0.02 | 20.0 |

3.31. P2 - Spillway chute and flip bucket (2026) - Unmitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Architect ural Coatings | 0.00 | | | | | | _ | _ | _ | _ | _ | | | | | | _ |
|-------------------------------|------|------|------|---------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | - | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.70 | 0.27 | < 0.005 | 0.01 | 0.11 | 0.12 | 0.01 | 0.03 | 0.04 | _ | 413 | 413 | 0.04 | 0.07 | 0.84 | 435 |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|------|------|---------|---------|------|------|---------|---------|---------|---|------|------|---------|---------|------|------|
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.75 | 0.27 | < 0.005 | 0.01 | 0.11 | 0.12 | 0.01 | 0.03 | 0.04 | _ | 413 | 413 | 0.04 | 0.07 | 0.02 | 434 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.24 | 0.09 | < 0.005 | < 0.005 | 0.03 | 0.04 | < 0.005 | 0.01 | 0.01 | _ | 135 | 135 | 0.01 | 0.02 | 0.12 | 142 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.04 | 0.02 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 22.3 | 22.3 | < 0.005 | < 0.005 | 0.02 | 23.5 |

3.32. P2 - Spillway chute and flip bucket (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|-------------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Architect ural | 0.00 | | _ | _ | _ | _ | | _ | _ | _ | _ | _ | | _ | | | _ |
|-------------------------------|------|------|------|---------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Architect ural Coatings | 0.00 | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.70 | 0.27 | < 0.005 | 0.01 | 0.11 | 0.12 | 0.01 | 0.03 | 0.04 | _ | 413 | 413 | 0.04 | 0.07 | 0.84 | 435 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.75 | 0.27 | < 0.005 | 0.01 | 0.11 | 0.12 | 0.01 | 0.03 | 0.04 | _ | 413 | 413 | 0.04 | 0.07 | 0.02 | 434 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Hauling | < 0.005 | 0.24 | 0.09 | < 0.005 | < 0.005 | 0.03 | 0.04 | < 0.005 | 0.01 | 0.01 | _ | 135 | 135 | 0.01 | 0.02 | 0.12 | 142 |
|---------|---------|------|----------|---------|---------|------|------|---------|---------|---------|----------|------|------|---------|---------|------|------|
| Annual | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.04 | 0.02 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 22.3 | 22.3 | < 0.005 | < 0.005 | 0.02 | 23.5 |

3.33. P1.4 - Access road construction (2025) - Unmitigated

| | · Ollatai | 100 (107 00 | , | ,, .c.,, y | i ioi aiiii | | 01100 | ib/ady it | | vi i / y i i O i | ailiaai | | | | | | |
|---------------------------|-----------|-------------|------|------------|-------------|-------|-------|-----------|--------|------------------|---------|-------|------|------|------|------|------|
| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.34. P1.4 - Access road construction (2025) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|----------|--------|--------|------|----------|----------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ | <u> </u> | <u> </u> | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|------|------|------|------|----------|------|------|------|------|------|---|------|------|------|------|------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | - | - | _ | - | _ | _ | _ | _ | - | _ | - | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.35. P3.2 - Excavate cofferdam (2026) - Unmitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | - | _ | _ | _ | _ | _ | _ | - | _ | - | _ | _ | - | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | - | _ | - | _ | _ | _ | _ | - | _ | - | _ | _ | - | _ | _ | _ |
| Daily, Winter (Max) | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | - | - | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.36. P3.2 - Excavate cofferdam (2026) - Mitigated

| Ontona | | 10 (10) 40 | ., | .,,,. | ioi aiiii | aai, ana | 01100 (| ib/ day ic | i dany, i | · · · · · · · · · · · · · · · · · · · | armaarj | | | | | | |
|---------------------------|------|------------|------|-------|-----------|----------|---------|------------|-----------|---------------------------------------|---------|----------|------|------|------|------|------|
| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | <u> </u> | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.37. P1.3 - Laydown area development (2025) - Unmitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.38. P1.3 - Laydown area development (2025) - Mitigated

| | | | | J . | | | · · | | | | , | | | | | | |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| D " | | | | | | | | | | | | | | | | | |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Daily, Winter (Max) | | _ | | | | | _ | _ | | | | | | | | | |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.39. P1.2 - Mobilization (2025) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|---------|------|------|---------|---------|-------|-------|---------|---------|---------|------|-------|-------|---------|------|------|-------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | - | _ | - | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | - | - | - | - | _ | _ | - |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | - | _ | _ | - | - | _ | - | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.03 | 2.21 | 0.85 | 0.01 | 0.02 | 0.33 | 0.35 | 0.02 | 0.09 | 0.11 | _ | 1,267 | 1,267 | 0.12 | 0.20 | 2.68 | 1,333 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.10 | 0.03 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 52.1 | 52.1 | < 0.005 | 0.01 | 0.05 | 54.7 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|---------|------|------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.02 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 8.62 | 8.62 | < 0.005 | < 0.005 | 0.01 | 9.06 |

3.40. P1.2 - Mobilization (2025) - Mitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|-------|------|------|------|-------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.03 | 2.21 | 0.85 | 0.01 | 0.02 | 0.33 | 0.35 | 0.02 | 0.09 | 0.11 | _ | 1,267 | 1,267 | 0.12 | 0.20 | 2.68 | 1,333 |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|------|------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.10 | 0.03 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 52.1 | 52.1 | < 0.005 | 0.01 | 0.05 | 54.7 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.02 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 8.62 | 8.62 | < 0.005 | < 0.005 | 0.01 | 9.06 |

3.41. P1.1 - Tree removal (2025) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | <u> </u> | _ | _ | _ | <u> </u> |
|---------------------------|---------|------|------|---------|---------|------|------|---------|---------|---------|---|-------|----------|---------|------|------|----------|
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.05 | 3.69 | 1.41 | 0.01 | 0.04 | 0.54 | 0.58 | 0.04 | 0.15 | 0.18 | _ | 2,112 | 2,112 | 0.20 | 0.33 | 4.47 | 2,221 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.37 | 0.14 | < 0.005 | < 0.005 | 0.05 | 0.06 | < 0.005 | 0.01 | 0.02 | _ | 203 | 203 | 0.02 | 0.03 | 0.19 | 213 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.07 | 0.02 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 33.5 | 33.5 | < 0.005 | 0.01 | 0.03 | 35.2 |

3.42. P1.1 - Tree removal (2025) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|------|------|---------|---------|------|------|---------|---------|---------|---|-------|-------|---------|------|------|-------|
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.05 | 3.69 | 1.41 | 0.01 | 0.04 | 0.54 | 0.58 | 0.04 | 0.15 | 0.18 | _ | 2,112 | 2,112 | 0.20 | 0.33 | 4.47 | 2,221 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.37 | 0.14 | < 0.005 | < 0.005 | 0.05 | 0.06 | < 0.005 | 0.01 | 0.02 | _ | 203 | 203 | 0.02 | 0.03 | 0.19 | 213 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.07 | 0.02 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 33.5 | 33.5 | < 0.005 | 0.01 | 0.03 | 35.2 |

3.43. P1 - Mobilization and access development (2025) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|---------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | - | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.02 | 1.11 | 0.42 | < 0.005 | 0.01 | 0.16 | 0.17 | 0.01 | 0.04 | 0.06 | _ | 634 | 634 | 0.06 | 0.10 | 1.34 | 666 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 1.19 | 0.42 | < 0.005 | 0.01 | 0.16 | 0.17 | 0.01 | 0.04 | 0.06 | _ | 633 | 633 | 0.06 | 0.10 | 0.03 | 665 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Hauling | < 0.005 | 0.36 | 0.13 | < 0.005 | < 0.005 | 0.05 | 0.05 | < 0.005 | 0.01 | 0.02 | _ | 196 | 196 | 0.02 | 0.03 | 0.18 | 206 |
|---------|---------|------|------|---------|---------|------|------|---------|---------|---------|---|------|------|---------|------|------|------|
| Annual | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.07 | 0.02 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 32.5 | 32.5 | < 0.005 | 0.01 | 0.03 | 34.1 |

3.44. P1 - Mobilization and access development (2025) - Mitigated

| Jiitona | · Ollatai | 10 (10/ 44 | ., | .,,, , . | 101 41111 | aai, aiia | 01100 | ib/ day ic | i daily, i | , | armaai | <i>'</i> | | | | | |
|---------------------------|-----------|------------|------|----------|-----------|-----------|-------|------------|------------|--------|--------|----------|------|------|------|------|------|
| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|---------|------|------|---------|---------|------|------|---------|---------|---------|---|------|------|---------|------|------|------|
| Hauling | 0.02 | 1.11 | 0.42 | < 0.005 | 0.01 | 0.16 | 0.17 | 0.01 | 0.04 | 0.06 | _ | 634 | 634 | 0.06 | 0.10 | 1.34 | 666 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 1.19 | 0.42 | < 0.005 | 0.01 | 0.16 | 0.17 | 0.01 | 0.04 | 0.06 | _ | 633 | 633 | 0.06 | 0.10 | 0.03 | 665 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.36 | 0.13 | < 0.005 | < 0.005 | 0.05 | 0.05 | < 0.005 | 0.01 | 0.02 | _ | 196 | 196 | 0.02 | 0.03 | 0.18 | 206 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.07 | 0.02 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 32.5 | 32.5 | < 0.005 | 0.01 | 0.03 | 34.1 |

3.45. P5 - Dam notch and tie-in chute (2026) - Unmitigated

| | | (1.07 0.01 | | | | | · | | | , , | | | | | | | |
|---------------------------|------|------------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|------|------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|------|------|
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.75 | 0.27 | < 0.005 | 0.01 | 0.11 | 0.12 | 0.01 | 0.03 | 0.04 | _ | 413 | 413 | 0.04 | 0.07 | 0.02 | 434 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.12 | 0.04 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | 0.01 | _ | 66.0 | 66.0 | 0.01 | 0.01 | 0.06 | 69.4 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.02 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 10.9 | 10.9 | < 0.005 | < 0.005 | 0.01 | 11.5 |

3.46. P5 - Dam notch and tie-in chute (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Doily | | | | | | | | | | | | | | | | | |
|---------------------------|---------|------|------|---------|---------|------|------|---------|---------|------|----------|------|------|------|------|------|------|
| Daily, Summer (Max) | _ | | | | _ | _ | | | | _ | | _ | _ | | | | |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | - | _ | - | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.75 | 0.27 | < 0.005 | 0.01 | 0.11 | 0.12 | 0.01 | 0.03 | 0.04 | _ | 413 | 413 | 0.04 | 0.07 | 0.02 | 434 |
| Average Daily | _ | _ | _ | - | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.12 | 0.04 | < 0.005 | < 0.005 | 0.02 | 0.02 | < 0.005 | < 0.005 | 0.01 | _ | 66.0 | 66.0 | 0.01 | 0.01 | 0.06 | 69.4 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | <u> </u> | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| | < 0.005 < 0.005 < 0.005 | + 0 00E + 0 00E + 0 00E | 40.0 | 0.005 0.005 0.04 44.5 |
|-----------------------------------|-----------------------------|-----------------------------|--------------------|---------------------------------|
| Hauling < 0.005 0.02 0.01 < 0.005 | < 0.005 < 0.005 < 0.005 | < 0.005 < 0.005 < 0.005 | — 10.9 10.9 | < 0.005 < 0.005 0.01 11.5 |

3.47. P5 - Dam notch and tie-in chute (2027) - Unmitigated

| | ROG | NOx | СО | so2 | PM10E | PM10D | PM10T | PM2.5E | | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|---------|-------|--------|---------|----------|----------|-----------|------|--------|------|------|------|------|------|
| Onsite | _ | — | _ | _ | — | TWITOD | T WITOT | T WIZ.JL | T WIZ.JD | T IVIZ.51 | _ | INDCO2 | | _ | 1020 | | 0020 |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.71 | 0.27 | < 0.005 | 0.01 | 0.11 | 0.12 | 0.01 | 0.03 | 0.04 | _ | 403 | 403 | 0.03 | 0.06 | 0.02 | 423 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|---------|------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.03 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 18.0 | 18.0 | < 0.005 | < 0.005 | 0.01 | 18.9 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 2.98 | 2.98 | < 0.005 | < 0.005 | < 0.005 | 3.13 |

3.48. P5 - Dam notch and tie-in chute (2027) - Mitigated

| | | | i e | | | 1 | | | | | annual | | | | | | |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|--------|-------|------|------|------|------|------|
| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.71 | 0.27 | < 0.005 | 0.01 | 0.11 | 0.12 | 0.01 | 0.03 | 0.04 | _ | 403 | 403 | 0.03 | 0.06 | 0.02 | 423 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.03 | 0.01 | < 0.005 | < 0.005 | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 18.0 | 18.0 | < 0.005 | < 0.005 | 0.01 | 18.9 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 2.98 | 2.98 | < 0.005 | < 0.005 | < 0.005 | 3.13 |

3.49. P5.1 - Demolition (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | - | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.50. P5.1 - Demolition (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Doily | | | | | | | | | | | | | | | | | |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | | _ | _ | _ | | | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | - | _ | - | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | - | - | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | - | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.51. P5.2 - Excavation, Subgrade (2026) - Unmitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|----------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | - | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | - | - | _ | _ |
| Daily, Winter (Max) | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | - | - | _ | - | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.52. P5.2 - Excavation, Subgrade (2026) - Mitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.53. P5.3 - Form and Pour Concrete (2026) - Unmitigated

| | | | | xiiy, toii, y | | | | | | | | | | | | | |
|---------------------------|------|------|------|---------------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | |

| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | - | _ | _ | _ | _ | - | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.54. P5.3 - Form and Pour Concrete (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | - | - | _ | _ | _ | - | _ | _ | _ | - | - | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.55. P5.4 - Install Footbridge (2026) - Unmitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | СО2Т | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | - | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | - | _ | _ | - | _ | - | - | _ | - | - | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | - | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.56. P5.4 - Install Footbridge (2026) - Mitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.57. P5.4 - Install Footbridge (2027) - Unmitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|----------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|----------|------|
| Onsite | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.58. P5.4 - Install Footbridge (2027) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|----------|
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | <u> </u> |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.59. P6 - Plunge pool (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|------|------|---------|---------|------|------|---------|---------|---------|---|------|------|---------|------|------|------|
| Summer (Max) | | | | | | | | | | | | | | | | | |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | | _ | - | _ | _ | _ | _ | _ | _ | _ | | _ | - | _ | |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.70 | 0.27 | < 0.005 | 0.01 | 0.11 | 0.12 | 0.01 | 0.03 | 0.04 | _ | 413 | 413 | 0.04 | 0.07 | 0.84 | 435 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.07 | 0.03 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 40.8 | 40.8 | < 0.005 | 0.01 | 0.04 | 42.9 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Hauling | 4 O OOF | 0.04 | 4 O OOF | 4 O OOF | - 0 00E | - 0 00E | < 0.005 | . O OOE | . O OOF | 4 O OOF | | 6 7E | 6 7E | < 0.005 | < 0.005 | 0.01 | 7.40 |
|---------|---------|------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|------|------|
| Hauling | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.75 | 0.70 | < 0.005 | < 0.005 | 0.01 | 7.10 |

3.60. P6 - Plunge pool (2026) - Mitigated

| | | | | aily, ton/y | | | | | | | | | | | | | |
|---------------------------|------|------|------|-------------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.70 | 0.27 | < 0.005 | 0.01 | 0.11 | 0.12 | 0.01 | 0.03 | 0.04 | _ | 413 | 413 | 0.04 | 0.07 | 0.84 | 435 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|---------|------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.07 | 0.03 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 40.8 | 40.8 | < 0.005 | 0.01 | 0.04 | 42.9 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 6.75 | 6.75 | < 0.005 | < 0.005 | 0.01 | 7.10 |

3.61. P6.1 - Flow bypass (2026) - Unmitigated

| _ocation | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|----------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite ruck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Onsite ruck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite ruck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Vorker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|------|------|------|------|------|------|------|----------|------|------|---|------|------|------|------|------|------|
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.62. P6.1 - Flow bypass (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | - | - | _ | - | _ | _ | _ | _ | - | _ | - | _ | - | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.63. P6.2 - Excavation (2026) - Unmitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|----------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| D " | | | | | | | | | | | | | | | | | |
|---------------------------|------|------|------|------|----------|------|------|------|------|------|---|------|------|------|------|------|------|
| Daily, Winter (Max) | | _ | | | | | _ | _ | | | | | | | | | |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.64. P6.2 - Excavation (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | - | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | - | _ | - | _ | _ | _ | _ | - | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | - | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.65. P6.3 - Slope protection (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.66. P6.3 - Slope protection (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Offsite | - | - | - | - | _ | - | _ | - | - | - | _ | _ | - | - | - | - | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.67. P7 - Remaining Work Scope (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.75 | 0.27 | < 0.005 | 0.01 | 0.11 | 0.12 | 0.01 | 0.03 | 0.04 | _ | 413 | 413 | 0.04 | 0.07 | 0.02 | 434 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 2.91 | 2.91 | < 0.005 | < 0.005 | < 0.005 | 3.06 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.48 | 0.48 | < 0.005 | < 0.005 | < 0.005 | 0.51 |

3.68. P7 - Remaining Work Scope (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, | | | | | | | | | | | | | | | | | |
|---------------------------|---------|------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Summer (Max) | _ | _ | | _ | | _ | _ | _ | | _ | _ | | _ | | _ | _ | |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.75 | 0.27 | < 0.005 | 0.01 | 0.11 | 0.12 | 0.01 | 0.03 | 0.04 | _ | 413 | 413 | 0.04 | 0.07 | 0.02 | 434 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 2.91 | 2.91 | < 0.005 | < 0.005 | < 0.005 | 3.06 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Hauling | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 0.48 | 0.48 | < 0.005 | < 0.005 | < 0.005 | 0.51 |
|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| riauling | < 0.003 | < 0.003 | < 0.003 | < 0.003 | < 0.005 | < 0.003 | < 0.003 | < 0.003 | < 0.003 | < 0.003 | | 0.40 | 0.40 | < 0.003 | < 0.003 | < 0.003 | 0.51 |

3.69. P7 - Remaining Work Scope (2027) - Unmitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|---------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.71 | 0.27 | < 0.005 | 0.01 | 0.11 | 0.12 | 0.01 | 0.03 | 0.04 | _ | 403 | 403 | 0.03 | 0.06 | 0.02 | 423 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|---------|------|------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.09 | 0.03 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 52.1 | 52.1 | < 0.005 | 0.01 | 0.04 | 54.7 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.02 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 8.62 | 8.62 | < 0.005 | < 0.005 | 0.01 | 9.06 |

3.70. P7 - Remaining Work Scope (2027) - Mitigated

| | ROG | NOx | СО | SO2 | | _ | · | PM2.5E | | | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|------|------|------|--------|------|------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---------|------|------|---------|---------|---------|---------|---------|----------|---------|---|------|------|---------|---------|------|------|
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.71 | 0.27 | < 0.005 | 0.01 | 0.11 | 0.12 | 0.01 | 0.03 | 0.04 | _ | 403 | 403 | 0.03 | 0.06 | 0.02 | 423 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.09 | 0.03 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 52.1 | 52.1 | < 0.005 | 0.01 | 0.04 | 54.7 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.02 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 8.62 | 8.62 | < 0.005 | < 0.005 | 0.01 | 9.06 |

3.71. P7.1 - Cofferdam removal (2027) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ | _ | _ | _ | |
|---------------------------|------|------|------|------|------|------|----------|------|------|------|---|------|------|------|------|------|------|
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.72. P7.1 - Cofferdam removal (2027) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Winter (Max) | _ | | _ | | _ | _ | | _ | | _ | _ | _ | _ | | | | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | - | - | - | - | - | _ | _ | _ | - | _ | - | - | - | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | - | _ |
| Daily, Winter (Max) | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | - | _ | - | _ | - | _ | _ | _ | - | _ | - | _ | - | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.73. P7.2 - Lighting (2027) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|----------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | - | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | - | - | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|----------|------|------|------|------|------|------|
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.74. P7.2 - Lighting (2027) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | - | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | | _ | _ | _ | - | _ | _ | _ | _ | - | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.75. P7.3 - Log boom (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | СО2Т | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | - | _ | _ | _ | _ | - | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.76. P7.3 - Log boom (2026) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | - | - | _ | _ | _ | - | _ | _ | _ | - | - | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.77. P7.3 - Log boom (2027) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | - |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | - | - | - | - | _ | _ | _ | _ | _ | - | _ | _ | - | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | | - |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.78. P7.3 - Log boom (2027) - Mitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | СО2Т | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.79. P7.4 - Restoration (2027) - Unmitigated

| | ROG | NOx | СО | SO2 | | | i i | PM2.5E | | PM2.5T | BCO2 | | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|------|------|------|--------|------|--------|------|------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | - | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.80. P7.4 - Restoration (2027) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|----------|
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | <u> </u> |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.81. P7.5 - Demobilization (2027) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|----------|------|------|------|
| Daily, Winter (Max) | _ | _ | _ | - | - | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | - | - | _ | _ | _ | - | _ | _ | _ | _ | - | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|

3.82. P7.5 - Demobilization (2027) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.83. P8 - Spillway abandonment (2027) - Unmitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|---------|------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|----------|---------|---------|---------|------|
| Hauling | 0.01 | 0.66 | 0.26 | < 0.005 | 0.01 | 0.11 | 0.12 | 0.01 | 0.03 | 0.04 | _ | 403 | 403 | 0.03 | 0.06 | 0.78 | 424 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.05 | 0.02 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 26.5 | 26.5 | < 0.005 | < 0.005 | 0.02 | 27.9 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 4.39 | 4.39 | < 0.005 | < 0.005 | < 0.005 | 4.61 |

3.84. P8 - Spillway abandonment (2027) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | СО2Т | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|---------|------|---------|---------|---------|---------|---------|---------|---------|---------|---|------|------|---------|---------|---------|------|
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.01 | 0.66 | 0.26 | < 0.005 | 0.01 | 0.11 | 0.12 | 0.01 | 0.03 | 0.04 | _ | 403 | 403 | 0.03 | 0.06 | 0.78 | 424 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.05 | 0.02 | < 0.005 | < 0.005 | 0.01 | 0.01 | < 0.005 | < 0.005 | < 0.005 | _ | 26.5 | 26.5 | < 0.005 | < 0.005 | 0.02 | 27.9 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | < 0.005 | 0.01 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | < 0.005 | _ | 4.39 | 4.39 | < 0.005 | < 0.005 | < 0.005 | 4.61 |

3.85. P8.1 - Remove Cofferdam (2027) - Unmitigated

| | | | | J . | | | · · | | | | , | | | | | | |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| D " | | | | | | | | | | | | | | | | | |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Daily, Winter (Max) | | _ | | | | | _ | _ | | | | | | | | | |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.86. P8.1 - Remove Cofferdam (2027) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | - | _ | _ | _ | _ | - | - | _ | _ | - | _ | _ | _ | - |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | - | _ | _ | _ | _ | - | - | _ | _ | - | _ | _ | _ | - |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.87. P8.2 - Canal Side Channel (2027) - Unmitigated

| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.88. P8.2 - Canal Side Channel (2027) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | | PM10T | PM2.5E | | | BCO2 | | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|------|-------|--------|------|------|------|------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.89. P8.3 - Cover Bathtub (2027) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.90. P8.3 - Cover Bathtub (2027) - Mitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|----------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Summer | _ | _ | - | _ | - | _ | _ | _ | _ | _ | _ | - | - | _ | - | _ | - |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|----------|------|------|------|
| (Max) | | | | | | | | | | | | | | | | | |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | - | _ | _ | _ |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | | _ | _ | _ | _ | _ | _ | - | _ | _ | - | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Average Daily | - | _ | _ | - | _ | _ | _ | _ | - | _ | _ | _ | - | - | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|

3.91. P9 - Batch Plant Equip (2025) - Unmitigated

| oriteria | Pollutar | its (ib/da | i e | | for anni | uai) and | GHGS (| lb/day fo | | | annual |) | | | | | |
|---------------------------|----------|------------|------|------|----------|----------|--------|-----------|--------|--------|--------|-------|------|------|------|------|------|
| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|----------|------|------|---|----------|------|------|------|------|------|
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.92. P9 - Batch Plant Equip (2025) - Mitigated

| | | | i e | | | 1 | | | | | annual | | | | | | |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|--------|-------|------|------|------|------|------|
| Location | ROG | NOx | СО | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|----------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | <u> </u> | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.93. P9 - Batch Plant Equip (2026) - Unmitigated

| Location | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|------|------|------|------|-------|-------|-------|--------|--------|--------|------|-------|------|------|------|------|------|
| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | - | - | _ | _ | _ | - |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

3.94. P9 - Batch Plant Equip (2026) - Mitigated

| | Location | n ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|--|----------|-------|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
|--|----------|-------|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|

| Onsite | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | - |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | - | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Onsite truck | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Offsite | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Average Daily | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | - | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|---------|------|------|------|------|------|------|------|------|------|------|---|------|------|------|------|------|------|
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Worker | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Vendor | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| Hauling | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | _ | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

4. Operations Emissions Details

4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

| Vegetatio n | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Total | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Total | _ | _ | _ | _ | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | | _ |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Total | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

| Land | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Use | | | | | | | | | | | | | | | | | |

| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---|---|---|---|---|---|---|----------|---|---|---|---|---|---|---|---|---|
| Total | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | _ | | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Total | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Total | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

| | | (| | J, J | | , | (| . | · J / | • , | , | | | | | | |
|---------------------------|-----|-----|----|------|-------|-------|-------|----------|--------------|--------|------|-------|------|-----|-----|---|------|
| Species | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Avoided | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Sequest ered | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Remove d | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Avoided | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Sequest ered | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|--------------|---|---|---|---|---|---|---|----------|---|---|---|---|---|---|---|---|---|
| Subtotal | _ | _ | _ | _ | _ | _ | _ | <u> </u> | _ | | _ | _ | _ | _ | _ | _ | _ |
| Remove d | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Avoided | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Sequest ered | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Remove d | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

4.10.4. Soil Carbon Accumulation By Vegetation Type - Mitigated

| Vegetatio n | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|----------|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Total | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Total | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| Total | _ | l | | _ | l | | _ | _ | | | |
|-------|---|---|--|---|---|--|---|---|--|--|------|
| Iotal | | | | | | | | | | | |

4.10.5. Above and Belowground Carbon Accumulation by Land Use Type - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

| | | | | | | DI MOD | | | | | | | ОООТ | 0114 | Noo | _ | 000 |
|---------------------------|-----|-----|----|-----|-------|--------|-------|--------|--------|--------|------|-------|------|------|-----|---|------|
| Land Use | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Total | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Total | _ | | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Total | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

4.10.6. Avoided and Sequestered Emissions by Species - Mitigated

| Species | ROG | NOx | со | SO2 | PM10E | PM10D | PM10T | PM2.5E | PM2.5D | PM2.5T | BCO2 | NBCO2 | CO2T | CH4 | N2O | R | CO2e |
|---------------------------|-----|-----|----|-----|-------|-------|-------|--------|--------|--------|------|-------|------|-----|-----|---|------|
| Daily, Summer (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Avoided | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Sequest ered | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Remove | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

| _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---------------------------|---|---|---|----------|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Daily, Winter (Max) | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Avoided | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Sequest ered | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Remove d | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Annual | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Avoided | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Sequest ered | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | <u> </u> | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Remove d | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| Subtotal | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
| _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |

5. Activity Data

5.1. Construction Schedule

| Phase Name | Phase Type | Start Date | End Date | Days Per Week | Work Days per Phase | Phase Description |
|-------------------------------------|------------|------------|------------|---------------|---------------------|-------------------|
| P4.2 - Crest form and pour concrete | Grading | 5/30/2026 | 10/24/2026 | 6.00 | 127 | _ |

| P4.1 - Crest excavation/ | Grading | 4/21/2026 | 5/29/2026 | 6.00 | 34.0 | _ |
|--|---------|------------|------------|------|------|---|
| subgrade | | | | | | |
| P4 - Crest structure | Grading | 4/21/2026 | 10/24/2026 | 6.00 | 161 | _ |
| P3.6 - Trench Cutoff Concrete 3 | Grading | 4/14/2026 | 4/14/2026 | 2.00 | 1.00 | _ |
| P3.5 - Trench Cutoff Concrete 2 | Grading | 4/7/2026 | 4/7/2026 | 2.00 | 1.00 | _ |
| P3.4 - Trench Cutoff Concrete 1 | Grading | 3/31/2026 | 3/31/2026 | 2.00 | 1.00 | _ |
| P3.3 - Place piles, sheets, and concrete | Grading | 3/27/2026 | 4/18/2026 | 6.00 | 20.0 | _ |
| P3.1 - Mass concrete | Grading | 11/16/2025 | 12/20/2025 | 6.00 | 30.0 | _ |
| P3 - Cofferdam | Grading | 11/16/2025 | 4/18/2026 | 6.00 | 132 | _ |
| P2.3 - Drains, Cleanouts, and Backfill | Grading | 4/28/2026 | 5/19/2026 | 6.00 | 19.0 | _ |
| P2.2 - Spillway form and pour concrete | Grading | 11/16/2025 | 4/25/2026 | 6.00 | 138 | _ |
| P2.1 - Spillway excavation/subgrade | Grading | 9/7/2025 | 11/9/2025 | 6.00 | 54.0 | _ |
| P2 - Spillway chute and flip bucket | Grading | 9/7/2025 | 5/19/2026 | 6.00 | 218 | _ |
| P1.4 - Access road construction | Grading | 8/22/2025 | 11/16/2025 | 6.00 | 74.0 | _ |
| P3.2 - Excavate cofferdam | Grading | 3/18/2026 | 3/26/2026 | 6.00 | 8.00 | _ |
| P1.3 - Laydown area development | Grading | 8/22/2025 | 8/28/2025 | 6.00 | 6.00 | _ |
| P1.2 - Mobilization | Grading | 8/5/2025 | 8/21/2025 | 6.00 | 15.0 | _ |
| P1.1 - Tree removal | Grading | 7/8/2025 | 8/17/2025 | 6.00 | 35.0 | _ |
| P1 - Mobilization and access development | Grading | 7/8/2025 | 11/16/2025 | 6.00 | 113 | _ |
| P5 - Dam notch and tie-in chute | Grading | 10/25/2026 | 1/19/2027 | 6.00 | 74.0 | _ |
| P5.1 - Demolition | Grading | 10/25/2026 | 11/5/2026 | 6.00 | 10.0 | _ |

| P5.2 - Excavation, Subgrade | Grading | 11/6/2026 | 11/20/2026 | 6.00 | 13.0 | _ |
|----------------------------------|---------|------------|------------|------|------|---|
| P5.3 - Form and Pour Concrete | Grading | 11/21/2026 | 12/29/2026 | 6.00 | 33.0 | _ |
| P5.4 - Install Footbridge | Grading | 12/30/2026 | 1/19/2027 | 6.00 | 18.0 | _ |
| P6 - Plunge pool | Grading | 8/5/2026 | 9/15/2026 | 6.00 | 36.0 | _ |
| P6.1 - Flow bypass | Grading | 8/5/2026 | 8/11/2026 | 6.00 | 6.00 | _ |
| P6.2 - Excavation | Grading | 8/12/2026 | 9/9/2026 | 6.00 | 25.0 | _ |
| P6.3 - Slope protection | Grading | 9/10/2026 | 9/15/2026 | 6.00 | 5.00 | _ |
| P7 - Remaining Work Scope | Grading | 12/29/2026 | 2/24/2027 | 6.00 | 50.0 | _ |
| P7.1 - Cofferdam removal | Grading | 1/9/2027 | 1/16/2027 | 6.00 | 7.00 | _ |
| P7.2 - Lighting | Grading | 1/19/2027 | 2/10/2027 | 6.00 | 20.0 | _ |
| P7.3 - Log boom | Grading | 12/29/2026 | 1/9/2027 | 6.00 | 11.0 | _ |
| P7.4 - Restoration | Grading | 1/16/2027 | 2/3/2027 | 6.00 | 16.0 | _ |
| P7.5 - Demobilization | Grading | 2/11/2027 | 2/24/2027 | 6.00 | 12.0 | _ |
| P8 - Spillway abandonment | Grading | 4/9/2027 | 5/6/2027 | 6.00 | 24.0 | _ |
| P8.1 - Remove Cofferdam | Grading | 4/9/2027 | 4/20/2027 | 6.00 | 10.0 | _ |
| P8.2 - Canal Side Channel | Grading | 4/9/2027 | 4/22/2027 | 6.00 | 12.0 | _ |
| P8.3 - Cover Bathtub | Grading | 4/23/2027 | 5/6/2027 | 6.00 | 12.0 | _ |
| P9 - Batch Plant Equip | Grading | 11/1/2025 | 12/31/2026 | 3.00 | 183 | _ |

5.2. Off-Road Equipment

5.2.1. Unmitigated

| Dhaca Nama | For the second Times | Fuel Time | Facility Ties | Musels on Box | Hauss Day Day | I la va a va a vu a v | Local Footon |
|------------|-------------------------------|-----------|---------------|----------------|---------------|-----------------------|--------------|
| Phase Name | Equipment Type | Fuel Type | Engine Tier | Number per Day | Hours Per Day | Horsepower | Load Factor |
| | - - - - - - - - | 1 | | | | | |

5.3. Construction Vehicles

5.3.1. Unmitigated

| Phase Name | Trip Type | One-Way Trips per Day | Miles per Trip | Vehicle Mix |
|--|--------------|-----------------------|----------------|---------------|
| P1 - Mobilization and access development | _ | _ | _ | _ |
| P1 - Mobilization and access development | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P1 - Mobilization and access development | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P1 - Mobilization and access development | Hauling | 6.00 | 28.7 | HHDT |
| P1 - Mobilization and access development | Onsite truck | 0.00 | 0.00 | HHDT |
| P1.1 - Tree removal | _ | _ | _ | _ |
| P1.1 - Tree removal | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P1.1 - Tree removal | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P1.1 - Tree removal | Hauling | 20.0 | 28.7 | HHDT |
| P1.1 - Tree removal | Onsite truck | 0.00 | 52.5 | HHDT |
| P1.2 - Mobilization | _ | _ | _ | _ |
| P1.2 - Mobilization | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P1.2 - Mobilization | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P1.2 - Mobilization | Hauling | 12.0 | 28.7 | HHDT |
| P1.2 - Mobilization | Onsite truck | 0.00 | 0.00 | HHDT |
| P1.3 - Laydown area development | _ | _ | _ | _ |
| P1.3 - Laydown area development | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P1.3 - Laydown area development | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P1.3 - Laydown area development | Hauling | 0.00 | 20.0 | HHDT |
| P1.3 - Laydown area development | Onsite truck | 0.00 | 47.5 | HHDT |
| P1.4 - Access road construction | _ | _ | _ | _ |
| P1.4 - Access road construction | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P1.4 - Access road construction | Vendor | 0.00 | 8.80 | HHDT,MHDT |

| P1 4 Access road construction | Hauling | 0.00 | 20.0 | HHDT |
|-------------------------------------|--------------|------|------|---------------|
| P1.4 - Access road construction | Hauling | | | |
| P1.4 - Access road construction | Onsite truck | 0.00 | 60.0 | HHDT |
| P2 - Spillway chute and flip bucket | _ | _ | _ | _ |
| P2 - Spillway chute and flip bucket | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P2 - Spillway chute and flip bucket | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P2 - Spillway chute and flip bucket | Hauling | 4.00 | 28.7 | HHDT |
| P2 - Spillway chute and flip bucket | Onsite truck | 0.00 | 0.00 | HHDT |
| P4.2 - Crest form and pour concrete | _ | _ | _ | _ |
| P4.2 - Crest form and pour concrete | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P4.2 - Crest form and pour concrete | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P4.2 - Crest form and pour concrete | Hauling | 0.00 | 8.00 | HHDT |
| P4.2 - Crest form and pour concrete | Onsite truck | 0.00 | 20.0 | HHDT |
| P4.1 - Crest excavation/ subgrade | _ | _ | _ | _ |
| P4.1 - Crest excavation/ subgrade | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P4.1 - Crest excavation/ subgrade | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P4.1 - Crest excavation/ subgrade | Hauling | 0.00 | 20.0 | HHDT |
| P4.1 - Crest excavation/ subgrade | Onsite truck | 0.00 | 60.0 | HHDT |
| P4 - Crest structure | _ | _ | _ | _ |
| P4 - Crest structure | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P4 - Crest structure | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P4 - Crest structure | Hauling | 4.00 | 28.7 | HHDT |
| P4 - Crest structure | Onsite truck | 0.00 | 0.00 | HHDT |
| P3.6 - Trench Cutoff Concrete 3 | _ | _ | _ | _ |
| P3.6 - Trench Cutoff Concrete 3 | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P3.6 - Trench Cutoff Concrete 3 | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P3.6 - Trench Cutoff Concrete 3 | Hauling | 0.00 | 8.00 | HHDT |
| P3.6 - Trench Cutoff Concrete 3 | Onsite truck | 0.00 | 10.0 | HHDT |
| P3.5 - Trench Cutoff Concrete 2 | _ | _ | _ | _ |

| P3.5 - Trench Cutoff Concrete 2 | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
|--|--------------|------|------|---------------|
| P3.5 - Trench Cutoff Concrete 2 | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P3.5 - Trench Cutoff Concrete 2 | Hauling | 0.00 | 8.00 | HHDT |
| P3.5 - Trench Cutoff Concrete 2 | Onsite truck | 0.00 | 10.0 | HHDT |
| P3.4 - Trench Cutoff Concrete 1 | _ | _ | _ | _ |
| P3.4 - Trench Cutoff Concrete 1 | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P3.4 - Trench Cutoff Concrete 1 | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P3.4 - Trench Cutoff Concrete 1 | Hauling | 0.00 | 8.00 | HHDT |
| P3.4 - Trench Cutoff Concrete 1 | Onsite truck | 0.00 | 10.0 | HHDT |
| P3.3 - Place piles, sheets, and concrete | _ | _ | _ | _ |
| P3.3 - Place piles, sheets, and concrete | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P3.3 - Place piles, sheets, and concrete | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P3.3 - Place piles, sheets, and concrete | Hauling | 0.00 | 20.0 | HHDT |
| P3.3 - Place piles, sheets, and concrete | Onsite truck | 0.00 | 20.0 | HHDT |
| P3.1 - Mass concrete | _ | _ | _ | _ |
| P3.1 - Mass concrete | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P3.1 - Mass concrete | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P3.1 - Mass concrete | Hauling | 0.00 | 20.0 | HHDT |
| P3.1 - Mass concrete | Onsite truck | 0.00 | 20.0 | HHDT |
| P3 - Cofferdam | _ | _ | _ | _ |
| P3 - Cofferdam | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P3 - Cofferdam | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P3 - Cofferdam | Hauling | 4.00 | 28.7 | HHDT |
| P3 - Cofferdam | Onsite truck | 0.00 | 0.00 | HHDT |
| P2.3 - Drains, Cleanouts, and Back | fill — | _ | _ | _ |

| P2.3 - Drains, Cleanouts, and Backfill | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
|--|--------------|------|------|---------------|
| P2.3 - Drains, Cleanouts, and Backfill | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P2.3 - Drains, Cleanouts, and Backfill | Hauling | 0.00 | 20.0 | HHDT |
| P2.3 - Drains, Cleanouts, and Backfill | Onsite truck | 0.00 | 0.00 | HHDT |
| P2.2 - Spillway form and pour concrete | _ | _ | _ | _ |
| P2.2 - Spillway form and pour concrete | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P2.2 - Spillway form and pour concrete | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P2.2 - Spillway form and pour concrete | Hauling | 0.00 | 8.00 | HHDT |
| P2.2 - Spillway form and pour concrete | Onsite truck | 0.00 | 50.0 | HHDT |
| P2.1 - Spillway excavation/subgrade | _ | _ | _ | _ |
| P2.1 - Spillway excavation/subgrade | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P2.1 - Spillway excavation/subgrade | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P2.1 - Spillway excavation/subgrade | Hauling | 0.00 | 20.0 | HHDT |
| P2.1 - Spillway excavation/subgrade | Onsite truck | 0.00 | 60.0 | HHDT |
| P3.2 - Excavate cofferdam | _ | _ | _ | _ |
| P3.2 - Excavate cofferdam | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P3.2 - Excavate cofferdam | Vendor | 0.00 | 8.80 | ннот,мнот |
| P3.2 - Excavate cofferdam | Hauling | 0.00 | 20.0 | HHDT |
| P3.2 - Excavate cofferdam | Onsite truck | 0.00 | 20.0 | HHDT |
| P5 - Dam notch and tie-in chute | _ | _ | _ | _ |
| P5 - Dam notch and tie-in chute | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P5 - Dam notch and tie-in chute | Vendor | 0.00 | 8.80 | ннот,мнот |
| P5 - Dam notch and tie-in chute | Hauling | 4.00 | 28.7 | HHDT |
| P5 - Dam notch and tie-in chute | Onsite truck | 0.00 | 0.00 | HHDT |
| P5.1 - Demolition | _ | _ | _ | _ |
| | | | | |

| P5.1 - Demolition | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
|-------------------------------|--------------|------|------|---------------|
| P5.1 - Demolition | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P5.1 - Demolition | Hauling | 0.00 | 20.0 | HHDT |
| P5.1 - Demolition | Onsite truck | 0.00 | 10.0 | HHDT |
| P5.2 - Excavation, Subgrade | _ | _ | _ | _ |
| P5.2 - Excavation, Subgrade | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P5.2 - Excavation, Subgrade | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P5.2 - Excavation, Subgrade | Hauling | 0.00 | 20.0 | HHDT |
| P5.2 - Excavation, Subgrade | Onsite truck | 0.00 | 10.0 | HHDT |
| P5.3 - Form and Pour Concrete | _ | _ | _ | _ |
| P5.3 - Form and Pour Concrete | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P5.3 - Form and Pour Concrete | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P5.3 - Form and Pour Concrete | Hauling | 0.00 | 8.00 | HHDT |
| P5.3 - Form and Pour Concrete | Onsite truck | 0.00 | 20.0 | HHDT |
| P5.4 - Install Footbridge | _ | _ | _ | _ |
| P5.4 - Install Footbridge | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P5.4 - Install Footbridge | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P5.4 - Install Footbridge | Hauling | 0.00 | 20.0 | HHDT |
| P5.4 - Install Footbridge | Onsite truck | 0.00 | 20.0 | HHDT |
| P6 - Plunge pool | _ | _ | _ | _ |
| P6 - Plunge pool | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P6 - Plunge pool | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P6 - Plunge pool | Hauling | 4.00 | 28.7 | HHDT |
| P6 - Plunge pool | Onsite truck | 0.00 | 0.00 | HHDT |
| P6.1 - Flow bypass | _ | _ | _ | _ |
| P6.1 - Flow bypass | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P6.1 - Flow bypass | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P6.1 - Flow bypass | Hauling | 0.00 | 20.0 | HHDT |

| P6.1 - Flow bypass | Onsite truck | 0.00 | 0.00 | ннот |
|---------------------------|--------------|------|------|---------------|
| P6.2 - Excavation | _ | _ | _ | _ |
| P6.2 - Excavation | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P6.2 - Excavation | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P6.2 - Excavation | Hauling | 0.00 | 20.0 | HHDT |
| P6.2 - Excavation | Onsite truck | 0.00 | 50.0 | HHDT |
| P6.3 - Slope protection | _ | _ | _ | _ |
| P6.3 - Slope protection | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P6.3 - Slope protection | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P6.3 - Slope protection | Hauling | 0.00 | 20.0 | HHDT |
| P6.3 - Slope protection | Onsite truck | 0.00 | 10.0 | HHDT |
| P7 - Remaining Work Scope | _ | _ | _ | _ |
| P7 - Remaining Work Scope | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P7 - Remaining Work Scope | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P7 - Remaining Work Scope | Hauling | 4.00 | 28.7 | HHDT |
| P7 - Remaining Work Scope | Onsite truck | 0.00 | 0.00 | HHDT |
| P7.1 - Cofferdam removal | _ | _ | _ | _ |
| P7.1 - Cofferdam removal | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P7.1 - Cofferdam removal | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P7.1 - Cofferdam removal | Hauling | 0.00 | 20.0 | HHDT |
| P7.1 - Cofferdam removal | Onsite truck | 0.00 | 0.00 | HHDT |
| P7.2 - Lighting | _ | _ | _ | _ |
| P7.2 - Lighting | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P7.2 - Lighting | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P7.2 - Lighting | Hauling | 0.00 | 20.0 | HHDT |
| P7.2 - Lighting | Onsite truck | 0.00 | 12.5 | HHDT |
| P7.3 - Log boom | _ | _ | _ | _ |
| P7.3 - Log boom | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| | | | | |

| P7.3 - Log boom | Vendor | 0.00 | 8.80 | HHDT,MHDT |
|---------------------------|--------------|------|------|---------------|
| P7.3 - Log boom | Hauling | 0.00 | 20.0 | HHDT |
| P7.3 - Log boom | Onsite truck | 0.00 | 0.00 | HHDT |
| P7.4 - Restoration | _ | _ | _ | - |
| P7.4 - Restoration | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P7.4 - Restoration | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P7.4 - Restoration | Hauling | 0.00 | 20.0 | HHDT |
| P7.4 - Restoration | Onsite truck | 0.00 | 72.5 | HHDT |
| P7.5 - Demobilization | _ | _ | _ | _ |
| P7.5 - Demobilization | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P7.5 - Demobilization | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P7.5 - Demobilization | Hauling | 0.00 | 20.0 | HHDT |
| P7.5 - Demobilization | Onsite truck | 0.00 | 72.5 | HHDT |
| P8 - Spillway abandonment | _ | _ | _ | _ |
| P8 - Spillway abandonment | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P8 - Spillway abandonment | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P8 - Spillway abandonment | Hauling | 4.00 | 28.7 | HHDT |
| P8 - Spillway abandonment | Onsite truck | 0.00 | 0.00 | HHDT |
| P8.1 - Remove Cofferdam | _ | _ | _ | _ |
| P8.1 - Remove Cofferdam | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P8.1 - Remove Cofferdam | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P8.1 - Remove Cofferdam | Hauling | 0.00 | 20.0 | HHDT |
| P8.1 - Remove Cofferdam | Onsite truck | 0.00 | 10.0 | HHDT |
| P8.2 - Canal Side Channel | _ | _ | _ | _ |
| P8.2 - Canal Side Channel | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P8.2 - Canal Side Channel | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P8.2 - Canal Side Channel | Hauling | 0.00 | 20.0 | HHDT |
| P8.2 - Canal Side Channel | Onsite truck | 0.00 | 10.0 | HHDT |
| | | | | |

| P8.3 - Cover Bathtub | _ | _ | _ | _ |
|------------------------|--------------|------|------|---------------|
| P8.3 - Cover Bathtub | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P8.3 - Cover Bathtub | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P8.3 - Cover Bathtub | Hauling | 0.00 | 20.0 | HHDT |
| P8.3 - Cover Bathtub | Onsite truck | 0.00 | 10.0 | HHDT |
| P9 - Batch Plant Equip | _ | _ | _ | _ |
| P9 - Batch Plant Equip | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P9 - Batch Plant Equip | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P9 - Batch Plant Equip | Hauling | 0.00 | 20.0 | HHDT |
| P9 - Batch Plant Equip | Onsite truck | 0.00 | 0.00 | HHDT |

5.3.2. Mitigated

| Phase Name | Trip Type | One-Way Trips per Day | Miles per Trip | Vehicle Mix |
|--|--------------|-----------------------|----------------|---------------|
| P1 - Mobilization and access development | _ | _ | _ | _ |
| P1 - Mobilization and access development | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P1 - Mobilization and access development | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P1 - Mobilization and access development | Hauling | 6.00 | 28.7 | ннот |
| P1 - Mobilization and access development | Onsite truck | 0.00 | 0.00 | HHDT |
| P1.1 - Tree removal | _ | _ | _ | _ |
| P1.1 - Tree removal | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P1.1 - Tree removal | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P1.1 - Tree removal | Hauling | 20.0 | 28.7 | HHDT |
| P1.1 - Tree removal | Onsite truck | 0.00 | 52.5 | HHDT |
| P1.2 - Mobilization | _ | _ | _ | _ |
| P1.2 - Mobilization | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |

| P1.2 - Mobilization | Vendor | 0.00 | 8.80 | HHDT,MHDT |
|-------------------------------------|--------------|------|------|---------------|
| P1.2 - Mobilization | Hauling | 12.0 | 28.7 | HHDT |
| P1.2 - Mobilization | Onsite truck | 0.00 | 0.00 | HHDT |
| P1.3 - Laydown area development | _ | _ | _ | _ |
| P1.3 - Laydown area development | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P1.3 - Laydown area development | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P1.3 - Laydown area development | Hauling | 0.00 | 20.0 | HHDT |
| P1.3 - Laydown area development | Onsite truck | 0.00 | 47.5 | HHDT |
| P1.4 - Access road construction | _ | _ | _ | _ |
| P1.4 - Access road construction | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P1.4 - Access road construction | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P1.4 - Access road construction | Hauling | 0.00 | 20.0 | HHDT |
| P1.4 - Access road construction | Onsite truck | 0.00 | 60.0 | HHDT |
| P2 - Spillway chute and flip bucket | _ | _ | _ | _ |
| P2 - Spillway chute and flip bucket | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P2 - Spillway chute and flip bucket | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P2 - Spillway chute and flip bucket | Hauling | 4.00 | 28.7 | HHDT |
| P2 - Spillway chute and flip bucket | Onsite truck | 0.00 | 0.00 | HHDT |
| P4.2 - Crest form and pour concrete | _ | _ | _ | _ |
| P4.2 - Crest form and pour concrete | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P4.2 - Crest form and pour concrete | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P4.2 - Crest form and pour concrete | Hauling | 0.00 | 8.00 | HHDT |
| P4.2 - Crest form and pour concrete | Onsite truck | 0.00 | 20.0 | HHDT |
| P4.1 - Crest excavation/ subgrade | _ | _ | _ | _ |
| P4.1 - Crest excavation/ subgrade | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P4.1 - Crest excavation/ subgrade | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P4.1 - Crest excavation/ subgrade | Hauling | 0.00 | 20.0 | HHDT |
| P4.1 - Crest excavation/ subgrade | Onsite truck | 0.00 | 60.0 | HHDT |
| | | | | |

| P4 - Crest structure | _ | _ | _ | _ |
|--|--------------|------|------|---------------|
| P4 - Crest structure | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P4 - Crest structure | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P4 - Crest structure | Hauling | 4.00 | 28.7 | HHDT |
| P4 - Crest structure | Onsite truck | 0.00 | 0.00 | HHDT |
| P3.6 - Trench Cutoff Concrete 3 | _ | _ | _ | _ |
| P3.6 - Trench Cutoff Concrete 3 | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P3.6 - Trench Cutoff Concrete 3 | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P3.6 - Trench Cutoff Concrete 3 | Hauling | 0.00 | 8.00 | HHDT |
| P3.6 - Trench Cutoff Concrete 3 | Onsite truck | 0.00 | 10.0 | HHDT |
| P3.5 - Trench Cutoff Concrete 2 | _ | _ | _ | _ |
| P3.5 - Trench Cutoff Concrete 2 | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P3.5 - Trench Cutoff Concrete 2 | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P3.5 - Trench Cutoff Concrete 2 | Hauling | 0.00 | 8.00 | HHDT |
| P3.5 - Trench Cutoff Concrete 2 | Onsite truck | 0.00 | 10.0 | HHDT |
| P3.4 - Trench Cutoff Concrete 1 | _ | _ | _ | _ |
| P3.4 - Trench Cutoff Concrete 1 | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P3.4 - Trench Cutoff Concrete 1 | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P3.4 - Trench Cutoff Concrete 1 | Hauling | 0.00 | 8.00 | HHDT |
| P3.4 - Trench Cutoff Concrete 1 | Onsite truck | 0.00 | 10.0 | HHDT |
| P3.3 - Place piles, sheets, and concrete | _ | _ | _ | _ |
| P3.3 - Place piles, sheets, and concrete | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P3.3 - Place piles, sheets, and concrete | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P3.3 - Place piles, sheets, and concrete | Hauling | 0.00 | 20.0 | HHDT |
| P3.3 - Place piles, sheets, and concrete | Onsite truck | 0.00 | 20.0 | ННОТ |

| P3.1 - Mass concrete | _ | _ | _ | _ |
|--|--------------|------|------|---------------|
| P3.1 - Mass concrete | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P3.1 - Mass concrete | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P3.1 - Mass concrete | Hauling | 0.00 | 20.0 | HHDT |
| P3.1 - Mass concrete | Onsite truck | 0.00 | 20.0 | HHDT |
| P3 - Cofferdam | _ | _ | _ | _ |
| P3 - Cofferdam | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P3 - Cofferdam | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P3 - Cofferdam | Hauling | 4.00 | 28.7 | HHDT |
| P3 - Cofferdam | Onsite truck | 0.00 | 0.00 | HHDT |
| P2.3 - Drains, Cleanouts, and Backfill | _ | _ | _ | _ |
| P2.3 - Drains, Cleanouts, and Backfill | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P2.3 - Drains, Cleanouts, and Backfill | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P2.3 - Drains, Cleanouts, and Backfill | Hauling | 0.00 | 20.0 | HHDT |
| P2.3 - Drains, Cleanouts, and Backfill | Onsite truck | 0.00 | 0.00 | HHDT |
| P2.2 - Spillway form and pour concrete | _ | _ | _ | _ |
| P2.2 - Spillway form and pour concrete | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P2.2 - Spillway form and pour concrete | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P2.2 - Spillway form and pour concrete | Hauling | 0.00 | 8.00 | HHDT |
| P2.2 - Spillway form and pour concrete | Onsite truck | 0.00 | 50.0 | HHDT |
| P2.1 - Spillway excavation/subgrade | _ | _ | _ | _ |
| P2.1 - Spillway excavation/subgrade | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P2.1 - Spillway excavation/subgrade | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P2.1 - Spillway excavation/subgrade | Hauling | 0.00 | 20.0 | HHDT |
| P2.1 - Spillway excavation/subgrade | Onsite truck | 0.00 | 60.0 | HHDT |

| P3.2 - Excavate cofferdam | _ | _ | _ | _ |
|---------------------------------|--------------|------|------|---------------|
| P3.2 - Excavate cofferdam | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P3.2 - Excavate cofferdam | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P3.2 - Excavate cofferdam | Hauling | 0.00 | 20.0 | HHDT |
| P3.2 - Excavate cofferdam | Onsite truck | 0.00 | 20.0 | HHDT |
| P5 - Dam notch and tie-in chute | _ | _ | _ | _ |
| P5 - Dam notch and tie-in chute | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P5 - Dam notch and tie-in chute | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P5 - Dam notch and tie-in chute | Hauling | 4.00 | 28.7 | HHDT |
| P5 - Dam notch and tie-in chute | Onsite truck | 0.00 | 0.00 | HHDT |
| P5.1 - Demolition | _ | _ | _ | _ |
| P5.1 - Demolition | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P5.1 - Demolition | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P5.1 - Demolition | Hauling | 0.00 | 20.0 | HHDT |
| P5.1 - Demolition | Onsite truck | 0.00 | 10.0 | HHDT |
| P5.2 - Excavation, Subgrade | _ | _ | _ | _ |
| P5.2 - Excavation, Subgrade | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P5.2 - Excavation, Subgrade | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P5.2 - Excavation, Subgrade | Hauling | 0.00 | 20.0 | HHDT |
| P5.2 - Excavation, Subgrade | Onsite truck | 0.00 | 10.0 | HHDT |
| P5.3 - Form and Pour Concrete | _ | _ | _ | _ |
| P5.3 - Form and Pour Concrete | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P5.3 - Form and Pour Concrete | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P5.3 - Form and Pour Concrete | Hauling | 0.00 | 8.00 | HHDT |
| P5.3 - Form and Pour Concrete | Onsite truck | 0.00 | 20.0 | HHDT |
| P5.4 - Install Footbridge | _ | _ | _ | _ |
| P5.4 - Install Footbridge | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P5.4 - Install Footbridge | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| | | | | |

| P5.4 - Install Footbridge | Hauling | 0.00 | 20.0 | HHDT |
|---------------------------|--------------|------|------|---------------|
| P5.4 - Install Footbridge | Onsite truck | 0.00 | 20.0 | HHDT |
| P6 - Plunge pool | _ | _ | _ | _ |
| P6 - Plunge pool | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P6 - Plunge pool | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P6 - Plunge pool | Hauling | 4.00 | 28.7 | HHDT |
| P6 - Plunge pool | Onsite truck | 0.00 | 0.00 | HHDT |
| P6.1 - Flow bypass | _ | _ | _ | _ |
| P6.1 - Flow bypass | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P6.1 - Flow bypass | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P6.1 - Flow bypass | Hauling | 0.00 | 20.0 | HHDT |
| P6.1 - Flow bypass | Onsite truck | 0.00 | 0.00 | HHDT |
| P6.2 - Excavation | _ | _ | _ | _ |
| P6.2 - Excavation | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P6.2 - Excavation | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P6.2 - Excavation | Hauling | 0.00 | 20.0 | HHDT |
| P6.2 - Excavation | Onsite truck | 0.00 | 50.0 | HHDT |
| P6.3 - Slope protection | _ | _ | _ | _ |
| P6.3 - Slope protection | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P6.3 - Slope protection | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P6.3 - Slope protection | Hauling | 0.00 | 20.0 | HHDT |
| P6.3 - Slope protection | Onsite truck | 0.00 | 10.0 | HHDT |
| P7 - Remaining Work Scope | _ | _ | _ | _ |
| P7 - Remaining Work Scope | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P7 - Remaining Work Scope | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P7 - Remaining Work Scope | Hauling | 4.00 | 28.7 | HHDT |
| P7 - Remaining Work Scope | Onsite truck | 0.00 | 0.00 | HHDT |
| P7.1 - Cofferdam removal | _ | _ | _ | _ |
| | | | | |

| P7.1 - Cofferdam removal | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
|---------------------------|---------------|------|------|---------------|
| P7.1 - Cofferdam removal | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P7.1 - Cofferdam removal | Hauling | 0.00 | 20.0 | HHDT |
| P7.1 - Cofferdam removal | Onsite truck | 0.00 | 0.00 | HHDT |
| | Offsite truck | | | |
| P7.2 - Lighting | W | - | | |
| P7.2 - Lighting | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P7.2 - Lighting | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P7.2 - Lighting | Hauling | 0.00 | 20.0 | HHDT |
| P7.2 - Lighting | Onsite truck | 0.00 | 12.5 | HHDT |
| P7.3 - Log boom | _ | _ | _ | _ |
| P7.3 - Log boom | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P7.3 - Log boom | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P7.3 - Log boom | Hauling | 0.00 | 20.0 | HHDT |
| P7.3 - Log boom | Onsite truck | 0.00 | 0.00 | HHDT |
| P7.4 - Restoration | _ | _ | _ | _ |
| P7.4 - Restoration | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P7.4 - Restoration | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P7.4 - Restoration | Hauling | 0.00 | 20.0 | HHDT |
| P7.4 - Restoration | Onsite truck | 0.00 | 72.5 | HHDT |
| P7.5 - Demobilization | _ | _ | _ | _ |
| P7.5 - Demobilization | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P7.5 - Demobilization | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P7.5 - Demobilization | Hauling | 0.00 | 20.0 | HHDT |
| P7.5 - Demobilization | Onsite truck | 0.00 | 72.5 | HHDT |
| P8 - Spillway abandonment | _ | _ | _ | _ |
| P8 - Spillway abandonment | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P8 - Spillway abandonment | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P8 - Spillway abandonment | Hauling | 4.00 | 28.7 | HHDT |

| P8 - Spillway abandonment | Onsite truck | 0.00 | 0.00 | HHDT |
|---------------------------|--------------|------|------|---------------|
| P8.1 - Remove Cofferdam | _ | _ | _ | _ |
| P8.1 - Remove Cofferdam | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P8.1 - Remove Cofferdam | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P8.1 - Remove Cofferdam | Hauling | 0.00 | 20.0 | HHDT |
| P8.1 - Remove Cofferdam | Onsite truck | 0.00 | 10.0 | HHDT |
| P8.2 - Canal Side Channel | _ | _ | _ | _ |
| P8.2 - Canal Side Channel | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P8.2 - Canal Side Channel | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P8.2 - Canal Side Channel | Hauling | 0.00 | 20.0 | HHDT |
| P8.2 - Canal Side Channel | Onsite truck | 0.00 | 10.0 | HHDT |
| P8.3 - Cover Bathtub | _ | _ | _ | _ |
| P8.3 - Cover Bathtub | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P8.3 - Cover Bathtub | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P8.3 - Cover Bathtub | Hauling | 0.00 | 20.0 | HHDT |
| P8.3 - Cover Bathtub | Onsite truck | 0.00 | 10.0 | HHDT |
| P9 - Batch Plant Equip | _ | _ | _ | _ |
| P9 - Batch Plant Equip | Worker | 0.00 | 14.3 | LDA,LDT1,LDT2 |
| P9 - Batch Plant Equip | Vendor | 0.00 | 8.80 | HHDT,MHDT |
| P9 - Batch Plant Equip | Hauling | 0.00 | 20.0 | HHDT |
| P9 - Batch Plant Equip | Onsite truck | 0.00 | 0.00 | HHDT |
| | | | | |

5.4. Vehicles

5.4.1. Construction Vehicle Control Strategies

Non-applicable. No control strategies activated by user.

5.5. Architectural Coatings

| Phase Name | Residential Interior Area Coated (sq ft) | | | Non-Residential Exterior Area Coated (sq ft) | Parking Area Coated (sq ft) |
|-------------------------------------|---|------|------|---|-----------------------------|
| P2 - Spillway chute and flip bucket | 0.00 | 0.00 | 0.00 | 0.00 | _ |

5.6. Dust Mitigation

5.6.1. Construction Earthmoving Activities

| Phase Name | Material Imported (cy) | Material Exported (cy) | Acres Graded (acres) | Material Demolished (sq. ft.) | Acres Paved (acres) |
|------------|------------------------|------------------------|----------------------|---|---------------------|
| | 1 | 1 (3) | \ | \ | \ |

5.6.2. Construction Earthmoving Control Strategies

| Control Strategies Applied | Frequency (per day) | PM10 Reduction | PM2.5 Reduction |
|----------------------------|---------------------|----------------|-----------------|
| Water Exposed Area | 2 | 61% | 61% |

5.7. Construction Paving

| Land Use | Area Paved (acres) | % Asphalt |
|-------------------------|--------------------|-----------|
| User Defined Industrial | 0.00 | 0% |

5.8. Construction Electricity Consumption and Emissions Factors

kWh per Year and Emission Factor (lb/MWh)

| Year | kWh per Year | CO2 | CH4 | N2O |
|------|--------------|-----|------|---------|
| 2025 | 0.00 | 375 | 0.01 | < 0.005 |
| 2026 | 0.00 | 375 | 0.01 | < 0.005 |
| 2027 | 0.00 | 375 | 0.01 | < 0.005 |

8. User Changes to Default Data

| Screen | Justification |
|--------|---------------|
| | |

| Land Use | n/a - Dam upgrades |
|---|--|
| Construction: Construction Phases | All modeled as grading - no defaults used. |
| Construction: Off-Road Equipment | No equip; hauling only |
| Construction: Dust From Material Movement | Hauling only |
| Construction: Demolition | Per PG&E |
| Construction: Trips and VMT | Per PG&E hauling miles for SMAQMD. |
| Construction: Electricity | None |
| Construction: Off-Road Equipment EF | No equipment, hauling only |

This data was produced from the i-Tree Planting Calculator version 2.6.0 for Pioneer; CA.

Location: Pioneer; CA

Lifetime: 99

Project Lifetime Tree Mortality: 70 Run Date: 6-9-2023

| Species | Number | DBH (inches) | TreeCondition | CrownLightExposure | CO2 Seqt (pounds) | CO2 Seqt (MT) |
|------------------------------------|--------|--------------|---------------|--------------------|-------------------|---------------|
| Cedar spp(Cedrus) | 6 | 17.33 | dead | full sun | 0 | 0.00 |
| Ponderosa pine(Pinus ponderosa) | 151 | 25.55 | excellent | full sun | 1,869,534.80 | 848.01 |
| White fir(Abies concolor) | 2 | 8 | excellent | full sun | 12,311.00 | 5.58 |
| Sugar pine(Pinus lambertiana) | 19 | 17.26 | excellent | full sun | 250,211.30 | 113.49 |
| Black oak(Quercus velutina) | 12 | 17.33 | excellent | full sun | 376,283.60 | 170.68 |
| Madrone spp(Arbutus) | 2 | 6 | excellent | full sun | 9,559.00 | 4.34 |
| Live oak(Quercus virginiana) | 16 | 12.67 | excellent | full sun | 260,639.60 | 118.22 |
| Pine spp(Pinus) | 1 | 18 | excellent | full sun | 14,144.20 | 6.42 |
| Oak spp(Quercus) | 3 | 10.67 | excellent | full sun | 59,410.90 | 26.95 |
| Douglas fir(Pseudotsuga menziesii) | 1 | 10 | excellent | full sun | 8,065.80 | 3.66 |
| Cedar spp(Cedrus) | 1 | 22 | dying | full sun | 1937.1 | 0.88 |
| Alder spp(Alnus) | 1 | 12 | dead | full sun | 0 | 0.00 |
| Douglas fir(Pseudotsuga menziesii) | 3 | 31 | dying | full sun | 4,307.20 | 1.95 |
| Ponderosa pine(Pinus ponderosa) | 1 | 16 | dying | full sun | 1016.2 | 0.46 |
| Douglas fir(Pseudotsuga menziesii) | 15 | 18.67 | dead | full sun | 0 | 0.00 |
| Ponderosa pine(Pinus ponderosa) | 4 | 21.5 | dead | full sun | 0 | 0.00 |
| Sugar pine(Pinus lambertiana) | 1 | 10 | dead | full sun | 0 | 0.00 |
| Black oak(Quercus velutina) | 3 | 18 | dead | full sun | 0 | 0.00 |
| Cedar spp(Cedrus) | 112 | 15.4 | excellent | full sun | 1,812,161.40 | 821.98 |
| Alder spp(Alnus) | 14 | 10.62 | excellent | full sun | 82,858.70 | 37.58 |
| Douglas fir(Pseudotsuga menziesii) | 394 | 17.21 | excellent | full sun | 3,468,087.80 | 1,573.10 |
| Total over lifetime of 99 years | | | | | 8,230,528.50 | 3,733.30 |
| Average annual | | | | | 83,137 | 38 |

Source: EMFAC2021 (v1.0.2) Emission Rates

Region Type: County Region: Amador Calendar Year: 2025 Season: Annual

Vehicle Classification: EMFAC2007 Categories

Units: miles/day for CVMT and EVMT, trips/day for Trips, g/mile for RUNEX, PMBW and PMTW, g/trip for STREX, HOTSOAK and RUNLOSS, g/vehicle/day for IDLEX and DIURN. PHEV calculated based on total VM1

| Region | Year | Vehicle Category | Model Year | Speed | Fuel | Population | Total VMT | Trips | PM10_RUNEX |
|--------|------|------------------|------------|-----------|--------|-------------|-----------|---------|------------|
| Amador | 20 | 25 HHDT | Aggregate | Aggregate | Diesel | 204.5484062 | 15630.80 | 1895.20 | 0.03 |

3.281

| Road | Amount | Unit | Distance (ft) | PM10 (g/day) | g/sec | g/sec/m^2 |
|------------------|--------|----------------------------|---|---------------|------------|-------------|
| Spur 1 | 38 | one-way haul trips per day | 1000 | 0.445090108 | 1.2364E-05 | 6.04546E-09 |
| Tiger Creek Road | 10 | one-way haul trips per day | 1000 | 0.117128976 | 3.2536E-06 | 1.59091E-09 |
| SR 88 | 38 | one-way haul trips per day | 1000 | 0.445090108 | 1.2364E-05 | 6.04546E-09 |
| | | | variable emissions operating seconds per day road width | 36000 6.71 | meters | |

feet per meter

| | Pounds | per day | Pounds | per day | Pounds per day | | |
|---------|--------|---------|--------|---------|----------------|---------|--|
| SchCode | 20 |)25 | 20 | 26 | 2027 | | |
| | PM10 D | PM2.5 D | PM10 D | PM2.5 D | PM10 D | PM2.5 D | |
| Batch01 | 2.1 | 0.3 | 2.1 | 0.3 | 0.0 | 0.0 | |

Annual Emissions

| Year | Tons PM10 | Tons PM2.5 | MT CO2 |
|-------|-----------|------------|--------|
| 2025 | 0.01 | 0.01 | 138 |
| 2026 | 0.03 | 0.03 | 911 |
| 2027 | 0.01 | 0.00 | 0 |
| Total | 0.05 | 0.03 | 1,049 |

PM Emissions from Concrete Batching at Onsite Facility

0.03

0.01

| | | Max Pounds p | er Day | |
|--------------------|--------------------|-----------------------------|-----------------------|-------------------|
| Code | Facility | PM10 | PM2.5 | |
| Batch01 Ceder Mill | | 2.04 | 0.30 | |
| | | Pounds of PM10 per Day | | |
| Sand Transfer | Aggregate Transfer | Cement Supplement Unloading | Weight Hopper Loading | Truck Mix Loading |
| 0.04 | 0.18 | 0.04 | 0.28 | 1.48 |
| | | Pounds of PM2.5 per Day | | |
| Sand Transfer | Aggregate Transfer | Cement Supplement Unloading | Weight Hopper Loading | Truck Mix Loading |

0.01

| | | Average Poun | ds per Day | Tons I | Tons PM2.5 per Year | | | | |
|---------|------------|--------------|------------|--------|---------------------|------|------|------|------|
| Code | Facility | PM10 | PM2.5 | 2025 | 2026 | 2027 | 2025 | 2026 | 2027 |
| Batch01 | Ceder Mill | 0.22 | 0.03 | 0.00 | 0.02 | 0.00 | 0.00 | 0.02 | 0.00 |

0.22

0.04

| | | Pounds of PM10 per Day | | |
|---------------|--------------------|-----------------------------|-----------------------|-------------------|
| Sand Transfer | Aggregate Transfer | Cement Supplement Unloading | Weight Hopper Loading | Truck Mix Loading |
| 0.00 | 0.02 | 0.00 | 0.03 | 0.16 |
| | | | | |
| | | Pounds of PM2.5 per Day | | |
| Sand Transfer | Aggregate Transfer | Cement Supplement Unloading | Weight Hopper Loading | Truck Mix Loading |
| 0.00 | 0.00 | 0.00 | 0.00 | 0.02 |

Dust Emissions from the Onsite Stockpile

| | | Pile Size | Pounds | per Day | Ton | s PM10 per \ | ⁄ear | Tons PM2.5 per Year | | |
|------------|----------|-----------|------------|---------|------|--------------|------|---------------------|------|------|
| Complex | Location | (acre) | PM10 PM2.5 | | 2025 | 2026 | 2027 | 2025 | 2026 | 2027 |
| Ceder Mill | MCAB | 0.5 | 0.06 | 0.01 | 0.01 | 0.01 | 0.01 | 0.00 | 0.00 | 0.00 |

Operational Lighting Electricity Consumption (2027)

| Pollutant | Factor* | Unit | Consumption | Unit | Emissions | Unit |
|-----------|---------|--------|-------------|--------|-----------|-------|
| CO2 | 203.983 | lb/MWh | 2.608 | MWh/yr | 0.241305 | MT/yr |
| CH4 | 0.033 | lb/MWh | 2.608 | MWh/yr | 0.000039 | MT/yr |
| N2O | 0.004 | lb/MWh | 2.608 | MWh/yr | 0.000005 | MT/yr |
| | | | | CO2e | 0.243691 | MT/yr |

^{*}Source: CalEEMod (PG&E data)

HRA Files Available Upon Request

Appendix E **Noise Measurement Data and Modeling Files**

Appendix E-1 **Long-Term Measurement Data**

| Project: | PG&E, Tige | r Creek | Spillway | | | Date: | 6/21/202 | 3 | Analyst: | Schu | ımaker, | N | | | |
|-----------|------------|--------------|----------|----------|---------|---------|----------|----------|------------|-----------|--------------|---------|--------------|---------|----------|
| Location: | LT-1 | | | | | | | | | | | | | | |
| | Wednesday | | | | | | | ١ | Norst Hour | Ld | n minus | | CNEL minu | IS | |
| Time | 6/21/2023 | | Leq(24) | | | Ldn | CNEL | | Leq | Wors | t Hour L | .eq | Ldn | |)ay |
| Midnight | 36.1 | | 41.4 | | 4 | 45.6 | 45.7 | | 48.1 | | - 2.5 | | 0.1 | E | vening |
| 1:00 AM | 35.5 | | | | | 9.9 | 10.0 | | | | | | | N | light |
| 2:00 AM | 36.5 | | | | | | | | | | | | | | |
| 3:00 AM | 36.7 | | | | | | 24-H | nır | Sound Lo | evels | | | | | |
| 4:00 AM | 35.7 | | | | | | 2-7 110 | <i>,</i> | Oouna L | 0 1 0 1 0 | | | | | |
| 5:00 AM | 44.9 | | | | | | | | | | | | | | |
| 6:00 AM | 36.3 | | 70.0 | | | | | | | | | | | | |
| 7:00 AM | 35.7 | | 65.0 | | | | | | | | | | | | |
| 8:00 AM | 36.6 | | | | | | | | | | | | | | |
| 9:00 AM | 34.7 | ਰੂ | 60.0 | | | | | | | | | | | | |
| 10:00 AM | 38.1 | <u> </u> | 55.0 | | | | | | | | | | | | |
| 11:00 AM | 42.0 | Ĕ | 50.0 | | | | | | | | | | | | |
| Noon | 41.8 | ¥ | | | | | | | | | | | | | |
| 1:00 PM | 44.7 | One-Hour Leg | 45.0 | | | | * | | | | | | \ | | |
| 2:00 PM | 46.0 | 0 | 40.0 | | | / | / \ | | | _ | | | | | |
| 3:00 PM | 45.7 | | | | - | | | • | , / | | | | | × | |
| 4:00 PM | 48.1 | | 35.0 | | | | | | ~ | | | | | | |
| 5:00 PM | 45.2 | | 30.0 | | | | | _ | | | | | | - | |
| 6:00 PM | 36.5 | | | Midnight | 2:00 AM | 4:00 AM | 6:00 AM | 8:00 AM | 10:00 AM | Noon | 2:00 PM | 4:00 PM | 6:00 PM | 8:00 PM | 10:00 PM |
| 7:00 PM | 38.8 | | | ig | 8 | 9 | 00: | 9 | 00 | Ž | 8 | 9 | 00 | 00 | 00 |
| 8:00 PM | 36.9 | | | Σ | 2 | 4 | | ώ | 10: | | .: | 4 | | ώ | 10: |
| 9:00 PM | 31.2 | | | | | | | | т: | me | | | | | |
| 10:00 PM | 32.9 | | | | | | | | 11 | iiie | | | | | |
| 11:00 PM | 33.5 | | | | | | | | | | | | | | |


| Ldn | 45.6 |
|-----------------|------|
| Worst Hour Leq | 48.1 |
| Lowest Hour LEQ | 31.2 |
| 12-hour Leq | 43.6 |

| Project: | PG&E, Tige | er Creek S | Spillway | | Da | te: | 6/22/2023 | Analyst: | Schumaker, N | | |
|-----------|------------|--------------|----------|----------|---------|---------|---------------|---------------------|-----------------|---|---------------------|
| Location: | LT-1 | | | | | | | | | | |
| | Thursday | | | | | | | Worst Hour | Ldn minus | CNEL minus | |
| Time | 6/22/2023 | | Leq(24) | | Lo | dn | CNEL | Leq | Worst Hour Leq | Ldn | Day |
| Midnight | 32.8 | | 41.2 | | 45 | .9 | 46.0 | 47.4 | -1.5 | 0.1 | Evening |
| 1:00 AM | 33.7 | | | | 8. | .0 | 8.1 | | | | Night |
| 2:00 AM | 34.9 | | | | | | | | | | |
| 3:00 AM | 36.1 | | | | | | 24-Ho | ur Sound I | evels | | |
| 4:00 AM | 38.3 | | | | | | 2 +110 | ui Oouiia i | | | |
| 5:00 AM | 45.7 | | | | | | | | | | |
| 6:00 AM | 39.8 | | 70.0 | | | | | | | | |
| 7:00 AM | 37.9 | | 65.0 | | | | | | | | |
| 8:00 AM | 34.2 | | 60.0 | | | | | | | | |
| 9:00 AM | 36.1 | ਰੂ | | | | | | | | | |
| 10:00 AM | 36.2 | اد ا | 55.0 | | | | | | | | |
| 11:00 AM | 39.8 | One-Hour Leg | 50.0 | | | | | | | | |
| Noon | 44.9 | ギ | 45.0 | | | | <u> </u> | | * | | |
| 1:00 PM | 43.3 | lue l | 40.0 | | | / | | | | | |
| 2:00 PM | 44.5 | 0 | | | . 🕢 | <i></i> | | | | A A | |
| 3:00 PM | 47.0 | | 35.0 | - | | | | | | | |
| 4:00 PM | 47.4 | | 30.0 | | | | | | | | |
| 5:00 PM | 43.7 | | 25.0 | | | | | | | _ ' ' _ ' ' | |
| 6:00 PM | 37.6 | | | Midnight | 2:00 AM | 4:00 AM | 6:00 AM | 8:00 AM 10:00 AM | Noon 2:00 PM | 4:00 PM 6:00 PM | 8:00 PM 10:00 PM |
| 7:00 PM | 36.8 | | | idn | 8 | 8 | 00: | 8 8 | ž 0 | 000000000000000000000000000000000000000 | 8 8 |
| 8:00 PM | 34.5 | | | Σ | .: | 4 | 9 | 9 | .;i | 4 0 | 9 :: |
| 9:00 PM | 30.1 | | | | | | | - | ·ima | | |
| 10:00 PM | 31.8 | | | | | | | l | ime | | |
| 11:00 PM | 31.8 | | | | | | | | | | |

| Ldn | 45.9 |
|-----------------|------|
| Worst Hour Leq | 47.4 |
| Lowest Hour LEQ | 30.1 |
| 11-hour Leq | 43.3 |

| Project: | PG&E, Tige | r Creek | Spillway | | D | ate: | 6/21/2023 | Analyst: | Schu | maker, N | | | |
|-----------|------------|--------------|----------|----------|----------|---------|-----------|---------------------|----------|----------|------------|--|----------|
| Location: | LT-2 | | | | | | | | | | | | |
| | Wednesday | | | | | | | Worst Hour | Ldr | n minus | CNEL minus | ; | |
| Time | 6/21/2023 | | Leq(24) | | L | _dn | CNEL | Leq | Worst | Hour Leq | Ldn | Day | / |
| Midnight | 47.8 | | 47.7 | | 5 | 54.6 | 54.8 | 50.8 | | 3.8 | 0.2 | Eve | ning |
| 1:00 AM | 47.9 | | | | (| 6.1 | 6.3 | | | | | Nig | ht |
| 2:00 AM | 47.9 | | | | | | | | | | | | |
| 3:00 AM | 48.0 | | | | | | 24-Hoi | ır Sound L | evels | | | | |
| 4:00 AM | 48.1 | | | | | | | 004.14 = | .010.0 | | | | |
| 5:00 AM | 50.8 | | | | | | | | | | | | |
| 6:00 AM | 48.2 | | 70.0 | | | | | | | | | | |
| 7:00 AM | 48.5 | | 65.0 | | | | | | | | | | |
| 8:00 AM | 49.5 | | | | | | | | | | | | |
| 9:00 AM | 48.1 | 5 | 60.0 | | | | | | | | | | |
| 10:00 AM | 46.9 | One-Hour Leg | 55.0 | | | | | | | | | | |
| 11:00 AM | 47.0 | j | | | | | • | | | | | | |
| Noon | 45.8 | ર્ | 50.0 | • | — | - | - | | | | | • | — |
| 1:00 PM | 46.1 | ne | 45.0 | | | | | | — | | | <u>* </u> | |
| 2:00 PM | 46.6 | 0 | 40.0 | | | | | | | | | | |
| 3:00 PM | 47.0 | | | | | | | | | | | | |
| 4:00 PM | 46.4 | | 35.0 | | | | | | | | | | |
| 5:00 PM | 46.3 | | 30.0 | | 1 | 1 1 | | 1 1 | - | 1 1 1 | 1 1 1 | | |
| 6:00 PM | 46.6 | | | Midnight | 2:00 AM | 4:00 AM | 6:00 AM | 8:00 AM 10:00 AM | Noon | 2:00 PM | 4:00 PM | 8:00 PM | 10:00 PM |
| 7:00 PM | 47.2 | | | idni | 00 | 00 | 00 | 8 8 | ž | 00 | 8 8 | 8 | 00 |
| 8:00 PM | 47.2 | | | Σ | 2: | 4. | .9 | 9 | | | . 6 | ώ | .0 |
| 9:00 PM | 47.3 | | | | | | | _ | • | | | | |
| 10:00 PM | 47.4 | | | | | | | Т | ime | | | | |
| 11:00 PM | 47.5 | | | | | | | | | | | | |

| Ldn | 54.6 |
|-----------------|------|
| Worst Hour Leq | 50.8 |
| Lowest Hour LEQ | 45.8 |
| 11-hour Leq | 47.3 |

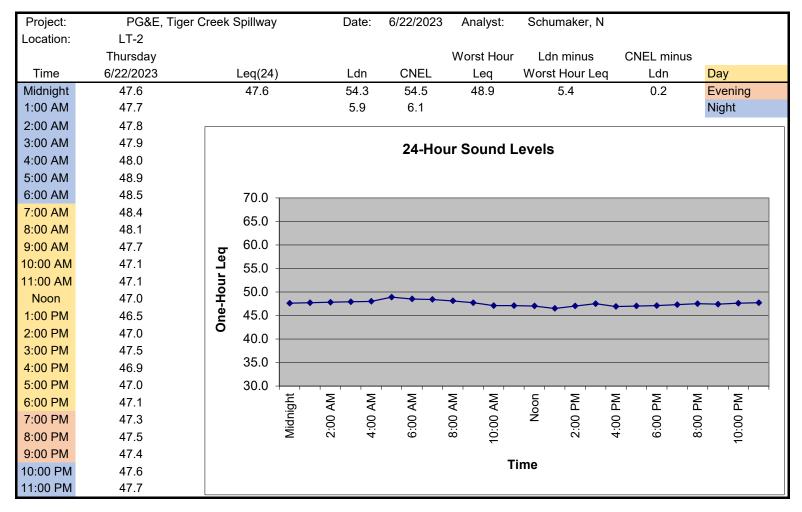

| Ldn | 54.3 |
|-----------------|------|
| Worst Hour Leq | 48.9 |
| Lowest Hour LEQ | 46.5 |
| 11-hour Leq | 47.3 |

| Project: | PG&E, Tiger | r Creek | Spillway | | D | ate: | 6/21/2023 | 3 Analyst | Scl | numaker, N | | | | |
|-----------|-------------|--------------|----------|----------|---------|---------|--|---------------------|----------|--------------|---|----------|---------------|----------|
| Location: | LT-3 | | | | | | | | | | | | | |
| | Wednesday | | | | | | | Worst Ho | ur L | dn minus | CN | NEL minu | S | |
| Time | 6/21/2023 | | Leq(24) |) | L | _dn | CNEL | Leq | Woı | st Hour Le | q | Ldn | D | ay |
| Midnight | 37.7 | | 55.4 | | 6 | 31.6 | 61.8 | 63.2 | | -1.6 | | 0.2 | E, | vening |
| 1:00 AM | 36.6 | | | | | 4.2 | 4.4 | | | | | | Ν | ight |
| 2:00 AM | 36.6 | | | | | | | | | | | | | |
| 3:00 AM | 36.4 | | | | | | 24-Ho | ur Sound | l evel | 2 | | | | |
| 4:00 AM | 54.3 | | | | | | 2110 | ui oouiiu | LCVCI | • | | | | |
| 5:00 AM | 57.1 | | | | | | | | | | | | | |
| 6:00 AM | 63.2 | | 70.0 | | | | | | | | | | | |
| 7:00 AM | 57.4 | | 65.0 | | | | | | | | | | | |
| 8:00 AM | 52.7 | | | | | | <u> </u> | | | | | | | |
| 9:00 AM | 59.9 | 5 | 60.0 | | | | $\overline{}$ | \wedge | <u> </u> | | | | | |
| 10:00 AM | 54.5 | <u> </u> | 55.0 | | | | <u>* </u> | \checkmark | _ | \checkmark | | | | |
| 11:00 AM | 58.9 | One-Hour Leg | | | | Ĭ | | ¥ | | ~ | | 7 | * | |
| Noon | 57.1 | │ 关 | 50.0 | | | \neg | | | | | 1 | | $\neg \vdash$ | |
| 1:00 PM | 55.7 | Je J | 45.0 | | | $+\!-$ | | | | | $-\!$ | / | \rightarrow | • |
| 2:00 PM | 52.8 | 0 | 40.0 | | | | | | | | \ | ! | <u>}</u> | |
| 3:00 PM | 57.5 | | | • | | | | | | | | | | |
| 4:00 PM | 50.4 | | 35.0 | | | | | | | | | | | |
| 5:00 PM | 40.5 | | 30.0 | | 1 | 1 1 | 1 1 | | | 1 1 | | 1 1 | | |
| 6:00 PM | 53.7 | | | Midnight | 2:00 AM | 4:00 AM | 6:00 AM | 8:00 AM 10:00 AM | Noon | 2:00 PM | 4:00 PM | 6:00 PM | 8:00 PM | Δ |
| 7:00 PM | 56.4 | | | idni | 9 | 00 | 00 | 000 | ž | 00 | 00 | 00 | 8 | 00 |
| 8:00 PM | 52.6 | | | Ī | 2 | 4 | ö | <u></u> | | <u>~</u> | 4 | Ö | ö | 10:00 PM |
| 9:00 PM | 41.4 | | | | | | | | - | | | | | |
| 10:00 PM | 43.2 | | | | | | | | Time | | | | | |
| 11:00 PM | 41.8 | | | | | | | | | | | | | |


| Ldn | 61.6 |
|-----------------|------|
| Worst Hour Leq | 63.2 |
| Lowest Hour LEQ | 36.4 |
| 11-hour Leq | 56.1 |

| Project: | PG&E, Tige | r Creek | Spillway | | D | ate: | 6/22/2023 | Analyst: | Schur | naker, N | | | |
|-----------|------------|--------------|----------|----------|---------|---------|-----------|---------------------|---------|----------|-----------------------------|---------|----------|
| Location: | LT-3 | | | | | | | | | | | | |
| | Thursday | | | | | | | Worst Hou | r Ldn | minus | CNEL min | ius | |
| Time | 6/22/2023 | | Leq(24) | | L | .dn | CNEL | Leq | Worst | Hour Leq | Ldn | D | ay |
| Midnight | 39.5 | | 56.0 | | 6 | 1.9 | 61.9 | 62.3 | - | 0.4 | 0.0 | E | vening |
| 1:00 AM | 38.0 | | | | 2 | 2.1 | 2.1 | | | | | N | light |
| 2:00 AM | 37.8 | | | | | | | | | | | | |
| 3:00 AM | 36.9 | | | | | | 24-Ho | ur Sound | l evels | | | | |
| 4:00 AM | 53.6 | | | | | | | ai ooana | _0.0.0 | | | | |
| 5:00 AM | 60.3 | | | | | | | | | | | | |
| 6:00 AM | 62.3 | | 70.0 | | | | | | | | | | |
| 7:00 AM | 59.8 | | 65.0 | | | | | | | | | | |
| 8:00 AM | 53.7 | | | | | | | | | | | | |
| 9:00 AM | 60.4 | ਰੂ | 60.0 | | | | | | | | | | |
| 10:00 AM | 59.6 | One-Hour Leg | 55.0 | | | / | | \bigvee | | | | | |
| 11:00 AM | 59.8 | | | | | 7 | | • | | • | X . | | |
| Noon | 58.9 | ¥ | 50.0 | | | | | | | | * | | |
| 1:00 PM | 57.2 | lue | 45.0 | | | +- | | | | | $\overline{}$ | +- | |
| 2:00 PM | 53.6 | 0 | 40.0 | | | | | | | | $\longrightarrow \diagdown$ | \perp | • |
| 3:00 PM | 56.7 | | | | | , | | | | | * | V | |
| 4:00 PM | 52.2 | | 35.0 | | | | | | | | | | |
| 5:00 PM | 48.1 | | 30.0 | | | | | | | | | | |
| 6:00 PM | 38.4 | | | Midnight | 2:00 AM | 4:00 AM | 6:00 AM | 8:00 AM 10:00 AM | Noon | 2:00 PM | 4:00 PM 6:00 PM | 8:00 PM | 10:00 PM |
| 7:00 PM | 51.0 | | | lidn | 99 | 99 | 00. | 8 8 | Ž | 8 | 8 8 | 99 | 89 |
| 8:00 PM | 36.6 | | | Σ | 7 | 4 | 9 | 8 .0 | | 7 | 4 0 | ∞ | 10 |
| 9:00 PM | 42.8 | | | | | | | - | Гіте | | | | |
| 10:00 PM | 44.4 | | | | | | | | iiiie | | | | |
| 11:00 PM | 42.8 | | | | | | | | | | | | |

| Ldn | 61.9 |
|-----------------|------|
| Worst Hour Leq | 62.3 |
| Lowest Hour LEQ | 36.6 |
| 11-hour Leq | 57.6 |

| Project: | PG&E, Tiger | r Creek | Spillway | | D | ate: | 6/21/2023 | 3 Analy | st: | Schumaker, | N | | | |
|-----------|-------------|--------------|----------|----------|---------|----------|-----------|----------|------------|--|---------------|-----------|----------|----------|
| Location: | LT-4 | | | | | | | | | | | | | |
| | Wednesday | | | | | | | Worst F | Hour | Ldn minus | i | CNEL minu | S | |
| Time | 6/21/2023 | | Leq(24) | | l | _dn | CNEL | Leq | | Worst Hour L | .eq | Ldn | D | ay |
| Midnight | 40.0 | | 53.2 | | 5 | 54.5 | 54.8 | 63.6 | 3 | -9.1 | | 0.3 | E | vening |
| 1:00 AM | 39.5 | | | | | 4.9 | 5.2 | | | | | | Ν | ight |
| 2:00 AM | 39.4 | | | | | | | | | | | | | |
| 3:00 AM | 45.2 | | | | | | 24-Ho | ur Soun | d I d | evels | | | | |
| 4:00 AM | 39.8 | | | | | | 2-7 110 | ui Oouii | u | 34010 | | | | |
| 5:00 AM | 41.6 | | | | | | | | | | | | | |
| 6:00 AM | 47.7 | | 70.0 | | | | | | | | | | | |
| 7:00 AM | 49.6 | | 65.0 | | | | | | | | | | | |
| 8:00 AM | 49.4 | | | | | | | | | 1 | <u> </u> | | | |
| 9:00 AM | 53.1 | 5 | 60.0 | | | | | | | - | $\overline{}$ | | | |
| 10:00 AM | 49.2 | One-Hour Leg | 55.0 | | | | | | | | Δ | | | |
| 11:00 AM | 48.4 | j | | | | | | | | / \ | | X | , | |
| Noon | 54.4 | ¥ | 50.0 | | | | * | → | | • | | N. | 1 | |
| 1:00 PM | 59.6 | ne | 45.0 | | | | -/ | | | | | | | |
| 2:00 PM | 50.8 | 0 | 40.0 | | | Δ | <u> </u> | | | | | | | |
| 3:00 PM | 63.6 | | | | | Ť | | | | | | | | • |
| 4:00 PM | 54.2 | | 35.0 | | | | | | | | | | | |
| 5:00 PM | 51.2 | | 30.0 | | | 1 1 | <u> </u> | | - | T T T T | | | | |
| 6:00 PM | 48.4 | | | Midnight | 2:00 AM | 4:00 AM | 6:00 AM | 8:00 AM | { | Noon 2:00 PM | 4:00 PM | 6:00 PM | 8:00 PM | 10:00 PM |
| 7:00 PM | 45.9 | | | idni | 8 | 8 | 00 | 8 | 3 | ž o | 8 | 8 | 00 | 00 |
| 8:00 PM | 47.5 | | | Σ | .: | 4. | 9: | 5 | <u>-</u> | | 4. | 9: | <u>∞</u> | |
| 9:00 PM | 51.6 | | | | | | | | - . | | | | | |
| 10:00 PM | 46.1 | | | | | | | | 111 | me | | | | |
| 11:00 PM | 39.2 | | | | | | | | | | | | | |

| Ldn | 54.5 |
|-----------------|------|
| Worst Hour Leq | 63.6 |
| Lowest Hour LEQ | 39.2 |
| 11-hour Leq | 56.2 |

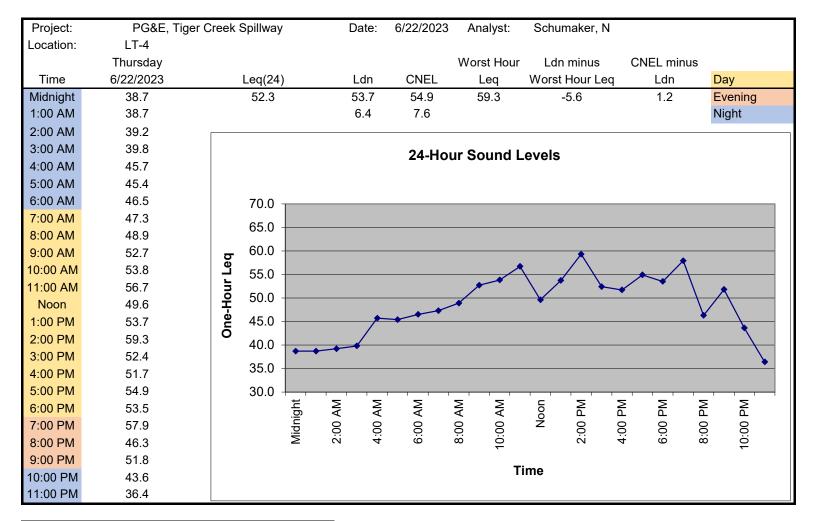

| Ldn | 53.7 |
|-----------------|------|
| Worst Hour Leq | 59.3 |
| Lowest Hour LEQ | 36.4 |
| 11-hour Leq | 54.4 |

| Project: | PG&E, Tiger | Creek | Spillway | | D | ate: | 6/21/2023 | Analyst: | Sc | humaker, N | | | |
|-----------|-------------|--------------|----------|----------|---------|---------|-----------|---------------------|-------|--------------|------------|---------|----------|
| Location: | LT-5 | | | | | | | | | | | | |
| | Wednesday | | | | | | | Worst Hou | ır L | dn minus | CNEL minus | ; | |
| Time | 6/21/2023 | | Leq(24) | | L | _dn | CNEL | Leq | Wo | rst Hour Leq | Ldn | Day | |
| Midnight | 59.6 | | 69.2 | | 7. | 2.8 | 73.1 | 72.1 | | 0.7 | 0.3 | Ever | ning |
| 1:00 AM | 59.7 | | | | C | 0.7 | 1.0 | | | | | Nigh | nt |
| 2:00 AM | 58.7 | | | | | | | | | | | | |
| 3:00 AM | 60.0 | | | | | | 24-Hoi | ır Sound | evel | s | | | |
| 4:00 AM | 65.9 | | | | | | | ar oouna | _0.0. | | | | |
| 5:00 AM | 67.9 | | | | | | | | | | | | |
| 6:00 AM | 70.6 | | 80.0 | | | | | | | | | | |
| 7:00 AM | 72.1 | | 75.0 | | | | | | | | | | |
| 8:00 AM | 70.3 | | | | | | • | | | | | | |
| 9:00 AM | 70.9 | ਰੂ | 70.0 | | | | | | | | | _ | |
| 10:00 AM | 71.5 | One-Hour Leq | 65.0 | | | | | | | | | | |
| 11:00 AM | 71.2 | j | 60.0 | | | | | | | | | | |
| Noon | 71.3 | ギ | | • | | | | | | | | | |
| 1:00 PM | 71.1 | l ne | 55.0 | | | | | | | | | | |
| 2:00 PM | 70.7 | 0 | 50.0 | | | | | | | | | | |
| 3:00 PM | 71.6 | | | | | | | | | | | | |
| 4:00 PM | 71.3 | | 45.0 | | | | | | | | | | |
| 5:00 PM | 70.7 | | 40.0 | | | | <u> </u> | | - | | | _ | _ |
| 6:00 PM | 69.2 | | | Midnight | 2:00 AM | 4:00 AM | 6:00 AM | 8:00 AM 10:00 AM | Noon | 2:00 PM | 0:00 PM | 8:00 PM | 10:00 PM |
| 7:00 PM | 68.0 | | | idn | 8 | 8 | 99 | 8 8 | ž | 00 00 | 8 8 | 000 | 8 |
| 8:00 PM | 67.8 | | | Σ | .5 | 4 | | 9 0 | | | 4 0 | ώ · | |
| 9:00 PM | 65.8 | | | | | | | | T: | | | | |
| 10:00 PM | 63.8 | | | | | | | | Гime | | | | |
| 11:00 PM | 61.0 | | | | | | | | | | | | |

| Ldn | 72.8 |
|-----------------|------|
| Worst Hour Leq | 72.1 |
| Lowest Hour LEQ | 58.7 |
| 11-hour Leq | 71.2 |

| Project: | PG&E, Tiger | r Creek : | Spillway | | Date | : 6/ | 22/2023 | Analyst: | Schur | naker, N | | | |
|-----------|-------------|-----------|------------------------|----------|---------|----------|----------|---------------------|----------------|----------|--------------|---------|----------|
| Location: | LT-5 | | | | | | | | | | | | |
| | Thursday | | | | | | | Worst Hour | Ldn minus | | CNEL minus | 6 | |
| Time | 6/22/2023 | | Leq(24) | | Ldn | | CNEL | Leq | Worst Hour Leq | | Ldn | Da | У |
| Midnight | 60.0 | | 69.6 | 73.1 | | | 73.4 | 72.6 | | 0.5 | 0.4 | Ev | ening |
| 1:00 AM | 57.7 | | | | 1.9 | | 2.2 | | | | | Nig | ght |
| 2:00 AM | 60.1 | | | | | | | | | | | | |
| 3:00 AM | 58.9 | | | | | | 24-Hoi | ır Sound I | evels | | | | |
| 4:00 AM | 65.4 | | 24-110ul Soulid Levels | | | | | | | | | | |
| 5:00 AM | 68.1 | | | | | | | | | | | | |
| 6:00 AM | 70.6 | | 80.0 | | | | | | | | | | |
| 7:00 AM | 71.2 | | 75.0 - | | | | | | | | | | |
| 8:00 AM | 71.1 | | | | | | | سد . | - | - | | | |
| 9:00 AM | 70.5 | 5 | 70.0 | | | N | | | | | | • | |
| 10:00 AM | 71.2 | ٦ | 65.0 - | | | <u> </u> | | | | | | | |
| 11:00 AM | 72.6 | j | 60.0 | | _ / | | | | | | | | |
| Noon | 72.5 | Ţ | 65.0 60.0 55.0 | | | | | | | | | | |
| 1:00 PM | 71.9 |) ne | 55.0 - | | | | | | | | | | |
| 2:00 PM | 71.2 | | 50.0 - | | | | | | | | | | |
| 3:00 PM | 72.1 | | 45.0 - | | | | | | | | | | |
| 4:00 PM | 71.6 | | | | | | | | | | | | |
| 5:00 PM | 71.5 | | 40.0 | | | _ | | | | | | _ | |
| 6:00 PM | 70.3 | | | Midnight | 2:00 AM | 4:00 AM | 6:00 AM | 8:00 AM 10:00 AM | Noon | 2:00 PM | .00 00:00 PM | 8:00 PM | 10:00 PM |
| 7:00 PM | 69.3 | | | lidn | 99 | 000 | <u>6</u> | 8 8 | Ž | 6 6 | 8 8 | 00. | 00: |
| 8:00 PM | 68.2 | | | ≥ | 0 . | 4 | 9 | 8 0 | | 0 4 | 4 0 | ω | 10 |
| 9:00 PM | 67.1 | | Time | | | | | | | | | | |
| 10:00 PM | 63.9 | | | | | | | ' | me | | | | |
| 11:00 PM | 63.3 | | | | | | | | | | | | |

| Ldn | 73.1 |
|-----------------|------|
| Worst Hour Leq | 72.6 |
| Lowest Hour LEQ | 57.7 |
| 11-hour Leq | 71.6 |

Ldn/CNEL Calculation Spreadsheet

| Project: | PG&E, Tiger | r Creek | Spillway | | Da | ate: | 6/21/2023 | Analyst: | Schun | naker, N | | | |
|-----------|-------------|--------------|----------|----------|---------|---------|-----------|---------------------|--------|----------|--------------------|---------|----------|
| Location: | LT-6 | | | | | | | | | | | | |
| | Wednesday | | | | | | | Worst Hour | Ldn | minus | CNEL minu | S | |
| Time | 6/21/2023 | | Leq(24) | | L | dn | CNEL | Leq | Worst | Hour Leq | Ldn | D | ay |
| Midnight | 63.8 | | 72.8 | | 70 | 6.3 | 76.7 | 75.4 | (| 0.9 | 0.4 | E | vening |
| 1:00 AM | 63.5 | | | | 1 | .1 | 1.5 | | | | | Ν | ight |
| 2:00 AM | 61.4 | | | | | | | | | | | | |
| 3:00 AM | 63.2 | | | | | | 24-Hoi | ır Sound L | evels | | | | |
| 4:00 AM | 69.6 | | | | | | 211100 | 004.14 = | .010.0 | | | | |
| 5:00 AM | 70.9 | | | | | | | | | | | | |
| 6:00 AM | 73.7 | | 80.0 | | | | | | | | | | |
| 7:00 AM | 75.2 | | 75.0 - | | | | _ | | | | | | |
| 8:00 AM | 74.0 | | | | | | | | | | - | | |
| 9:00 AM | 74.1 | 5 | 70.0 | | | - | <u> </u> | | | | | | |
| 10:00 AM | 74.6 | One-Hour Leg | 65.0 | | | | | | | | | | |
| 11:00 AM | 74.9 | ļ j | | | | | | | | | | | |
| Noon | 74.9 | મૅ | 60.0 | | | | | | | | | | |
| 1:00 PM | 74.9 | l ne | 55.0 | | | | | | | | | | |
| 2:00 PM | 74.2 | 0 | 50.0 | | | | | | | | | | |
| 3:00 PM | 75.2 | | | | | | | | | | | | |
| 4:00 PM | 75.4 | | 45.0 | | | | | | | | | | |
| 5:00 PM | 74.5 | | 40.0 | | 1 1 | 1 1 | 1 1 1 | 1 1 1 | 1 1 | 1 1 1 | 1 1 1 | | |
| 6:00 PM | 73.8 | | | Midnight | 2:00 AM | 4:00 AM | 6:00 AM | 8:00 AM 10:00 AM | Noon | 2:00 PM | 4:00 PM 6:00 PM | 8:00 PM | 10:00 PM |
| 7:00 PM | 72.1 | | | idni | 00 | 00 | 00 | 000 | ž | 8 | 8 8 | 00 | 00 |
| 8:00 PM | 71.5 | | | Σ | .: | 4. | 9: | 9 | | | 4 | ∞. | 10: |
| 9:00 PM | 70.0 | | | | | | | - | | | | | |
| 10:00 PM | 68.4 | | | | | | | ı | ime | | | | |
| 11:00 PM | 65.1 | | | | | | | | | | | | |

| Ldn | 76.3 |
|-----------------|------|
| Worst Hour Leq | 75.4 |
| Lowest Hour LEQ | 61.4 |
| 11-hour Leq | 74.7 |

Ldn/CNEL Calculation Spreadsheet

| Project: | PG&E, Tige | r Creek | Spillway | | Da | ate: | 6/22/2023 | Analyst: | Sch | umaker, N | | | |
|-----------|------------|--------------|----------|----------|----------|----------|-----------|---------------------|--------|--------------|------------|---------------------|-----|
| Location: | LT-6 | | | | | | | | | | | | |
| | Thursday | | | | | | | Worst Hou | r Lo | dn minus | CNEL minus | | |
| Time | 6/22/2023 | | Leq(24) |) | L | dn | CNEL | Leq | Wors | st Hour Leq | Ldn | Day | |
| Midnight | 64.2 | | 73.3 | | 76 | 6.6 | 77.0 | 75.8 | | 0.8 | 0.4 | Evening | |
| 1:00 AM | 62.6 | | | | 2 | 2.3 | 2.7 | | | | | Night | |
| 2:00 AM | 64.0 | | | | | | | | | | | | |
| 3:00 AM | 63.1 | | | | | | 24-Ho | ur Sound | l evel | s | | | |
| 4:00 AM | 69.3 | | | | | | | ai ocana | _0,0 | | | | |
| 5:00 AM | 71.5 | | | | | | | | | | | | |
| 6:00 AM | 73.5 | | 80.0 | | | | | | | | | | |
| 7:00 AM | 74.3 | | 75.0 | | | | | | • | * * * | - | | |
| 8:00 AM | 74.8 | | | | | | | | | | | • | |
| 9:00 AM | 74.0 | 5 | 70.0 | | | 1 | | | | | | | |
| 10:00 AM | 74.8 | One-Hour Leg | 65.0 | • | | | | | | | | | 4 1 |
| 11:00 AM | 75.8 |] j | 60.0 | | | | | | | | | | |
| Noon | 75.7 | ギ | | | | | | | | | | | |
| 1:00 PM | 75.5 | l eu | 55.0 | | | | | | | | | | - |
| 2:00 PM | 74.8 | 0 | 50.0 | | | | | | | | | | 4 1 |
| 3:00 PM | 75.8 | | | | | | | | | | | | |
| 4:00 PM | 75.5 | | 45.0 | | | | | | | | | | |
| 5:00 PM | 75.6 | | 40.0 | | <u> </u> | <u> </u> | <u> </u> | _ ' ' _ ' | | | | _ ' _ ' | 4 |
| 6:00 PM | 74.3 | | | Midnight | 2:00 AM | 4:00 AM | 6:00 AM | 8:00 AM 10:00 AM | Noon | 2:00 PM | 6:00 PM | 8:00 PM 10:00 PM | |
| 7:00 PM | 73.3 | | | ligh | 8 | 00 | 8 | 8 8 | Ž | 00 | 8 8 | 8 8 | |
| 8:00 PM | 72.5 | | | Σ | | 4 | 9 | 8 6 | | | 4 0 | 8 5 | |
| 9:00 PM | 71.0 | | | | | | | | Гіте | | | | |
| 10:00 PM | 68.2 | | | | | | | | iiiie | | | | |
| 11:00 PM | 67.2 | | | | | | | | | | | | |

| Ldn | 76.6 |
|-----------------|------|
| Worst Hour Leq | 75.8 |
| Lowest Hour LEQ | 62.6 |
| 11-hour Leq | 75.2 |

| N | umber S | Start Date | Start Time | Duration | LAeq | LASmax | LASmin | LAS1% | LAS2% | LAS5% | LAS8% | LAS10% | LAS25% | LAS50% | LAS90% | LAS95% | LAS99% |
|---|---------|-------------|----------------------------|--------------------|------|--------|--------------|-------|--------------|--------------|--------------|--------------|--------------|--------------|--------|--------------|--------------|
| | 1 (| 6/20/2023 | 11:27:00 AM | 0:33:00 | 57.6 | 80.7 | 30.7 | 70.7 | 68.2 | 63 | 59.3 | 57.3 | 44.9 | 37 | 31.8 | 31.4 | 31 |
| | 2 (| 6/20/2023 | 12:00:02 PM | 0:59:58 | 44.8 | 65.4 | 30.4 | 57.5 | 54.5 | 48.9 | 46.2 | 45.1 | 39.8 | 35.9 | 31.7 | 31.1 | 30.5 |
| | 3 (| 6/20/2023 | 1:00:02 PM | 0:59:58 | 48 | 70.7 | 31.3 | 60 | 57.8 | 53.8 | 50.5 | 48.7 | 42.1 | 38.5 | 34 | 32.9 | 31.7 |
| | 4 (| 6/20/2023 | 2:00:02 PM | 0:59:58 | | | 33.1 | 65.8 | 63.3 | 58.9 | 56.3 | 54.9 | 47.1 | 41.8 | 35.4 | 34.5 | 33.7 |
| | | 6/20/2023 | | 0:59:58 | 45.5 | 63.9 | 31.3 | 57 | 54.8 | 52.1 | 50.1 | 49.2 | 43 | 38.4 | 33.2 | 32.6 | 31.7 |
| | | 6/20/2023 | | 0:59:58 | | | 30.8 | | 54.6 | 51.1 | 48.8 | 47.6 | 41.7 | 37.8 | | 32.2 | 31.2 |
| | | 6/20/2023 | | 0:59:58 | | | | | 51.1 | 47.2 | 44.8 | 43.7 | 38.2 | | | 31.4 | 30.9 |
| | | 6/20/2023 | | 0:59:58 | | | 30.1 | | 42.4 | 39.3 | 37.8 | 37.3 | 35.2 | | | 30.7 | 30.3 |
| | | 6/20/2023 | | 0:59:58 | | | | | 43.1 | 40.7 | 38.7 | 37.6 | | | | 30.2 | 30.1 |
| | | 6/20/2023 | | 0:59:58 | | | | | 40.4 | 38.1 | 36.5 | 35.7 | 32.8 | 31 | | 30.4 | 30.2 |
| | | 6/20/2023 | 9:00:02 PM 10:00:02 PM | 0:59:58 0:59:58 | | | 30.3 30.8 | | 31.4 42 | 31.2 34.6 | 31.2 33.2 | 31.2 32.9 | 31.1 31.7 | 30.8 31.3 | | 30.4 31 | 30.3 |
| | | | 11:00:02 PM | 0:59:58 | | | 32.2 | | 36.9 | 36.2 | 35.6 | 35.3 | 33.9 | 33.3 | | 32.5 | 32.4 |
| | | | 12:00:02 FM | 0:59:58 | | | | | 39.9 | 38.5 | 37.6 | | 36.5 | 35.7 | | 34.3 | 33.9 |
| | | | 1:00:02 AM | 0:59:58 | | | | | 37.7 | 37.1 | | | | 35.4 | | 34.1 | 33.9 |
| | | 6/21/2023 | | 0:59:58 | | | | | 39.1 | 38.3 | 37.9 | 37.8 | 37 | | | 34.8 | 34.5 |
| | | 6/21/2023 | | 0:59:58 | | | | | 39 | 38.3 | | | 37 | | | 35.1 | 34.8 |
| | 18 (| 6/21/2023 | 4:00:02 AM | 0:59:58 | 35.7 | 47 | 34.2 | 38.6 | 37.6 | 36.7 | 36.4 | 36.3 | 35.9 | 35.5 | 35 | 34.8 | 34.5 |
| | 19 (| 6/21/2023 | 5:00:02 AM | 0:59:58 | 44.9 | 64.2 | 34 | 51.1 | 50.6 | 49.8 | 49.3 | 49 | 47.2 | 40.1 | 35.2 | 34.9 | 34.4 |
| | 20 (| 6/21/2023 | 6:00:02 AM | 0:59:58 | 36.3 | 50.2 | 33.3 | 44 | 41.9 | 39.1 | 37.9 | 37.4 | 35.8 | 35.2 | 34.3 | 34 | 33.6 |
| | 21 (| 6/21/2023 | 7:00:02 AM | 0:59:58 | 35.7 | 52.9 | 30.9 | 42.6 | 41.5 | 39.6 | 38.7 | 38.2 | 36.1 | 34.3 | 32 | 31.6 | 31.2 |
| | 22 (| 6/21/2023 | 8:00:02 AM | 0:59:58 | | | 29.7 | 49.4 | 46.6 | 40 | 38.1 | 37.4 | 33.8 | 31.5 | 30.3 | 30.2 | 30 |
| | | | 9:00:02 AM | 0:59:58 | 34.7 | 50.4 | 29.7 | 44.1 | 42.8 | 40.7 | 39.3 | 38.2 | 32.5 | 30.9 | 30.2 | 30.1 | 30 |
| | | | 10:00:02 AM | 0:59:58 | | | 30.2 | | 46.9 | 41.7 | 38.8 | | 34.1 | | | 30.9 | 30.6 |
| | | | 11:00:02 AM | 0:59:58 | 42 | | 30.6 | | 52.4 | 47.9 | 45.5 | 44.1 | 37.3 | | | 31.6 | 31.1 |
| | | | 12:00:02 PM | 0:59:58 | | | | | 51 | 46.1 | 43.4 | | 36.3 | | | 30.8 | 30.5 |
| | | 6/21/2023 | | 0:59:58 | | | | | 54.6 | 51.1 | 48.2 | | 39.2 | | | 31.2 | 30.6 |
| | | 6/21/2023 | | 0:59:58 | | | | | 56.6 | 51.9 | 49.1 | | 42.9 | 38.7 | | 32.5 | 31.2 |
| | | 6/21/2023 | | 0:59:58 | | | | | 55.6 | 51.2 53.2 | 47.8 50.7 | | | | | 32.2 32.7 | 31.2 32.1 |
| | | 6/21/2023 | 4:00:02 PM 5:00:02 PM | 0:59:58 0:59:58 | | | 31.8 30.7 | | 57.4 55.8 | 50.9 | 48.5 | 49.3 47 | 42.8 40.3 | 37.6 36 | | 32.7 | 31.5 |
| | | | 6:00:02 PM | 0:59:58 | | | | | 33.8 41.9 | 30.9 40 | 46.5 39.3 | | 36.7 | | | 30.9 | 30.4 |
| | | 6/21/2023 | | 0:59:58 | | | | | 47.6 | 40.9 | 39.4 | | 36.1 | | | 30.6 | 30.4 |
| | | 6/21/2023 | | 0:59:58 | | | | | 47.0 | 41.7 | 39.5 | 38.5 | 34.9 | 32.3 | | 30.5 | 30.2 |
| | | 6/21/2023 | | 0:59:58 | | | | | 32.9 | 31.5 | 31.4 | | 31.2 | | | 30.6 | 30.5 |
| | | | 10:00:02 PM | 0:59:58 | | | | | 41 | 32.4 | 31.6 | | 31.3 | | | 30.7 | 30.6 |
| | | | 11:00:02 PM | 0:59:58 | | | | | 37.6 | 35.4 | | | | | | 31.4 | 31.3 |
| | 38 (| 6/22/2023 | 12:00:02 AM | 0:59:58 | 32.8 | 41.3 | 31.5 | 36.8 | 36.1 | 34.7 | 34.1 | 33.9 | 32.8 | 32.4 | 31.9 | 31.8 | 31.7 |
| | 39 | 6/22/2023 | 1:00:02 AM | 0:59:58 | 33.7 | 40.2 | 32 | 37.6 | 36.7 | 35.8 | 35.4 | 35.1 | 34 | 33.1 | 32.5 | 32.4 | 32.2 |
| | 40 | 6/22/2023 | 2:00:02 AM | 0:59:58 | 34.9 | 43.6 | 32.3 | 41.2 | 40.2 | 38.5 | 37.4 | 37 | 34.7 | 33.7 | 32.8 | 32.7 | 32.5 |
| | 41 (| 6/22/2023 | 3:00:02 AM | 0:59:58 | 36.1 | 44.7 | 33 | 41.6 | 40.3 | 38.7 | 38 | 37.5 | 36.3 | 35.6 | 33.9 | 33.6 | 33.3 |
| | 42 | 6/22/2023 | 4:00:02 AM | 0:59:58 | 38.3 | 50.3 | 35.3 | 45.9 | 44.9 | 40.8 | 40 | 39.6 | 38.1 | 37.2 | 36.2 | 36 | 35.7 |
| | | 6/22/2023 | | 0:59:58 | | | | | 52 | | | | 47.4 | | | 36.5 | 36 |
| | 44 (| 6/22/2023 | 6:00:02 AM | | | | 35 | 47.8 | 46.1 | 43.1 | 41.8 | 41.1 | 38.9 | 37.7 | 36.3 | 36 | 35.6 |
| | | | 7:00:02 AM | | | | 32.9 | | 41.8 | 40.2 | | 39.1 | 37.9 | 37 | | 33.8 | 33.2 |
| | | | 8:00:02 AM | | | | | | 40.7 | 38.5 | | 36 | | | | | 30.1 |
| | | | 9:00:02 AM | | | | | | 41.7 | | | | | | | 29.9 | 29.7 |
| | | | 10:00:02 AM 11:00:02 AM | | | | | | 44.4 | | | | | | | 30.1 | 30 30.6 |
| | | | 12:00:02 AM | | | | | | 48.7 55.5 | 45.7 51.6 | | 43.3 47.8 | 38.6 41.3 | | | 31.3 32.5 | 31.7 |
| | | | 1:00:02 PM | | | | | | | 48.3 | | | 38.7 | | | 33 | 31.7 |
| | | | 2:00:02 PM | | | | | | 54.2 | 50.1 | | | | | | 33.7 | 31.6 |
| | | | 3:00:02 PM | | | | | | 57.4 | 52.5 | | | 43.1 | | | 33.2 | 32.2 |
| | | | 4:00:02 PM | | | | | | 58 | | | | | | | 31.5 | 30.8 |
| | | | 5:00:02 PM | | | | | | 54.2 | 49.7 | | | | | | 32.2 | 31.5 |
| | 56 | 6/22/2023 | 6:00:02 PM | 0:59:58 | 37.6 | 47.1 | 31.5 | 43.4 | 42.4 | 41.3 | 40.7 | 40.3 | 38.8 | 36.5 | 33.4 | 32.6 | 31.7 |
| | 57 (| 6/22/2023 | 7:00:02 PM | 0:59:58 | 36.8 | 54.7 | 29.8 | 48.4 | 46.6 | 42.3 | 39.2 | 38.2 | 34.6 | 32.2 | 30.3 | 30.1 | 29.9 |
| | 58 (| 6/22/2023 | 8:00:02 PM | 0:59:58 | 34.5 | 46.9 | 29.8 | 42.6 | 41.6 | 39.9 | 38.6 | 37.9 | 34.6 | 31.7 | 30 | 30 | 29.9 |
| | 59 (| 6/22/2023 | 9:00:02 PM | | | | 29.8 | 30.4 | 30.3 | 30.2 | 30.2 | | | 30 | 29.9 | 29.9 | 29.9 |
| | | | 10:00:02 PM | | | | 29.9 | | 39.5 | 36.5 | | | | | | 30 | 29.9 |
| | | | 11:00:02 PM | | | | | | 37.2 | 31.9 | | | 31.1 | | | 30.3 | 30.2 |
| | | | 12:00:02 AM | | | | | | 40.7 | 31.8 | | | | | | 30.6 | 30.5 |
| | | | 1:00:02 AM | | | | 30.6 | | 32.8 | 32 | | | 31.2 | | | 30.8 | 30.7 |
| | | | 2:00:02 AM | | | | | | 31.4 | 31.3 | | | | | | 30.7 | 30.6 |
| | | | 3:00:02 AM | | | | | | 31.8 | 31.6 | | | | | | 30.7 | 30.7 |
| | | | 4:00:02 AM | | | | 31.3 32.2 | | 34.1 50.5 | 33.3 48.6 | 32.8 47.7 | | | | | 31.5 33.4 | 31.4 |
| | | | 5:00:02 AM 6:00:02 AM | | | | | | 40.7 | 48.6 37.2 | | | | 41.1 32.9 | | 31.8 | 32.7 31.6 |
| | 00 (| 0, 20, 2023 | 3.00.02 AIVI | 0.33.30 | 57.0 | 50 | 31.4 | 77.3 | 70.7 | 37.2 | 30.2 | 33.0 | 37.2 | 32.3 | 31.9 | 51.0 | 31.0 |

| 69 6/23/2023 | 7:00:02 AM | 0:59:58 | 36.6 | 47.5 | 30.5 | 45.2 | 44.4 | 42.8 | 41.6 | 40.9 | 35.5 | 32.7 | 31.6 | 31.2 | 30.8 |
|--------------|-------------|---------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 70 6/23/2023 | 8:00:02 AM | 0:59:58 | 37.8 | 57.1 | 30.1 | 50.1 | 47.9 | 42.8 | 40.2 | 39.1 | 34.7 | 32.3 | 30.7 | 30.5 | 30.3 |
| 71 6/23/2023 | 9:00:02 AM | 0:59:58 | 37.9 | 54.7 | 30.5 | 47.9 | 46.1 | 43 | 41.5 | 40.6 | 36.5 | 34.5 | 32.6 | 32.2 | 31.3 |
| 72 6/23/2023 | 10:00:01 AM | 0:56:00 | 56.4 | 87.3 | 30.2 | 66.2 | 57.8 | 49.4 | 44.5 | 43.4 | 37.9 | 35.2 | 33.3 | 32.7 | 31.9 |

| Number S | Start Date | Start Time | End Time | Duration | LAeq | LASmax | LASmin | LAS1% | LAS2% | LAS5% | LAS8% | LAS10% | LAS25% | LAS50% | LAS90% | LAS95% | LAS99% |
|----------|------------------------|----------------------------|---------------------------|----------|------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 1 6 | 6/20/2023 | 10:58:24 AM | 11:00:00 AM | 0:01:36 | 66.4 | 81.5 | 36.9 | 80.6 | 77.7 | 72.3 | 69 | 67.5 | 61.4 | 55.8 | 42.7 | 41.5 | 38.1 |
| | | 11:00:02 AM | | | | 82.5 | 45.2 | 68.8 | 65.1 | 57.4 | 48.8 | 47.9 | 46.6 | 46.1 | 45.7 | 45.6 | 45.4 |
| | | 12:00:02 PM | | | | 52.7 | 45.1 | 49.6 | 48.6 | 47.7 | 47.2 | 47 | 46.4 | 46.1 | 45.6 | 45.5 | 45.4 |
| | 6/20/2023 6/20/2023 | 1:00:02 PM 2:00:02 PM | | | | 57.5 60.8 | 45.9 45.8 | 53 52.4 | 51.3 50.5 | 49.8 48.7 | 49 48.1 | 48.7 47.9 | 47.6 46.9 | 46.9 46.5 | 46.3 46.1 | 46.2 46.1 | 46.1 46 |
| | 6/20/2023 | 3:00:02 PM | | | | 57.5 | 45.6 | 53.3 | 51.2 | 48.6 | 47.6 | 47.3 | | 46.3 | 46 | 45.9 | 45.8 |
| | 6/20/2023 | 4:00:02 PM | | | | 78.8 | 45.7 | 66.9 | 57.3 | 51.3 | 48.9 | 48.3 | 47 | 46.5 | 46 | 46 | 45.9 |
| 8 6 | 6/20/2023 | 5:00:02 PM | 6:00:00 PM | 0:59:58 | 46.3 | 51.2 | 45.6 | 47.6 | 47.3 | 46.8 | 46.6 | 46.5 | 46.3 | 46.2 | 46 | 45.9 | 45.8 |
| | 6/20/2023 | 6:00:02 PM | | | | 54.7 | 46 | 48 | 47.5 | 46.9 | 46.8 | 46.8 | | 46.5 | 46.3 | 46.3 | 46.2 |
| | 6/20/2023 | 7:00:02 PM | | | 47 | 50.6 | 46.4 | 48.5 | 48 | 47.4 | 47.2 | 47.1 | | 46.9 | 46.7 | 46.7 | 46.6 |
| | 6/20/2023 6/20/2023 | 8:00:02 PM | 9:00:00 PM 10:00:00 PM | | | 59.9 48.7 | 46.8 47 | 54.4 47.6 | 49.5 47.6 | 48 47.5 | 47.5 47.5 | 47.4 47.5 | 47.3 47.4 | 47.2 47.4 | 47.1 47.2 | 47 47.2 | 46.9 47.2 |
| | | 10:00:02 PM | | | | 52.6 | 47.2 | 48.8 | 48.3 | 47.7 | 47.7 | 47.6 | | 47.5 | 47.4 | 47.4 | 47.3 |
| | | 11:00:02 PM | | | | 48.4 | 47.3 | 47.8 | 47.8 | 47.8 | 47.8 | 47.7 | 47.7 | 47.6 | 47.5 | 47.5 | 47.5 |
| 15 6 | 6/21/2023 | 12:00:02 AM | | | | 48.1 | 47.5 | 47.9 | 47.9 | 47.9 | 47.9 | 47.8 | 47.8 | 47.7 | 47.7 | 47.6 | 47.6 |
| | 6/21/2023 | 1:00:02 AM | | | | 48.2 | 47.5 | 48 | 48 | 48 | 48 | 48 | 47.9 | 47.9 | 47.8 | 47.7 | 47.7 |
| | 6/21/2023 | | | | | 48.8 | 47.6 | 48.1 | 48.1 | 48.1 | 48 | 48 | | 47.9 | 47.8 | 47.8 | 47.8 |
| | 6/21/2023 6/21/2023 | 3:00:02 AM 4:00:02 AM | | | 48 48 1 | 48.3 49.2 | 47.7 47.7 | 48.2 48.9 | 48.1 48.8 | 48.1 48.7 | 48.1 48.6 | 48.1 48.5 | | 48 48.1 | 47.9 47.9 | 47.9 47.9 | 47.8 47.9 |
| | 6/21/2023 | | | | | 67.5 | 47.9 | 62.6 | 57.3 | 51.8 | 50.8 | 50.3 | | 48.7 | 48.1 | 48.1 | 48 |
| | 6/21/2023 | | | | | 53.1 | 47.8 | 49.9 | 49.3 | 48.6 | 48.4 | 48.3 | 48.2 | 48.1 | 48 | 48 | 48 |
| 22 6 | 6/21/2023 | 7:00:02 AM | 8:00:00 AM | 0:59:58 | 48.5 | 56.6 | 47.9 | 52.1 | 51.1 | 49.7 | 49.1 | 48.8 | 48.4 | 48.2 | 48.1 | 48.1 | 48 |
| | | 8:00:02 AM | | | | 62.6 | 47.7 | 57.1 | 55.3 | 53 | 51.9 | 51.3 | 48.7 | 48.1 | 47.9 | 47.8 | 47.8 |
| | | 9:00:02 AM | | | | 69.9 | 46.7 | 51.6 | 50.5 | 49.2 | 48.7 | 48.5 | | 47.7 | 47.1 | 47 | 46.8 |
| | | 10:00:02 AM 11:00:02 AM | | | 46.9 47 | 55.1 63.7 | 46.1 45.2 | 50.7 53.4 | 49.4 50.2 | 48 47.9 | 47.4 47.2 | 47.2 47 | | 46.6 46.2 | 46.4 45.7 | 46.3 45.6 | 46.2 45.4 |
| | | 12:00:02 PM | | | | 53.7 | 44.6 | 48.9 | 48 | 47.3 | 46.6 | 46.3 | | 45.5 | 45.2 | 45.1 | 44.9 |
| | 6/21/2023 | 1:00:02 PM | | | | 59.4 | 45 | 49.6 | 49 | 47.8 | 47.3 | 47 | 46.2 | 45.6 | 45.3 | 45.2 | 45.1 |
| 29 6 | 6/21/2023 | 2:00:02 PM | 3:00:00 PM | 0:59:58 | 46.6 | 55 | 45.3 | 48.9 | 48.3 | 47.7 | 47.4 | 47.3 | 46.8 | 46.4 | 45.8 | 45.7 | 45.6 |
| | 6/21/2023 | 3:00:02 PM | | | 47 | 64.2 | 45.5 | 51 | 49.2 | 48 | 47.6 | 47.4 | 46.8 | 46.4 | 45.9 | 45.8 | 45.7 |
| | 6/21/2023 | 4:00:02 PM | | | | 55.2 | 45.6 | 49.8 | 48.9 | 47.5 | 47.1 | 47 | 46.4 | 46.1 | 45.9 | 45.8 | 45.8 |
| | 6/21/2023 6/21/2023 | 5:00:02 PM 6:00:02 PM | | | | 51.9 52.1 | 45.7 45.9 | 48.8 48 | 47.7 47.4 | 47 46.9 | 46.7 46.8 | 46.6 46.8 | | 46.2 46.5 | 46 46.3 | 46 46.1 | 45.9 46 |
| | 6/21/2023 | 7:00:02 PM | | | | 58.2 | 46.4 | 52.7 | 49.2 | 47.4 | 47.1 | 47.1 | | 46.9 | 46.7 | 46.7 | 46.6 |
| | 6/21/2023 | 8:00:02 PM | | | | 52.6 | 46.8 | 48.4 | 47.8 | 47.4 | 47.3 | 47.3 | 47.2 | 47.1 | 47 | 46.9 | 46.9 |
| 36 6 | 6/21/2023 | 9:00:02 PM | 10:00:00 PM | 0:59:58 | 47.3 | 48.1 | 47 | 47.5 | 47.4 | 47.4 | 47.4 | 47.3 | 47.3 | 47.2 | 47.2 | 47.1 | 47.1 |
| | | 10:00:02 PM | | | | 54.2 | 47 | 48.8 | 48.2 | 47.5 | 47.5 | 47.5 | | 47.4 | 47.3 | 47.2 | 47.2 |
| | | 11:00:02 PM | | | | 50.7 | 47.2 | 48.4 | 47.7 | 47.6 | 47.6 | 47.6 | | 47.5 | 47.4 | 47.4 | 47.3 |
| | | 12:00:02 AM 1:00:02 AM | | | | 47.9 48 | 47.3 47.4 | 47.8 47.8 | 47.7 47.8 | 47.7 47.8 | 47.7 47.8 | 47.7 47.8 | | 47.6 47.7 | 47.5 47.6 | 47.4 47.5 | 47.4 47.5 |
| | 6/22/2023 | | | | | 48.2 | 47.4 | 47.8 | 47.8 | 47.8 | 47.8 | 47.8 | | 47.7 | 47.7 | 47.6 | 47.6 |
| | 6/22/2023 | | | | | 48.2 | 47.6 | 48 | 48 | 48 | 48 | 47.9 | | 47.8 | 47.8 | 47.7 | 47.7 |
| 43 6 | 6/22/2023 | 4:00:02 AM | 5:00:00 AM | 0:59:58 | 48 | 51.9 | 47.6 | 49 | 48.8 | 48.5 | 48.4 | 48.3 | 48 | 47.9 | 47.8 | 47.8 | 47.7 |
| | 6/22/2023 | 5:00:02 AM | | | | 53.6 | 47.8 | 52.1 | 51.8 | 51.1 | 50.5 | 50.1 | | 48.4 | 48.1 | 48.1 | 48 |
| | 6/22/2023 | 6:00:02 AM | | | | 61.3 | 47.8 | 52.7 | 50.7 | 49.2 | 48.8 | 48.7 | 48.3 | 48.2 | 48 | 48 | 47.9 |
| | | 7:00:02 AM 8:00:02 AM | | | | 57.5 55.6 | 47.8 47.5 | 51.4 50 | 49.7 49.3 | 49.1 48.8 | 48.8 48.5 | 48.7 48.4 | 48.4 48.1 | 48.2 48 | 48 47.7 | 48 47.7 | 47.9 47.6 |
| | | 9:00:02 AM | | | | 56.7 | 46.8 | 51.4 | 49.9 | 48.4 | 48.1 | 48 | | 47.5 | 47.7 | 47.1 | 46.9 |
| | | 10:00:02 AM | | | | 54.5 | 46.5 | 49 | 48.2 | 47.4 | 47.2 | 47.2 | | 47 | 46.8 | 46.7 | 46.6 |
| 50 6 | 6/22/2023 | 11:00:02 AM | 12:00:00 PM | 0:59:58 | 47.1 | 60.6 | 46.1 | 51.2 | 49.6 | 47.9 | 47.4 | 47.3 | 47 | 46.7 | 46.4 | 46.3 | 46.2 |
| | | 12:00:02 PM | | | | 65.7 | 45.7 | 50.6 | 49.6 | 48.2 | 47.6 | 47.4 | | 46.4 | 46.1 | 46 | 45.9 |
| | 6/22/2023 | | | | | 54 | 45.5 | 49.2 | 48.7 | 47.9 | 47.5 | 47.3 | | 46.2 | 45.9 | 45.8 | 45.7 |
| | 6/22/2023 6/22/2023 | 2:00:02 PM 3:00:02 PM | | | 47 47 5 | 59.5 55.2 | 45.4 46 | 51.2 51.5 | 50.2 50.4 | 49.2 49.8 | 48.5 49.1 | 48.1 48.8 | | 46.3 46.9 | 45.8 46.3 | 45.8 46.3 | 45.6 46.1 |
| | 6/22/2023 | | | | | 52.8 | 46 | 50.5 | 49.7 | 48.4 | 47.9 | 47.6 | | 46.5 | 46.3 | 46.2 | 46.1 |
| | 6/22/2023 | | | | 47 | 55.8 | 46.2 | 51.9 | 49.5 | 47.7 | 47.2 | 47.1 | | 46.6 | 46.4 | 46.4 | 46.3 |
| 57 6 | 6/22/2023 | 6:00:02 PM | 7:00:00 PM | 0:59:58 | 47.1 | 59.1 | 46.3 | 52.3 | 48.3 | 47.3 | 47.1 | 47.1 | 46.9 | 46.8 | 46.7 | 46.6 | 46.5 |
| | 6/22/2023 | | | | | 55.7 | 46.6 | 51.7 | 50.7 | 48.5 | 47.8 | 47.5 | | 47 | 46.8 | 46.8 | 46.7 |
| | 6/22/2023 | 8:00:02 PM 9:00:02 PM | | | | 55.8 | 46.9 | 52.3 | 49.3 | 47.8 | 47.6 | 47.5 | | 47.3 | 47.1 | 47.1 | 47 47.2 |
| | | 9:00:02 PM 10:00:02 PM | | | | 47.7 48.8 | 47.1 47.2 | 47.6 48.2 | 47.6 48.1 | 47.5 47.8 | 47.5 47.7 | 47.5 47.7 | | 47.4 47.5 | 47.3 47.4 | 47.3 47.4 | 47.2 47.4 |
| | | 11:00:02 PM | | | | 49.8 | 47.2 | 48.3 | 48.1 | 47.8 | 47.7 | 47.7 | | 47.3 | 47.4 | 47.4 | 47.4 |
| | | 12:00:02 AM | | | | 54.2 | 47.5 | 50.5 | 48.5 | 47.9 | 47.9 | 47.9 | | 47.8 | 47.7 | 47.6 | 47.6 |
| 64 6 | 6/23/2023 | 1:00:02 AM | 2:00:00 AM | | | 48.1 | 47.5 | 48 | 48 | 47.9 | 47.9 | 47.9 | 47.9 | 47.8 | 47.7 | 47.7 | 47.6 |
| | 6/23/2023 | | | | | 50 | 47.6 | 48 | 48 | 48 | 48 | 48 | | 47.9 | 47.8 | 47.7 | 47.7 |
| | 6/23/2023 | 3:00:02 AM | | | | 48.2 | 47.7 | 48.1 | 48.1 | 48.1 | 48 | 48 | 48 | 47.9 | 47.8 | 47.8 | 47.8 |
| | 6/23/2023 6/23/2023 | | | | | 49.8 55.2 | 47.8 47.9 | 49.3 52.9 | 49.1 52.5 | 48.9 51.6 | 48.8 51.1 | 48.7 50.8 | | 48 48.9 | 47.9 48.3 | 47.9 48.2 | 47.8 48.1 |
| | 6/23/2023 | | | | | 53.2 | 47.9 | 49.7 | 49.2 | 48.7 | 48.5 | 48.4 | | 48.2 | 48.1 | 48.1 | 48.1 |
| | 6/23/2023 | | | | | 54.2 | 47.8 | 51 | 50.2 | 49.2 | 48.8 | 48.7 | | 48.2 | 48 | 48 | 48 |
| 71 6 | 6/23/2023 | 8:00:02 AM | 9:00:00 AM | 0:59:58 | 48.3 | 55.7 | 47.5 | 51.8 | 50.7 | 49.5 | 49 | 48.8 | 48.2 | 48 | 47.7 | 47.7 | 47.6 |

| 72 6/23/2023 | 9:00:02 AM 10:00:00 AM | 0:59:58 | 47.7 | 50.8 | 46.9 | 49 | 48.8 | 48.5 | 48.3 | 48.2 | 47.8 | 47.6 | 47.3 | 47.2 | 47.1 |
|--------------|-------------------------|---------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 73 6/23/2023 | 11:02:18 AM 11:14:42 AM | 0:12:24 | 47.7 | 54.7 | 46.9 | 51.9 | 51.2 | 49.4 | 48.4 | 48.1 | 47.4 | 47.2 | 47.1 | 47 | 47 |
| 74 6/23/2023 | 11:14:42 AM 11:14:49 AM | 0:00:07 | 50.2 | 56 | 43 | 55.9 | 55.8 | 55.2 | 55.1 | 54.9 | 53.3 | 48.3 | 44.8 | 43.9 | 43.1 |
| 75 6/23/2023 | 11:14:50 AM 11:14:53 AM | 0:00:03 | 42.7 | 47.5 | 40.6 | 47.5 | 47.5 | 47.1 | 46.9 | 46.7 | 45.1 | 42.8 | 40.9 | 40.8 | 40.7 |

| Rec 1 to 71 | Slow Response | | dBA weightin | σ | 1.0 dB resoluti | ion stats | | | | | | | | |
|------------------------------------|---------------|--------------|--------------|--------------|-----------------|-----------|----------|----------|----------|----------|----------|----------|----------|----------|
| Date hh:mm:ss | LeqPeriod | Leq | Lmax Lm | _ | L1% L5% | | L50% | L90% | L95% | L99% | L10% | L8% | L25% | |
| 6/20/2023 14:40 | 1.0 hour | 63.2 | 91.5 | 35.3 | 76 | 61 | 49 | 38 | 35 | 35 | 35 | 49 | 51 | 42 |
| 6/20/2023 15:40 | | 55.1 | | 35.3 | 60 | 44 | 42 | 37 | 35 | 35 | 35 | 42 | 43 | 38 |
| 6/20/2023 16:40 | | 38.9 | | 35.3 | 48 | 42 | 40 | 35 | 35 | 35 | 35 | 40 | 41 | 38 |
| 6/20/2023 17:40 6/20/2023 18:40 | | 44.4 | | 35.3 | 50 47 | 40 | 38 39 | 35 35 | 35 35 | 35 35 | 35 35 | 38 39 | 38 40 | 36 36 |
| 6/20/2023 19:40 | | 38.5 43.2 | | 35.3 35.3 | 55 | 41 45 | 41 | 35 35 | 35 | 35 | 35 | 41 | 40 | 37 |
| 6/20/2023 20:40 | | 38.7 | | 35.3 | 42 | 40 | 40 | 38 | 35 | 35 | 35 | 40 | 40 | 40 |
| 6/20/2023 21:40 | | 38.5 | | 35.3 | 41 | 40 | 40 | 37 | 35 | 35 | 35 | 40 | 40 | 40 |
| 6/20/2023 22:40 | 1.0 hour | 38.3 | 48.1 | 35.3 | 42 | 40 | 40 | 38 | 35 | 35 | 35 | 40 | 40 | 39 |
| 6/20/2023 23:40 | 1.0 hour | 37.7 | 51.2 | 35.3 | 44 | 39 | 38 | 35 | 35 | 35 | 35 | 38 | 39 | 38 |
| 6/21/2023 0:40 | | 36.6 | | 35.3 | 38 | 38 | 38 | 35 | 35 | 35 | 35 | 38 | 38 | 37 |
| 6/21/2023 1:40 | | 36.6 | | 35.3 | 40 | 38 | 38 | 35 | 35 | 35 | 35 | 38 | 38 | 36 |
| 6/21/2023 2:40 6/21/2023 3:40 | | 36.4 54.3 | | 35.3 35.3 | 38 56 | 38 42 | 37 40 | 35 35 | 35 35 | 35 35 | 35 35 | 37 40 | 38 40 | 35 37 |
| 6/21/2023 4:40 | | 57.1 | | 35.3 | 64 | 47 | 45 | 39 | 35 | 35 | 35 | 45 | 45 | 42 |
| 6/21/2023 5:40 | | 63.2 | | 35.3 | 75 | 63 | 52 | 45 | 38 | 38 | 35 | 52 | 54 | 46 |
| 6/21/2023 6:40 | 1.0 hour | 57.4 | 86.1 | 35.3 | 67 | 55 | 48 | 40 | 38 | 37 | 36 | 48 | 51 | 42 |
| 6/21/2023 7:40 | 1.0 hour | 52.7 | 79.3 | 35.3 | 66 | 55 | 50 | 40 | 36 | 35 | 35 | 50 | 51 | 45 |
| 6/21/2023 8:40 | | 59.9 | | 35.3 | 70 | 60 | 54 | 40 | 35 | 35 | 35 | 54 | 56 | 43 |
| 6/21/2023 9:40 | | 54.5 | | 35.3 | 59 | 49 | 47 | 38 | 35 | 35 | 35 | 47 | 47 | 41 |
| 6/21/2023 10:40 6/21/2023 11:40 | | 58.9 57.1 | | 35.3 35.3 | 68 58 | 52 48 | 46 46 | 39 40 | 36 35 | 35 35 | 35 35 | 46 46 | 48 47 | 42 43 |
| 6/21/2023 11:40 | | 55.7 | | 35.3 | 62 | 46 | 44 | 38 | 35 | 35 | 35 | 44 | 47 | 40 |
| 6/21/2023 13:40 | | 52.8 | | 35.3 | 63 | 50 | 46 | 39 | 35 | 35 | 35 | 46 | 47 | 42 |
| 6/21/2023 14:40 | | 57.5 | | 35.3 | 64 | 51 | 46 | 39 | 37 | 35 | 35 | 46 | 47 | 42 |
| 6/21/2023 15:40 | 1.0 hour | 50.4 | 73.4 | 35.3 | 63 | 53 | 49 | 38 | 35 | 35 | 35 | 49 | 50 | 41 |
| 6/21/2023 16:40 | | 40.5 | | 35.3 | 50 | 46 | 43 | 36 | 35 | 35 | 35 | 43 | 44 | 38 |
| 6/21/2023 17:40 | | 53.7 | | 35.3 | 64 | 59 | 57 | 44 | 35 | 35 | 35 | 57 | 58 | 53 |
| 6/21/2023 18:40 | | 56.4 | | 43.8 | 61 | 59 | 58 | 55 | 51 | 49 | 46 | 58 | 59 | 57 |
| 6/21/2023 19:40 6/21/2023 20:40 | | 52.6 41.4 | | 35.3 35.3 | 59 44 | 57 43 | 55 43 | 52 41 | 35 35 | 35 35 | 35 35 | 55 43 | 56 43 | 54 43 |
| 6/21/2023 20:40 | | 43.2 | | 35.3 | 45 | 44 | 44 | 43 | 40 | 38 | 35 | 44 | 44 | 43 |
| 6/21/2023 22:40 | | 41.8 | | 35.3 | 44 | 44 | 43 | 42 | 35 | 35 | 35 | 43 | 43 | 43 |
| 6/21/2023 23:40 | 1.0 hour | 39.5 | 44.4 | 35.3 | 43 | 42 | 42 | 38 | 35 | 35 | 35 | 42 | 42 | 41 |
| 6/22/2023 0:40 | 1.0 hour | 38 | 42.1 | 35.3 | 41 | 40 | 40 | 35 | 35 | 35 | 35 | 40 | 40 | 39 |
| 6/22/2023 1:40 | | 37.8 | | 35.3 | 40 | 40 | 40 | 37 | 35 | 35 | 35 | 40 | 40 | 39 |
| 6/22/2023 2:40 | | 36.9 | | 35.3 | 40 | 39 | 38 | 35 | 35 | 35 | 35 | 38 | 38 | 38 |
| 6/22/2023 3:40 6/22/2023 4:40 | | 53.6 60.3 | | 35.3 35.3 | 55 67 | 46 49 | 44 46 | 39 42 | 35 38 | 35 37 | 35 35 | 44 46 | 45 47 | 42 44 |
| 6/22/2023 5:40 | | 62.3 | | 35.3 | 72 | 59 | 50 | 45 | 38 | 38 | 37 | 50 | 53 | 46 |
| 6/22/2023 6:40 | | 59.8 | | 35.3 | 71 | 58 | 51 | 41 | 36 | 35 | 35 | 51 | 54 | 44 |
| 6/22/2023 7:40 | 1.0 hour | 53.7 | 72.3 | 35.3 | 66 | 58 | 55 | 46 | 38 | 37 | 36 | 55 | 55 | 52 |
| 6/22/2023 8:40 | 1.0 hour | 60.4 | 87.2 | 35.3 | 69 | 57 | 50 | 40 | 35 | 35 | 35 | 50 | 52 | 43 |
| 6/22/2023 9:40 | | 59.6 | | 35.3 | 66 | 56 | 51 | 38 | 35 | 35 | 35 | 51 | 53 | 42 |
| 6/22/2023 10:40 | | 59.8 | | 35.4 | 68 | 59 | 55 | 47 | 43 | 41 | 38 | 55 | 56 | 49 |
| 6/22/2023 11:40 | | 58.9 | | 39.7 | 64 60 | 60 52 | 57 48 | 48 | 43 36 | 42 25 | 41 25 | 57 48 | 58 50 | 51 41 |
| 6/22/2023 12:40 6/22/2023 13:40 | | 57.2 53.6 | | 35.3 35.3 | 60 62 | 52 57 | 48 54 | 38 45 | 36 38 | 35 37 | 35 35 | 54 | 50 55 | 48 |
| 6/22/2023 14:40 | | 56.7 | | 39.9 | 61 | 55 | 52 | 47 | 44 | 43 | 42 | 52 | 53 | 49 |
| 6/22/2023 15:40 | | 52.2 | | 38 | 62 | 57 | 54 | 48 | 45 | 44 | 41 | 54 | 55 | 51 |
| 6/22/2023 16:40 | | 48.1 | | 35.3 | 62 | 53 | 48 | 38 | 35 | 35 | 35 | 48 | 49 | 44 |
| 6/22/2023 17:40 | | 38.4 | | 35.3 | 46 | 41 | 39 | 36 | 35 | 35 | 35 | 39 | 40 | 38 |
| 6/22/2023 18:40 | | 51 | | 35.3 | 64 | 46 | 41 | 35 | 35 | 35 | 35 | 41 | 43 | 37 |
| 6/22/2023 19:40 6/22/2023 20:40 | | 36.6 42.8 | | 35.3 35.3 | 42 45 | 38 45 | 38 44 | 35 42 | 35 38 | 35 37 | 35 35 | 38 44 | 38 45 | 35 44 |
| 6/22/2023 21:40 | | 44.4 | | 35.3 | 46 | 45 | 45 | 44 | 41 | 36 | 35 | 45 | 45 | 45 |
| 6/22/2023 22:40 | | 42.8 | | 35.3 | 45 | 45 | 44 | 42 | 37 | 35 | 35 | 44 | 44 | 44 |
| 6/22/2023 23:40 | 1.0 hour | 41.5 | 45 | 35.3 | 44 | 43 | 43 | 41 | 35 | 35 | 35 | 43 | 43 | 42 |
| 6/23/2023 0:40 | | 40.4 | | 35.3 | 46 | 42 | 42 | 40 | 35 | 35 | 35 | 42 | 42 | 41 |
| 6/23/2023 1:40 | | 38.3 | | 35.3 | 44 | 41 | 40 | 37 | 35 | 35 | 35 | 40 | 40 | 38 |
| 6/23/2023 2:40 | | 36.9 | | 35.3 | 40 56 | 39 44 | 38 | 35 | 35 25 | 35 25 | 35 25 | 38 | 39 44 | 38 |
| 6/23/2023 3:40 6/23/2023 4:40 | | 53.6 55.6 | | 35.3 35.3 | 56 57 | 44 46 | 43 45 | 35 39 | 35 35 | 35 35 | 35 35 | 43 45 | 44 45 | 38 43 |
| 6/23/2023 5:40 | | 62.9 | | 37.5 | 72 | 61 | 55 | 45 | 39 | 38 | 38 | 55 | 56 | 48 |
| 6/23/2023 6:40 | | 58.4 | | 35.3 | 69 | 58 | 51 | 41 | 35 | 35 | 35 | 51 | 54 | 44 |
| 6/23/2023 7:40 | | 49.1 | | 35.3 | 63 | 52 | 48 | 38 | 35 | 35 | 35 | 48 | 49 | 43 |
| 6/23/2023 8:40 | | 51.7 | | 35.3 | 62 | 56 | 53 | 38 | 35 | 35 | 35 | 53 | 54 | 47 |
| 6/23/2023 9:40 | | 55.3 | | 35.3 | 62 | 52 | 50 | 42 | 36 | 35 | 35 | 50 | 51 | 46 |
| 6/23/2023 10:40 | | 57.5 | | 35.3 | 62 63 | 56 54 | 55 | 46 | 38 | 38 | 35 | 55 | 56 E1 | 52 |
| 6/23/2023 11:40 6/23/2023 12:40 | | 50.2 71.8 | | 38.1 39.7 | 63 84 | 54 79 | 50 73 | 42 49 | 40 44 | 39 43 | 38 41 | 50 73 | 51 76 | 46 59 |
| 3/ 23/ 2023 12.40 | . J.O IIIII | 71.0 | . 05 | 33.1 | 0- | , , | , 5 | -13 | | 10 | 12 | , , | , , | 33 |

| Rec 1 to 69 | Slow Response | Low | | dBA weighting | | 1.0 dB resolut | | 1.500/ | 1000/ | L95% | L99% | 1100/ | L8% | L25% | , |
|------------------------------------|---------------|-----|--------------|-------------------|--------------|----------------|----------|----------|------------|----------|----------|----------|----------|----------|----------|
| Date hh:mm:ss 6/20/2023 15:09 | LeqPeriod | Leq | 64.9 | Lmax Lmin 90.2 | 35.8 | L1% L5% | 68 L10% | L50% | L90% 39 | 35 | 35 | L10% | 61 | 63 | 。 50 |
| 6/20/2023 16:09 | | | 54.5 | 84.3 | 35.8 | 64 | 56 | 54 | 38 | 35 | 35 | 35 | 54 | 54 | 44 |
| 6/20/2023 17:09 | 1.0 hour | | 55.5 | 80.9 | 35.8 | 69 | 56 | 48 | 38 | 35 | 35 | 35 | 48 | 50 | 40 |
| 6/20/2023 18:09 | | | 52.7 | 83.9 | 35.8 | 53 | 42 | 39 | 35 | 35 | 35 | 35 | 39 | 40 | 37 |
| 6/20/2023 19:09 | | | 48 | 71.6 | 35.8 | 62 | 48 | 42 | 35 | 35 | 35 | 35 | 42 | 44 | 38 |
| 6/20/2023 20:09 | | | 47.2 | 77.4 | 35.8 | 50 | 39 | 38 | 35 | 35 | 35 | 35 | 38 | 38 | 38 |
| 6/20/2023 21:09 6/20/2023 22:09 | | | 45.6 44.5 | 73.7 74.8 | 36.7 38.6 | 49 44 | 40 40 | 38 40 | 38 38 | 38 38 | 38 38 | 37 38 | 38 40 | 39 40 | 38 39 |
| 6/20/2023 22:09 | | | 42.8 | 70.8 | 38.6 | 44 | 41 | 40 | 38 | 38 | 38 | 38 | 40 | 40 | 40 |
| 6/21/2023 0:09 | | | 40 | 50.5 | 38.7 | 43 | 42 | 41 | 39 | 38 | 38 | 38 | 41 | 41 | 40 |
| 6/21/2023 1:09 | 1.0 hour | | 39.5 | 46.5 | 38.5 | 42 | 41 | 40 | 38 | 38 | 38 | 38 | 40 | 40 | 40 |
| 6/21/2023 2:09 | 1.0 hour | | 39.4 | 45.1 | 38.5 | 43 | 41 | 40 | 38 | 38 | 38 | 38 | 40 | 40 | 39 |
| 6/21/2023 3:09 | | | 45.2 | 74.6 | 38.7 | 43 | 41 | 40 | 38 | 38 | 38 | 38 | 40 | 40 | 39 |
| 6/21/2023 4:09 | | | 39.8 | 46 | 38.6 | 43 | 41 | 40 | 38 | 38 | 38 | 38 | 40 | 41 | 40 |
| 6/21/2023 5:09 6/21/2023 6:09 | | | 41.6 47.7 | 55.7 77.1 | 38.6 38 | 47 49 | 44 45 | 43 43 | 40 38 | 38 38 | 38 38 | 38 38 | 43 43 | 43 43 | 42 40 |
| 6/21/2023 7:09 | | | 47.7 | 77.1 76.4 | 35.8 | 61 | 45 47 | 43 42 | 38 | 35 | 35 | 35 | 43 | 43 44 | 39 |
| 6/21/2023 7:03 | | | 49.4 | 76.6 | 35.8 | 58 | 45 | 42 | 36 | 35 | 35 | 35 | 42 | 43 | 39 |
| 6/21/2023 9:09 | | | 53.1 | 82.5 | 35.8 | 63 | 47 | 43 | 36 | 35 | 35 | 35 | 43 | 44 | 39 |
| 6/21/2023 10:09 | 1.0 hour | | 49.2 | 76.9 | 35.8 | 54 | 45 | 43 | 38 | 35 | 35 | 35 | 43 | 43 | 39 |
| 6/21/2023 11:09 | 1.0 hour | | 48.4 | 72.3 | 35.8 | 57 | 47 | 46 | 42 | 35 | 35 | 35 | 46 | 46 | 44 |
| 6/21/2023 12:09 | | | 54.4 | 81.1 | 35.8 | 68 | 49 | 45 | 38 | 35 | 35 | 35 | 45 | 46 | 41 |
| 6/21/2023 13:09 | | | 59.6 | 90.5 | 35.8 | 69 | 50 | 47 | 38 | 35 | 35 | 35 | 47 | 48 | 42 |
| 6/21/2023 14:09 | | | 50.8 63.6 | 76 95.1 | 35.8 35.8 | 63 73 | 48 58 | 45 51 | 40 40 | 36 38 | 35 37 | 35 35 | 45 | 46 53 | 42 44 |
| 6/21/2023 15:09 6/21/2023 16:09 | | | 54.2 | 80.8 | 35.8 | 73 67 | 58 49 | 43 | 39 | 38 | 37 | 35 35 | 51 43 | 55 44 | 40 |
| 6/21/2023 17:09 | | | 51.2 | 77.5 | 35.8 | 63 | 49 | 44 | 38 | 35 | 35 | 35 | 44 | 45 | 40 |
| 6/21/2023 18:09 | | | 48.4 | 73.8 | 35.8 | 59 | 47 | 43 | 38 | 35 | 35 | 35 | 43 | 44 | 39 |
| 6/21/2023 19:09 | 1.0 hour | | 45.9 | 70.9 | 35.8 | 55 | 49 | 45 | 38 | 35 | 35 | 35 | 45 | 47 | 41 |
| 6/21/2023 20:09 | 1.0 hour | | 47.5 | 75.4 | 35.8 | 54 | 46 | 43 | 38 | 35 | 35 | 35 | 43 | 44 | 39 |
| 6/21/2023 21:09 | | | 51.6 | 80.8 | 35.8 | 58 | 47 | 43 | 38 | 38 | 37 | 35 | 43 | 44 | 38 |
| 6/21/2023 22:09 | | | 46.1 | 74.9 | 35.8 | 47 | 40 | 39 | 38 | 38 | 38 | 37 | 39 | 40 | 38 |
| 6/21/2023 23:09 | | | 39.2 | 53.7 | 37.8 | 43 | 40 39 | 40 | 38 | 38 | 38 | 38 | 40 | 40 | 38 |
| 6/22/2023 0:09 6/22/2023 1:09 | | | 38.7 38.7 | 44.9 43 | 38.5 36.8 | 40 40 | 39 39 | 38 38 | 38 38 | 38 38 | 38 38 | 38 38 | 38 38 | 38 39 | 38 38 |
| 6/22/2023 2:09 | | | 39.2 | 50 | 38.5 | 44 | 40 | 40 | 38 | 38 | 38 | 38 | 40 | 40 | 38 |
| 6/22/2023 3:09 | | | 39.8 | 51.7 | 38.6 | 44 | 42 | 41 | 38 | 38 | 38 | 38 | 41 | 41 | 40 |
| 6/22/2023 4:09 | 1.0 hour | | 45.7 | 75.6 | 38.5 | 46 | 42 | 41 | 38 | 38 | 38 | 38 | 41 | 41 | 40 |
| 6/22/2023 5:09 | | | 45.4 | 64.9 | 38.7 | 56 | 50 | 47 | 41 | 39 | 38 | 38 | 47 | 48 | 43 |
| 6/22/2023 6:09 | | | 46.5 | 73.4 | 35.8 | 50 | 44 | 43 | 39 | 38 | 37 | 35 | 43 | 43 | 40 |
| 6/22/2023 7:09 | | | 47.3 | 72.8 75.3 | 35.8 | 56 58 | 46 46 | 44 43 | 39 | 37 35 | 36 35 | 35 | 44 | 45 44 | 41 |
| 6/22/2023 8:09 6/22/2023 9:09 | | | 48.9 52.7 | 75.3 78.2 | 35.8 35.8 | 58 62 | 46 55 | 43 53 | 36 38 | 35 35 | 35 35 | 35 35 | 43 53 | 54 | 39 42 |
| 6/22/2023 10:09 | | | 53.8 | 80.1 | 35.8 | 65 | 56 | 52 | 37 | 35 | 35 | 35 | 52 | 53 | 40 |
| 6/22/2023 11:09 | | | 56.7 | 88.6 | 35.8 | 61 | 54 | 52 | 39 | 35 | 35 | 35 | 52 | 52 | 42 |
| 6/22/2023 12:09 | 1.0 hour | | 49.6 | 73.4 | 35.8 | 62 | 47 | 44 | 40 | 36 | 35 | 35 | 44 | 45 | 42 |
| 6/22/2023 13:09 | 1.0 hour | | 53.7 | 80.2 | 35.8 | 66 | 55 | 52 | 42 | 38 | 35 | 35 | 52 | 53 | 46 |
| 6/22/2023 14:09 | | | 59.3 | 77.4 | 35.8 | | 66 | 65 | 44 | 38 | 38 | 35 | 65 | 65 | 52 |
| 6/22/2023 15:09 | | | 52.4 | 76 | 35.8 | | 54 | 51 | 44 | 38 | 37 | 35 | 51 | 52 | 48 |
| 6/22/2023 16:09 6/22/2023 17:09 | | | 51.7 54.9 | 79 79.2 | 35.8 35.8 | | 50 52 | 49 48 | 42 40 | 36 35 | 35 35 | 35 35 | 49 48 | 49 49 | 47 45 |
| 6/22/2023 17:09 | | | 53.5 | 82.6 | 35.8 | | 48 | 43 | 35 | 35 | 35 | 35 | 43 | 45 | 38 |
| 6/22/2023 19:09 | | | 57.9 | 88.5 | 35.8 | | 49 | 43 | 35 | 35 | 35 | 35 | 43 | 45 | 39 |
| 6/22/2023 20:09 | | | 46.3 | 74.8 | 35.8 | | 42 | 38 | 35 | 35 | 35 | 35 | 38 | 39 | 36 |
| 6/22/2023 21:09 | 1.0 hour | | 51.8 | 77.7 | 35.8 | 63 | 43 | 38 | 35 | 35 | 35 | 35 | 38 | 40 | 35 |
| 6/22/2023 22:09 | | | 43.6 | 74.4 | 35.8 | | 38 | 37 | 35 | 35 | 35 | 35 | 37 | 38 | 35 |
| 6/22/2023 23:09 | | | 36.4 | 45.2 | 35.8 | 39 | 38 | 36 | 35 | 35 | 35 | 35 | 36 | 36 | 35 |
| 6/23/2023 0:09 6/23/2023 1:09 | | | 37.3 44.8 | 54.2 72.6 | 35.8 35.8 | | 38 35 | 35 35 | 35 35 | 35 35 | 35 35 | 35 35 | 35 35 | 36 35 | 35 35 |
| 6/23/2023 2:09 | | | 35.8 | 48 | 35.8 | | 35 | 35 | 35 | 35 | 35 | 35 | 35 | 35 | 35 |
| 6/23/2023 2:09 | | | 44.2 | 75.1 | 35.8 | 41 | 38 | 38 | 35 | 35 | 35 | 35 | 38 | 38 | 35 |
| 6/23/2023 4:09 | | | 38.4 | 44.2 | 35.8 | 41 | 40 | 39 | 38 | 36 | 35 | 35 | 39 | 39 | 38 |
| 6/23/2023 5:09 | | | 50.5 | 77.1 | 35.8 | 62 | 49 | 47 | 41 | 38 | 38 | 38 | 47 | 48 | 45 |
| 6/23/2023 6:09 | | | 44.6 | 71.9 | 35.8 | 49 | 45 | 44 | 39 | 38 | 38 | 37 | 44 | 44 | 41 |
| 6/23/2023 7:09 | | | 48.4 | 74 | 35.8 | 59 | 46 | 43 | 38 | 36 | 35 | 35 | 43 | 44 | 40 |
| 6/23/2023 8:09 | | | 50.9 | 79.1 | 35.8 | 62 | 47 | 43 | 38 | 35 | 35 | 35 | 43 | 44 | 40 |
| 6/23/2023 9:09 6/23/2023 10:09 | | | 60 53.2 | 81.2 76.9 | 35.8 35.8 | 76 66 | 56 55 | 51 52 | 40 41 | 37 37 | 35 36 | 35 35 | 51 52 | 52 53 | 43 49 |
| 6/23/2023 10:09 | | | 53.9 | 76.9 82.8 | 35.8 | 60 | 55 55 | 53 | 41 | 38 | 36 | 35 | 53 | 53 54 | 50 |
| 3, 23, 2323 11.03 | | | 55.5 | 02.0 | 20.0 | - 00 | - 55 | 30 | | 55 | 30 | 30 | 30 | | 30 |

| Number | Start Date | Start Time | End Time | Duration Sensitiv | vity LAec | LASmax | LASmin | LAS1% | LAS2% | LAS5% | LAS8% | LAS10% | LAS25% | LAS50% | LAS90% | LAS95% | LAS99% |
|--------|------------------------|----------------------------|----------------------------|----------------------------------|-----------|--------|--------|-------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 1 | 6/20/2023 | 3:40:20 PM | 4:00:00 PM | 0:19:40 16.82m | nV/Pa 71. | 7 89.6 | 41.5 | 80.1 | 79.3 | 77.8 | 76.6 | 76 | 72.7 | 66.4 | 53.5 | 49.2 | 46.3 |
| | 6/20/2023 | 4:00:02 PM | | | nV/Pa 71. | 2 87.1 | 42.9 | | 78.8 | 77.1 | 76.1 | 75.6 | 72.5 | 65.5 | 49.8 | 46.8 | 43.6 |
| | 6/20/2023 | 5:00:02 PM | | | | | | | 78.7 | 77 | 75.9 | 75.4 | 71.8 | 64.3 | 49.7 | 47.2 | 43.9 |
| | 6/20/2023 | 6:00:02 PM | | | | | | | 77.7 | 75.9 | 74.7 | 74.1 | 70.1 | 62.5 | 48 | 45.9 | 44.3 |
| | 6/20/2023 6/20/2023 | 7:00:02 PM 8:00:02 PM | | | | | | | 77.4 75.8 | 75.2 74.1 | 73.6 72.8 | 72.9 71.8 | 67.1 65.6 | 58.9 57.7 | 44.4 41.6 | 41.8 41.4 | 41.1 41.2 |
| | 6/20/2023 | | 10:00:00 PM | | | | | | 75.5 | 73.3 | 71.5 | 70.4 | 63.6 | 54.8 | 41.4 | 41.4 | 41.2 |
| | | | 11:00:00 PM | | | | | | 72.9 | 69.5 | 66.4 | 64.6 | 56.4 | 47 | 41.4 | 41.4 | 41.3 |
| | | | 12:00:00 AM | | | | | | 73 | 68.5 | 64.9 | 62.8 | 52.9 | 42.1 | 41.4 | 41.4 | 41.3 |
| 10 | 6/21/2023 | 12:00:02 AM | 1:00:00 AM | 0:59:58 16.82m | nV/Pa 59. | 5 80.9 | 39.9 | 73.7 | 70.9 | 64.3 | 60.7 | 58.8 | 47.5 | 40.4 | 39.9 | 39.9 | 39.8 |
| 11 | 6/21/2023 | 1:00:02 AM | 2:00:00 AM | 0:59:58 16.82m | nV/Pa 59. | 7 82.7 | 39.9 | 74 | 71.3 | 64.4 | 60 | 57.6 | 44.8 | 40.2 | 39.9 | 39.9 | 39.8 |
| | 6/21/2023 | | | 0:59:58 16.82m | | | | | 70 | 64.1 | 60.4 | 57.8 | 43.2 | 40 | 39.9 | 39.9 | 39.8 |
| | 6/21/2023 | | | 0:59:58 16.82m | | | | | 71.5 | 65.3 | 61.2 | 59 | 44 | 42.5 | 39.9 | 39.9 | 39.9 |
| | 6/21/2023 | 4:00:02 AM | | 0:59:58 16.82m | | | | | 76.4 | 73.4 | 70.9 | 69.2 | 62.1 | 53.1 | 40.2 | | 40 |
| | 6/21/2023 6/21/2023 | | | 0:59:58 16.82m 0:59:58 16.82m | | | | | 77.5 79 | 75.1 77.2 | 73.1 76 | 71.9 75.3 | 65 69.7 | 58.7 | 45.5 53.5 | | 40.5 44.4 |
| | | 7:00:02 AM | | 0:59:58 16.82m | | | | | 79.9 | 78.2 | 77.2 | 76.6 | 72.9 | 63.6 66.8 | 55.8 | 52.7 | 46.8 |
| | | 8:00:02 AM | | | | | | | 79 | 77.2 | 76.2 | 75.5 | 70.7 | 62.1 | 47.2 | | 43.6 |
| | | | 10:00:00 AM | 0:59:58 16.82m | | | | | 79 | 77.5 | 76.4 | 75.8 | 72.1 | 63.1 | 48.4 | 46 | 43.9 |
| | | | 11:00:00 AM | 0:59:58 16.82m | | | | 79.9 | 78.9 | 77.5 | 76.6 | 76.1 | 73 | 66.2 | 52.3 | 49.7 | 46 |
| 21 | 6/21/2023 | 11:00:02 AM | 12:00:00 PM | 0:59:58 16.82m | nV/Pa 71. | 2 84.6 | 45.2 | 79.8 | 78.7 | 77.4 | 76.4 | 75.8 | 72.8 | 65 | 54.2 | 51.6 | 48.1 |
| 22 | 6/21/2023 | 12:00:02 PM | 1:00:00 PM | 0:59:58 16.82m | nV/Pa 71. | 3 82.3 | 43.5 | 79.4 | 78.7 | 77.3 | 76.4 | 75.9 | 72.9 | 66.4 | 51.7 | 49.4 | 46.8 |
| | 6/21/2023 | 1:00:02 PM | | 0:59:58 16.82m | | | | | 78.9 | 77.3 | 76.3 | 75.8 | 72.5 | 64.7 | 54.2 | 52.7 | 48.1 |
| | 6/21/2023 | 2:00:02 PM | | 0:59:58 16.82m | | | | | 78.8 | 77.3 | 76.2 | 75.7 | 71.7 | 62.3 | 49.3 | 46.5 | 43.2 |
| | 6/21/2023 | 3:00:02 PM | | | • | | | | 79.1 | 77.5 | 76.6 | 76 | 73.2 | | 50.7 | 48.4 | 44.8 |
| | 6/21/2023 6/21/2023 | 4:00:02 PM 5:00:02 PM | 5:00:00 PM 6:00:00 PM | | | | | | 78.6 78.3 | 77.1 76.8 | 76.1 75.8 | 75.6 75.3 | 72.8 72 | 66.8 64.2 | 51.8 49.6 | 48.9 46.9 | 45.1 44.3 |
| | 6/21/2023 | 6:00:02 PM | | | | | | | 76.3 77 | 75.4 | 74.5 | 74.1 | 70.4 | 62.9 | 48.8 | 45.7 | 41.5 |
| | 6/21/2023 | 7:00:02 PM | 8:00:00 PM | 0:59:58 16.82m | | | | | 76.9 | 74.8 | 73.5 | 72.8 | 67.6 | | 44.8 | | 41.4 |
| | 6/21/2023 | | | 0:59:58 16.82m | • | | | | 76.8 | 74.7 | 73.3 | 72.4 | 66.7 | 59.7 | 43.6 | | 41 |
| 31 | 6/21/2023 | 9:00:02 PM | 10:00:00 PM | 0:59:58 16.82m | nV/Pa 65. | 82.3 | 41 | 76.5 | 75.3 | 73.3 | 71.9 | 70.7 | 63.9 | 56.4 | 41.6 | 41.1 | 41 |
| 32 | 6/21/2023 | 10:00:02 PM | 11:00:00 PM | 0:59:58 16.82m | nV/Pa 63. | 3 79.8 | 41 | 75.7 | 74.3 | 71.8 | 69.3 | 67.7 | 60 | 49.2 | 41.1 | 41 | 41 |
| | | | 12:00:00 AM | 0:59:58 16.82m | nV/Pa 6 | 1 80.2 | 41 | | 72.7 | 67.7 | 64.2 | 62.7 | 51.9 | 41.8 | 41 | 41 | 41 |
| | | 12:00:02 AM | | 0:59:58 16.82m | | | | | 71.4 | 66.6 | 63.1 | 61.2 | 49.3 | 42.5 | 39.9 | 39.9 | 39.8 |
| | | 1:00:02 AM | | 0:59:58 16.82m | | | | | 68.9 | 61.5 | 58 | 55 | 43.5 | 40.7 | 39.9 | 39.9 | 39.9 |
| | 6/22/2023 6/22/2023 | | | 0:59:58 16.82m 0:59:58 16.82m | | | | | 71.6 70.3 | 65.6 63.4 | 61.5 59.3 | 59.1 56.9 | 45.2 44.7 | 40.4 44.1 | 40 40.5 | 39.9 40.4 | 39.9 40.4 |
| | 6/22/2023 | | | 0:59:58 16.82m | | | | | 76.2 | 72.9 | 70 | 68.1 | 61.2 | | 44.1 | 44 | 43.9 |
| | 6/22/2023 | | | 0:59:58 16.82m | | | | | 77.9 | 75.4 | 73.5 | 72.2 | 64.5 | 57.3 | 45.2 | 44.7 | 44.4 |
| | 6/22/2023 | | | 0:59:58 16.82m | | | | | 78.9 | 77.2 | 76 | 75.3 | 70.2 | | 55.4 | 52.3 | 46 |
| 41 | 6/22/2023 | 7:00:02 AM | 8:00:00 AM | 0:59:58 16.82m | nV/Pa 71. | 2 88.5 | 44.5 | 80.3 | 79.2 | 77.6 | 76.5 | 75.9 | 71.5 | 65.1 | 50.7 | 47.7 | 45.1 |
| 42 | 6/22/2023 | 8:00:02 AM | 9:00:00 AM | 0:59:58 16.82m | nV/Pa 71. | 1 83.9 | 42.9 | 79.6 | 78.7 | 77.3 | 76.4 | 75.9 | 72.5 | 65.4 | 51.2 | 47.2 | 44.2 |
| | 6/22/2023 | | 10:00:00 AM | 0:59:58 16.82m | • | | | | 78.1 | 76.7 | 75.8 | 75.3 | 71.9 | 64.2 | 52 | 50 | 46.2 |
| | | | 11:00:00 AM | 0:59:58 16.82m | | | | | 78.6 | 77.2 | 76.3 | 75.8 | 72.6 | | 50.1 | 46.9 | 43.6 |
| | | 11:00:02 AM 12:00:02 PM | 12:00:00 PM | 0:59:58 16.82m | , | | | | 79.3 | 78.2 | 77.4 | 77 | 74.5 | 68.6 | 51.3 | 48.5 | 43.1 |
| | | 1:00:02 PM | | 0:59:58 16.82m 0:59:58 16.82m | | | | | 79.9 79.3 | 78.4 77.9 | 77.5 77 | 77 76.5 | 73.9 73.5 | 68 66.4 | 51.8 52.7 | 49.9 49.7 | 46.9 45.5 |
| | 6/22/2023 | | | | | | | | 78.9 | 77.5 | 76.5 | 75.9 | 72.7 | 65.1 | 49 | 46.8 | 44.4 |
| | | 3:00:02 PM | | | | | | | 79.2 | 77.9 | 77.1 | 76.6 | 73.6 | 67.8 | 52 | 47.8 | 43.7 |
| | | | | 0:59:58 16.82m | | | | | | | 76.6 | 76.1 | 73.2 | | 52.4 | | 46.7 |
| 51 | 6/22/2023 | 5:00:02 PM | 6:00:00 PM | 0:59:58 16.82m | | 5 83.6 | 41.9 | 79.9 | 78.7 | 77.4 | 76.4 | 76 | 73 | 66.4 | 50.8 | 48.3 | 43.2 |
| | | | 7:00:00 PM | | | | | | 78.2 | 76.6 | 75.7 | 75.1 | 71.6 | 63.5 | 48.5 | 45.3 | 41.6 |
| | 6/22/2023 | | | | | | | | 77.9 | 76.1 | 74.8 | 74.1 | 69 | 61.4 | 42.6 | 41.7 | 41.3 |
| | | 8:00:02 PM | | | | | | | 77.3 | 75.1 | 73.8 | 73.1 | 67.5 | 59.9 | 44.7 | 44.1 | 42.2 |
| | | | 10:00:00 PM 11:00:00 PM | | | | | | 76.3 | 74.4 71.8 | 72.9 68.9 | 72 67.3 | 65.3 59.1 | 57.8 45.5 | 41.8 41.4 | 41.5 41.4 | 41.2 |
| | | | 12:00:00 PM | | | | | | 74.8 74.2 | 71.8 70.9 | 68.9 67.9 | 67.3 66.7 | 57.9 | 45.5 45.8 | 40.2 | 40.1 | 41.3 40 |
| | | | 1:00:00 AM | | | | | | 71.4 | 65.1 | 61.8 | 59.9 | 46.9 | 40.2 | 40.2 | 39.9 | 39.9 |
| | | | 2:00:00 AM | | | | | | 68 | 61.6 | 56.4 | 52.8 | 40.5 | 40.1 | 39.9 | 39.9 | 39.9 |
| | | | 3:00:00 AM | | | | | | 71.6 | 64.4 | 59.8 | 57.3 | 42.5 | 40.1 | 39.9 | 39.9 | 39.9 |
| | | 3:00:02 AM | | | | | | | 74.2 | 68.6 | 65.3 | 63.7 | 51.4 | 41 | 40.1 | 40 | 39.9 |
| 62 | 6/23/2023 | 4:00:02 AM | 5:00:00 AM | 0:59:58 16.82m | nV/Pa 65. | 6 84.8 | 40.1 | 78.3 | 76.5 | 73.3 | 70.5 | 68.4 | 60.4 | 50.9 | 40.2 | 40.1 | 40 |
| | | | 6:00:00 AM | | | | | | 77.9 | 75.3 | 73.4 | 72.1 | 64.2 | 55.8 | 44.5 | 43.7 | 42.9 |
| | | | 7:00:00 AM | | | | | | 79.2 | 77.5 | 76.3 | 75.7 | 70 | 63.3 | 49.7 | 45.4 | 44.6 |
| | | 7:00:02 AM | | | | | | | 79.9 | 78.5 | 77.5 | 76.9 | 72.8 | 65.6 | 55.3 | 52.8 | 49.4 |
| | | | 9:00:00 AM 10:00:00 AM | | | | | | 79.8 | 78.1 | 77.2 | 76.7 | 72.7 | 64.6 | 52.2 | 49.2 | 45.5 |
| | | | 10:00:00 AM 11:00:00 AM | | | | | | 80.2 79.8 | 78.6 78.4 | 77.7 77.6 | 77.2 77.1 | 74.2 74.6 | 65.5 68 | 49.2 51.9 | 46.4 49.2 | 44.5 45 |
| | | | 12:00:00 AM | | | | | | 79.5 | 78.5 | 77.7 | 77.2 | 74.7 | 68.8 | 52.7 | 50 | 46 |
| | | | 1:00:00 PM | | | | | | 79.9 | 78.6 | 77.7 | 77.2 | 74.6 | 68.6 | 50.4 | 47.1 | 44 |
| | | | 1:18:13 PM | | | | | | 80.1 | 78.7 | 77.8 | 77.3 | 75 | 70 | 53.2 | 49.9 | 45.9 |
| 72 | 6/23/2023 | 1:18:17 PM | 1:18:20 PM | 0:00:03 16.82m | N/Pa 62. | 1 63.8 | 58.6 | 63.8 | 63.7 | 63.5 | 63.4 | 63.3 | 62.9 | 61.9 | 59.8 | 58.8 | 58.6 |

| Number | Start Date | Start Time | End Time | Duration | LAeq | LASmax | LASmin | LAS1% | LAS2% | LAS5% | LAS8% | LAS10% | LAS25% | LAS50% | LAS90% | LAS95% | LAS99% |
|--------|------------------------|--------------------------|----------------------------|----------|------------|---------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| 1 | 6/20/2023 | 3:28:54 PM | 4:00:00 PM | 0:31:06 | 75.6 | 90.5 | 43.5 | 83.7 | 82.8 | 81.5 | 80.6 | 80.1 | 77.2 | 70 | 53.8 | 50.1 | 45.7 |
| | 6/20/2023 | 4:00:02 PM | | | | 87.8 | 36.3 | 83.9 | 83.1 | 81.8 | 80.8 | 80.2 | 76.1 | 66.9 | 48.7 | 45.3 | 40.5 |
| | 6/20/2023 6/20/2023 | 5:00:02 PM 6:00:02 PM | | | | 102.2 92.5 | 36.2 32.9 | 83.9 83.5 | 83 82.6 | 81.5 81 | 80.5 79.9 | 79.9 79.1 | 75.3 72.4 | 64.6 60.3 | 44.7 42.8 | 42.4 40.2 | 38.1 35.1 |
| | 6/20/2023 | 7:00:02 PM | | 0:59:58 | 72 | 87.6 | 32.1 | 83.3 | 82 | 80 | 78.4 | 77.3 | 67.2 | 54 | 39.2 | 37.8 | 34.1 |
| | 6/20/2023 | 8:00:02 PM | | 0:59:58 | 70.7 | 88.4 | 31.6 | 82.8 | 81.4 | 78.9 | 76.8 | 75 | 62.2 | 51.9 | 36.8 | | 32.8 |
| | 6/20/2023 | | 10:00:00 PM | | | 89.7 | 30.7 | 82.3 | 81 | 78.1 | 75.2 | 73.1 | 59.9 | 48.9 | 32.3 | 31.4 | 30.9 |
| | | | 11:00:00 PM | | | 86.8 | 30.2 | 79.9 | 77.9 | 72.2 | 67.1 | 63.8 | 51.1 | 40 | 30.7 | 30.5 | 30.4 |
| | | 12:00:02 PM | 12:00:00 AM 1:00:00 AM | | | 89.2 89.6 | 30.1 30.4 | 80.9 78.8 | 77.9 73.9 | 69.4 62 | 62.1 55.9 | 58.3 52.9 | 47.6 42.1 | 36.8 34.4 | 30.3 30.6 | 30.2 30.6 | 30.2 |
| | | 1:00:02 AM | | | | 86.5 | 30.2 | 78.5 | 73.3 | 60.4 | 54.3 | 51.8 | 40 | 31.8 | | | 30.3 |
| 12 | 6/21/2023 | 2:00:02 AM | 3:00:00 AM | 0:59:58 | 61.4 | 84.8 | 30.1 | 76.7 | 71.7 | 59.5 | 54.2 | 52 | 38 | 31.5 | 30.3 | 30.3 | 30.2 |
| | 6/21/2023 | | | | | 84.7 | 30.2 | 78.2 | 74.3 | 63.7 | 56.5 | 53.5 | 38 | 31.1 | 30.6 | | 30.3 |
| | 6/21/2023 6/21/2023 | 4:00:02 AM 5:00:02 AM | | | | 88.7 88.8 | 30.7 32.9 | 82.7 83.2 | 81 81.7 | 77 78.9 | 73.3 76.4 | 71 74.7 | 58.2 63 | 48.4 52 | 32.5 38.9 | 31.4 37.1 | 31 34.7 |
| | 6/21/2023 | | | | | 92.5 | 37.1 | 84.4 | 83.1 | 81.1 | 79.8 | 79 | 70.9 | 62.4 | 48.9 | 42.7 | 37.7 |
| | 6/21/2023 | 7:00:02 AM | | | | 92.6 | 40.1 | 85.1 | 83.8 | 82 | 80.9 | 80.3 | 75 | 63.8 | 53 | 50.7 | 47.8 |
| | 6/21/2023 | | | | 74 | 91.3 | 32.2 | 84.3 | 83.1 | 81.2 | 79.9 | 79.2 | 72.8 | 59 | 40.9 | 38.2 | 33.9 |
| | 6/21/2023 | | 10:00:00 AM | | | 91.7 | 32.1 | 83.8 | 82.7 | 81 | 80 | 79.3 | 73.9 | 61.9 | 41.7 | 37.2 | 34.2 |
| | | | 11:00:00 AM 12:00:00 PM | | | 87.2 88.9 | 37.9 42.2 | 83.8 83.7 | 82.8 82.7 | 81.1 81.2 | 80.1 80.1 | 79.5 79.5 | 75.6 76.1 | 67.4 68.3 | 47.3 55.9 | 44.7 51.7 | 40.4 47.9 |
| | - | 12:00:02 PM | | | | 89.3 | 44.6 | 83.4 | 82.5 | 81.1 | 80.2 | 79.6 | 76.3 | 68.3 | 54.3 | 50.9 | 47 |
| | | 1:00:02 PM | | | | 90.3 | 45.4 | 83.6 | 82.8 | 81.3 | 80.3 | 79.8 | 75.9 | 67.9 | 59.8 | 54.4 | 48.1 |
| | 6/21/2023 | | | | | 91.5 | 34 | 83.5 | 82.4 | 80.7 | 79.6 | 79.1 | 75 | 66.1 | 46.9 | 42.5 | 36.9 |
| | 6/21/2023 | | | | | 90.6 | 39.7 | 83.5 | 82.8 | 81.5 | 80.7 | 80.2 | 76.7 | 67.8 | 47.2 | | 42.2 |
| | 6/21/2023 6/21/2023 | 4:00:02 PM 5:00:02 PM | | | | 89 92.9 | 36.7 37.5 | 83.9 83.5 | 83.1 82.6 | 81.8 81.2 | 80.9 80.3 | 80.3 79.8 | 76.8 75.3 | 68 64.2 | 50 43.4 | 46 40.9 | 40.8 38.8 |
| | 6/21/2023 | 6:00:02 PM | | | | 87.4 | 33.9 | 83.3 | 82.5 | 81 | 79.8 | 79.2 | 73.9 | 62.8 | 43.3 | 40.7 | 36.4 |
| 29 | 6/21/2023 | 7:00:02 PM | 8:00:00 PM | 0:59:58 | 72.1 | 90.6 | 34.4 | 82.9 | 81.9 | 80 | 78.4 | 77.4 | 68.5 | 56.3 | 41.6 | 39 | 35.9 |
| | 6/21/2023 | 8:00:02 PM | | 0:59:58 | | 87.3 | 31 | 83.2 | 81.9 | 79.5 | 77.6 | 76.4 | 66.1 | 54.3 | 40 | | 31.5 |
| | 6/21/2023 | | 10:00:00 PM 11:00:00 PM | | 70 68.4 | 86.1 91.9 | 30.5 30.3 | 82.3 81.5 | 81 79.9 | 78.4 75.7 | 75.8 71 | 73.9 68.2 | 61 54 | 50.2 43.3 | 36.7 31.5 | 33.2 30.6 | 30.9 30.4 |
| | | | 12:00:00 PM | | | 86.1 | 30.3 | 80.1 | 77.1 | 68.5 | 61.2 | 57.8 | 47.6 | 45.5 35.9 | 30.5 | | 30.4 |
| | | 12:00:02 AM | | 0:59:58 | | 88.1 | 30 | 78.9 | 75.3 | 65.3 | 57.8 | 55 | 44.4 | 34.4 | 30.3 | 30.2 | 30.1 |
| 35 | 6/22/2023 | 1:00:02 AM | 2:00:00 AM | 0:59:58 | 62.6 | 87.7 | 30 | 77.3 | 71.6 | 56.8 | 50.8 | 49.1 | 36.5 | 31.3 | 30.2 | 30.1 | 30.1 |
| | | 2:00:02 AM | | 0:59:58 | 64 | 87.6 | 30.1 | 79 | 74.5 | 62.2 | 55.5 | 53 | 40.8 | 31.9 | 30.3 | 30.3 | 30.1 |
| | 6/22/2023 | 3:00:02 AM 4:00:02 AM | | | | 87.7 89.7 | 30.3 31.4 | 78.4 82.8 | 73.4 80.6 | 62.2 76.5 | 53.9 72.4 | 51.1 70 | 40.1 56.8 | 32.8 47.2 | 30.6 34.5 | 30.5 33.2 | 30.4 32 |
| | 6/22/2023 | | | | | 89.8 | 32.8 | 83.5 | 82.1 | 79.4 | 72.4 | 75.3 | 64 | 53.2 | | 34.9 | 33.7 |
| | 6/22/2023 | 6:00:02 AM | | | | 89.6 | 35.2 | 83.8 | 82.6 | 80.8 | 79.6 | 78.8 | 71.8 | 61 | 45.6 | | 36.3 |
| | 6/22/2023 | | | | | 91.1 | 36.7 | 84.6 | 83.3 | 81.3 | 80.2 | 79.5 | 72.8 | 60.5 | 49.4 | 46.6 | 41.7 |
| | 6/22/2023 | | | | | 91.8 | 38.7 | 84.6 | 83.4 | 81.6 | 80.5 | 79.9 | 74.9 | 63.2 | | 44 | 40.6 |
| | | | 10:00:00 AM 11:00:00 AM | | 74 74.8 | 88.9 87.8 | 39.3 37.4 | 83.4 83.8 | 82.4 82.9 | 80.8 81.4 | 79.7 80.4 | 79 79.8 | 74.4 75.8 | 66.2 66.4 | 49 49.5 | 45.7 46.5 | 42 41.9 |
| | | | 12:00:00 PM | | | 88.7 | 38.8 | 84.3 | 83.3 | 82 | 81.1 | 80.5 | 77.4 | 69.7 | 49.9 | 46.9 | 42.6 |
| 46 | 6/22/2023 | 12:00:02 PM | 1:00:00 PM | 0:59:58 | 75.7 | 88 | 41.6 | 84 | 83.2 | 81.7 | 81 | 80.5 | 77.4 | 69.9 | 52 | 48.9 | 44.5 |
| | 6/22/2023 | | | | | 89.4 | 39 | 83.8 | 83 | 81.7 | 80.7 | 80.2 | 77.2 | 69.1 | | | 42.4 |
| | 6/22/2023 | 2:00:02 PM | | | | 86.8 | 37.3 | 83.4 | 82.6 | 81.3 | 80.4 | 79.8 | 76.1 | 66.6 | | | 39.7 |
| | 6/22/2023 6/22/2023 | | | | | 91.4 88.2 | 40 39.9 | 83.9 83.9 | 83.1 83.2 | 81.8 82 | 81 81 | 80.5 80.5 | 77.5 77.1 | 69.7 68.2 | | 47.4 46 | 42.2 42.2 |
| | 6/22/2023 | | | | | 91.2 | 39.6 | 84.5 | 83.5 | 82 | 81.2 | 80.6 | 76.7 | 66.9 | 46.3 | | 41 |
| 52 | 6/22/2023 | 6:00:02 PM | 7:00:00 PM | 0:59:58 | 74.3 | 87.9 | 35 | 83.9 | 83 | 81.5 | 80.4 | 79.7 | 74.1 | 61.9 | 43.2 | 40.8 | 37.2 |
| | 6/22/2023 | | | | | 89 | 31.9 | 84.4 | 83.2 | 81.2 | 79.7 | 78.6 | 69.6 | 55.4 | 39.2 | | 33.8 |
| | 6/22/2023 | | 9:00:00 PM 10:00:00 PM | | | 90.5 | 33.1 | 83.5 82.8 | 82.4 81.7 | 80.3 | 78.7 77.1 | 77.6 75.4 | 67.8 62.4 | 54.6 51.2 | | | 34.5 |
| | | | 11:00:00 PM | | | 89.1 86.5 | 31.9 30.1 | 82.3 | 80.3 | 79.3 75.5 | 70 | 66.5 | 51 | 39.7 | | | 32.8 30.2 |
| | | | 12:00:00 AM | | | 87.9 | 30.1 | 81.4 | 79.2 | 73.5 | 67.7 | 64.2 | 50.5 | 40.9 | 30.9 | 30.7 | 30.3 |
| 58 | 6/23/2023 | 12:00:02 AM | 1:00:00 AM | | | 88.6 | 30.2 | 79.7 | 75.5 | 63.7 | 55.7 | 52.5 | 41.6 | 32.3 | 30.4 | 30.3 | 30.3 |
| | | 1:00:02 AM | | | | 87.2 | 30.2 | 76.3 | 69.5 | 55.2 | 49.2 | 46.7 | 35.6 | 31.2 | | 30.4 | 30.3 |
| | | 2:00:02 AM 3:00:02 AM | | | | 87 90.3 | 30.4 30.7 | 78.6 81.3 | 73.8 78 | 62.2 68.7 | 54.5 61.5 | 50.5 57.8 | 36.3 47.3 | 31.4 34.9 | 30.7 31.3 | 30.6 31.1 | 30.5 30.9 |
| | | 4:00:02 AM | | | | 90.3 | 30.7 | 82.7 | 80.9 | 76.4 | 71.7 | 68.8 | 53.9 | 44.4 | 32.2 | 31.6 | 31.3 |
| | | 5:00:02 AM | | | | 90.9 | 32.7 | 83.4 | 82 | 79.1 | 76.2 | 74.2 | 61 | 50 | | | 33.6 |
| | | | 7:00:00 AM | | | 88.7 | 33.8 | 84.7 | 83.7 | 81.9 | 80.5 | 79.6 | 71.4 | 58.9 | 45.5 | | 35.6 |
| | | | 8:00:00 AM | | | 94.9 | 39.8 | 85.2 | 84.2 | 82.4 | 81.2 | 80.6 | 74.6 | 63.3 | 50.6 | | 45.2 |
| | | 8:00:02 AM 9:00:02 AM | 9:00:00 AM 10:00:00 AM | | | 92 98.2 | 35.7 35.6 | 84.8 84.9 | 83.6 83.9 | 81.8 82.3 | 80.7 81.2 | 80.6 | 75 76.6 | 63.5 65.7 | 46.2 43.7 | 43.5 41.6 | 39.7 38.2 |
| | | | 11:00:00 AM | | | 88.1 | 39.1 | 84.3 | 83.5 | 82.2 | 81.2 | 80.7 | 77.6 | 68.5 | 45.9 | | 41.3 |
| | | | 12:00:00 PM | | | 90.3 | 40.4 | 84.8 | 83.9 | 82.5 | 81.7 | 81.1 | 78.2 | 70.3 | 49.7 | 46.4 | 42.4 |
| | | | 1:00:00 PM | | | 93.6 | 38.6 | 84.5 | 83.6 | 82.5 | 81.7 | 81.3 | 78.3 | 70.2 | | | 41.3 |
| 71 | 6/23/2023 | 1:00:00 PM | 1:10:42 PM | 0:10:42 | 75.4 | 87.5 | 43.3 | 83.7 | 82.5 | 81.2 | 80.5 | 80.1 | 77.2 | 70.2 | 52.1 | 49 | 43.9 |

Appendix E-2 **Short-Term Measurement Data**

| Summary | | | | | | |
|---------------------------|--|------------------|--------------------|------|------------------|----------------------|
| | 931 P-t- 070 - | | | | | |
| File Name on Meter | 831_Data.079.s | | | | | |
| File Name on PC | 831_0003785-20230620 131014-831_Data.079.ldbin | | | | | |
| Serial Number | 0003785 | | | | | |
| Model | Model 831 | | | | | |
| Firmware Version | 2.403 | | | | | |
| | 2.403 | | | | | |
| User | | | | | | |
| Location | | | | | | |
| Job Description | | | | | | |
| Note | | | | | | |
| Note | | | | | | |
| | | | | | | |
| Measurement | | | | | | |
| Description | | | | | | |
| Start | 2023-06-20 13:10:14 | | | | | |
| Stop | 2023-06-20 13:20:40 | | | | | |
| | 00:10:00.5 | | | | | |
| Duration | | | | | | |
| Run Time | 00:10:00.5 | | | | | |
| Pause | 00:00:00.0 | | | | | |
| | | | | | | |
| Pre-Calibration | 2023-06-20 13:03:42 | | | | | |
| Post-Calibration | 2023-06-20 13:22:41 | | | | | |
| Calibration Deviation | 0.03 dB | | | | | |
| Canstation Deviation | U.U3 UB | | | | | |
| 0 6 - 1 | <u></u> | | | | | |
| Overall Settings | | | | | | |
| RMS Weight | A Weighting | | | | | |
| Peak Weight | A Weighting | | | | | |
| Detector | Slow | | | | | |
| Preamplifier | PRM831 | | | | | |
| | | | | | | |
| Microphone Correction | Off | | | | | |
| Integration Method | Linear | | | | | |
| OBA Range | Normal | | | | | |
| OBA Bandwidth | 1/1 and 1/3 | | | | | |
| OBA Frequency Weighting | A Weighting | | | | | |
| | | | | | | |
| OBA Max Spectrum | Bin Max | | | | | |
| Gain | 20.0 dB | | | | | |
| Overload | 124.5 dB | | | | | |
| | A | С | Z | | | |
| Under Range Peak | 57.0 | 54.0 | 59.0 dB | | | |
| | | | | | | |
| Under Range Limit | 24.8 | 25.4 | 33.0 dB | | | |
| Noise Floor | 15.6 | 16.3 | 21.4 dB | | | |
| | | | | | | |
| | First | Second | Third | | | |
| Instrument Identification | | | | | | |
| | | | | | | |
| | | | | | | |
| Results | | | | | | |
| LAeq | 60.3 dB | | | | | |
| | | | | | | |
| LAE | 88.1 dB | | | | | |
| EA | 71.494 μPa²h | | | | | |
| LApeak (max) | 2023-06-20 13:12:09 | 88.2 dE | 3 | | | |
| LASmax | 2023-06-20 13:14:59 | 61.6 dE | | | | |
| LASmin | 2023-06-20 13:15:38 | 59.5 df | | | | |
| SEA | -99.9 dB | 55.5 ut | : | | | |
| JLA | -55.5 UB | | | | | |
| | | _ | | | | |
| | Exceedance Counts | Duration | | | | |
| LAS > 65.0 dB | 0 | 0.0 s | | | | |
| LAS > 85.0 dB | 0 | 0.0 s | | | | |
| LApeak > 135.0 dB | 0 | 0.0 s | | | | |
| LApeak > 137.0 dB | | | | | | |
| | 0 | 0.0 s | | | | |
| LApeak > 140.0 dB | 0 | 0.0 s | | | | |
| | | | | | | |
| Community Noise | Ldn | LDay 07:00-22:00 | LNight 22:00-07:00 | Lden | LDay 07:00-19:00 | LEvening 19:00-22:00 |
| | 60.3 | 60.3 | -99.9 | 60.3 | | -99.9 |
| | | | | | | |
| LCeq | 66.5 dB | | | | | |
| | | | | | | |
| LAeq | 60.3 dB | | | | | |
| LCeq - LAeq | 6.2 dB | | | | | |
| LAleq | 61.0 dB | | | | | |
| LAeq | 60.3 dB | | | | | |
| LAleq - LAeq | 0.7 dB | | | | | |
| winey wiley | 0.7 dB | | С | | Z | |
| | | | | | | |
| | dB Time Stamp | | dB Time Stamp | | dB Tim | e stamp |
| Leq | 60.3 | | 66.5 | | 71.0 | |
| | | | | | | |

| LS(max) | 61.6 | 2023/06/20 13:14:59 | 68.4 | 2023/06/20 13:11:08 | 80.9 | 2023/06/20 13:11:09 |
|------------|------|---------------------|------|---------------------|------|---------------------|
| LF(max) | 66.1 | 2023/06/20 13:14:59 | 70.7 | 2023/06/20 13:11:08 | 85.4 | 2023/06/20 13:11:09 |
| LI(max) | 70.3 | 2023/06/20 13:14:59 | 72.9 | 2023/06/20 13:20:28 | 87.7 | 2023/06/20 13:11:09 |
| LS(min) | 59.5 | 2023/06/20 13:15:38 | 64.8 | 2023/06/20 13:18:43 | 66.9 | 2023/06/20 13:18:43 |
| LF(min) | 58.7 | 2023/06/20 13:10:45 | 63.6 | 2023/06/20 13:17:40 | 65.2 | 2023/06/20 13:18:43 |
| LI(min) | 59.1 | 2023/06/20 13:10:45 | 64.5 | 2023/06/20 13:17:41 | 67.5 | 2023/06/20 13:18:43 |
| LPeak(max) | 88.2 | 2023/06/20 13:12:09 | 88.5 | 2023/06/20 13:14:59 | 90.4 | 2023/06/20 13:11:09 |

| Overload Count | 0 |
|-----------------------|-------|
| Overload Duration | 0.0 s |
| OBA Overload Count | 0 |
| OBA Overload Duration | 0.0 s |

| Statistics | |
|------------|---------|
| LA 1.37 | 60.9 dB |
| LA 10.00 | 60.6 dB |
| LA 33.00 | 60.4 dB |
| LA 50.00 | 60.2 dB |
| LA 90.00 | 59.9 dB |
| LA 99.00 | 59.7 dB |
| | |

| Calibration History | | |
|---------------------|---------------------|--------------|
| Preamp | Date | dB re. 1V/Pa |
| PRM831 | 2023-06-20 13:22:16 | -27.06 |
| PRM831 | 2023-06-20 13:03:42 | -27.09 |
| PRM831 | 2023-06-20 12:51:56 | -27.14 |
| PRM831 | 2023-06-20 12:39:52 | -27.13 |
| PRM831 | 2023-06-20 12:11:10 | -27.11 |
| PRM831 | 2023-06-13 14:56:33 | -27.17 |
| PRM831 | 2023-06-13 14:34:03 | -27.14 |
| PRM831 | 2023-06-13 14:26:45 | -27.14 |
| PRM831 | 2023-06-13 14:10:34 | -27.15 |
| PRM831 | 2023-06-13 13:54:59 | -27.22 |
| PRM831 | 2023-06-05 22:05:22 | -27.12 |

Short Term Noise Measurement - Summary Data, ST-2

| Summary File Name on Meter | 831_Data.081.s | | | | | |
|--|--|------------------|-------|------------|------|----------------------|
| File Name on PC | 831_0003785-20230623 115000-831_Data.081.ldbin | | | | | |
| Serial Number | 0003785 | | | | | |
| Model | Model 831 | | | | | |
| Firmware Version | 2.403 | | | | | |
| User Location | | | | | | |
| Job Description | | | | | | |
| Note | | | | | | |
| Measurement | | | | | | |
| Description | | | | | | |
| Start | 2023-06-23 11:50:00 2023-06-23 12:05:00 | | | | | |
| Stop Duration | 00:15:00.0 | | | | | |
| Run Time | 00:15:00.0 | | | | | |
| Pause | 00:00:00.0 | | | | | |
| Pre-Calibration | 2023-06-23 11:48:00 | | | | | |
| Post-Calibration | 2023-06-23 12:06:03 | | | | | |
| Calibration Deviation | -0.01 dB | | | | | |
| Overall Settings RMS Weight | A Weighting | | | | | |
| Peak Weight | A Weighting | | | | | |
| Detector | Slow | | | | | |
| Preamplifier | PRM831 | | | | | |
| Microphone Correction | Off | | | | | |
| Integration Method | Linear | | | | | |
| OBA Range OBA Bandwidth | Normal 1/1 and 1/3 | | | | | |
| OBA Frequency Weighting | A Weighting | | | | | |
| OBA Max Spectrum | Bin Max | | | | | |
| Gain | 20.0 dB | | | | | |
| Overload | 124.5 dB | | Z | | | |
| Under Range Peak | A 57.0 | C 54.0 | 59.0 | dB | | |
| Under Range Limit | 24.8 | 25.4 | | | | |
| Noise Floor | 15.6 | 16.3 | 21.4 | qB | | |
| Instrument Identification | First | Second | Third | | | |
| | | | | | | |
| Results LAeq | 52.0 dB | | | | | |
| LAE | 81.5 dB | | | | | |
| EA | 15.849 μPa²h | | | | | |
| LApeak (max) | 2023-06-23 11:52:46 | 85.0 | | | | |
| LASmax | 2023-06-23 11:52:47 | 74.2 | | | | |
| LASmin | 2023-06-23 11:55:18 | 36.2 | dB | | | |
| SEA | -99.9 dB | | | | | |
| | Exceedance Counts | Duratio | | | | |
| LAS > 65.0 dB | 1 | 7.3 | | | | |
| LAS > 85.0 dB | 0 | 0.0 | | | | |
| LApeak > 135.0 dB LApeak > 137.0 dB | 0 | 0.0 | | | | |
| LApeak > 140.0 dB | 0 | 0.0 | | | | |
| Community Noise | Ldn | LDay 07:00-22:00 | | Lden | | LEvening 19:00-22:00 |
| | 52.0 | 52.0 | | 52.0 | | |
| LCeq | 66.0 dB | | | | | |
| LAeq | 52.0 dB | | | | | |
| LCeq - LAeq | 14.0 dB | | | | | |
| LAleq | 53.4 dB | | | | | |
| LAeq LAleq - LAeq | 52.0 dB 1.4 dB | | | | | |
| Eniey - Litey | 1.4 dB | | | С | | Z |
| | dB Time Stamp | | dB | Time Stamp | dB | |
| Leq | 52.0 | | 66.0 | | 67.4 | |
| | | | | | | |

| LS(max) | 74.2 | 2023/06/23 11:52:47 | 88.5 | 2023/06/23 11:52:47 | 88.7 | 2023/06/23 11:52:47 |
|------------|------|---------------------|------|---------------------|------|---------------------|
| LF(max) | 76.7 | 2023/06/23 11:52:46 | 90.9 | 2023/06/23 11:52:46 | 91.0 | 2023/06/23 11:52:46 |
| Li(max) | 77.4 | 2023/06/23 11:52:46 | 91.7 | 2023/06/23 11:52:46 | 91.8 | 2023/06/23 11:52:46 |
| LS(min) | 36.2 | 2023/06/23 11:55:18 | 47.2 | 2023/06/23 11:55:17 | 55.9 | 2023/06/23 11:52:11 |
| LF(min) | 35.8 | 2023/06/23 11:55:17 | 45.5 | 2023/06/23 11:55:03 | 52.3 | 2023/06/23 11:52:08 |
| LI(min) | 36.3 | 2023/06/23 11:55:06 | 48.5 | 2023/06/23 11:55:17 | 57.3 | 2023/06/23 11:52:00 |
| LPeak(max) | 85.0 | 2023/06/23 11:52:46 | 96.2 | 2023/06/23 11:52:47 | 96.1 | 2023/06/23 11:52:46 |

| Overload Count | 0 |
|-----------------------|-------|
| Overload Duration | 0.0 s |
| OBA Overload Count | 0 |
| OBA Overload Duration | 0.0 s |

| Statistics | |
|------------|---------|
| LA 1.37 | 60.2 dB |
| LA 10.00 | 46.8 dB |
| LA 33.00 | 42.6 dB |
| LA 50.00 | 41.1 dB |
| LA 90.00 | 38.3 dB |
| LA 99.00 | 36.6 dB |
| | |

| Calibration History | | |
|---------------------|---------------------|--------------|
| Preamp | Date | dB re. 1V/Pa |
| PRM831 | 2023-06-23 12:05:43 | -27.04 |
| PRM831 | 2023-06-23 11:48:00 | -27.02 |
| PRM831 | 2023-06-23 10:39:29 | -27.08 |
| PRM831 | 2023-06-23 10:13:15 | -26.98 |
| PRM831 | 2023-06-20 13:22:16 | -27.06 |
| PRM831 | 2023-06-20 13:03:42 | -27.09 |
| PRM831 | 2023-06-20 12:51:56 | -27.14 |
| PRM831 | 2023-06-20 12:39:52 | -27.13 |
| PRM831 | 2023-06-20 12:11:10 | -27.11 |
| PRM831 | 2023-06-13 14:56:33 | -27.17 |
| PRM831 | 2023-06-13 14:34:03 | -27.14 |

| Record # | Record Type | Date | Time | LAeq | LASmax | LASmin |
|----------|-------------|------------|----------|------|--------|--------|
| 1 | Run | 2023-06-20 | 13:10:14 | | | |
| 2 | | 2023-06-20 | 13:10:14 | 60.9 | 60.7 | 60.4 |
| 3 | | 2023-06-20 | 13:10:15 | 60.3 | 60.7 | 60.4 |
| 4 | | 2023-06-20 | 13:10:16 | 59.9 | 60.5 | 60.0 |
| 5 | | 2023-06-20 | 13:10:17 | 60.1 | 60.1 | 59.9 |
| 6 | | 2023-06-20 | 13:10:18 | 60.7 | 60.5 | 60.1 |
| 7 | | 2023-06-20 | 13:10:19 | 60.2 | 60.5 | 60.3 |
| 8 | | 2023-06-20 | 13:10:20 | 59.9 | 60.4 | 60.0 |
| 9 | | 2023-06-20 | 13:10:21 | 60.8 | 60.6 | 60.1 |
| 10 | | 2023-06-20 | 13:10:22 | 60.5 | 60.6 | 60.5 |
| 11 | | 2023-06-20 | 13:10:23 | 60.1 | 60.5 | 60.2 |
| 12 | | 2023-06-20 | 13:10:24 | 60.4 | 60.4 | 60.3 |
| 13 | | 2023-06-20 | 13:10:25 | 60.5 | 60.5 | 60.3 |
| 14 | | 2023-06-20 | 13:10:26 | 60.0 | 60.6 | 60.2 |
| 15 | | 2023-06-20 | 13:10:27 | 60.3 | 60.4 | 60.0 |
| 16 | | 2023-06-20 | 13:10:28 | 60.9 | 60.7 | 60.4 |
| 17 | | 2023-06-20 | 13:10:29 | 60.8 | 60.8 | 60.6 |
| 18 | | 2023-06-20 | 13:10:30 | 60.4 | 60.7 | 60.4 |
| 19 | | 2023-06-20 | 13:10:31 | 60.5 | 60.6 | 60.5 |
| 20 | | 2023-06-20 | 13:10:32 | 60.4 | 60.5 | 60.4 |
| 21 | | 2023-06-20 | 13:10:33 | 59.9 | 60.5 | 60.1 |
| 22 | | 2023-06-20 | 13:10:34 | 60.3 | 60.2 | 60.1 |
| 23 | | 2023-06-20 | 13:10:35 | 60.1 | 60.3 | 60.1 |
| 24 | | 2023-06-20 | 13:10:36 | 60.0 | 60.2 | 60.0 |
| 25 | | 2023-06-20 | 13:10:37 | 60.0 | 60.1 | 60.0 |
| 26 | | 2023-06-20 | 13:10:38 | 59.7 | 60.0 | 59.8 |
| 27 | | 2023-06-20 | 13:10:39 | 60.0 | 60.1 | 59.9 |
| 28 | | 2023-06-20 | 13:10:40 | 60.0 | 60.0 | 59.9 |
| 29 | | 2023-06-20 | 13:10:41 | 60.2 | 60.2 | 60.0 |
| 30 | | 2023-06-20 | 13:10:42 | 60.2 | 60.2 | 60.1 |
| 31 | | 2023-06-20 | 13:10:43 | 60.3 | 60.3 | 60.1 |
| 32 | | 2023-06-20 | 13:10:44 | 59.4 | 60.2 | 59.7 |
| 33 | | 2023-06-20 | 13:10:45 | 59.9 | 59.8 | 59.7 |
| 34 | | 2023-06-20 | 13:10:46 | 59.7 | 59.9 | 59.7 |
| 35 | | 2023-06-20 | 13:10:47 | 60.3 | 60.2 | 59.7 |
| 36 | | 2023-06-20 | 13:10:48 | 59.7 | 60.2 | 59.9 |
| 37 | | 2023-06-20 | 13:10:49 | 60.0 | 60.0 | 59.9 |
| 38 | | 2023-06-20 | 13:10:50 | 60.3 | 60.2 | 59.9 |
| 39 | | 2023-06-20 | 13:10:51 | 59.9 | 60.2 | 60.0 |
| 40 | | 2023-06-20 | 13:10:52 | 59.7 | 60.0 | 59.8 |
| 41 | | 2023-06-20 | 13:10:53 | 60.2 | 60.1 | 59.8 |
| 42 | | 2023-06-20 | 13:10:54 | 60.1 | 60.2 | 60.0 |
| 43 | | 2023-06-20 | 13:10:55 | 60.0 | 60.1 | 59.8 |
| 44 | | 2023-06-20 | 13:10:56 | 60.4 | 60.3 | 60.1 |
| 45 | | 2023-06-20 | 13:10:57 | 60.6 | 60.5 | 60.3 |
| 46 | | 2023-06-20 | 13:10:58 | 60.2 | 60.5 | 60.3 |
| 47 | | 2023-06-20 | 13:10:59 | 59.7 | 60.3 | 59.9 |
| 48 | | 2023-06-20 | 13:11:00 | 60.1 | 60.1 | 59.9 |
| 49 | | 2023-06-20 | 13:11:01 | 60.0 | 60.1 | 60.0 |
| 50 | | 2023-06-20 | 13:11:02 | 59.9 | 60.0 | 59.8 |
| 51 | | 2023-06-20 | 13:11:03 | 60.1 | 60.1 | 59.9 |

2023-06-20

2023-06-20

13:11:53

13:11:54

13:11:55

60.7

60.1

60.0

60.7

60.6

60.3

60.5

60.2

60.1

101

102

| 104 2023-06-20 13:11:56 60.0 60.1 60.0 105 2023-06-20 13:11:57 60.3 60.2 60.0 106 2023-06-20 13:11:58 61.4 61.4 60.1 107 2023-06-20 13:11:59 60.2 61.0 60.4 108 2023-06-20 13:12:00 60.0 60.5 60.2 | -1 |
|--|---------|
| 105 2023-06-20 13:11:57 60.3 60.2 60.0 106 2023-06-20 13:11:58 61.4 61.4 60.1 107 2023-06-20 13:11:59 60.2 61.0 60.4 | |
| 106 2023-06-20 13:11:58 61.4 61.4 60.1 107 2023-06-20 13:11:59 60.2 61.0 60.4 | |
| 107 2023-06-20 13:11:59 60.2 61.0 60.4 | |
| | |
| | |
| 109 2023-06-20 13:12:01 60.3 60.3 60.1 | |
| 110 2023-06-20 13:12:02 60.2 60.2 60.1 | |
| 111 2023-06-20 13:12:03 60.1 60.3 60.1 | |
| 112 2023-06-20 13:12:04 60.1 60.3 60.1 | |
| 113 2023-06-20 13:12:05 60.4 60.4 60.2 | |
| 114 2023-06-20 13:12:06 59.7 60.3 59.9 | |
| 115 2023-06-20 13:12:07 59.7 60.1 59.8 | |
| 116 2023-06-20 13:12:08 60.1 59.8 | |
| 117 2023-06-20 13:12:09 60.6 60.8 60.0 | |
| 118 2023-06-20 13:12:10 60.3 60.3 60.1 | |
| 118 2023-06-20 13.12.10 60.5 60.5 60.1 119 2023-06-20 13:12:11 60.4 60.4 60.3 | |
| | |
| | |
| | |
| | |
| 123 2023-06-20 13:12:15 59.5 59.7 59.6 | |
| 124 2023-06-20 13:12:16 60.2 60.1 59.6 | |
| 125 2023-06-20 13:12:17 60.8 60.6 60.1 | |
| 126 2023-06-20 13:12:18 60.2 60.5 60.2 | |
| | |
| 2023-06-20 13:12:19 60.6 60.5 60.4 | obiolo |
| 127 2023-06-20 13:12:19 60.6 60.5 60.4 128 Stop 2023-06-20 13:12:20 ** Run Stopped to prevent approaching v | ehicle |
| 127 2023-06-20 13:12:19 60.6 60.5 60.4 128 Stop 2023-06-20 13:12:20 ** Run Stopped to prevent approaching v 129 Run 2023-06-20 13:12:45 from contaminating data | ehicle |
| 127 2023-06-20 13:12:19 60.6 60.5 60.4 128 Stop 2023-06-20 13:12:20 ** Run Stopped to prevent approaching value of the stopped to prevent approaching val | ehicle |
| 127 2023-06-20 13:12:19 60.6 60.5 60.4 128 Stop 2023-06-20 13:12:20 ** Run Stopped to prevent approaching value 129 Run 2023-06-20 13:12:45 from contaminating data 130 2023-06-20 13:12:45 60.9 61.0 60.6 131 2023-06-20 13:12:46 61.0 61.0 60.9 | ehicle |
| 127 2023-06-20 13:12:19 60.6 60.5 60.4 128 Stop 2023-06-20 13:12:20 ** Run Stopped to prevent approaching values from contaminating data 129 Run 2023-06-20 13:12:45 from contaminating data 130 2023-06-20 13:12:45 60.9 61.0 60.6 131 2023-06-20 13:12:46 61.0 61.0 60.9 132 2023-06-20 13:12:47 60.6 60.9 60.7 | ehicle |
| 127 2023-06-20 13:12:19 60.6 60.5 60.4 128 Stop 2023-06-20 13:12:20 ** Run Stopped to prevent approaching value of from contaminating data 129 Run 2023-06-20 13:12:45 from contaminating data 130 2023-06-20 13:12:45 60.9 61.0 60.6 131 2023-06-20 13:12:46 61.0 61.0 60.9 132 2023-06-20 13:12:47 60.6 60.9 60.7 133 2023-06-20 13:12:48 60.7 60.8 60.6 | ehicle |
| 127 2023-06-20 13:12:19 60.6 60.5 60.4 128 Stop 2023-06-20 13:12:20 ** Run Stopped to prevent approaching value of the properties of the | rehicle |
| 127 | vehicle |
| 127 2023-06-20 13:12:19 60.6 60.5 60.4 128 Stop 2023-06-20 13:12:20 ** Run Stopped to prevent approaching of the preve | rehicle |
| 127 2023-06-20 13:12:19 60.6 60.5 60.4 128 Stop 2023-06-20 13:12:20 ** Run Stopped to prevent approaching of the preve | rehicle |
| 127 128 Stop 129 Run 2023-06-20 13:12:20 ** Run Stopped to prevent approaching value from contaminating data 130 2023-06-20 13:12:45 60.9 61.0 60.6 60.9 60.6 60.9 60.6 60.9 60.6 60.9 60.6 60.9 60.6 60.9 60.6 60.9 60.6 60.9 60.6 60.9 60.6 60.9 60.6 60.9 60.7 60.8 60.8 60.9 60.7 60.8 60.8 60.9 60.8 60.9 60.9 60.7 60.8 60.8 60.9 60.8 60.9 60.8 60.9 60.8 60.9 60.8 60.9 60.8 60.9 60.8 60.8 60.9 60.8 60.8 60.8 60.8 60.8 60.8 | rehicle |
| 127 128 Stop 129 Run 12023-06-20 13:12:20 Run 13:12:45 13 | rehicle |
| 2023-06-20 13:12:19 60.6 60.5 60.4 | rehicle |
| 127 | rehicle |
| 127 | rehicle |
| 127 | rehicle |
| 127 2023-06-20 13:12:19 60.6 60.5 60.4 128 | rehicle |
| 127 128 Stop 129 Run 130 2023-06-20 13:12:20 8** Run Stopped to prevent approaching of from contaminating data 130 2023-06-20 13:12:45 60.9 61.0 60.6 131 2023-06-20 13:12:45 60.9 61.0 60.9 60.7 133 2023-06-20 13:12:47 60.6 60.9 60.7 133 2023-06-20 13:12:48 60.7 60.8 60.9 60.7 134 2023-06-20 13:12:49 60.8 60.9 60.7 135 2023-06-20 13:12:50 60.5 60.7 60.5 136 2023-06-20 13:12:51 60.5 60.7 60.5 137 2023-06-20 13:12:52 60.3 60.6 60.3 138 2023-06-20 13:12:53 60.6 60.6 60.3 139 2023-06-20 13:12:54 60.6 60.6 60.7 60.5 140 2023-06-20 13:12:55 60.4 60.6 60.3 141 2023-06-20 13:12:55 60.4 60.5 60.3 142 2023-06-20 13:12:57 60.5 60.3 60.6 60.3 144 2023-06-20 13:12:58 60.4 60.5 60.3 144 2023-06-20 13:12:58 60.4 60.5 60.3 144 2023-06-20 13:12:59 60.7 60.7 60.5 | rehicle |
| 127 | rehicle |
| 127 2023-06-20 13:12:19 60.6 60.5 60.4 128 | rehicle |
| 127 2023-06-20 13:12:19 60.6 60.5 60.4 128 Stop 2023-06-20 13:12:20 *** Run Stopped to prevent approaching from contaminating data 130 2023-06-20 13:12:45 60.9 61.0 60.6 131 2023-06-20 13:12:46 61.0 61.0 60.9 132 2023-06-20 13:12:47 60.6 60.9 60.7 133 2023-06-20 13:12:48 60.7 60.8 60.6 134 2023-06-20 13:12:49 60.8 60.9 60.7 135 2023-06-20 13:12:50 60.5 60.7 60.5 136 2023-06-20 13:12:51 60.5 60.7 60.5 137 2023-06-20 13:12:52 60.3 60.5 60.3 138 2023-06-20 13:12:53 60.6 60.6 60.3 139 2023-06-20 13:12:53 60.6 60.6 60.5 60.2 140 2023-06-20 | rehicle |
| 127 2023-06-20 13:12:19 60.6 60.5 60.4 128 | rehicle |
| 127 | rehicle |

13:13:10

2023-06-20

155

60.5

60.6

| k Spillway | | Short To | erm Noise Mea | surement - Tin | ne History, S |
|------------|------------|----------|---------------|----------------|---------------|
| 156 | 2023-06-20 | 13:13:11 | 60.7 | 60.7 | 60.5 |
| 157 | 2023-06-20 | 13:13:12 | 60.7 | 60.8 | 60.6 |
| 158 | 2023-06-20 | 13:13:13 | 59.8 | 60.6 | 60.1 |
| 159 | 2023-06-20 | 13:13:14 | 59.9 | 60.2 | 59.9 |
| 160 | 2023-06-20 | 13:13:15 | 59.9 | 60.1 | 59.9 |
| 161 | 2023-06-20 | 13:13:16 | 60.7 | 60.5 | 60.0 |
| 162 | 2023-06-20 | 13:13:17 | 60.8 | 60.7 | 60.4 |
| 163 | 2023-06-20 | 13:13:18 | 60.7 | 60.8 | 60.5 |
| 164 | 2023-06-20 | 13:13:19 | 60.1 | 60.8 | 60.4 |
| 165 | 2023-06-20 | 13:13:20 | 60.4 | 60.4 | 60.1 |
| 166 | 2023-06-20 | 13:13:21 | 60.8 | 60.7 | 60.4 |
| 167 | 2023-06-20 | 13:13:22 | 60.5 | 60.6 | 60.4 |
| 168 | 2023-06-20 | 13:13:23 | 60.1 | 60.6 | 60.2 |
| 169 | 2023-06-20 | 13:13:24 | 59.9 | 60.3 | 59.9 |
| 170 | 2023-06-20 | 13:13:25 | 59.7 | 60.2 | 59.9 |
| 171 | 2023-06-20 | 13:13:26 | 60.1 | 60.1 | 59.8 |
| 172 | 2023-06-20 | 13:13:27 | 59.9 | 60.1 | 59.8 |
| 173 | 2023-06-20 | 13:13:28 | 60.3 | 60.1 | 59.9 |
| 174 | 2023-06-20 | 13:13:29 | 59.9 | 60.2 | 59.9 |
| 175 | 2023-06-20 | 13:13:30 | 60.2 | 60.2 | 60.0 |
| 176 | 2023-06-20 | 13:13:31 | 60.5 | 60.4 | 60.2 |
| 177 | 2023-06-20 | 13:13:32 | 60.3 | 60.4 | 60.2 |
| 178 | 2023-06-20 | 13:13:33 | 60.0 | 60.3 | 60.1 |
| 179 | 2023-06-20 | 13:13:34 | 59.8 | 60.1 | 59.8 |
| 180 | 2023-06-20 | 13:13:35 | 60.5 | 60.4 | 60.0 |
| 181 | 2023-06-20 | 13:13:36 | 60.0 | 60.2 | 60.0 |
| 182 | 2023-06-20 | 13:13:37 | 60.2 | 60.2 | 59.9 |
| 183 | 2023-06-20 | 13:13:38 | 60.3 | 60.3 | 60.2 |
| 184 | 2023-06-20 | 13:13:39 | 60.1 | 60.3 | 60.1 |
| 185 | 2023-06-20 | 13:13:40 | 59.9 | 60.2 | 60.0 |
| 186 | 2023-06-20 | 13:13:41 | 59.6 | 60.0 | 59.7 |
| 187 | 2023-06-20 | 13:13:42 | 59.7 | 59.8 | 59.6 |
| 188 | 2023-06-20 | 13:13:43 | 60.0 | 59.9 | 59.7 |
| 189 | 2023-06-20 | 13:13:44 | 60.0 | 60.0 | 59.7 |
| 190 | 2023-06-20 | 13:13:45 | 60.4 | 60.3 | 60.0 |
| 191 | 2023-06-20 | 13:13:46 | 60.8 | 60.7 | 60.2 |
| 191 | 2023-06-20 | 13:13:47 | 60.6 | 60.7 | 60.6 |
| 193 | 2023-06-20 | 13:13:47 | 60.6 | 60.7 | 60.6 |
| 194 | 2023-06-20 | 13:13:49 | 60.1 | 60.6 | 60.3 |
| | 2023-06-20 | 13:13:50 | 59.7 | 60.3 | 59.9 |
| 195 196 | 2023-06-20 | 13:13:51 | 59.7 | 59.9 | 59.9 59.8 |
| 197 | 2023-06-20 | 13:13:51 | 60.1 | 60.1 | 59.9 |
| | 2023-06-20 | 13:13:53 | 60.1 | 60.1 | |
| 198 | | | | | 60.0 |
| 199 | 2023-06-20 | 13:13:54 | 60.4 | 60.4 | 60.1 |
| 200 | 2023-06-20 | 13:13:55 | 60.9 | 60.7 | 60.4 |
| 201 | 2023-06-20 | 13:13:56 | 61.1 | 61.0 | 60.7 |
| 202 | 2023-06-20 | 13:13:57 | 60.4 | 60.9 | 60.6 |
| 203 | 2023-06-20 | 13:13:58 | 60.3 | 60.6 | 60.4 |
| 204 | 2023-06-20 | 13:13:59 | 60.6 | 60.6 | 60.4 |
| 205 | 2023-06-20 | 13:14:00 | 59.7 | 60.6 | 60.0 |
| 206 | 2023-06-20 | 13:14:01 | 60.2 | 60.2 | 60.0 |
| 207 | 2023-06-20 | 13:14:02 | 60.1 | 60.3 | 60.1 |
| | | | | | |

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

13:14:48

13:14:49

13:14:50

13:14:51

13:14:52

13:14:53

13:14:54

253

254

255

256

257

258

259

60.3

60.0

60.1

60.1

60.5

60.7

59.9

60.3

60.3

60.2

60.2

60.4

60.7

60.7

59.9

60.0

60.0

60.0

60.2

60.2

2023-06-20

2023-06-20

309

310

311

13:15:44

13:15:45

13:15:46

59.8

59.9

60.2

59.8

59.9

60.0

59.7

59.8

2023-06-20

2023-06-20

2023-06-20

360

361

362

363

61.4

60.3

60.7

60.7

13:16:35

13:16:36

13:16:37

13:16:38

60.3

60.6

60.5

60.6

61.3

61.0

60.7

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

13:17:02

13:17:03

13:17:04

13:17:05

13:17:06

13:17:07

13:17:08

13:17:09

13:17:10

13:17:11

13:17:12

13:17:13

13:17:14

13:17:15

13:17:16

13:17:17

13:17:18

13:17:19

13:17:20

13:17:21

13:17:22

13:17:23

13:17:24

13:17:25

13:17:26

13:17:27

13:17:28

13:17:29

13:17:30

60.2

60.0

59.5

59.8

59.7

60.0

60.5

60.3

60.5

59.6

60.0

60.3

60.6

59.8

60.4

60.1

60.5

60.3

60.5

60.3

60.3

60.4

60.2

60.4

59.9

60.0

60.0

59.9

59.8

60.6

60.3

60.2

59.9

59.8

59.9

60.3

60.3

60.6

60.4

60.1

60.2

60.5

60.5

60.3

60.4

60.4

60.4

60.5

60.5

60.5

60.5

60.4

60.5

60.4

60.2

60.1

60.1

59.9

60.3

60.1

59.7

59.7

59.7

59.7

59.9

60.3

60.3

59.9

59.8

59.9

60.1

60.1

60.1

60.2

60.1

60.2

60.3

60.3 60.3

60.2

60.2

60.3

60.1

60.0

59.9

59.8

59.8

387

388

389

390

391

392

393

394

395

396

397

398 399

400

401

402

403

404

405 406

407

408

409

410

411

412

413

414

2023-06-20

2023-06-20

465

466

467

13:18:20

13:18:21

13:18:22

60.3

60.3

60.5

60.2

60.3

60.4

60.0

60.2

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

2023-06-20

13:18:46

13:18:47

13:18:48

13:18:49

13:18:50

13:18:51

13:18:52

13:18:53

13:18:54

13:18:55

13:18:56

13:18:57

13:18:58

13:18:59

13:19:00

13:19:01

13:19:02

13:19:03

13:19:04

13:19:05

13:19:06

13:19:07

13:19:08

13:19:09

13:19:10

13:19:11

13:19:12

13:19:13

13:19:14

60.2

60.3

60.1

60.3

60.6

60.3

60.0

60.1

60.4

60.2

60.4

60.4

60.7

60.2

60.5

60.4

60.0

60.3

60.6

59.7

60.4

60.4

60.3

60.4

61.1

60.2

60.7

60.4

60.2

60.3

60.4

60.2

60.3

60.5

60.5

60.4

60.2

60.3

60.4

60.4

60.4

60.7

60.6

60.5

60.5

60.4

60.4

60.5

60.4

60.4

60.4

60.4

60.5

60.9

61.0

60.6

60.6

60.5

60.2

60.1

60.1

60.1

60.3

60.3

60.1

60.1

60.0

60.2

60.2

60.3

60.3

60.3

60.3

60.4

60.1

60.2

60.3

60.0

60.0

60.1

60.3

60.2

60.5

60.3

60.4

60.4

60.2

491

492

493

494

495

496

497

498

499

500

501 502

503

504

505

506

507

508

509 510

511512

513

514

515

516

517

518

13:20:06

60.2

60.4

60.2

| | | 2022 06 20 | 12.20.07 | FO 0 | CO 2 | FO 0 |
|-----|--------------------|------------|----------|------|------|------|
| 572 | | 2023-06-20 | 13:20:07 | 59.8 | 60.2 | 59.9 |
| 573 | | 2023-06-20 | 13:20:08 | 60.2 | 60.2 | 59.9 |
| 574 | | 2023-06-20 | 13:20:09 | 60.2 | 60.4 | 60.1 |
| 575 | | 2023-06-20 | 13:20:10 | 60.6 | 60.5 | 60.1 |
| 576 | | 2023-06-20 | 13:20:11 | 60.6 | 60.6 | 60.4 |
| 577 | | 2023-06-20 | 13:20:12 | 60.1 | 60.6 | 60.3 |
| 578 | | 2023-06-20 | 13:20:13 | 60.4 | 60.4 | 60.2 |
| 579 | | 2023-06-20 | 13:20:14 | 60.1 | 60.4 | 60.2 |
| 580 | | 2023-06-20 | 13:20:15 | 60.5 | 60.4 | 60.2 |
| 581 | | 2023-06-20 | 13:20:16 | 60.5 | 60.5 | 60.4 |
| 582 | | 2023-06-20 | 13:20:17 | 60.4 | 60.5 | 60.4 |
| 583 | | 2023-06-20 | 13:20:18 | 60.2 | 60.4 | 60.2 |
| 584 | | 2023-06-20 | 13:20:19 | 60.5 | 60.4 | 60.2 |
| 585 | | 2023-06-20 | 13:20:20 | 60.6 | 60.6 | 60.4 |
| 586 | | 2023-06-20 | 13:20:21 | 60.6 | 60.6 | 60.5 |
| 587 | | 2023-06-20 | 13:20:22 | 60.3 | 60.7 | 60.4 |
| 588 | | 2023-06-20 | 13:20:23 | 60.4 | 60.5 | 60.4 |
| 589 | | 2023-06-20 | 13:20:24 | 60.3 | 60.5 | 60.3 |
| 590 | | 2023-06-20 | 13:20:25 | 60.7 | 60.6 | 60.3 |
| 591 | | 2023-06-20 | 13:20:26 | 60.1 | 60.4 | 60.2 |
| 592 | | 2023-06-20 | 13:20:27 | 60.6 | 60.6 | 60.2 |
| 593 | | 2023-06-20 | 13:20:28 | 60.4 | 60.5 | 60.3 |
| 594 | | 2023-06-20 | 13:20:29 | 60.3 | 60.6 | 60.3 |
| 595 | | 2023-06-20 | 13:20:30 | 60.0 | 60.5 | 60.1 |
| 596 | | 2023-06-20 | 13:20:31 | 60.0 | 60.1 | 59.9 |
| 597 | | 2023-06-20 | 13:20:32 | 60.3 | 60.3 | 60.1 |
| 598 | | 2023-06-20 | 13:20:33 | 60.0 | 60.1 | 60.0 |
| 599 | | 2023-06-20 | 13:20:34 | 60.2 | 60.2 | 60.0 |
| 600 | | 2023-06-20 | 13:20:35 | 60.4 | 60.3 | 60.1 |
| 601 | | 2023-06-20 | 13:20:36 | 60.6 | 60.5 | 60.3 |
| 602 | | 2023-06-20 | 13:20:37 | 60.5 | 60.6 | 60.4 |
| 603 | | 2023-06-20 | 13:20:38 | 60.2 | 60.5 | 60.3 |
| 604 | | 2023-06-20 | 13:20:39 | 60.4 | 60.4 | 60.3 |
| 605 | | 2023-06-20 | 13:20:40 | 60.2 | 60.4 | 60.3 |
| 606 | Stop | 2023-06-20 | 13:20:41 | | | |
| 607 | Calibration Change | 2023-06-20 | 13:22:41 | | | |
| - | | | _ | | | |

| Record # | Record Type | Date | Time | LAeq | LASmax | LASmin |
|---------------------|-------------|--------------------------|----------------------|--------------|--------------|--------------|
| 1 | Run | 2023-06-23 | 11:50:00 | | | |
| 2 | | 2023-06-23 | 11:50:00 | 40.5 | 40.6 | 40.3 |
| 3 | | 2023-06-23 | 11:50:01 | 42.7 | 42.3 | 40.4 |
| 4 | | 2023-06-23 | 11:50:02 | 43.2 | 43.3 | 42.1 |
| 5 | | 2023-06-23 | 11:50:03 | 40.0 | 42.9 | 41.3 |
| 6 | | 2023-06-23 | 11:50:04 | 40.2 | 41.3 | 40.5 |
| 7 | | 2023-06-23 | 11:50:05 | 40.8 | 40.9 | 40.7 |
| 8 | | 2023-06-23 | 11:50:06 | 41.2 | 41.2 | 40.5 |
| 9 | | 2023-06-23 | 11:50:07 | 40.4 | 41.3 | 40.7 |
| 10 | | 2023-06-23 | 11:50:08 | 42.6 | 42.2 | 40.6 |
| 11 | | 2023-06-23 | 11:50:09 | 43.9 | 43.4 | 42.2 |
| 12 | | 2023-06-23 | 11:50:10 | 42.0 | 43.2 | 42.5 |
| 13 | | 2023-06-23 | 11:50:11 | 41.7 | 42.6 | 42.0 |
| 14 | | 2023-06-23 | 11:50:12 | 41.8 | 42.0 | 41.9 |
| 15 | | 2023-06-23 | 11:50:13 | 41.6 | 41.9 | 41.7 |
| 16 | | 2023-06-23 | 11:50:14 | 41.3 | 41.7 | 41.4 |
| 17 | | 2023-06-23 | 11:50:15 | 41.3 | 41.4 | 41.3 |
| 18 | | 2023-06-23 | 11:50:16 | 42.1 | 41.9 | 41.3 |
| 19 | | 2023-06-23 | 11:50:17 | 43.9 | 43.3 | 41.9 |
| 20 | | 2023-06-23 | 11:50:18 | 44.7 | 44.4 | 43.3 |
| 21 | | 2023-06-23 | 11:50:19 | 43.7 | 44.4 | 43.9 |
| 22 | | 2023-06-23 | 11:50:20 | 44.7 | 44.7 | 43.9 |
| 23 | | 2023-06-23 | 11:50:21 | 42.6 | 44.2 | 43.3 |
| 24 | | 2023-06-23 | 11:50:22 | 42.8 | 43.3 | 43.0 |
| 25 | | 2023-06-23 | 11:50:23 | 43.4 | 43.3 | 43.0 |
| 26 | | 2023-06-23 | 11:50:24 | 43.1 | 43.3 | 43.1 |
| 27 | | 2023-06-23 | 11:50:25 | 45.0 | 44.6 | 43.1 |
| 28 | | 2023-06-23 | 11:50:26 | 47.7 | 47.0 | 44.6 |
| 29 | | 2023-06-23 | 11:50:27 | 48.3 | 48.0 | 47.0 |
| 30 | | 2023-06-23 | 11:50:28 | 47.5 | 47.7 | 47.5 |
| 31 | | 2023-06-23 | 11:50:29 | 48.5 | 48.3 | 47.7 |
| 32 | | 2023-06-23 | 11:50:30 | 49.7 | 49.2 | 48.3 |
| 33 | | 2023-06-23 | 11:50:31 | 49.9 | 49.7 | 49.2 |
| 34 | | 2023-06-23 | 11:50:32 | 50.3 | 50.1 | 49.7 |
| 35 | | 2023-06-23 | 11:50:33 | 49.9 | 50.4 | 49.8 |
| 36 | | 2023-06-23 | 11:50:34 | 48.9 | 49.8 | 49.2 |
| 37 | | 2023-06-23 2023-06-23 | 11:50:35 | 52.1 | 51.5 | 49.4 |
| 38 | | 2023-06-23 | 11:50:36 | 56.2 | 55.2 57.9 | 51.5 |
| 39 | | 2023-06-23 | 11:50:37 | 58.8 | 57.8 | 55.2 57.0 |
| 40 | | 2023-06-23 | 11:50:38 11:50:39 | 59.5 60.0 | 59.0 59.7 | 57.9 59.0 |
| 41 | | 2023-06-23 | 11:50:40 | 59.1 | 59.7 59.9 | 59.0 59.2 |
| 42 | | 2023-06-23 | 11:50:40 | 57.3 | 59.9 59.1 | 58.1 |
| 43 | | 2023-06-23 | 11:50:41 | 56.1 | 58.1 | 56.9 |
| 44 45 | | 2023-06-23 | 11:50:42 | 52.8 | 56.1 56.9 | 56.9 54.7 |
| 45 46 | | 2023-06-23 | 11:50:43 | 50.0 | 56.9 54.7 | 54.7 52.3 |
| 46 47 | | 2023-06-23 | 11:50:44 | 47.4 | 54.7 52.3 | 49.9 |
| 47 | | 2023-06-23 | 11:50:45 | 47.4 46.0 | 52.5 49.8 | 49.9 47.9 |
| 48 49 | | 2023-06-23 | 11:50:47 | 45.1 | 49.8 47.9 | 47.9 |
| 49 50 | | 2023-00-23 | 11:50:47 | 43.1 47.0 | 47.3 47.1 | 46.1 |
| 51 | | 2023-06-23 | 11:50:48 | 46.8 | 46.9 | 46.6 |
| JI | | 2023 00-23 | 11.50.49 | +0.0 | +0.9 | 70.0 |

2023-06-23

2023-06-23

2023-06-23

100 101

102

103

11:51:38

11:51:39

11:51:40

11:51:41

47.2

43.2

41.8

41.5

49.2

47.9

45.5

43.5

47.9

45.5

43.5

| 105 | 2023-06-23 | 11:51:43 | 41.1 | 42.1 | 41.5 |
|-----|------------|----------|------|------|------|
| 106 | 2023-06-23 | 11:51:44 | 41.1 | 41.5 | 41.2 |
| 107 | 2023-06-23 | 11:51:45 | 40.8 | 41.3 | 40.8 |
| 108 | 2023-06-23 | 11:51:46 | 40.8 | 41.0 | 40.6 |
| 109 | 2023-06-23 | 11:51:47 | 41.0 | 41.1 | 40.6 |
| 110 | 2023-06-23 | 11:51:48 | 40.9 | 41.1 | 40.7 |
| 111 | 2023-06-23 | 11:51:49 | 40.6 | 41.1 | 40.8 |
| 112 | 2023-06-23 | 11:51:50 | 40.5 | 40.8 | 40.6 |
| 113 | 2023-06-23 | 11:51:51 | 39.8 | 40.6 | 40.0 |
| 114 | 2023-06-23 | 11:51:52 | 39.5 | 40.0 | 39.7 |
| 115 | 2023-06-23 | 11:51:53 | 40.2 | 40.3 | 39.4 |
| 116 | 2023-06-23 | 11:51:54 | 41.0 | 40.8 | 40.3 |
| 117 | 2023-06-23 | 11:51:55 | 39.1 | 40.7 | 39.7 |
| 118 | 2023-06-23 | 11:51:56 | 38.5 | 39.7 | 38.9 |
| 119 | 2023-06-23 | 11:51:57 | 38.7 | 38.9 | 38.6 |
| 120 | 2023-06-23 | 11:51:58 | 39.1 | 39.1 | 38.8 |
| 121 | 2023-06-23 | 11:51:59 | 38.3 | 38.9 | 38.6 |
| 122 | 2023-06-23 | 11:52:00 | 37.9 | 38.6 | 38.1 |
| 123 | 2023-06-23 | 11:52:01 | 38.8 | 38.6 | 38.1 |
| 124 | 2023-06-23 | 11:52:02 | 38.9 | 38.8 | 38.6 |
| 125 | 2023-06-23 | 11:52:03 | 39.0 | 39.0 | 38.7 |
| 126 | 2023-06-23 | 11:52:04 | 39.7 | 39.5 | 39.0 |
| 127 | 2023-06-23 | 11:52:05 | 40.2 | 40.0 | 39.5 |
| 128 | 2023-06-23 | 11:52:06 | 39.5 | 40.0 | 39.7 |
| 129 | 2023-06-23 | 11:52:07 | 39.4 | 39.7 | 39.4 |
| 130 | 2023-06-23 | 11:52:08 | 39.1 | 39.4 | 39.2 |
| 131 | 2023-06-23 | 11:52:09 | 38.9 | 39.3 | 39.0 |
| 132 | 2023-06-23 | 11:52:10 | 38.7 | 39.0 | 38.8 |
| 133 | 2023-06-23 | 11:52:11 | 38.8 | 38.9 | 38.7 |
| 134 | 2023-06-23 | 11:52:12 | 38.5 | 38.8 | 38.6 |
| 135 | 2023-06-23 | 11:52:13 | 38.3 | 38.6 | 38.4 |
| 136 | 2023-06-23 | 11:52:14 | 38.0 | 38.5 | 38.1 |
| 137 | 2023-06-23 | 11:52:15 | 38.0 | 38.2 | 38.0 |
| 138 | 2023-06-23 | 11:52:16 | 37.7 | 38.0 | 37.8 |
| 139 | 2023-06-23 | 11:52:17 | 37.8 | 37.9 | 37.8 |
| 140 | 2023-06-23 | 11:52:18 | 38.5 | 38.3 | 37.8 |
| 141 | 2023-06-23 | 11:52:19 | 38.2 | 38.4 | 38.2 |
| 142 | 2023-06-23 | 11:52:20 | 39.1 | 38.9 | 38.2 |
| 143 | 2023-06-23 | 11:52:21 | 38.8 | 38.9 | 38.8 |
| 144 | 2023-06-23 | 11:52:22 | 39.6 | 39.4 | 38.9 |
| 145 | 2023-06-23 | 11:52:23 | 39.1 | 39.4 | 39.2 |
| 146 | 2023-06-23 | 11:52:24 | 39.2 | 39.2 | 39.1 |
| 147 | 2023-06-23 | 11:52:25 | 39.7 | 39.6 | 39.2 |
| 148 | 2023-06-23 | 11:52:26 | 38.8 | 39.4 | 39.0 |
| 149 | 2023-06-23 | 11:52:27 | 38.9 | 39.1 | 38.9 |
| 150 | 2023-06-23 | 11:52:28 | 39.3 | 39.3 | 38.8 |
| 151 | 2023-06-23 | 11:52:29 | 41.6 | 40.9 | 39.3 |
| 152 | 2023-06-23 | 11:52:30 | 43.1 | 42.5 | 41.0 |
| 153 | 2023-06-23 | 11:52:31 | 43.1 | 43.0 | 42.5 |
| 154 | 2023-06-23 | 11:52:32 | 45.4 | 44.9 | 42.9 |
| 155 | 2023-06-23 | 11:52:33 | 46.3 | 45.9 | 44.9 |

| k Spillway | | Short T | erm Noise Mea | surement - Tin | ne History, S |
|------------|------------|----------|---------------|----------------|---------------|
| 156 | 2023-06-23 | 11:52:34 | 47.8 | 47.3 | 45.9 |
| 157 | 2023-06-23 | 11:52:35 | 47.8 | 47.9 | 46.8 |
| 158 | 2023-06-23 | 11:52:36 | 53.0 | 51.9 | 48.0 |
| 159 | 2023-06-23 | 11:52:37 | 55.4 | 54.5 | 51.9 |
| 160 | 2023-06-23 | 11:52:38 | 57.0 | 56.2 | 54.6 |
| 161 | 2023-06-23 | 11:52:39 | 57.3 | 57.0 | 56.2 |
| 162 | 2023-06-23 | 11:52:40 | 56.6 | 57.0 | 56.7 |
| 163 | 2023-06-23 | 11:52:41 | 57.8 | 57.5 | 56.7 |
| 164 | 2023-06-23 | 11:52:42 | 59.6 | 59.1 | 57.6 |
| 165 | 2023-06-23 | 11:52:43 | 62.2 | 61.6 | 59.2 |
| 166 | 2023-06-23 | 11:52:44 | 64.1 | 63.7 | 61.5 |
| 167 | 2023-06-23 | 11:52:45 | 72.7 | 71.5 | 63.7 |
| 168 | 2023-06-23 | 11:52:46 | 75.3 | 74.2 | 71.6 |
| 169 | 2023-06-23 | 11:52:47 | 73.3 | 74.1 | 73.4 |
| 170 | 2023-06-23 | 11:52:48 | 73.1 | 73.7 | 73.3 |
| 171 | 2023-06-23 | 11:52:49 | 68.5 | 73.2 | 70.8 |
| 172 | 2023-06-23 | 11:52:50 | 63.8 | 70.8 | 67.7 |
| 173 | 2023-06-23 | 11:52:51 | 58.9 | 67.7 | 64.3 |
| 174 | 2023-06-23 | 11:52:52 | 55.5 | 64.3 | 60.9 |
| 175 | 2023-06-23 | 11:52:53 | 51.6 | 60.8 | 57.3 |
| 176 | 2023-06-23 | 11:52:54 | 47.4 | 57.3 | 53.8 |
| 177 | 2023-06-23 | 11:52:55 | 48.1 | 53.7 | 51.2 |
| 178 | 2023-06-23 | 11:52:56 | 51.2 | 51.4 | 50.5 |
| 179 | 2023-06-23 | 11:52:57 | 54.3 | 53.6 | 51.5 |
| 180 | 2023-06-23 | 11:52:58 | 51.7 | 53.4 | 52.3 |
| 181 | 2023-06-23 | 11:52:59 | 47.9 | 52.2 | 50.1 |
| 182 | 2023-06-23 | 11:53:00 | 48.0 | 50.1 | 48.9 |
| 183 | 2023-06-23 | 11:53:01 | 48.2 | 48.9 | 48.5 |
| 184 | 2023-06-23 | 11:53:02 | 50.6 | 50.0 | 48.6 |
| 185 | 2023-06-23 | 11:53:03 | 48.4 | 50.0 | 49.0 |
| 186 | 2023-06-23 | 11:53:04 | 45.4 | 49.0 | 47.1 |
| 187 | 2023-06-23 | 11:53:05 | 45.2 | 47.1 | 46.0 |
| 188 | 2023-06-23 | 11:53:06 | 45.9 | 46.1 | 45.9 |
| 189 | 2023-06-23 | 11:53:07 | 44.0 | 46.0 | 44.7 |
| 190 | 2023-06-23 | 11:53:08 | 42.0 | 44.7 | 43.2 |
| 191 | 2023-06-23 | 11:53:09 | 42.4 | 43.2 | 42.4 |
| 192 | 2023-06-23 | 11:53:10 | 46.0 | 45.2 | 43.0 |
| 193 | 2023-06-23 | 11:53:11 | 47.9 | 47.1 | 45.2 |
| 194 | 2023-06-23 | 11:53:12 | 49.3 | 48.7 | 47.1 |
| 195 | 2023-06-23 | 11:53:13 | 48.4 | 48.7 | 48.4 |
| 196 | 2023-06-23 | 11:53:14 | 50.6 | 50.1 | 48.6 |
| 197 | 2023-06-23 | 11:53:15 | 50.0 | 50.4 | 49.9 |
| 198 | 2023-06-23 | 11:53:16 | 46.2 | 49.8 | 47.8 |
| 199 | 2023-06-23 | 11:53:17 | 43.9 | 47.8 | 45.9 |
| 200 | 2023-06-23 | 11:53:18 | 47.3 | 47.0 | 46.2 |
| 201 | 2023-06-23 | 11:53:19 | 41.8 | 46.7 | 44.2 |
| 202 | 2023-06-23 | 11:53:20 | 39.7 | 44.2 | 42.0 |
| 203 | 2023-06-23 | 11:53:21 | 38.7 | 41.9 | 40.2 |
| 204 | 2023-06-23 | 11:53:22 | 38.5 | 40.2 | 39.2 |
| 205 | 2023-06-23 | 11:53:23 | 39.5 | 39.5 | 39.3 |
| 206 | 2023-06-23 | 11:53:24 | 39.8 | 39.7 | 39.5 |
| 207 | 2023-06-23 | 11:53:25 | 40.3 | 40.3 | 39.6 |
| | | | | | |

2023-06-23

2023-06-23

11:54:15

11:54:16

11:54:17

38.8

37.9

39.9

39.6

39.0

39.3

39.0

38.3

38.4

257

258

2023-06-23

2023-06-23

309

310

311

11:55:07

11:55:08

11:55:09

36.6

36.6

36.9

36.7

36.7

36.8

36.5

36.6

2023-06-23

2023-06-23

361

362

363

11:55:59

11:56:00

11:56:01

40.1

40.3

40.8

40.0

40.2

40.5

39.8

40.0

2023-06-23

2023-06-23

2023-06-23

2023-06-23

11:56:49

11:56:50

11:56:51

11:56:52

11:56:53

38.0

37.9

38.2

38.2

38.9

38.4

38.2

38.1

38.2

38.6

38.1

38.0

38.0

38.0

38.1

411

412

413

414

2023-06-23

2023-06-23

2023-06-23

39.6

41.0

46.0

47.4

11:57:42

11:57:43

11:57:44

11:57:45

40.9

40.9

45.3

47.0

40.2

40.1

40.8

45.3

463

464

465

466

| k Spillway | | Short T | erm Noise Mea | surement - Tin | ne History, S |
|------------|------------|----------|---------------|----------------|---------------|
| 468 | 2023-06-23 | 11:57:46 | 45.1 | 46.4 | 45.5 |
| 469 | 2023-06-23 | 11:57:47 | 45.8 | 46.1 | 45.6 |
| 470 | 2023-06-23 | 11:57:48 | 47.5 | 47.2 | 45.6 |
| 471 | 2023-06-23 | 11:57:49 | 46.0 | 46.7 | 46.2 |
| 472 | 2023-06-23 | 11:57:50 | 45.0 | 46.3 | 45.4 |
| 473 | 2023-06-23 | 11:57:51 | 43.8 | 45.4 | 44.4 |
| 474 | 2023-06-23 | 11:57:52 | 49.3 | 48.5 | 44.4 |
| 475 | 2023-06-23 | 11:57:53 | 45.4 | 48.6 | 46.7 |
| 476 | 2023-06-23 | 11:57:54 | 43.3 | 46.6 | 45.0 |
| 477 | 2023-06-23 | 11:57:55 | 42.6 | 45.1 | 43.6 |
| 478 | 2023-06-23 | 11:57:56 | 42.3 | 43.6 | 42.9 |
| 479 | 2023-06-23 | 11:57:57 | 42.8 | 43.1 | 42.8 |
| 480 | 2023-06-23 | 11:57:58 | 44.8 | 44.4 | 42.7 |
| 481 | 2023-06-23 | 11:57:59 | 45.9 | 45.9 | 44.2 |
| 482 | 2023-06-23 | 11:58:00 | 43.0 | 45.2 | 44.0 |
| 483 | 2023-06-23 | 11:58:01 | 40.7 | 44.0 | 42.3 |
| 484 | 2023-06-23 | 11:58:02 | 41.7 | 42.3 | 41.9 |
| 485 | 2023-06-23 | 11:58:03 | 43.6 | 43.2 | 42.0 |
| 486 | 2023-06-23 | 11:58:04 | 44.8 | 44.4 | 43.2 |
| 487 | 2023-06-23 | 11:58:05 | 44.0 | 44.4 | 44.1 |
| 488 | 2023-06-23 | 11:58:06 | 44.7 | 44.5 | 44.1 |
| 489 | 2023-06-23 | 11:58:07 | 44.9 | 44.9 | 44.4 |
| 490 | 2023-06-23 | 11:58:08 | 47.6 | 46.9 | 44.9 |
| 491 | 2023-06-23 | 11:58:09 | 50.4 | 49.5 | 46.9 |
| 492 | 2023-06-23 | 11:58:10 | 53.4 | 52.5 | 49.5 |
| 493 | 2023-06-23 | 11:58:11 | 54.2 | 53.7 | 52.5 |
| 494 | 2023-06-23 | 11:58:12 | 55.1 | 54.8 | 53.7 |
| 495 | 2023-06-23 | 11:58:13 | 54.9 | 55.0 | 54.1 |
| 496 | 2023-06-23 | 11:58:14 | 59.1 | 58.2 | 55.0 |
| 497 | 2023-06-23 | 11:58:15 | 62.3 | 61.2 | 58.2 |
| 498 | 2023-06-23 | 11:58:16 | 62.0 | 61.8 | 61.2 |
| 499 | 2023-06-23 | 11:58:17 | 59.6 | 61.7 | 60.5 |
| 500 | 2023-06-23 | 11:58:18 | 57.2 | 60.4 | 58.5 |
| 501 | 2023-06-23 | 11:58:19 | 52.5 | 58.5 | 55.7 |
| 502 | 2023-06-23 | 11:58:20 | 50.2 | 55.7 | 53.1 |
| 503 | 2023-06-23 | 11:58:21 | 47.3 | 53.0 | 50.4 |
| 504 | 2023-06-23 | 11:58:22 | 46.0 | 50.3 | 48.1 |
| 505 | 2023-06-23 | 11:58:23 | 43.8 | 48.1 | 45.8 |
| 506 | 2023-06-23 | 11:58:24 | 41.9 | 45.8 | 43.7 |
| 507 | 2023-06-23 | 11:58:25 | 41.6 | 43.7 | 42.5 |
| 508 | 2023-06-23 | 11:58:26 | 42.3 | 42.5 | 42.4 |
| 509 | 2023-06-23 | 11:58:27 | 42.0 | 42.4 | 42.1 |
| 510 | 2023-06-23 | 11:58:28 | 42.5 | 42.5 | 42.2 |
| 511 | 2023-06-23 | 11:58:29 | 42.7 | 42.7 | 42.3 |
| 512 | 2023-06-23 | 11:58:30 | 41.7 | 42.5 | 42.0 |
| 513 | 2023-06-23 | 11:58:31 | 41.5 | 42.1 | 41.7 |
| 514 | 2023-06-23 | 11:58:32 | 41.7 | 41.8 | 41.6 |
| 515 | 2023-06-23 | 11:58:33 | 41.7 | 41.8 | 41.6 |
| 516 | 2023-06-23 | 11:58:34 | 41.5 | 41.7 | 41.5 |
| 517 | 2023-06-23 | 11:58:35 | 42.7 | 42.4 | 41.6 |
| 518 | 2023-06-23 | 11:58:36 | 43.8 | 43.5 | 42.3 |
| 519 | 2023-06-23 | 11:58:37 | 48.3 | 47.4 | 43.6 |
| | | | | | |

2023-06-23

11:59:29

41.1

41.1

40.8

571

12:00:20

12:00:21

2023-06-23

2023-06-23

622

623

41.8

42.0

42.2

42.0

42.0

41.9

2023-06-23

2023-06-23

2023-06-23

2023-06-23

12:01:10

12:01:11

12:01:12

12:01:13

44.8

45.0

45.2

45.2

44.5

44.9

45.1

45.2

44.0

44.5

44.8

45.0

671

672 673

674

675

| k Spillway | | Short | Term Noise N | /leasurement - | Time History, S |
|------------|------------|----------|--------------|----------------|-----------------|
| 676 | 2023-06-23 | 12:01:14 | 46.0 | 45.8 | 45.2 |
| 677 | 2023-06-23 | 12:01:15 | 46.4 | 46.2 | 45.8 |
| 678 | 2023-06-23 | 12:01:16 | 46.4 | 46.4 | 46.2 |
| 679 | 2023-06-23 | 12:01:17 | 45.7 | 46.4 | 45.9 |
| 680 | 2023-06-23 | 12:01:18 | 44.9 | 45.9 | 45.2 |
| 681 | 2023-06-23 | 12:01:19 | 44.6 | 45.2 | 44.8 |
| 682 | 2023-06-23 | 12:01:20 | 44.5 | 44.9 | 44.6 |
| 683 | 2023-06-23 | 12:01:21 | 44.3 | 44.7 | 44.4 |
| 684 | 2023-06-23 | 12:01:22 | 44.3 | 44.5 | 44.4 |
| 685 | 2023-06-23 | 12:01:23 | 44.5 | 44.4 | 44.3 |
| 686 | 2023-06-23 | 12:01:24 | 44.5 | 44.6 | 44.4 |
| 687 | 2023-06-23 | 12:01:25 | 44.0 | 44.5 | 44.2 |
| 688 | 2023-06-23 | 12:01:26 | 43.8 | 44.2 | 43.9 |
| 689 | 2023-06-23 | 12:01:27 | 43.9 | 44.0 | 43.9 |
| 690 | 2023-06-23 | 12:01:28 | 43.9 | 44.0 | 43.9 |
| 691 | 2023-06-23 | 12:01:29 | 44.0 | 44.0 | 43.9 |
| 692 | 2023-06-23 | 12:01:30 | 43.8 | 44.0 | 43.9 |
| 693 | 2023-06-23 | 12:01:31 | 43.8 | 43.9 | 43.8 |
| 694 | 2023-06-23 | 12:01:32 | 43.6 | 43.8 | 43.6 |
| 695 | 2023-06-23 | 12:01:33 | 43.7 | 43.8 | 43.6 |
| 696 | 2023-06-23 | 12:01:34 | | 43.8 | 43.6 |
| 697 | 2023-06-23 | 12:01:35 | 43.6 | 43.6 | 43.5 |
| 698 | 2023-06-23 | 12:01:36 | 43.2 | 43.6 | 43.3 |
| 699 | 2023-06-23 | 12:01:37 | 43.3 | 43.4 | 43.3 |
| 700 | 2023-06-23 | 12:01:38 | 43.6 | 43.5 | 43.3 |
| 701 | 2023-06-23 | 12:01:39 | 43.6 | 43.6 | 43.5 |
| 702 | 2023-06-23 | 12:01:40 | 43.4 | 43.6 | 43.4 |
| 703 | 2023-06-23 | 12:01:41 | 43.4 | 43.5 | 43.4 |
| 704 | 2023-06-23 | 12:01:42 | 43.3 | 43.4 | 43.3 |
| 705 | 2023-06-23 | 12:01:43 | 43.4 | 43.5 | 43.3 |
| 706 | 2023-06-23 | 12:01:44 | 43.3 | 43.4 | 43.3 |
| 707 | 2023-06-23 | 12:01:45 | 43.1 | 43.3 | 43.1 |
| 708 | 2023-06-23 | 12:01:46 | 42.4 | 43.1 | 42.7 |
| 709 | 2023-06-23 | 12:01:47 | 42.7 | 42.7 | 42.6 |
| 710 | 2023-06-23 | 12:01:48 | 42.6 | 42.7 | 42.6 |
| 711 | 2023-06-23 | 12:01:49 | 42.5 | 42.7 | 42.5 |
| 712 | 2023-06-23 | 12:01:50 | 42.7 | 42.8 | 42.4 |
| 713 | 2023-06-23 | 12:01:51 | 42.4 | 42.6 | 42.4 |
| 714 | 2023-06-23 | 12:01:52 | 41.7 | 42.4 | 42.0 |
| 715 | 2023-06-23 | 12:01:53 | 41.5 | 42.0 | 41.7 |
| 716 | 2023-06-23 | 12:01:54 | 41.8 | 41.8 | 41.7 |
| 717 | 2023-06-23 | 12:01:55 | 42.0 | 41.9 | 41.7 |
| 718 | 2023-06-23 | 12:01:56 | 42.4 | 42.3 | 41.9 |
| 719 | 2023-06-23 | 12:01:57 | 43.3 | 42.9 | 42.3 |
| 720 | 2023-06-23 | 12:01:58 | 43.1 | 43.1 | 42.9 |
| 721 | 2023-06-23 | 12:01:59 | 43.0 | 43.0 | 43.0 |
| 722 | 2023-06-23 | 12:02:00 | 43.0 | 43.1 | 42.9 |
| 723 | 2023-06-23 | 12:02:01 | 42.3 | 43.0 | 42.5 |
| 724 | 2023-06-23 | 12:02:02 | 42.1 | 42.6 | 42.2 |
| 725 | 2023-06-23 | 12:02:03 | 42.4 | 42.4 | 42.2 |
| 726 | 2023-06-23 | 12:02:04 | 41.9 | 42.4 | 42.1 |
| 727 | 2023-06-23 | 12:02:05 | 42.4 | 42.3 | 42.1 |
| | | | | | |

12:02:28

12:02:29

12:02:30

12:02:31

12:02:32

12:02:33

12:02:34

12:02:35

12:02:36

12:02:37

12:02:38

12:02:39

12:02:40

12:02:41

12:02:42

12:02:43

12:02:44

12:02:45

12:02:46

12:02:47

12:02:48

12:02:49

12:02:50

12:02:51

12:02:52

12:02:53

12:02:54

12:02:55

12:02:56

12:02:57

2023-06-23

2023-06-23

2023-06-23

2023-06-23

2023-06-23

2023-06-23

2023-06-23

2023-06-23

2023-06-23

2023-06-23

2023-06-23

2023-06-23

2023-06-23

2023-06-23

2023-06-23

2023-06-23

2023-06-23

2023-06-23

2023-06-23

2023-06-23

2023-06-23

2023-06-23

2023-06-23

2023-06-23

2023-06-23

2023-06-23

2023-06-23

2023-06-23

2023-06-23

2023-06-23

750

751

752

753

754

755

756

757

758

759

760

761

762

763

764

765

766

767

768

769

770

771

772

773

774

775

776 777

778

779

42.4

42.7

42.4

42.4

42.3

41.6

41.2

41.0

41.0

41.0

41.4

41.5

41.3

41.4

41.2

41.4

41.5

41.3

41.5

40.9

40.9

40.9

41.4

41.4

41.3

40.6

40.6

40.9

40.7

40.3

42.4

42.6

42.6

42.5

42.4

42.3

41.9

41.4

41.2

41.1

41.3

41.4

41.4

41.4

41.4

41.4

41.5

41.5

41.5

41.4

41.2

41.0

41.3

41.3

41.4

41.3

40.9

40.9

40.8

40.7

42.3

42.4

42.4

42.4

42.3

41.8

41.4

41.2

41.0

41.0

41.0

41.3

41.3

41.3

41.2

41.2

41.3

41.3

41.4 41.1

40.9

40.8

41.0

41.2

41.3

40.9

40.7

40.7

40.7

40.4

| k Spiliway | | 311011 | errir ivoise iviea | isurement - mi | ie nistory, s |
|------------|------------|----------|--------------------|----------------|---------------|
| 780 | 2023-06-23 | 12:02:58 | 40.4 | 40.5 | 40.4 |
| 781 | 2023-06-23 | 12:02:59 | 40.4 | 40.5 | 40.3 |
| 782 | 2023-06-23 | 12:03:00 | 39.8 | 40.3 | 40.0 |
| 783 | 2023-06-23 | 12:03:01 | 39.5 | 40.0 | 39.7 |
| 784 | 2023-06-23 | 12:03:02 | 39.5 | 39.7 | 39.4 |
| 785 | 2023-06-23 | 12:03:03 | 39.9 | 39.9 | 39.5 |
| 786 | 2023-06-23 | 12:03:04 | 39.7 | 39.9 | 39.7 |
| 787 | 2023-06-23 | 12:03:05 | 40.3 | 40.1 | 39.7 |
| 788 | 2023-06-23 | 12:03:06 | 41.3 | 40.9 | 40.1 |
| 789 | 2023-06-23 | 12:03:07 | 40.5 | 40.9 | 40.6 |
| 790 | 2023-06-23 | 12:03:08 | 39.9 | 40.6 | 40.2 |
| 791 | 2023-06-23 | 12:03:09 | 40.6 | 40.6 | 40.1 |
| 792 | 2023-06-23 | 12:03:10 | 40.3 | 40.5 | 40.3 |
| 793 | 2023-06-23 | 12:03:11 | 41.0 | 40.8 | 40.4 |
| 794 | 2023-06-23 | 12:03:12 | 42.8 | 42.3 | 40.8 |
| 795 | 2023-06-23 | 12:03:13 | 42.0 | 42.3 | 42.1 |
| 796 | 2023-06-23 | 12:03:14 | 43.2 | 43.0 | 42.1 |
| 797 | 2023-06-23 | 12:03:15 | 42.3 | 42.8 | 42.4 |
| 798 | 2023-06-23 | 12:03:16 | 46.3 | 45.2 | 42.4 |
| 799 | 2023-06-23 | 12:03:17 | 45.1 | 46.0 | 44.9 |
| 800 | 2023-06-23 | 12:03:18 | 44.3 | 44.8 | 44.5 |
| 801 | 2023-06-23 | 12:03:19 | 44.9 | 45.4 | 44.5 |
| 802 | 2023-06-23 | 12:03:20 | 42.2 | 44.5 | 43.2 |
| 803 | 2023-06-23 | 12:03:21 | 46.7 | 45.7 | 43.3 |
| 804 | 2023-06-23 | 12:03:22 | 50.5 | 49.6 | 45.7 |
| 805 | 2023-06-23 | 12:03:23 | 43.5 | 49.2 | 46.5 |
| 806 | 2023-06-23 | 12:03:24 | 43.3 | 46.5 | 44.9 |
| 807 | 2023-06-23 | 12:03:25 | 46.8 | 46.4 | 44.7 |
| 808 | 2023-06-23 | 12:03:26 | 45.3 | 46.5 | 45.6 |
| 809 | 2023-06-23 | 12:03:27 | 45.6 | 45.8 | 45.0 |
| 810 | 2023-06-23 | 12:03:28 | 45.5 | 45.9 | 45.4 |
| 811 | 2023-06-23 | 12:03:29 | 44.5 | 45.7 | 44.9 |
| 812 | 2023-06-23 | 12:03:30 | 44.1 | 44.9 | 44.2 |
| 813 | 2023-06-23 | 12:03:31 | 46.5 | 46.0 | 44.5 |
| 814 | 2023-06-23 | 12:03:32 | 44.8 | 46.0 | 45.3 |
| 815 | 2023-06-23 | 12:03:33 | 42.4 | 45.3 | 43.6 |
| 816 | 2023-06-23 | 12:03:34 | 41.4 | 43.6 | 42.3 |
| 817 | 2023-06-23 | 12:03:35 | 42.3 | 42.4 | 42.2 |
| 818 | 2023-06-23 | 12:03:36 | 44.5 | 44.2 | 42.2 |
| 819 | 2023-06-23 | 12:03:37 | 46.1 | 45.7 | 44.2 |
| 820 | 2023-06-23 | 12:03:38 | 43.5 | 45.7 | 44.3 |
| 821 | 2023-06-23 | 12:03:39 | 42.0 | 44.3 | 43.0 |
| 822 | 2023-06-23 | 12:03:40 | 43.0 | 43.1 | 42.9 |
| 823 | 2023-06-23 | 12:03:41 | 42.3 | 43.4 | 42.4 |
| 824 | 2023-06-23 | 12:03:42 | 41.9 | 42.4 | 42.1 |
| 825 | 2023-06-23 | 12:03:43 | 42.8 | 42.7 | 42.1 |
| 826 | 2023-06-23 | 12:03:44 | 44.1 | 43.7 | 42.7 |
| 827 | 2023-06-23 | 12:03:45 | 42.8 | 43.7 | 43.1 |
| 828 | 2023-06-23 | 12:03:46 | 42.4 | 43.1 | 42.6 |
| 829 | 2023-06-23 | 12:03:47 | 42.1 | 42.6 | 42.3 |
| 830 | 2023-06-23 | 12:03:48 | 43.1 | 42.9 | 42.2 |
| 831 | 2023-06-23 | 12:03:49 | 43.0 | 43.0 | 42.8 |
| | | | | | |

| k Spiliway | | 311011.1 | erri ivoise iviea | surement - m | ne history, s |
|------------|------------|----------|-------------------|--------------|---------------|
| 832 | 2023-06-23 | 12:03:50 | 43.1 | 43.1 | 43.0 |
| 833 | 2023-06-23 | 12:03:51 | 43.1 | 43.1 | 43.0 |
| 834 | 2023-06-23 | 12:03:52 | 43.5 | 43.3 | 43.1 |
| 835 | 2023-06-23 | 12:03:53 | 43.5 | 43.5 | 43.3 |
| 836 | 2023-06-23 | 12:03:54 | 43.1 | 43.5 | 43.2 |
| 837 | 2023-06-23 | 12:03:55 | 43.6 | 43.6 | 43.2 |
| 838 | 2023-06-23 | 12:03:56 | 43.0 | 43.4 | 43.1 |
| 839 | 2023-06-23 | 12:03:57 | 43.1 | 43.2 | 43.0 |
| 840 | 2023-06-23 | 12:03:58 | 43.6 | 43.5 | 43.2 |
| 841 | 2023-06-23 | 12:03:59 | 42.9 | 43.4 | 43.1 |
| 842 | 2023-06-23 | 12:04:00 | 42.6 | 43.1 | 42.7 |
| 843 | 2023-06-23 | 12:04:01 | 42.5 | 42.8 | 42.6 |
| 844 | 2023-06-23 | 12:04:02 | 42.9 | 42.9 | 42.5 |
| 845 | 2023-06-23 | 12:04:03 | 43.9 | 43.5 | 42.9 |
| 846 | 2023-06-23 | 12:04:04 | 42.9 | 43.4 | 43.1 |
| 847 | 2023-06-23 | 12:04:05 | 43.6 | 43.5 | 43.1 |
| 848 | 2023-06-23 | 12:04:06 | 44.6 | 44.4 | 43.4 |
| 849 | 2023-06-23 | 12:04:07 | 44.0 | 44.4 | 44.1 |
| 850 | 2023-06-23 | 12:04:08 | 43.7 | 44.1 | 43.8 |
| 851 | 2023-06-23 | 12:04:09 | 44.1 | 44.1 | 43.8 |
| 852 | 2023-06-23 | 12:04:10 | 42.5 | 44.0 | 43.0 |
| 853 | 2023-06-23 | 12:04:11 | 42.6 | 43.0 | 42.8 |
| 854 | 2023-06-23 | 12:04:12 | 42.3 | 42.8 | 42.4 |
| 855 | 2023-06-23 | 12:04:13 | 42.2 | 42.5 | 42.3 |
| 856 | 2023-06-23 | 12:04:14 | 41.5 | 42.3 | 41.8 |
| 857 | 2023-06-23 | 12:04:15 | 41.6 | 41.8 | 41.6 |
| 858 | 2023-06-23 | 12:04:16 | 41.2 | 41.6 | 41.3 |
| 859 | 2023-06-23 | 12:04:17 | 40.8 | 41.3 | 41.0 |
| 860 | 2023-06-23 | 12:04:18 | 40.3 | 41.0 | 40.5 |
| 861 | 2023-06-23 | 12:04:19 | 40.7 | 40.7 | 40.5 |
| 862 | 2023-06-23 | 12:04:20 | 40.2 | 40.7 | 40.4 |
| 863 | 2023-06-23 | 12:04:21 | 39.9 | 40.4 | 40.1 |
| 864 | 2023-06-23 | 12:04:22 | 40.5 | 40.4 | 40.0 |
| 865 | 2023-06-23 | 12:04:23 | 40.5 | 40.5 | 40.4 |
| 866 | 2023-06-23 | 12:04:24 | 40.1 | 40.4 | 40.2 |
| 867 | 2023-06-23 | 12:04:25 | 40.3 | 40.4 | 40.2 |
| 868 | 2023-06-23 | 12:04:26 | 40.2 | 40.3 | 40.1 |
| 869 | 2023-06-23 | 12:04:27 | 40.0 | 40.2 | 40.0 |
| 870 | 2023-06-23 | 12:04:28 | 40.5 | 40.5 | 40.1 |
| 871 | 2023-06-23 | 12:04:29 | 39.7 | 40.3 | 40.0 |
| 872 | 2023-06-23 | 12:04:30 | 39.8 | 40.0 | 39.8 |
| 873 | 2023-06-23 | 12:04:31 | 40.1 | 40.1 | 39.8 |
| 874 | 2023-06-23 | 12:04:32 | 40.2 | 40.2 | 40.0 |
| 875 | 2023-06-23 | 12:04:33 | 40.2 | 40.2 | 40.1 |
| 876 | 2023-06-23 | 12:04:34 | 40.2 | 40.2 | 40.1 |
| 877 | 2023-06-23 | 12:04:35 | 40.5 | 40.4 | 40.2 |
| 878 | 2023-06-23 | 12:04:36 | 40.6 | 40.5 | 40.4 |
| 879 | 2023-06-23 | 12:04:37 | 39.9 | 40.6 | 40.1 |
| 880 | 2023-06-23 | 12:04:38 | 39.6 | 40.2 | 39.8 |
| 881 | 2023-06-23 | 12:04:39 | 39.6 | 39.8 | 39.7 |
| 882 | 2023-06-23 | 12:04:40 | 39.7 | 39.7 | 39.6 |
| 883 | 2023-06-23 | 12:04:41 | 39.0 | 39.7 | 39.3 |
| | | | | | |

12:04:59

12:05:00

12:06:03

2023-06-23

2023-06-23

2023-06-23

901

902

903

Stop

Calibration Change

40.0

39.8

39.8

Appendix E-3 **Field Sheets**

| Motor | Lacations |
|-------|-----------|

| | ivieter Locations | | | | | | | | |
|----------------|-------------------|-------|---------------------------------|--------------|------------|-----------------|----------------|-------------|--|
| { { | | 9 | Start | } S | Stop | Start Cal | End Cal | Lock # | Location Description |
| Site # | Meter# | Time | Date | Time | Date | | L | | |
| <u>2</u> T-2 | A | 10:50 | 20230626 | 11:15 | 20230623 | 13.83 mar/pr | 13.92 | | Just Besse Bridge to regulater Up a hill on Telephone Pole |
| LT-1 | D | 11:27 | | 10:55 | 20230623 | 17.02 nyp. | 16.82 | | 3rd Telephone poor from Roal (Telephone to Eight of dirt Path. |
| LP-3 | A ZIOS | 2:35 | | 2135 1:19 | 22233623 | 14.34 mups | 14.15 m5/P4 | | LT-3 bodion cost Self Spring Telephon like |
| LT-4 | 4006 | 3:05 | | niss | 20220623 | 4,79 mo/p. | 14.9 ms/ps | | Caroly + Melica in recomitions |
| II-5 Bullup | J | 3:30 | | 1:10 | 2023 6623 | 16.44 mv | 16.63 | T | north of Mckenzie /Carolya intersection |
| LZS | I | 3041 | 1 1 1 1 1 1 1 | 1:18 | 7073 00 | 16,82 mJ/p | 16.92 NJO2 | - | LT-SBackup Telephone pole Just north of Ceder Mill off 68. |

23

LT-1: distant fireums @ pickup

LT-4: True work deeper in reignborhood.

LT-3; heighber 619055 Sheet doing time prender Stude



i-s
on religherize pole, off Uside of 98
between home and Zips Pioneer Browshap

NOISE MEASUREMENT SITE INFORMATION SHEET

Jones & Stokes

| PROJECT NAME: | | | | | PROJECT# | · | |
|--|-----------------|-------------|--|---------------------------------|------------------|----------------------------|------------------------|
| SITE NUMBER: | ST-1 | | | | | | -3 |
| LOCATION/ADDRESS: | Regula | tes | | | ENGINEERS | 2023 06 2 Schunda | was W. |
| SITE SKETCH: Show roadways, driveways, grand camera locations/di | ound type, tree | s. Indicate | reference c | listances bet | ween objects, | arrows showing | wind direction, North, |
| "Glonge. Shout Sor debris | | Senu | the state of the s | Jence Sence | | | |
| WEATHER DATA: (terr | nperature, wind | speed/dire | ction, sky co | onditions, rel | ative humidity) | | |
| | 55.1 | 2.(| Ch | out. | \$6. | 9 | |
| EQUIPMENT DATA: (| sound level met | er, microph | none, pream | p, calibrator, \ (e.1 zew | | ate) Pre: +0.07 UKAI | -dr\$ |
| ESTIMATED CONSTRUPOSTED SPEED: TRAFFIC COUNTS: | JCTION DATE | OF RESID | | Pre-1978, or | new construction | on) | |
| Roadway/Direction | | Autos | Modium | Норуч | Speed | Start Time | Duration |
| 1 todaway/Direction | | Autos | Medium | Heavy | Sheed | Start Time | IDUIAUOII |
| | | | | | | | |
| | | 1 | | <u> </u> | | 1 | |
| | | | | | | | |

NOISE MEASUREMENT LOG SHEET (20)

Iones & Stokes

| | | 290. | | | | , | | Jones & Stokes |
|-----|--------------------|-----------------------|--------------|--------|---------------------|-----------------|---|--|
| | JECT NAME: | | ger Cre | eu spi | Hwny for /spilla | | PROJECT #: _ | 9 mm a 4 /2 4 mm |
| | NUMBER: | <u> </u> | 1 | 20 . | | | DATE/TIME: _ | 202306 23 10:17 |
| LOC | ATION/ADDRE | SS: New | Creek | Kegulu | tor / Sp; 11 h | sky. | | Schambur N. |
| # | Minute Starting | Measured Leq (dBA) | O or A | lutos | Medium Trucks | Heavy Trucks | (includ | se Sources/Comments de SLM equipment, alibration Data) |
| 1 | 10:17 | | | | | | | |
| 2 | 10:18 | | | | | | | |
| 3 | 19 | | | | | | | • |
| 4 | 20 | | | | | | | |
| 5 | 21 | | | | | | | 77 77 77 |
| 6 | 21 | | | | | | | |
| 7 | 23 | | | 2 | | | | |
| 8 | 29 | | | | | | | |
| 9 | 25 | | | | | | | |
| 10 | 26 | | | | | | Squaking / L - i whitele so Squaking (1s again | oude Bird? |
| 11 | 27 | | | | | | Squeezing (1s | internitual.) |
| 12 | 58 | | | | | | | |
| 13 | 29 | | | | | | | |
| 14 | 30 | | | | | | distant square, | |
| 15 | 31 | | | _ | | | | Lmax 61.6 |
| 16 | | | | | | | | Lmin 59.5 |
| 17 | | | | | | | | L10 60.6 |
| 18 | - | | | | | | | L33 60.4 |
| 19 | | | | : | | | | L50 60.2 |
| 20 | | | | i | | | | L90 59.9 |

| Overall Leq (Include "O" minutes, Exclude "X" minutes) | = | l | abr |
|--|---|---|-----|
| Subset Leq (Exclude "O" and "X" minutes) | = | | dBA |

[&]quot;O" = other characteristic sources that contributed to the Leq

[&]quot;X" = exclude from Leq calculation; a non-typical source contaminated the measurement

NOISE MEASUREMENT SITE INFORMATION SHEET

Jones & Stokes

| PROJECT NAME: | Tros | . (reell | Spillway | J | PROJECT #: | | |
|---|----------------|------------------|--------------|----------------|---------------------------------------|---------------|------------------------|
| SITE NUMBER: | ST-2. | | | | DATE/TIME: | 2023 06 2 | 3 |
| LOCATION/ADDRESS: | Tigar Crue | K Road | | | ENGINEERS | Schumiker | N |
| SITE SKETCH: Show mic roadways, driveways, groun and camera locations/direc | nd type, tree: | s. Indicate | reference | distances be | tween objects, a | rrows showing | wind direction, North, |
| | | Tiqu | CFE | en | Road | A. | |
| WEATHER DATA: (temper | rature, wind | | ction, sky c | onditions, rel | ative humidity) | | |
| EQUIPMENT DATA: (sou | nd level mete | er micronh | one pream | en calibrator | | a) | |
| EQUIPMENT DATA. (304 | nu ievei mea | 31, IIIIGI OPI 1 | Ollei hieau | ip, calibrator | , lactory car. dar | Re: to | .06dB |
| Detc. 081 | 021 | | | (4/20 |) <i>(</i> | Rost : | 06dB |
| ESTIMATED CONSTRUCT POSTED SPEED: | | OF RESIDE | • | Pre-1978, or | | | |
| TRAFFIC COUNTS: | | | | | | | |
| Roadway/Direction | | Autos | Medium | Heavy | Speed | Start Time | Duration |
| | | | | | | | |
| | | | | | · · · · · · · · · · · · · · · · · · · | | |
| ., | | | | | | | |

NOISE MEASUREMENT LOG SHEET (20)

Jones & Stokes

| PROJECT NAME: | Tigo Creek Collway | PROJECT#: |
|-------------------|--------------------|-----------------------------|
| SITE NUMBER: | ST-2 | DATE/TIME: 2023 06 23 11:50 |
| LOCATION/ADDRESS: | Tigo (need Nort | ENGINEERS: Schomaker N. |

| # | Minute Starting | Measured Leq (dBA) | O or X | Autos | Medium Trucks | Heavy Trucks | Other Noise Sourc (include SLM e Calibration | quipment, |
|----|--------------------|-----------------------|--------------|---|------------------|-----------------|--|-------------------------------|
| 1 | 11:50 | | | | | | prop plane | 1 |
| 2 | 11:51 | | | teritorius anticaminista della 1997 efficiante i carice della | | | Proce Arm by | |
| 3 | 11/52 | | i | | | | propoline ends 2:15 | |
| 4 | 11:53 | | | | | | Some Truck Indistance | |
| 5 | , 54 | | | | | | day backing (distant | -) Birds |
| 6 | 11/55 | | | | | | (| 8:19:45 |
| 7 | 11:56 | | | | ! | | dogs bushing (disturt) | Birds |
| 8 | 11:57 | | | | | | prop plane (distant but Bee Buzzin | sproching) Tires something |
| 9 | 11:58 | | | | | | Truch pass by | 7 0 |
| 10 | 11:59 | | | | | | prop plan | |
| 11 | 12:00 | | | - | | | propipline gone | |
| 12 | 12; .51 | | | | | | Seaguil, distart dog | pr |
| 13 | 12:02 | | | | | | Gergoria dividante da | |
| 14 | 12;03 | | | | : | | Set plane overhood | Leq 57.0 |
| 15 | 12:04 | | | | | | biob byers | Lmax 74.2 |
| 16 | | | | | | | | Lmin 36.2 |
| 17 | | | | | No.5e 50 | Through. | or" Brids | L10 46, 8 |
| 18 | | | | | | | | L33 42.6 |
| 19 | | | i | | | | | L50 41,1 |
| 20 | | : ! } | | | | | | L90 38.3 |

| Overall Leq (Include "O" minutes, Exclude "X" minutes) | == | dBA |
|--|----|-----|
| Subset Leq (Exclude "O" and "X" minutes) | = | dBA |

[&]quot;O" = other characteristic sources that contributed to the Leq

[&]quot;X" = exclude from Leq calculation; a non-typical source contaminated the measurement

Appendix E-4 **Field Pictures**



LT-1 Looking Northeast



LT-1 Looking Southwest



LT-1 Looking Southeast



LT-2 Looking North



LT-2 Looking East



LT-2 Looking North, close up



LT-2 Looking South



LT-3 Looking Northeast



LT-3 Looking Southwest



LT-3 Looking Southeast



LT-4 Looking Northeast



LT-4 Looking Southeast



LT-4 Looking Northwest



LT-5 Looking North



LT-5 Looking West



LT-5 Looking Northwest



LT-6 Looking East



LT-6 Looking West



LT-6 Looking Southeast



ST-1 Looking North



ST-1 Looking Southwest



ST-1 Looking Northeast



ST-1 Looking Southeast



ST-2 Looking East



ST-2 Looking West



ST-2 Looking South

Appendix E-5 Construction Noise Modeling

Tiger Creek Spillway

Construction Equipment List - Provided by Applicant

| Code | Phase/Sub-Phase | Equipment Type | Fuel Type | # of equipment per day | Operating hours/equipment per day | |
|-------------------------------|--|---|---------------|------------------------|-----------------------------------|------------|
| 1 | Backilination and Access Development | | | | nours/ equipment per uny | 4 |
| 1-1 | Mobilization and Access Development Tree Removal | CAT 325DFM Tracked Log Loader | Diesel | 1 | 8 | 1 |
| 1-1 | Tree Removal | CAT 950H Rubber Tire Loader | Diesel | 1 | 6 | t |
| 1-1 | Tree Removal | CAT 545C Rubber Tire Skid w/ Winch | Diesel | 1 | 8 | 1 |
| 1-1 | Tree Removal | Timbco 425 Feller-Buncher | Diesel | 1 | 8 | Adde |
| 1-1 | Tree Removal | John Deere 2654G Log Processor | Diesel | 1 | 8 | Adde |
| 1-1 | Tree Removal | CAT 527 Tracked Skidder | Diesel | 1 | 6 | , |
| 1-1 | Tree Removal | Peterson Pacific 4310B Chipper | Diesel | 1 | 6 | 1 |
| 1-1 | Tree Removal | Chainsaw | Gasoline | 3 | 8 | Adde |
| 1-1 | Tree Removal | 4000 Gallon Water Truck | Diesel | 1 | 6 | 1 |
| 1-1 | Tree Removal | Ford F-250 | Gas | 3 | 1.5 | 1 |
| 1-2 | Mobilization | None | - | - | - | 1 |
| 1-3 | Laydown Area Development | CAT D6 Dozer | Diesel | 1 | 8 | 1 |
| 1-3 | Laydown Area Development | CAT TL 1255 Telehandler | Diesel | 1 | 6 | 1 |
| 1-3 | Laydown Area Development | CAT 950 Loader | Diesel | 1 | 6 | 1 |
| 1-3 | Laydown Area Development | 4000 Gallon Water Truck | Diesel | 1 | 8 | 1 |
| 1-3 | Laydown Area Development | Ford F250 | Gas | 1 | 1.5 | 1 |
| 1-4 | Access Road Construction | CAT D6 Dozer | Diesel | 1 | 8 | 1 |
| 1-4 | Access Road Construction | CAT 735 Off-Highway Truck | Diesel | 4 | 9 | 1 |
| 1-4 | Access Road Construction | CAT 349 Excavator | Diesel | 1 | 9 | 1 |
| 1-4 | Access Road Construction | CAT CP86 Roller Compactor | Diesel | 1 | 10 | 1 |
| 1-4 | Access Road Construction | 4000 Gal Water Truck | Diesel | 1 | 10 | 1 |
| 1-4 | Access Road Construction | Ford F250 | Gas | 1 | 2 | 1 |
| 2 | Spillway Chute and Flip Bucket | | | | | 1 |
| 2-1 | Spillway excavation/subgrade | CAT D6 Dozer | Diesel | 1 | 8 | 1 |
| 2-1 | Spillway excavation/subgrade | CAT 735 Off-Highway Truck | Diesel | 4 | 9 | 1 |
| 2-1 | Spillway excavation/subgrade | CAT 349 Excavator | Diesel | 1 | 9 | 1 |
| 2-1 | Spillway excavation/subgrade | CAT 297/299 Skid Steer | Diesel | 1 | 5 | 1 |
| 2-1 | Spillway excavation/subgrade | Sandvick Ranger 600R Drill | Diesel | 1 | 5 | 1 |
| 2-1 | Spillway excavation/subgrade | 4000 Gallon Water Truck | Diesel | 1 | 10 | 1 |
| 2-1 | Spillway excavation/subgrade | Ford F250 | Gas | 1 | 2 | 1 |
| 2-2 | Spillway Form and Pour Concrete | Concrete Pump | Diesel | 1 | 5 | 1 |
| 2-2 | Spillway Form and Pour Concrete | 375 Air Compressor | Diesel | 1 | 5 | 1 |
| 2-2 | Spillway Form and Pour Concrete | Crane Crawler 150 Ton | Diesel | 1 | 6 | 1 |
| 2-2 | Spillway Form and Pour Concrete | Generator 45-55 kW (for light tower) | Diesel | 1 | 10 | 1 |
| 2-2 | Spillway Form and Pour Concrete | CAT 297/299 Skid Steer | Diesel | 1 | 5 | 1 |
| 2-2 | Spillway Form and Pour Concrete | Ford F250 | Gas | 1 | 2 | 1 |
| 2-2 | Spillway Form and Pour Concrete | Ford F450 Flat Bed | Diesel | 1 | 8 | 1 |
| 2-3 | Drains, Cleanouts, and Backfill | None | - Diesei | - | - | 1 |
| 3 | Cofferdam | None | | | | i |
| 3-1 to 3-3 | Mass concrete, Excavate cofferdam, Place piles, sheets, and concrete | CAT TL 1255 Telehandler | Diesel | 1 | 6 | Equip |
| 3-1 to 3-3 | Mass concrete, Excavate cofferdam, Place piles, sheets, and concrete | CAT 336 Excavator | Diesel | 1 | 5 | Equip |
| 3-1 to 3-3 | Mass concrete, Excavate cofferdam, Place piles, sheets, and concrete | Crane Crawler 150 Ton | Diesel | 1 | 6 | Equip |
| 3-1 to 3-3 | Mass concrete, Excavate cofferdam, Place piles, sheets, and concrete | Ford F250 | Gas | 1 | 2 | Equip |
| 3-1 to 3-3 | Mass concrete, Excavate cofferdam, Place piles, sheets, and concrete | Ford F550 | Diesel | 1 | 2 | Equip |
| 3-4, 3-5, 3-6 | Trench Cutoff Concrete (limited to 3-days) | Concrete Pump | Diesel | 1 | 8 | Equip |
| | Trench Cutoff Concrete (limited to 3-days) | CAT 297/299 Skid Steer | Diesel | 1 | 5 | Equip |
| | Trench Cutoff Concrete (limited to 3-days) | Generator 45-55 kW | Diesel | 1 | 10 | Equip |
| | Trench Cutoff Concrete (limited to 3-days) | CAT TL 1255 Telehandler | Diesel | 1 | 6 | Lyuip |
| | Trench Cutoff Concrete (limited to 3-days) Trench Cutoff Concrete (limited to 3-days) | Ford F250 | Gas | 1 | 2 | Equip |
| л ч, л-л, л-б Л | Crest Structure | 10101230 | Gas | 1 | | Lyuip |
| <i>1</i> _1 | Crest excavation/ subgrade | CAT D6 Dozer | Diesel | 1 | 8 | 1 |
| 4-1 4-1 | Crest excavation/ subgrade Crest excavation/ subgrade | CAT 735 Off-Highway Truck | Diesel | 4 | 9 | 1 |
| 4-1 4-1 | Crest excavation/ subgrade Crest excavation/ subgrade | CAT 735 Off-Highway Truck CAT 349 Excavator | Diesel | 1 | 9 | ł |
| 4-1 4-1 | Crest excavation/ subgrade Crest excavation/ subgrade | Sandvick Ranger 600R Drill | Diesel | 1 | 5 | 1 |
| 4-1 4-1 | | 4000 Gallon Water Truck | | | 10 | 1 |
| 4-1 4-1 | Crest excavation/ subgrade Crest excavation/ subgrade | Ford F250 | Diesel | 1 | 2 | 1 |
| 4-1 4-2 | Crest Form and Pour Concrete | Concrete Pump | Gas Diesel | 1 | 5 | 1 |
| 4-2 4-2 | | | Diesel | 1 | 5 | 1 |
| 4-2 4-2 | Crest Form and Pour Concrete | 375 Air Compressor | | | | 1 |
| | Crest Form and Pour Concrete | Crane Crawler 150 Ton | Diesel | 1 | 6 | + |
| 4-2 | Crest Form and Pour Concrete | Generator 45-55 kW (for light tower) | Diesel | 1 | 10 | 4 |
| 4-2 | Crest Form and Pour Concrete | CAT 297/299 Skid Steer | Diesel | 1 | 5 | 4 |
| 4-2 | Crest Form and Pour Concrete | Ford F250 | Gas | 1 | 2 | 4 |
| 4-2 | Crest Form and Pour Concrete | Ford F450 Flat Bed | Diesel | 1 | 2 | 4 |
| | Dam Notch and Tie-in Chute | | L | | | - − |
| 5-1, 5-2 | Demolition, Excavation, Subgrade Prep, and Rock Anchors | CAT 336 Excavator | Diesel | 1 | 10 | Equip |

Added 6/26 per PD revision Added 6/26 per PD revision

Added 6/26 per PD revision

quipment used through all Phase 3 sub-phases, excluding Trench Cutoff Concrete quipment used through all Phase 3 sub-phases, excluding Trench Cutoff Concrete quipment used through all Phase 3 sub-phases, excluding Trench Cutoff Concrete quipment used through all Phase 3 sub-phases, excluding Trench Cutoff Concrete quipment used through all Phase 3 sub-phases, excluding Trench Cutoff Concrete quipment used for all three days quipment used for all three days

Equipment used for all three days

quipment used for Phases 5-1 and 5-2

Tiger Creek Spillway

Construction Equipment List - Provided by Applicant

| 5-1. 5-2 | Demolition, Excavation, Subgrade Prep, and Rock Anchors | CAT 349 Excavator | Diesel | 1 | 10 | Equipment used for Phases 5-1 and 5-2 |
|-----------------|--|---|----------------------|-------------|--------|---|
| 5-1, 5-2 | Demolition, Excavation, Subgrade Prep, and Rock Anchors | Hydraulic Breaker for Excavator | N/A | 1 | 10 | ** Assuming Equipment used for Phases 5-1 and 5-2 |
| 5-1, 5-2 | Demolition, Excavation, Subgrade Prep, and Rock Anchors | Concrete Saws | Gas | 2 | 8 | ** Assuming Equipment used for Phases 5-1 and 5-2 |
| 5-1, 5-2 | Demolition, Excavation, Subgrade Prep, and Rock Anchors | CAT 735 Off-Highway Truck | Diesel | 1 | 3 | Equipment used for Phases 5-1 and 5-2 |
| 5-1, 5-2 | Demolition, Excavation, Subgrade Prep, and Rock Anchors Demolition, Excavation, Subgrade Prep, and Rock Anchors | Ford F250 | Gas | 1 | 2 | Equipment used for Phases 5-1 and 5-2 |
| 5-3, 5-4 | | | Diesel | 1 | 2 | |
| 5-3, 5-4 | Form and Pour Concrete; Footbridge Install | Concrete Pump 375 Air Compressor | Diesel | 1 | 2 5 | Equipment used for Phases 5-3 and 5-4 |
| 5-3, 5-4 | Form and Pour Concrete; Footbridge Install | Crane Crawler 150 Ton | Diesel | 1 | 6 | Equipment used for Phases 5-3 and 5-4 |
| | Form and Pour Concrete; Footbridge Install | | | | - | Equipment used for Phases 5-3 and 5-4 |
| 5-3, 5-4 | Form and Pour Concrete; Footbridge Install | Generator 45-55 kW (for light tower) | Diesel | 1 | 10 | Equipment used for Phases 5-3 and 5-4 |
| 5-3, 5-4 | Form and Pour Concrete; Footbridge Install | CAT 297/299 Skid Steer | Diesel | 1 | 5 | - |
| 5-3, 5-4 | Form and Pour Concrete; Footbridge Install | Ford F250 | Gas | 1 | 2 | Equipment used for Phases 5-3 and 5-4 |
| 5-3, 5-4 | Form and Pour Concrete; Footbridge Install | Ford F450 Flat Bed | Diesel | 1 | 2 | Equipment used for Phases 5-3 and 5-4 |
| 6 | Plunge Pool | | | | | |
| 6-1 | Flow bypass | Generator 55 kW | Diesel | 1 | 24 | |
| 6-2 | Excavation | 55KW generator (for bypass pumps) | Diesel | 1 | 10 | |
| 6-2 | Excavation | CAT D6 Dozer | Diesel | 1 | 8 | |
| 6-2 | Excavation | CAT 735 Off-Highway Truck | Diesel | 2 | 9 | |
| 6-2 | Excavation | CAT 349 Excavator | Diesel | 1 | 9 | |
| 6-2 | Excavation | 4000 Gallon Water Truck | Diesel | 1 | 10 | |
| 6-3 | Slope Protection | Sandvick Ranger 600R Drill | Diesel | 1 | 5 | |
| 6-3 | Slope Protection | Putzmeister TK 20 Shotcrete Pump | Diesel | 1 | 5 | |
| 6-3 | Slope Protection | Ford F250 | Gas | 1 | 2 | |
| 7 | Remaining Work Scope | | | | | |
| 7-1 | Cofferdam Removal | CAT TL 1255 Telehandler | Diesel | 1 | 6 | |
| 7-1 | Cofferdam Removal | Crane Crawler 150 Ton | Diesel | 1 | 6 | |
| 7-1 | Cofferdam Removal | Concrete Saws | Gas | 2 | 8 | |
| 7-2 | Lighting | CAT TL 1255 Telehandler | Diesel | 1 | 6 | |
| 7-2 | Lighting | Ford F250 | Gas | 1 | 2.5 | |
| 7-3 | Log Boom | CAT 336 Excavator | Diesel | 1 | 8 | |
| 7-4, 7-5 | Site Restoration and Demobilization | CAT 297/299 Skid Steer | Diesel | 1 | 10 | Equipment used for Phases 7-4 and 7-5 |
| 7-4, 7-5 | Site Restoration and Demobilization | CAT 336 Excavator | Diesel | 1 | 5 | Equipment used for Phases 7-4 and 7-5 |
| 7-4, 7-5 | Site Restoration and Demobilization | CAT TL 1255 Telehandler | Diesel | 1 | 6 | Equipment used for Phases 7-4 and 7-5 |
| 7-4, 7-5 | Site Restoration and Demobilization | Ford F250 | Gas | 1 | 2.5 | Equipment used for Phases 7-4 and 7-5 |
| 7-4, 7-5 | Site Restoration and Demobilization | 4000 Gallon Water Truck | Diesel | 1 | 10 | Equipment used for Phases 7-4 and 7-5 |
| 7-4, 7-5 | Site Restoration and Demobilization | Ford F450 Flat Bed | Diesel | 1 | 2 | Equipment used for Phases 7-4 and 7-5 |
| 8 | Spillway Abandonment and Cofferdam Removal | | | | | |
| 8-1 | Remove Cofferdam | CAT TL 1255 Telehandler | Diesel | 1 | 6 | |
| 8-1 | Remove Cofferdam | Crane Crawler 150 Ton | Diesel | 1 | 6 | |
| 8-1 | Remove Cofferdam | Ford F250 | Gas | 1 | 2 | ╗ |
| | | Concrete Saws | Gas | 2 | 8 | ⊣ |
| 18-1 | Remove Cofferdam | | | | - | |
| 8-1 8-2, 8-3 | | Crane RT Hydraulic 90 | Diesel | 1 | 8 | Eauipment used for Phases 8-2 and 8-3 |
| 8-2, 8-3 | Canal Side Channel, Cover Bathtub and Siphon | Crane RT Hydraulic 90 | Diesel | | | Equipment used for Phases 8-2 and 8-3 Fauinment used for Phases 8-2 and 8-3 |
| | | Crane RT Hydraulic 90 CAT TL 1255 Telehandler Concrete Pump | Diesel Diesel Diesel | 1 1 1 | 6 5 | Equipment used for Phases 8-2 and 8-3 Equipment used for Phases 8-2 and 8-3 Equipment used for Phases 8-2 and 8-3 |

| | | Noise Level (dBA Leq) | | | | | |
|-----------------|------------------|-----------------------|-----------------------------|-----------------------------|----------------------------|-----------------------------|--|
| Distance (feet) | Distance (Miles) | Tree Removal | Laydown Area Development | Access Road Construction | Spillway/Dam Demolition | Spillway/Dam Construction 1 | |
| 50 | | 90.3 | 81.0 | 81.9 | 87.8 | 82.1 | |
| 100 | 0.02 | 84.2 | 75.0 | 75.8 | 81.8 | 76.1 | |
| 150 | 0.03 | 80.7 | 71.5 | 72.3 | 78.2 | 72.6 | |
| 200 | 0.04 | 78.2 | 69.0 | 69.8 | 75.7 | 70.1 | |
| 300 | 0.06 | 74.7 | 65.5 | 66.3 | 72.2 | 66.6 | |
| 400 | 0.08 | 72.2 | 63.0 | 63.8 | 69.7 | 64.1 | |
| 800 | 0.15 | 66.2 | 57.0 | 57.8 | 63.7 | 58.1 | |
| 1000 | 0.19 | 64.2 | 55.0 | 55.8 | 61.8 | 56.1 | |
| 1250 | 0.24 | 62.3 | 53.1 | 53.9 | 59.8 | 54.2 | |
| 1500 | 0.28 | 60.7 | 51.5 | 52.3 | 58.2 | 52.6 | |
| 2000 | 0.38 | 58.2 | 49.0 | 49.8 | 55.7 | 50.1 | |
| 4000 | 0.76 | 52.2 | 43.0 | 43.8 | 49.7 | 44.1 | |
| 6000 | 1.14 | 48.7 | 39.5 | 40.3 | 46.2 | 40.6 | |
| 8000 | 1.52 | 46.2 | 37.0 | 37.8 | 43.7 | 38.1 | |
| 10000 | 1.89 | 44.2 | 35.0 | 35.8 | 41.8 | 36.1 | |
| 11500 | 2.18 | 43.0 | 33.8 | 34.6 | 40.5 | 34.9 | |
| 12000 | 2.27 | 42.7 | 33.4 | 34.3 | 40.2 | 34.5 | |
| 14100 | 2.67 | 41.3 | 32.0 | 32.9 | 38.8 | 33.1 | |
| 15000 | 2.84 | 40.7 | 31.5 | 32.3 | 38.2 | 32.6 | |
| 15300 | 2.90 | 40.6 | 31.3 | 32.2 | 38.1 | 32.4 | |
| 20000 | 3.79 | 38.2 | 29.0 | 29.8 | 35.7 | 30.1 | |

Footnote:

^{1.} Spillway Construction phase is made up 3 loudest equipment from overlapping phases occuring within the spillway construction area

| | | Noise Level (dBA Leq) | | | | | | |
|-----------------|------------------|-----------------------|---------------------|------------------------------------|------------------------------------|--|--|--|
| Distance (feet) | Distance (Miles) | 1-1 Tree Removal | 1-2 Mobilization | 1-3 Laydown Area Development | 1-4 Access Road Construction | | | |
| 50 | | 90 | N/A | 81 | 82 | | | |
| 100 | 0.02 | 84 | N/A | 75 | 76 | | | |
| 150 | 0.03 | 81 | N/A | 71 | 72 | | | |
| 200 | 0.04 | 78 | N/A | 69 | 70 | | | |
| 300 | 0.06 | 75 | N/A | 65 | 66 | | | |
| 400 | 0.08 | 72 | N/A | 63 | 64 | | | |
| 800 | 0.15 | 66 | N/A | 57 | 58 | | | |
| 1000 | 0.19 | 64 | N/A | 55 | 56 | | | |
| 1250 | 0.24 | 62 | N/A | 53 | 54 | | | |
| 1500 | 0.28 | 61 | N/A | 51 | 52 | | | |
| 2000 | 0.38 | 58 | N/A | 49 | 50 | | | |
| 4000 | 0.76 | 52 | N/A | 43 | 44 | | | |
| 6000 | 1.14 | 49 | N/A | 39 | 40 | | | |
| 8000 | 1.52 | 46 | N/A | 37 | 38 | | | |
| 10000 | 1.89 | 44 | N/A | 35 | 36 | | | |
| 11500 | 2.18 | 43 | N/A | 34 | 35 | | | |
| 12000 | 2.27 | 43 | N/A | 33 | 34 | | | |
| 14100 | 2.67 | 41 | N/A | 32 | 33 | | | |
| 15000 | 2.84 | 41 | N/A | 31 | 32 | | | |
| 15300 | 2.90 | 41 | N/A | 31 | 32 | | | |
| 20000 | 3.79 | 38 | N/A | 29 | 30 | | | |

Note: Equipment lists provided by PG&E did not include equipment for Phase 1-2 Mobilization.

| | | Noise Leve | l (dBA Leq) | |
|-----------------|------------------|--|---|---|
| Distance (feet) | Distance (Miles) | 2-1 Spillway Excavation/Subgrade | 2-2 Spillway Form and Pour Concrete | 2-3 Drains, Cleanouts, and Backfill Mobilization |
| 50 | 0.01 | 82 | 80 | N/A |
| 100 | 0.02 | 76 | 74 | N/A |
| 150 | 0.03 | 73 | 71 | N/A |
| 200 | 0.04 | 70 | 68 | N/A |
| 300 | 0.06 | 67 | 65 | N/A |
| 400 | 0.08 | 64 | 62 | N/A |
| 800 | 0.15 | 58 | 56 | N/A |
| 1000 | 0.19 | 56 | 54 | N/A |
| 1250 | 0.24 | 54 | 52 | N/A |
| 1500 | 0.28 | 53 | 51 | N/A |
| 2000 | 0.38 | 50 | 48 | N/A |
| 4000 | 0.76 | 44 | 42 | N/A |
| 6000 | 1.14 | 41 | 39 | N/A |
| 8000 | 1.52 | 38 | 36 | N/A |
| 10000 | 1.89 | 36 | 34 | N/A |
| 11500 | 2.18 | 35 | 33 | N/A |
| 12000 | 2.27 | 35 | 33 | N/A |
| 14100 | 2.67 | 33 | 31 | N/A |
| 15000 | 2.84 | 33 | 31 | N/A |
| 15300 | 2.90 | 32 | 31 | N/A |
| 20000 | 3.79 | 30 | 28 | N/A |

Note: Equipment lists provided by PG&E did not include equipment for Phase 2-3 Drains, Cleanouts, and Backfill Mobilization.

| | | Noise Level (dBA Leq) | | | | | |
|-----------------|------------------|-----------------------|--------------------|-----------------------------|--------------------------------|--|--|
| | | 3-1 | 3-2 | 3-3 Place Piles, Sheets, | 3-4, 3-5, 3-6 Trench Cutoff | | |
| Distance (feet) | Distance (Miles) | Mass Concrete | Excavate Cofferdam | and Concrete | Concrete | | |
| 50 | 1 | 80 | 80 | 80 | 80 | | |
| 100 | 0.02 | 74 | 74 | 74 | 74 | | |
| 150 | 0.03 | 71 | 71 | 71 | 71 | | |
| 200 | 0.04 | 68 | 68 | 68 | 68 | | |
| 300 | 0.06 | 65 | 65 | 65 | 65 | | |
| 400 | 0.08 | 62 | 62 | 62 | 62 | | |
| 800 | 0.15 | 56 | 56 | 56 | 56 | | |
| 1000 | 0.19 | 54 | 54 | 54 | 54 | | |
| 1250 | 0.24 | 52 | 52 | 52 | 52 | | |
| 1500 | 0.28 | 51 | 51 | 51 | 51 | | |
| 2000 | 0.38 | 48 | 48 | 48 | 48 | | |
| 4000 | 0.76 | 42 | 42 | 42 | 42 | | |
| 6000 | 1.14 | 39 | 39 | 39 | 39 | | |
| 8000 | 1.52 | 36 | 36 | 36 | 36 | | |
| 10000 | 1.89 | 34 | 34 | 34 | 34 | | |
| 11500 | 2.18 | 33 | 33 | 33 | 33 | | |
| 12000 | 2.27 | 32 | 32 | 32 | 33 | | |
| 14100 | 2.67 | 31 | 31 | 31 | 31 | | |
| 15000 | 2.84 | 31 | 31 | 31 | 31 | | |
| 15300 | 2.90 | 30 | 30 | 30 | 31 | | |
| 20000 | 3.79 | 28 | 28 | 28 | 28 | | |

| | | Noise Level (dBA Leq) | | |
|-----------------|------------------|-----------------------|----------------------------|--|
| | | 4-1 | 4-2 | |
| | | Crest | Crest Form and Pour | |
| Distance (feet) | Distance (Miles) | Excavation/Subgrade | Concrete | |
| 50 | 0.01 | 82 | 80 | |
| 100 | 0.02 | 76 | 74 | |
| 150 | 0.03 | 73 | 71 | |
| 200 | 0.04 | 70 | 68 | |
| 300 | 0.06 | 67 | 65 | |
| 400 | 0.08 | 64 | 62 | |
| 800 | 0.15 | 58 | 56 | |
| 1000 | 0.19 | 56 | 54 | |
| 1250 | 0.24 | 54 | 52 | |
| 1500 | 0.28 | 53 | 51 | |
| 2000 | 0.38 | 50 | 48 | |
| 4000 | 0.76 | 44 | 42 | |
| 6000 | 1.14 | 41 | 39 | |
| 8000 | 1.52 | 38 | 36 | |
| 10000 | 1.89 | 36 | 34 | |
| 11500 | 2.18 | 35 | 33 | |
| 12000 | 2.27 | 35 | 33 | |
| 14100 | 2.67 | 33 | 31 | |
| 15000 | 2.84 | 33 | 31 | |
| 15300 | 2.90 | 32 | 31 | |
| 20000 | 3.79 | 30 | 28 | |

| | | Noise Level (dBA Leq) | | | | | |
|-----------------|------------------|-----------------------|-----------------------------|----------------------------|---------------------------|--|--|
| Distance (feet) | Distance (Miles) | 5-1 Demolition | 5-2 Excavation, Subgrade | 5-3 Form and Pour Concrete | 5-4 Footbridge Install | | |
| 50 | | 88 | 88 | 80 | 80 | | |
| 100 | 0.02 | 82 | 82 | 74 | 74 | | |
| 150 | 0.03 | 78 | 78 | 71 | 71 | | |
| 200 | 0.04 | 76 | 76 | 68 | 68 | | |
| 300 | 0.06 | 72 | 72 | 65 | 65 | | |
| 400 | 0.08 | 70 | 70 | 62 | 62 | | |
| 800 | 0.15 | 64 | 64 | 56 | 56 | | |
| 1000 | 0.19 | 62 | 62 | 54 | 54 | | |
| 1250 | 0.24 | 60 | 60 | 52 | 52 | | |
| 1500 | 0.28 | 58 | 58 | 51 | 51 | | |
| 2000 | 0.38 | 56 | 56 | 48 | 48 | | |
| 4000 | 0.76 | 50 | 50 | 42 | 42 | | |
| 6000 | 1.14 | 46 | 46 | 39 | 39 | | |
| 8000 | 1.52 | 44 | 44 | 36 | 36 | | |
| 10000 | 1.89 | 42 | 42 | 34 | 34 | | |
| 11500 | 2.18 | 41 | 41 | 33 | 33 | | |
| 12000 | 2.27 | 40 | 40 | 33 | 33 | | |
| 14100 | 2.67 | 39 | 39 | 31 | 31 | | |
| 15000 | 2.84 | 38 | 38 | 31 | 31 | | |
| 15300 | 2.90 | 38 | 38 | 31 | 31 | | |
| 20000 | 3.79 | 36 | 36 | 28 | 28 | | |

| | | Noise Level (dBA Leq) | | | |
|-----------------|------------------|-----------------------|------------|------------------|--|
| | | 6-1 | 6-2 | 6-3 | |
| Distance (feet) | Distance (Miles) | Flow Bypass | Excavation | Slope Protection | |
| 50 | 0.01 | 78 | 82 | 81 | |
| 100 | 0.02 | 72 | 76 | 75 | |
| 150 | 0.03 | 68 | 73 | 71 | |
| 200 | 0.04 | 66 | 70 | 69 | |
| 300 | 0.06 | 62 | 67 | 65 | |
| 400 | 0.08 | 60 | 64 | 63 | |
| 800 | 0.15 | 54 | 58 | 57 | |
| 1000 | 0.19 | 52 | 56 | 55 | |
| 1250 | 0.24 | 50 | 55 | 53 | |
| 1500 | 0.28 | 48 | 53 | 51 | |
| 2000 | 0.38 | 46 | 50 | 49 | |
| 4000 | 0.76 | 40 | 44 | 43 | |
| 6000 | 1.14 | 36 | 41 | 39 | |
| 8000 | 1.52 | 34 | 38 | 37 | |
| 10000 | 1.89 | 32 | 36 | 35 | |
| 11500 | 2.18 | 31 | 35 | 34 | |
| 12000 | 2.27 | 30 | 35 | 33 | |
| 14100 | 2.67 | 29 | 33 | 32 | |
| 15000 | 2.84 | 28 | 33 | 31 | |
| 15300 | 2.90 | 28 | 33 | 31 | |
| 20000 | 3.79 | 26 | 30 | 29 | |

| | | Noise Level (dBA Leq) | | | | |
|-----------------|------------------|-----------------------|----------|----------|------------------|----------------|
| | | 7-1 | 7-2 | 7-3 | 7-4 | 7-5 |
| Distance (feet) | Distance (Miles) | Cofferdam Removal | Lighting | Log Boom | Site Restoration | Demobilization |
| 50 | 0.01 | 88 | 76 | 77 | 80 | 80 |
| 100 | 0.02 | 82 | 70 | 71 | 74 | 74 |
| 150 | 0.03 | 78 | 67 | 67 | 71 | 71 |
| 200 | 0.04 | 76 | 64 | 65 | 68 | 68 |
| 300 | 0.06 | 72 | 61 | 61 | 65 | 65 |
| 400 | 0.08 | 70 | 58 | 59 | 62 | 62 |
| 800 | 0.15 | 64 | 52 | 53 | 56 | 56 |
| 1000 | 0.19 | 62 | 50 | 51 | 54 | 54 |
| 1250 | 0.24 | 60 | 49 | 49 | 52 | 52 |
| 1500 | 0.28 | 58 | 47 | 47 | 51 | 51 |
| 2000 | 0.38 | 56 | 44 | 45 | 48 | 48 |
| 4000 | 0.76 | 50 | 38 | 39 | 42 | 42 |
| 6000 | 1.14 | 46 | 35 | 35 | 39 | 39 |
| 8000 | 1.52 | 44 | 32 | 33 | 36 | 36 |
| 10000 | 1.89 | 42 | 30 | 31 | 34 | 34 |
| 11500 | 2.18 | 41 | 29 | 30 | 33 | 33 |
| 12000 | 2.27 | 40 | 29 | 29 | 33 | 33 |
| 14100 | 2.67 | 39 | 27 | 28 | 31 | 31 |
| 15000 | 2.84 | 38 | 27 | 27 | 31 | 31 |
| 15300 | 2.90 | 38 | 27 | 27 | 31 | 31 |
| 20000 | 3.79 | 36 | 24 | 25 | 28 | 28 |

| | | Noise Level (dBA Leq) | | | | |
|-----------------|------|-----------------------|--------------------|--------------------------|--|--|
| | | 8-1 | 8-2 | 8-3 Cover Bathtub and | | |
| Distance (feet) | | Remove Cofferdam | Canal Side Channel | Siphon | | |
| 50 | | 88 | 79 | 79 | | |
| 100 | 0.02 | 82 | 73 | 73 | | |
| 150 | 0.03 | 78 | 69 | 69 | | |
| 200 | 0.04 | 76 | 67 | 67 | | |
| 300 | 0.06 | 72 | 63 | 63 | | |
| 400 | 0.08 | 70 | 61 | 61 | | |
| 800 | 0.15 | 64 | 55 | 55 | | |
| 1000 | 0.19 | 62 | 53 | 53 | | |
| 1250 | 0.24 | 60 | 51 | 51 | | |
| 1500 | 0.28 | 58 | 49 | 49 | | |
| 2000 | 0.38 | 56 | 47 | 47 | | |
| 4000 | 0.76 | 50 | 41 | 41 | | |
| 6000 | 1.14 | 46 | 37 | 37 | | |
| 8000 | 1.52 | 44 | 35 | 35 | | |
| 10000 | 1.89 | 42 | 33 | 33 | | |
| 11500 | 2.18 | 41 | 32 | 32 | | |
| 12000 | 2.27 | 40 | 31 | 31 | | |
| 14100 | 2.67 | 39 | 30 | 30 | | |
| 15000 | 2.84 | 38 | 29 | 29 | | |
| 15300 | 2.90 | 38 | 29 | 29 | | |
| 20000 | 3.79 | 36 | 27 | 27 | | |

Table 1. Construction Noise

| Source Data: | Maximum Sound Level (dBA) | Utilization Factor | Leq Sound Level (dBA) |
|--|------------------------------------|-----------------------|--------------------------|
| Construction Condition: Tree Removal | | | |
| Source 1: Chain Saw - Sound level (dBA) at 50 feet = | 84 | 20% | 77.0 |
| Source 2: Chain Saw - Sound level (dBA) at 50 feet = | 84 | 20% | 77.0 |
| Source 3: Woodchipper - Sound level (dBA) at 50 feet = | 93 | 50% | 89.8 |
| Calculated Data: | | | |
| All Sources Combined - Lmax sound level (dBA) at 50 feet = | | | 94 |
| All Sources Combined - Leq sound level (dBA) at 50 feet = | | | 90 |

| Distance Between | Geometric | Ground Effect | Calculated | Calculated Leq |
|------------------|------------------|------------------|-------------|----------------|
| Source and | Attenuation (dB) | Attenuation (dB) | Lmax Sound | Sound Level |
| Receiver (ft.) | | | Level (dBA) | (dBA) |
| 15 | 10 | 0.0 | 104 | 101 |
| 25 | 6 | 0.0 | 100 | 96 |
| 50 | 0 | 0.0 | 94 | 90 |
| 75 | -4 | 0.0 | 90 | 87 |
| 100 | -6 | 0.0 | 88 | 84 |
| 200 | -12 | 0.0 | 82 | 78 |
| 300 | -16 | 0.0 | 78 | 75 |
| 500 | -20 | 0.0 | 74 | 70 |
| 1000 | -26 | 0.0 | 68 | 64 |
| 2000 | -32 | 0.0 | 62 | 58 |

Ground affect attenuation based on 1.5 dB per doubling of distance

Note: This calculation does not include the effects, if any, of local shielding

Table 2. Construction Noise

| Source Data: | Maximum Sound Level (dBA) | Utilization Factor | Leq Sound Level (dBA) |
|--|------------------------------------|-----------------------|--------------------------|
| Construction Condition: Laydown Area Development | | | |
| Source 1: Dozer - Sound level (dBA) at 50 feet = | 82 | 40% | 78.0 |
| Source 2: Telehandler (based on front end loader) - Sound level (dBA) at 50 feet = | 79 | 40% | 75.0 |
| Source 3: Front end loader - Sound level (dBA) at 50 feet = | 79 | 40% | 75.0 |
| Calculated Data: | | | |
| All Sources Combined - Lmax sound level (dBA) at 50 feet = | | | 85 |
| All Sources Combined - Leq sound level (dBA) at 50 feet = | | | 81 |

| Distance Between | Geometric | Ground Effect | Calculated | Calculated Leq |
|------------------|------------------|------------------|-------------|----------------|
| Source and | Attenuation (dB) | Attenuation (dB) | Lmax Sound | Sound Level |
| Receiver (ft.) | | | Level (dBA) | (dBA) |
| 15 | 10 | 0.0 | 95 | 91 |
| 25 | 6 | 0.0 | 91 | 87 |
| 50 | 0 | 0.0 | 85 | 81 |
| 75 | -4 | 0.0 | 81 | 78 |
| 100 | -6 | 0.0 | 79 | 75 |
| 200 | -12 | 0.0 | 73 | 69 |
| 300 | -16 | 0.0 | 69 | 65 |
| 500 | -20 | 0.0 | 65 | 61 |
| 1000 | -26 | 0.0 | 59 | 55 |
| 2000 | -32 | 0.0 | 53 | 49 |

Ground affect attenuation based on 1.5 dB per doubling of distance

Note: This calculation does not include the effects, if any, of local shielding

Table 3. Construction Noise

| Source Data: | Maximum Sound Level (dBA) | Utilization Factor | Leq Sound Level (dBA) |
|--|------------------------------------|-----------------------|--------------------------|
| Construction Condition: Access Road Construction | | | |
| Source 1: Dozer - Sound level (dBA) at 50 feet = | 82 | 40% | 78.0 |
| Source 2: Excavator - Sound level (dBA) at 50 feet = | 81 | 40% | 77.0 |
| Source 3: Compactor - Sound level (dBA) at 50 feet = | 83 | 20% | 76.0 |
| Calculated Data: | | | |
| All Sources Combined - Lmax sound level (dBA) at 50 feet = | | | 87 |
| All Sources Combined - Leq sound level (dBA) at 50 feet = | | | 82 |

| Distance Between | Geometric | Ground Effect | Calculated | Calculated Leq |
|------------------|------------------|------------------|-------------|----------------|
| Source and | Attenuation (dB) | Attenuation (dB) | Lmax Sound | Sound Level |
| Receiver (ft.) | | | Level (dBA) | (dBA) |
| 15 | 10 | 0.0 | 97 | 92 |
| 25 | 6 | 0.0 | 93 | 88 |
| 50 | 0 | 0.0 | 87 | 82 |
| 75 | -4 | 0.0 | 83 | 78 |
| 100 | -6 | 0.0 | 81 | 76 |
| 200 | -12 | 0.0 | 75 | 70 |
| 300 | -16 | 0.0 | 71 | 66 |
| 500 | -20 | 0.0 | 67 | 62 |
| 1000 | -26 | 0.0 | 61 | 56 |
| 2000 | -32 | 0.0 | 55 | 50 |

Ground affect attenuation based on 1.5 dB per doubling of distance

Note: This calculation does not include the effects, if any, of local shielding

Table 4. Construction Noise

| Source Data: | Maximum Sound Level (dBA) | Utilization Factor | Leq Sound Level (dBA) |
|--|------------------------------------|-----------------------|--------------------------|
| Construction Condition: Demolition | | | |
| Source 1: Concrete saw - Sound level (dBA) at 50 feet = | 90 | 20% | 83.0 |
| Source 2: Concrete saw - Sound level (dBA) at 50 feet = | 90 | 20% | 83.0 |
| Source 3: Mounted Impact Hammer - Sound level (dBA) at 50 feet = | 90 | 20% | 83.0 |
| Calculated Data: | | | |
| All Sources Combined - Lmax sound level (dBA) at 50 feet = | | | 95 |
| All Sources Combined - Leq sound level (dBA) at 50 feet = | | | 88 |

| Distance Between | Geometric | Ground Effect | Calculated | Calculated Leq |
|------------------|------------------|------------------|-------------|----------------|
| Source and | Attenuation (dB) | Attenuation (dB) | Lmax Sound | Sound Level |
| Receiver (ft.) | | | Level (dBA) | (dBA) |
| 15 | 10 | 0.0 | 105 | 98 |
| 25 | 6 | 0.0 | 101 | 94 |
| 50 | 0 | 0.0 | 95 | 88 |
| 75 | -4 | 0.0 | 91 | 84 |
| 100 | -6 | 0.0 | 89 | 82 |
| 200 | -12 | 0.0 | 83 | 76 |
| 300 | -16 | 0.0 | 79 | 72 |
| 500 | -20 | 0.0 | 75 | 68 |
| 1000 | -26 | 0.0 | 69 | 62 |
| 2000 | -32 | 0.0 | 63 | 56 |

Ground affect attenuation based on 1.5 dB per doubling of distance

Note: This calculation does not include the effects, if any, of local shielding

Table 5. Construction Noise

| Source Data: | Maximum Sound Level (dBA) | Utilization Factor | Leq Sound Level (dBA) |
|--|------------------------------------|-----------------------|--------------------------|
| Construction Condition: Worst Case Dam/Spillway Construction | | | |
| Source 1: Drill Rig - Sound level (dBA) at 50 feet = | 84 | 20% | 77.0 |
| Source 2: Generator - Sound level (dBA) at 50 feet = | 81 | 50% | 78.0 |
| Source 3: Excavator - Sound level (dBA) at 50 feet = | 81 | 40% | 77.0 |
| Calculated Data: | | | |
| All Sources Combined - Lmax sound level (dBA) at 50 feet = | | | 87 |
| All Sources Combined - Leq sound level (dBA) at 50 feet = | | | 82 |

| Distance Between | Geometric | Ground Effect | Calculated | Calculated Leq |
|------------------|------------------|------------------|-------------|----------------|
| Source and | Attenuation (dB) | Attenuation (dB) | Lmax Sound | Sound Level |
| Receiver (ft.) | | | Level (dBA) | (dBA) |
| 15 | 10 | 0.0 | 97 | 93 |
| 25 | 6 | 0.0 | 93 | 88 |
| 50 | 0 | 0.0 | 87 | 82 |
| 75 | -4 | 0.0 | 83 | 79 |
| 100 | -6 | 0.0 | 81 | 76 |
| 200 | -12 | 0.0 | 75 | 70 |
| 300 | -16 | 0.0 | 71 | 67 |
| 500 | -20 | 0.0 | 67 | 62 |
| 1000 | -26 | 0.0 | 61 | 56 |
| 2000 | -32 | 0.0 | 55 | 50 |

Ground affect attenuation based on 1.5 dB per doubling of distance

Note: This calculation does not include the effects, if any, of local shielding

Table 6. Construction Noise

| Source Data: | Maximum Sound Level (dBA) | Utilization Factor | Leq Sound Level (dBA) |
|--|------------------------------------|-----------------------|--------------------------|
| Construction Condition: 1-1 Tree Removal | | | |
| Source 1: Chain Saw - Sound level (dBA) at 50 feet = | 84 | 20% | 77.0 |
| Source 2: Chain Saw - Sound level (dBA) at 50 feet = | 84 | 20% | 77.0 |
| Source 3: Woodchipper - Sound level (dBA) at 50 feet = | 93 | 50% | 89.8 |
| Calculated Data: | | | |
| All Sources Combined - Lmax sound level (dBA) at 50 feet = | | | 94 |
| All Sources Combined - Leq sound level (dBA) at 50 feet = | | | 90 |

| Distance Between | Geometric | Ground Effect | Calculated | Calculated Leq |
|------------------|------------------|------------------|-------------|----------------|
| Source and | Attenuation (dB) | Attenuation (dB) | Lmax Sound | Sound Level |
| Receiver (ft.) | | | Level (dBA) | (dBA) |
| 15 | 10 | 0.0 | 104 | 101 |
| 25 | 6 | 0.0 | 100 | 96 |
| 50 | 0 | 0.0 | 94 | 90 |
| 75 | -4 | 0.0 | 90 | 87 |
| 100 | -6 | 0.0 | 88 | 84 |
| 200 | -12 | 0.0 | 82 | 78 |
| 300 | -16 | 0.0 | 78 | 75 |
| 500 | -20 | 0.0 | 74 | 70 |
| 1000 | -26 | 0.0 | 68 | 64 |
| 2000 | -32 | 0.0 | 62 | 58 |

Ground affect attenuation based on 1.5 dB per doubling of distance

Note: This calculation does not include the effects, if any, of local shielding

Table 7. Construction Noise

| Source Data: | Maximum Sound Level (dBA) | Utilization Factor | Leq Sound Level (dBA) |
|--|------------------------------------|-----------------------|--------------------------|
| Construction Condition: 1-3 Laydown Area Development | | | |
| Source 1: Dozer - Sound level (dBA) at 50 feet = | 82 | 40% | 78.0 |
| Source 2: Telehandler (based on front end loader) - Sound level (dBA) at 50 feet = | 79 | 40% | 75.0 |
| Source 3: Front end loader - Sound level (dBA) at 50 feet = | 79 | 40% | 75.0 |
| Calculated Data: | | | |
| All Sources Combined - Lmax sound level (dBA) at 50 feet = | | | 85 |
| All Sources Combined - Leq sound level (dBA) at 50 feet = | | | 81 |

| Distance Between | Geometric | Ground Effect | Calculated | Calculated Leq |
|------------------|------------------|------------------|-------------|----------------|
| Source and | Attenuation (dB) | Attenuation (dB) | Lmax Sound | Sound Level |
| Receiver (ft.) | | | Level (dBA) | (dBA) |
| 15 | 10 | 0.0 | 95 | 91 |
| 25 | 6 | 0.0 | 91 | 87 |
| 50 | 0 | 0.0 | 85 | 81 |
| 75 | -4 | 0.0 | 81 | 78 |
| 100 | -6 | 0.0 | 79 | 75 |
| 200 | -12 | 0.0 | 73 | 69 |
| 300 | -16 | 0.0 | 69 | 65 |
| 500 | -20 | 0.0 | 65 | 61 |
| 1000 | -26 | 0.0 | 59 | 55 |
| 2000 | -32 | 0.0 | 53 | 49 |

Ground affect attenuation based on 1.5 dB per doubling of distance

Note: This calculation does not include the effects, if any, of local shielding

Table 8. Construction Noise

| Source Data: | Maximum Sound Level (dBA) | Utilization Factor | Leq Sound Level (dBA) |
|--|------------------------------------|-----------------------|--------------------------|
| Construction Condition: 1-4 Access Road Construction | | | |
| Source 1: Dozer - Sound level (dBA) at 50 feet = | 82 | 40% | 78.0 |
| Source 2: Excavator - Sound level (dBA) at 50 feet = | 81 | 40% | 77.0 |
| Source 3: Compactor - Sound level (dBA) at 50 feet = | 83 | 20% | 76.0 |
| Calculated Data: | | | |
| All Sources Combined - Lmax sound level (dBA) at 50 feet = | | | 87 |
| All Sources Combined - Leq sound level (dBA) at 50 feet = | | | 82 |

| Distance Between | Geometric | Ground Effect | Calculated | Calculated Leq |
|------------------|------------------|------------------|-------------|----------------|
| Source and | Attenuation (dB) | Attenuation (dB) | Lmax Sound | Sound Level |
| Receiver (ft.) | | | Level (dBA) | (dBA) |
| 15 | 10 | 0.0 | 97 | 92 |
| 25 | 6 | 0.0 | 93 | 88 |
| 50 | 0 | 0.0 | 87 | 82 |
| 75 | -4 | 0.0 | 83 | 78 |
| 100 | -6 | 0.0 | 81 | 76 |
| 200 | -12 | 0.0 | 75 | 70 |
| 300 | -16 | 0.0 | 71 | 66 |
| 500 | -20 | 0.0 | 67 | 62 |
| 1000 | -26 | 0.0 | 61 | 56 |
| 2000 | -32 | 0.0 | 55 | 50 |

Ground affect attenuation based on 1.5 dB per doubling of distance

Note: This calculation does not include the effects, if any, of local shielding

Table 9. Construction Noise

| Source Data: | Maximum Sound Level (dBA) | Utilization Factor | Leq Sound Level (dBA) |
|--|------------------------------------|-----------------------|--------------------------|
| Construction Condition: 2-1 Spillway Excavation/Subgrade | | | |
| Source 1: Dozer - Sound level (dBA) at 50 feet = | 82 | 40% | 78.0 |
| Source 2: Excavator - Sound level (dBA) at 50 feet = | 81 | 40% | 77.0 |
| Source 3: Drill Rig - Sound level (dBA) at 50 feet = | 84 | 20% | 77.0 |
| Calculated Data: | | | |
| All Sources Combined - Lmax sound level (dBA) at 50 feet = | | | 87 |
| All Sources Combined - Leq sound level (dBA) at 50 feet = | | | 82 |

| Distance Between | Geometric | Ground Effect | Calculated | Calculated Leq |
|------------------|------------------|------------------|-------------|----------------|
| Source and | Attenuation (dB) | Attenuation (dB) | Lmax Sound | Sound Level |
| Receiver (ft.) | | | Level (dBA) | (dBA) |
| 15 | 10 | 0.0 | 98 | 93 |
| 25 | 6 | 0.0 | 93 | 88 |
| 50 | 0 | 0.0 | 87 | 82 |
| 75 | -4 | 0.0 | 84 | 79 |
| 100 | -6 | 0.0 | 81 | 76 |
| 200 | -12 | 0.0 | 75 | 70 |
| 300 | -16 | 0.0 | 72 | 67 |
| 500 | -20 | 0.0 | 67 | 62 |
| 1000 | -26 | 0.0 | 61 | 56 |
| 2000 | -32 | 0.0 | 55 | 50 |

Ground affect attenuation based on 1.5 dB per doubling of distance

Note: This calculation does not include the effects, if any, of local shielding

Table 10. Construction Noise

| Source Data: | Maximum Sound Level (dBA) | Utilization Factor | Leq Sound Level (dBA) |
|--|------------------------------------|-----------------------|--------------------------|
| Construction Condition: 2-2 Spillway Form and Pour Concrete | | | |
| Source 1: Concrete pump truck - Sound level (dBA) at 50 feet = | 81 | 20% | 74.0 |
| Source 2: Crane - Sound level (dBA) at 50 feet = | 81 | 16% | 73.0 |
| Source 3: Generator - Sound level (dBA) at 50 feet = | 81 | 50% | 78.0 |
| Calculated Data: | | | |
| All Sources Combined - Lmax sound level (dBA) at 50 feet = | | | 86 |
| All Sources Combined - Leq sound level (dBA) at 50 feet = | | | 80 |

| Distance Between | Geometric | Ground Effect | Calculated | Calculated Leq |
|------------------|------------------|------------------|-------------|----------------|
| Source and | Attenuation (dB) | Attenuation (dB) | Lmax Sound | Sound Level |
| Receiver (ft.) | | | Level (dBA) | (dBA) |
| 15 | 10 | 0.0 | 96 | 91 |
| 25 | 6 | 0.0 | 92 | 86 |
| 50 | 0 | 0.0 | 86 | 80 |
| 75 | -4 | 0.0 | 82 | 77 |
| 100 | -6 | 0.0 | 80 | 74 |
| 200 | -12 | 0.0 | 74 | 68 |
| 300 | -16 | 0.0 | 70 | 65 |
| 500 | -20 | 0.0 | 66 | 60 |
| 1000 | -26 | 0.0 | 60 | 54 |
| 2000 | -32 | 0.0 | 54 | 48 |

Ground affect attenuation based on 1.5 dB per doubling of distance

Note: This calculation does not include the effects, if any, of local shielding

Table 11. Construction Noise

| Source Data: | Maximum Sound Level (dBA) | Utilization Factor | Leq Sound Level (dBA) |
|--|------------------------------------|-----------------------|--------------------------|
| Construction Condition: 3-1 Mass Concrete | | | |
| Source 1: Telehandler (based on front end loader) - Sound level (dBA) at 50 feet = | 79 | 40% | 75.0 |
| Source 2: Excavator - Sound level (dBA) at 50 feet = | 81 | 40% | 77.0 |
| Source 3: Crane - Sound level (dBA) at 50 feet = | 81 | 16% | 73.0 |
| Calculated Data: | | | |
| All Sources Combined - Lmax sound level (dBA) at 50 feet = | | | 85 |
| All Sources Combined - Leq sound level (dBA) at 50 feet = | | | 80 |

| Distance Between | Geometric | Ground Effect | Calculated | Calculated Leq |
|------------------|------------------|------------------|-------------|----------------|
| Source and | Attenuation (dB) | Attenuation (dB) | Lmax Sound | Sound Level |
| Receiver (ft.) | | | Level (dBA) | (dBA) |
| 15 | 10 | 0.0 | 96 | 91 |
| 25 | 6 | 0.0 | 91 | 86 |
| 50 | 0 | 0.0 | 85 | 80 |
| 75 | -4 | 0.0 | 82 | 77 |
| 100 | -6 | 0.0 | 79 | 74 |
| 200 | -12 | 0.0 | 73 | 68 |
| 300 | -16 | 0.0 | 70 | 65 |
| 500 | -20 | 0.0 | 65 | 60 |
| 1000 | -26 | 0.0 | 59 | 54 |
| 2000 | -32 | 0.0 | 53 | 48 |

Ground affect attenuation based on 1.5 dB per doubling of distance

Note: This calculation does not include the effects, if any, of local shielding

Table 12. Construction Noise

| Source Data: | Maximum Sound Level (dBA) | Utilization Factor | Leq Sound Level (dBA) |
|--|------------------------------------|-----------------------|--------------------------|
| Construction Condition: 3-2 Excavate Cofferdam | | | |
| Source 1: Telehandler (based on front end loader) - Sound level (dBA) at 50 feet = | 79 | 40% | 75.0 |
| Source 2: Excavator - Sound level (dBA) at 50 feet = | 81 | 40% | 77.0 |
| Source 3: Crane - Sound level (dBA) at 50 feet = | 81 | 16% | 73.0 |
| Calculated Data: | | | |
| All Sources Combined - Lmax sound level (dBA) at 50 feet = | | | 85 |
| All Sources Combined - Leq sound level (dBA) at 50 feet = | | | 80 |

| Distance Between | Geometric | Ground Effect | Calculated | Calculated Leq |
|------------------|------------------|------------------|-------------|----------------|
| Source and | Attenuation (dB) | Attenuation (dB) | Lmax Sound | Sound Level |
| Receiver (ft.) | | | Level (dBA) | (dBA) |
| 15 | 10 | 0.0 | 96 | 91 |
| 25 | 6 | 0.0 | 91 | 86 |
| 50 | 0 | 0.0 | 85 | 80 |
| 75 | -4 | 0.0 | 82 | 77 |
| 100 | -6 | 0.0 | 79 | 74 |
| 200 | -12 | 0.0 | 73 | 68 |
| 300 | -16 | 0.0 | 70 | 65 |
| 500 | -20 | 0.0 | 65 | 60 |
| 1000 | -26 | 0.0 | 59 | 54 |
| 2000 | -32 | 0.0 | 53 | 48 |

Ground affect attenuation based on 1.5 dB per doubling of distance

Note: This calculation does not include the effects, if any, of local shielding

Table 13. Construction Noise

| Source Data: | Maximum Sound Level (dBA) | Utilization Factor | Leq Sound Level (dBA) |
|--|------------------------------------|-----------------------|--------------------------|
| Construction Condition: 3-3 Place Piles, Sheets, and Concrete | | | |
| Source 1: Telehandler (based on front end loader) - Sound level (dBA) at 50 feet = | 79 | 40% | 75.0 |
| Source 2: Excavator - Sound level (dBA) at 50 feet = | 81 | 40% | 77.0 |
| Source 3: Crane - Sound level (dBA) at 50 feet = | 81 | 16% | 73.0 |
| Calculated Data: | | | |
| All Sources Combined - Lmax sound level (dBA) at 50 feet = | | | 85 |
| All Sources Combined - Leq sound level (dBA) at 50 feet = | | | 80 |

| Distance Between | Geometric | Ground Effect | Calculated | Calculated Leq |
|------------------|------------------|------------------|-------------|----------------|
| Source and | Attenuation (dB) | Attenuation (dB) | Lmax Sound | Sound Level |
| Receiver (ft.) | | | Level (dBA) | (dBA) |
| 15 | 10 | 0.0 | 96 | 91 |
| 25 | 6 | 0.0 | 91 | 86 |
| 50 | 0 | 0.0 | 85 | 80 |
| 75 | -4 | 0.0 | 82 | 77 |
| 100 | -6 | 0.0 | 79 | 74 |
| 200 | -12 | 0.0 | 73 | 68 |
| 300 | -16 | 0.0 | 70 | 65 |
| 500 | -20 | 0.0 | 65 | 60 |
| 1000 | -26 | 0.0 | 59 | 54 |
| 2000 | -32 | 0.0 | 53 | 48 |

Ground affect attenuation based on 1.5 dB per doubling of distance

Note: This calculation does not include the effects, if any, of local shielding

Table 14. Construction Noise

| Source Data: | Maximum Sound Level (dBA) | Utilization Factor | Leq Sound Level (dBA) |
|--|------------------------------------|-----------------------|--------------------------|
| Construction Condition: 3-4, 3-5, 3-6 Trench Cutoff Concrete | | | |
| Source 1: Telehandler (based on front end loader) - Sound level (dBA) at 50 feet = | 79 | 40% | 75.0 |
| Source 2: Excavator - Sound level (dBA) at 50 feet = | 81 | 40% | 77.0 |
| Source 3: Concrete pump truck - Sound level (dBA) at 50 feet = | 81 | 20% | 74.0 |
| Calculated Data: | | | |
| All Sources Combined - Lmax sound level (dBA) at 50 feet = | | | 85 |
| All Sources Combined - Leq sound level (dBA) at 50 feet = | | | 80 |

| Distance Between | Geometric | Ground Effect | Calculated | Calculated Leq |
|------------------|------------------|------------------|-------------|----------------|
| Source and | Attenuation (dB) | Attenuation (dB) | Lmax Sound | Sound Level |
| Receiver (ft.) | | | Level (dBA) | (dBA) |
| 15 | 10 | 0.0 | 96 | 91 |
| 25 | 6 | 0.0 | 91 | 86 |
| 50 | 0 | 0.0 | 85 | 80 |
| 75 | -4 | 0.0 | 82 | 77 |
| 100 | -6 | 0.0 | 79 | 74 |
| 200 | -12 | 0.0 | 73 | 68 |
| 300 | -16 | 0.0 | 70 | 65 |
| 500 | -20 | 0.0 | 65 | 60 |
| 1000 | -26 | 0.0 | 59 | 54 |
| 2000 | -32 | 0.0 | 53 | 48 |

Ground affect attenuation based on 1.5 dB per doubling of distance

Note: This calculation does not include the effects, if any, of local shielding

Table 15. Construction Noise

| Source Data: | Maximum Sound Level (dBA) | Utilization Factor | Leq Sound Level (dBA) |
|--|------------------------------------|-----------------------|--------------------------|
| Construction Condition: 4-1 Crest Excavation/Subgrade | | | |
| Source 1: Dozer - Sound level (dBA) at 50 feet = | 82 | 40% | 78.0 |
| Source 2: Excavator - Sound level (dBA) at 50 feet = | 81 | 40% | 77.0 |
| Source 3: Drill Rig - Sound level (dBA) at 50 feet = | 84 | 20% | 77.0 |
| Calculated Data: | | | |
| All Sources Combined - Lmax sound level (dBA) at 50 feet = | | | 87 |
| All Sources Combined - Leq sound level (dBA) at 50 feet = | | | 82 |

| Distance Between | Geometric | Ground Effect | Calculated | Calculated Leq |
|------------------|------------------|------------------|-------------|----------------|
| Source and | Attenuation (dB) | Attenuation (dB) | Lmax Sound | Sound Level |
| Receiver (ft.) | | | Level (dBA) | (dBA) |
| 15 | 10 | 0.0 | 98 | 93 |
| 25 | 6 | 0.0 | 93 | 88 |
| 50 | 0 | 0.0 | 87 | 82 |
| 75 | -4 | 0.0 | 84 | 79 |
| 100 | -6 | 0.0 | 81 | 76 |
| 200 | -12 | 0.0 | 75 | 70 |
| 300 | -16 | 0.0 | 72 | 67 |
| 500 | -20 | 0.0 | 67 | 62 |
| 1000 | -26 | 0.0 | 61 | 56 |
| 2000 | -32 | 0.0 | 55 | 50 |

Ground affect attenuation based on 1.5 dB per doubling of distance

Note: This calculation does not include the effects, if any, of local shielding

Table 16. Construction Noise

| Source Data: | Maximum Sound Level (dBA) | Utilization Factor | Leq Sound Level (dBA) |
|--|------------------------------------|-----------------------|--------------------------|
| Construction Condition: 4-2 Crest Form and Pour Concrete | | | |
| Source 1: Concrete pump truck - Sound level (dBA) at 50 feet = | 81 | 20% | 74.0 |
| Source 2: Crane - Sound level (dBA) at 50 feet = | 81 | 16% | 73.0 |
| Source 3: Generator - Sound level (dBA) at 50 feet = | 81 | 50% | 78.0 |
| Calculated Data: | | | |
| All Sources Combined - Lmax sound level (dBA) at 50 feet = | | | 86 |
| All Sources Combined - Leq sound level (dBA) at 50 feet = | | | 80 |

| Distance Between | Geometric | Ground Effect | Calculated | Calculated Leq |
|------------------|------------------|------------------|-------------|----------------|
| Source and | Attenuation (dB) | Attenuation (dB) | Lmax Sound | Sound Level |
| Receiver (ft.) | | | Level (dBA) | (dBA) |
| 15 | 10 | 0.0 | 96 | 91 |
| 25 | 6 | 0.0 | 92 | 86 |
| 50 | 0 | 0.0 | 86 | 80 |
| 75 | -4 | 0.0 | 82 | 77 |
| 100 | -6 | 0.0 | 80 | 74 |
| 200 | -12 | 0.0 | 74 | 68 |
| 300 | -16 | 0.0 | 70 | 65 |
| 500 | -20 | 0.0 | 66 | 60 |
| 1000 | -26 | 0.0 | 60 | 54 |
| 2000 | -32 | 0.0 | 54 | 48 |

Ground affect attenuation based on 1.5 dB per doubling of distance

Note: This calculation does not include the effects, if any, of local shielding

Table 17. Construction Noise

| Source Data: | Maximum Sound Level (dBA) | Utilization Factor | Leq Sound Level (dBA) |
|--|------------------------------------|-----------------------|--------------------------|
| Construction Condition: 5-1 Demolition | | | |
| Source 1: Concrete saw - Sound level (dBA) at 50 feet = | 90 | 20% | 83.0 |
| Source 2: Concrete saw - Sound level (dBA) at 50 feet = | 90 | 20% | 83.0 |
| Source 3: Mounted Impact Hammer - Sound level (dBA) at 50 feet = | 90 | 20% | 83.0 |
| Calculated Data: | | | |
| All Sources Combined - Lmax sound level (dBA) at 50 feet = | | | 95 |
| All Sources Combined - Leq sound level (dBA) at 50 feet = | | | 88 |

| Distance Between | Geometric | Ground Effect | Calculated | Calculated Leq |
|------------------|------------------|------------------|-------------|----------------|
| Source and | Attenuation (dB) | Attenuation (dB) | Lmax Sound | Sound Level |
| Receiver (ft.) | | | Level (dBA) | (dBA) |
| 15 | 10 | 0.0 | 105 | 98 |
| 25 | 6 | 0.0 | 101 | 94 |
| 50 | 0 | 0.0 | 95 | 88 |
| 75 | -4 | 0.0 | 91 | 84 |
| 100 | -6 | 0.0 | 89 | 82 |
| 200 | -12 | 0.0 | 83 | 76 |
| 300 | -16 | 0.0 | 79 | 72 |
| 500 | -20 | 0.0 | 75 | 68 |
| 1000 | -26 | 0.0 | 69 | 62 |
| 2000 | -32 | 0.0 | 63 | 56 |

Ground affect attenuation based on 1.5 dB per doubling of distance

Note: This calculation does not include the effects, if any, of local shielding

Table 18. Construction Noise

| Source Data: | Maximum Sound Level (dBA) | Utilization Factor | Leq Sound Level (dBA) |
|--|------------------------------------|-----------------------|--------------------------|
| Construction Condition: 5-2 Excavation, Subgrade | | | |
| Source 1: Concrete saw - Sound level (dBA) at 50 feet = | 90 | 20% | 83.0 |
| Source 2: Concrete saw - Sound level (dBA) at 50 feet = | 90 | 20% | 83.0 |
| Source 3: Mounted Impact Hammer - Sound level (dBA) at 50 feet = | 90 | 20% | 83.0 |
| Calculated Data: | | | |
| All Sources Combined - Lmax sound level (dBA) at 50 feet = | | | 95 |
| All Sources Combined - Leq sound level (dBA) at 50 feet = | | | 88 |

| Distance Between | Geometric | Ground Effect | Calculated | Calculated Leq |
|------------------|------------------|------------------|-------------|----------------|
| Source and | Attenuation (dB) | Attenuation (dB) | Lmax Sound | Sound Level |
| Receiver (ft.) | | | Level (dBA) | (dBA) |
| 15 | 10 | 0.0 | 105 | 98 |
| 25 | 6 | 0.0 | 101 | 94 |
| 50 | 0 | 0.0 | 95 | 88 |
| 75 | -4 | 0.0 | 91 | 84 |
| 100 | -6 | 0.0 | 89 | 82 |
| 200 | -12 | 0.0 | 83 | 76 |
| 300 | -16 | 0.0 | 79 | 72 |
| 500 | -20 | 0.0 | 75 | 68 |
| 1000 | -26 | 0.0 | 69 | 62 |
| 2000 | -32 | 0.0 | 63 | 56 |

Ground affect attenuation based on 1.5 dB per doubling of distance

Note: This calculation does not include the effects, if any, of local shielding

Table 19. Construction Noise

| Source Data: | Maximum Sound Level (dBA) | Utilization Factor | Leq Sound Level (dBA) |
|--|------------------------------------|-----------------------|--------------------------|
| Construction Condition: 5-3 Form and Pour Concrete | | | |
| Source 1: Concrete pump truck - Sound level (dBA) at 50 feet = | 81 | 20% | 74.0 |
| Source 2: Crane - Sound level (dBA) at 50 feet = | 81 | 16% | 73.0 |
| Source 3: Generator - Sound level (dBA) at 50 feet = | 81 | 50% | 78.0 |
| Calculated Data: | | | |
| All Sources Combined - Lmax sound level (dBA) at 50 feet = | | | 86 |
| All Sources Combined - Leq sound level (dBA) at 50 feet = | | | 80 |

| Distance Between | Geometric | Ground Effect | Calculated | Calculated Leq |
|------------------|------------------|------------------|-------------|----------------|
| Source and | Attenuation (dB) | Attenuation (dB) | Lmax Sound | Sound Level |
| Receiver (ft.) | | | Level (dBA) | (dBA) |
| 15 | 10 | 0.0 | 96 | 91 |
| 25 | 6 | 0.0 | 92 | 86 |
| 50 | 0 | 0.0 | 86 | 80 |
| 75 | -4 | 0.0 | 82 | 77 |
| 100 | -6 | 0.0 | 80 | 74 |
| 200 | -12 | 0.0 | 74 | 68 |
| 300 | -16 | 0.0 | 70 | 65 |
| 500 | -20 | 0.0 | 66 | 60 |
| 1000 | -26 | 0.0 | 60 | 54 |
| 2000 | -32 | 0.0 | 54 | 48 |

Ground affect attenuation based on 1.5 dB per doubling of distance

Note: This calculation does not include the effects, if any, of local shielding

Table 20. Construction Noise

| Source Data: | Maximum Sound Level (dBA) | Utilization Factor | Leq Sound Level (dBA) |
|--|------------------------------------|-----------------------|--------------------------|
| Construction Condition: 5-4 Footbridge Install | | | |
| Source 1: Concrete pump truck - Sound level (dBA) at 50 feet = | 81 | 20% | 74.0 |
| Source 2: Crane - Sound level (dBA) at 50 feet = | 81 | 16% | 73.0 |
| Source 3: Generator - Sound level (dBA) at 50 feet = | 81 | 50% | 78.0 |
| Calculated Data: | | | |
| All Sources Combined - Lmax sound level (dBA) at 50 feet = | | | 86 |
| All Sources Combined - Leq sound level (dBA) at 50 feet = | | | 80 |

| Distance Between | Geometric | Ground Effect | Calculated | Calculated Leq |
|------------------|------------------|------------------|-------------|----------------|
| Source and | Attenuation (dB) | Attenuation (dB) | Lmax Sound | Sound Level |
| Receiver (ft.) | | | Level (dBA) | (dBA) |
| 15 | 10 | 0.0 | 96 | 91 |
| 25 | 6 | 0.0 | 92 | 86 |
| 50 | 0 | 0.0 | 86 | 80 |
| 75 | -4 | 0.0 | 82 | 77 |
| 100 | -6 | 0.0 | 80 | 74 |
| 200 | -12 | 0.0 | 74 | 68 |
| 300 | -16 | 0.0 | 70 | 65 |
| 500 | -20 | 0.0 | 66 | 60 |
| 1000 | -26 | 0.0 | 60 | 54 |
| 2000 | -32 | 0.0 | 54 | 48 |

Ground affect attenuation based on 1.5 dB per doubling of distance

Note: This calculation does not include the effects, if any, of local shielding

Table 21. Construction Noise

| Source Data: | Maximum Sound Level (dBA) | Utilization Factor | Leq Sound Level (dBA) |
|---|------------------------------------|-----------------------|--------------------------|
| Construction Condition: 6-1 Flow Bypass Source 1: Generator - Sound level (dBA) at 50 feet = | 81 | 50% | 78.0 |
| Calculated Data: All Sources Combined - Lmax sound level (dBA) at 50 feet = All Sources Combined - Leq sound level (dBA) at 50 feet = | | | 81 78 |

| Distance Between | Geometric | Ground Effect | Calculated | Calculated Leq |
|------------------|------------------|------------------|-------------|----------------|
| Source and | Attenuation (dB) | Attenuation (dB) | Lmax Sound | Sound Level |
| Receiver (ft.) | | | Level (dBA) | (dBA) |
| 15 | 10 | 0.0 | 91 | 88 |
| 25 | 6 | 0.0 | 87 | 84 |
| 50 | 0 | 0.0 | 81 | 78 |
| 75 | -4 | 0.0 | 77 | 74 |
| 100 | -6 | 0.0 | 75 | 72 |
| 200 | -12 | 0.0 | 69 | 66 |
| 300 | -16 | 0.0 | 65 | 62 |
| 500 | -20 | 0.0 | 61 | 58 |
| 1000 | -26 | 0.0 | 55 | 52 |
| 2000 | -32 | 0.0 | 49 | 46 |

Ground affect attenuation based on 1.5 dB per doubling of distance

Note: This calculation does not include the effects, if any, of local shielding

Table 22. Construction Noise

| Source Data: | Maximum Sound Level (dBA) | Utilization Factor | Leq Sound Level (dBA) |
|--|------------------------------------|-----------------------|--------------------------|
| Construction Condition: 6-2 Excavation | | | |
| Source 1: Excavator - Sound level (dBA) at 50 feet = | 81 | 40% | 77.0 |
| Source 2: Dozer - Sound level (dBA) at 50 feet = | 82 | 40% | 78.0 |
| Source 3: Generator - Sound level (dBA) at 50 feet = | 81 | 50% | 78.0 |
| Calculated Data: | | | |
| All Sources Combined - Lmax sound level (dBA) at 50 feet = | | | 86 |
| All Sources Combined - Leq sound level (dBA) at 50 feet = | | | 82 |

| Distance Between | Geometric | Ground Effect | Calculated | Calculated Leq |
|------------------|------------------|------------------|-------------|----------------|
| Source and | Attenuation (dB) | Attenuation (dB) | Lmax Sound | Sound Level |
| Receiver (ft.) | | | Level (dBA) | (dBA) |
| 15 | 10 | 0.0 | 97 | 93 |
| 25 | 6 | 0.0 | 92 | 88 |
| 50 | 0 | 0.0 | 86 | 82 |
| 75 | -4 | 0.0 | 83 | 79 |
| 100 | -6 | 0.0 | 80 | 76 |
| 200 | -12 | 0.0 | 74 | 70 |
| 300 | -16 | 0.0 | 71 | 67 |
| 500 | -20 | 0.0 | 66 | 62 |
| 1000 | -26 | 0.0 | 60 | 56 |
| 2000 | -32 | 0.0 | 54 | 50 |

Ground affect attenuation based on 1.5 dB per doubling of distance

Note: This calculation does not include the effects, if any, of local shielding

Table 23. Construction Noise

| Source Data: | Maximum Sound Level (dBA) | Utilization Factor | Leq Sound Level (dBA) |
|--|------------------------------------|-----------------------|--------------------------|
| Construction Condition: 6-3 Slope Protection | | | |
| Source 1: Drill Rig - Sound level (dBA) at 50 feet = | 84 | 20% | 77.0 |
| Source 2: Pump - Sound level (dBA) at 50 feet = | 81 | 50% | 78.0 |
| Source 3: Pickup Truck - Sound level (dBA) at 50 feet = | 75 | 40% | 71.0 |
| Calculated Data: | | | |
| All Sources Combined - Lmax sound level (dBA) at 50 feet = | | | 86 |
| All Sources Combined - Leq sound level (dBA) at 50 feet = | | | 81 |

| Distance Between | Geometric | Ground Effect | Calculated | Calculated Leq |
|------------------|------------------|------------------|-------------|----------------|
| Source and | Attenuation (dB) | Attenuation (dB) | Lmax Sound | Sound Level |
| Receiver (ft.) | | | Level (dBA) | (dBA) |
| 15 | 10 | 0.0 | 97 | 91 |
| 25 | 6 | 0.0 | 92 | 87 |
| 50 | 0 | 0.0 | 86 | 81 |
| 75 | -4 | 0.0 | 83 | 77 |
| 100 | -6 | 0.0 | 80 | 75 |
| 200 | -12 | 0.0 | 74 | 69 |
| 300 | -16 | 0.0 | 71 | 65 |
| 500 | -20 | 0.0 | 66 | 61 |
| 1000 | -26 | 0.0 | 60 | 55 |
| 2000 | -32 | 0.0 | 54 | 49 |

Ground affect attenuation based on 1.5 dB per doubling of distance

Note: This calculation does not include the effects, if any, of local shielding

Table 24. Construction Noise

| Source Data: | Maximum Sound Level (dBA) | Utilization Factor | Leq Sound Level (dBA) |
|--|------------------------------------|-----------------------|--------------------------|
| Construction Condition: 7-1 Cofferdam Removal | | | |
| Source 1: Concrete saw - Sound level (dBA) at 50 feet = | 90 | 20% | 83.0 |
| Source 2: Concrete saw - Sound level (dBA) at 50 feet = | 90 | 20% | 83.0 |
| Source 3: Mounted Impact Hammer - Sound level (dBA) at 50 feet = | 90 | 20% | 83.0 |
| Calculated Data: | | | |
| All Sources Combined - Lmax sound level (dBA) at 50 feet = | | | 95 |
| All Sources Combined - Leq sound level (dBA) at 50 feet = | | | 88 |

| Distance Between | Geometric | Ground Effect | Calculated | Calculated Leq |
|------------------|------------------|------------------|-------------|----------------|
| Source and | Attenuation (dB) | Attenuation (dB) | Lmax Sound | Sound Level |
| Receiver (ft.) | | | Level (dBA) | (dBA) |
| 15 | 10 | 0.0 | 105 | 98 |
| 25 | 6 | 0.0 | 101 | 94 |
| 50 | 0 | 0.0 | 95 | 88 |
| 75 | -4 | 0.0 | 91 | 84 |
| 100 | -6 | 0.0 | 89 | 82 |
| 200 | -12 | 0.0 | 83 | 76 |
| 300 | -16 | 0.0 | 79 | 72 |
| 500 | -20 | 0.0 | 75 | 68 |
| 1000 | -26 | 0.0 | 69 | 62 |
| 2000 | -32 | 0.0 | 63 | 56 |

Ground affect attenuation based on 1.5 dB per doubling of distance

Note: This calculation does not include the effects, if any, of local shielding

Table 25. Construction Noise

| Source Data: | Maximum Sound Level (dBA) | Utilization Factor | Leq Sound Level (dBA) |
|--|------------------------------------|-----------------------|--------------------------|
| Construction Condition: 7-2 Lighting | | | |
| Source 1: Telehandler (based on front end loader) - Sound level (dBA) at 50 feet = | 79 | 40% | 75.0 |
| Source 2: Pickup Truck - Sound level (dBA) at 50 feet = | 75 | 40% | 71.0 |
| Calculated Data: | | | |
| All Sources Combined - Lmax sound level (dBA) at 50 feet = | | | 80 |
| All Sources Combined - Leq sound level (dBA) at 50 feet = | | | 76 |

| Distance Between | Geometric | Ground Effect | Calculated | Calculated Leq |
|------------------|------------------|------------------|-------------|----------------|
| Source and | Attenuation (dB) | Attenuation (dB) | Lmax Sound | Sound Level |
| Receiver (ft.) | | | Level (dBA) | (dBA) |
| 15 | 10 | 0.0 | 91 | 87 |
| 25 | 6 | 0.0 | 86 | 82 |
| 50 | 0 | 0.0 | 80 | 76 |
| 75 | -4 | 0.0 | 77 | 73 |
| 100 | -6 | 0.0 | 74 | 70 |
| 200 | -12 | 0.0 | 68 | 64 |
| 300 | -16 | 0.0 | 65 | 61 |
| 500 | -20 | 0.0 | 60 | 56 |
| 1000 | -26 | 0.0 | 54 | 50 |
| 2000 | -32 | 0.0 | 48 | 44 |

Ground affect attenuation based on 1.5 dB per doubling of distance

Note: This calculation does not include the effects, if any, of local shielding

Table 26. Construction Noise

| Source Data: | Maximum Sound Level (dBA) | Utilization Factor | Leq Sound Level (dBA) |
|--|------------------------------------|-----------------------|--------------------------|
| Construction Condition: 7-3 Log Boom | _, | / | |
| Source 1: Excavator - Sound level (dBA) at 50 feet = | 81 | 40% | 77.0 |
| Calculated Data: | | | |
| All Sources Combined - Lmax sound level (dBA) at 50 feet = | | | 81 |
| All Sources Combined - Leq sound level (dBA) at 50 feet = | | | 77 |

| Distance Between | Geometric | Ground Effect | Calculated | Calculated Leq |
|------------------|------------------|------------------|-------------|----------------|
| Source and | Attenuation (dB) | Attenuation (dB) | Lmax Sound | Sound Level |
| Receiver (ft.) | | | Level (dBA) | (dBA) |
| 15 | 10 | 0.0 | 91 | 87 |
| 25 | 6 | 0.0 | 87 | 83 |
| 50 | 0 | 0.0 | 81 | 77 |
| 75 | -4 | 0.0 | 77 | 73 |
| 100 | -6 | 0.0 | 75 | 71 |
| 200 | -12 | 0.0 | 69 | 65 |
| 300 | -16 | 0.0 | 65 | 61 |
| 500 | -20 | 0.0 | 61 | 57 |
| 1000 | -26 | 0.0 | 55 | 51 |
| 2000 | -32 | 0.0 | 49 | 45 |

Ground affect attenuation based on 1.5 dB per doubling of distance

Note: This calculation does not include the effects, if any, of local shielding

Table 27. Construction Noise

| Source Data: | Maximum Sound Level (dBA) | Utilization Factor | Leq Sound Level (dBA) |
|--|------------------------------------|-----------------------|--------------------------|
| Construction Condition: 7-4 Site Restoration | | | |
| Source 1: Excavator - Sound level (dBA) at 50 feet = | 81 | 40% | 77.0 |
| Source 2: Skid Steer (based on backhoe) - Sound level (dBA) at 50 feet = | 78 | 40% | 74.0 |
| Source 3: Telehandler (based on front end loader) - Sound level (dBA) at 50 feet = | 79 | 40% | 75.0 |
| Calculated Data: | | | |
| All Sources Combined - Lmax sound level (dBA) at 50 feet = | | | 84 |
| All Sources Combined - Leq sound level (dBA) at 50 feet = | | | 80 |

| Distance Between | Geometric | Ground Effect | Calculated | Calculated Leq |
|------------------|------------------|------------------|-------------|----------------|
| Source and | Attenuation (dB) | Attenuation (dB) | Lmax Sound | Sound Level |
| Receiver (ft.) | | | Level (dBA) | (dBA) |
| 15 | 10 | 0.0 | 95 | 91 |
| 25 | 6 | 0.0 | 90 | 86 |
| 50 | 0 | 0.0 | 84 | 80 |
| 75 | -4 | 0.0 | 81 | 77 |
| 100 | -6 | 0.0 | 78 | 74 |
| 200 | -12 | 0.0 | 72 | 68 |
| 300 | -16 | 0.0 | 69 | 65 |
| 500 | -20 | 0.0 | 64 | 60 |
| 1000 | -26 | 0.0 | 58 | 54 |
| 2000 | -32 | 0.0 | 52 | 48 |

Ground affect attenuation based on 1.5 dB per doubling of distance

Note: This calculation does not include the effects, if any, of local shielding

Table 28. Construction Noise

| Source Data: | Maximum Sound Level (dBA) | Utilization Factor | Leq Sound Level (dBA) |
|--|------------------------------------|-----------------------|--------------------------|
| Construction Condition: 7-5 Demobilization | | | |
| Source 1: Excavator - Sound level (dBA) at 50 feet = | 81 | 40% | 77.0 |
| Source 2: Skid Steer (based on backhoe) - Sound level (dBA) at 50 feet = | 78 | 40% | 74.0 |
| Source 3: Telehandler (based on front end loader) - Sound level (dBA) at 50 feet = | 79 | 40% | 75.0 |
| Calculated Data: | | | |
| All Sources Combined - Lmax sound level (dBA) at 50 feet = | | | 84 |
| All Sources Combined - Leq sound level (dBA) at 50 feet = | | | 80 |

| Distance Between | Geometric | Ground Effect | Calculated | Calculated Leq |
|------------------|------------------|------------------|-------------|----------------|
| Source and | Attenuation (dB) | Attenuation (dB) | Lmax Sound | Sound Level |
| Receiver (ft.) | | | Level (dBA) | (dBA) |
| 15 | 10 | 0.0 | 95 | 91 |
| 25 | 6 | 0.0 | 90 | 86 |
| 50 | 0 | 0.0 | 84 | 80 |
| 75 | -4 | 0.0 | 81 | 77 |
| 100 | -6 | 0.0 | 78 | 74 |
| 200 | -12 | 0.0 | 72 | 68 |
| 300 | -16 | 0.0 | 69 | 65 |
| 500 | -20 | 0.0 | 64 | 60 |
| 1000 | -26 | 0.0 | 58 | 54 |
| 2000 | -32 | 0.0 | 52 | 48 |

Ground affect attenuation based on 1.5 dB per doubling of distance

Note: This calculation does not include the effects, if any, of local shielding

Table 29. Construction Noise

| Source Data: | Maximum Sound Level (dBA) | Utilization Factor | Leq Sound Level (dBA) |
|--|------------------------------------|-----------------------|--------------------------|
| Construction Condition: 8-1 Remove Cofferdam | | | |
| Source 1: Concrete saw - Sound level (dBA) at 50 feet = | 90 | 20% | 83.0 |
| Source 2: Concrete saw - Sound level (dBA) at 50 feet = | 90 | 20% | 83.0 |
| Source 3: Mounted Impact Hammer - Sound level (dBA) at 50 feet = | 90 | 20% | 83.0 |
| Calculated Data: | | | |
| All Sources Combined - Lmax sound level (dBA) at 50 feet = | | | 95 |
| All Sources Combined - Leq sound level (dBA) at 50 feet = | | | 88 |

| Distance Between | Geometric | Ground Effect | Calculated | Calculated Leq |
|------------------|------------------|------------------|-------------|----------------|
| Source and | Attenuation (dB) | Attenuation (dB) | Lmax Sound | Sound Level |
| Receiver (ft.) | | | Level (dBA) | (dBA) |
| 15 | 10 | 0.0 | 105 | 98 |
| 25 | 6 | 0.0 | 101 | 94 |
| 50 | 0 | 0.0 | 95 | 88 |
| 75 | -4 | 0.0 | 91 | 84 |
| 100 | -6 | 0.0 | 89 | 82 |
| 200 | -12 | 0.0 | 83 | 76 |
| 300 | -16 | 0.0 | 79 | 72 |
| 500 | -20 | 0.0 | 75 | 68 |
| 1000 | -26 | 0.0 | 69 | 62 |
| 2000 | -32 | 0.0 | 63 | 56 |

Ground affect attenuation based on 1.5 dB per doubling of distance

Note: This calculation does not include the effects, if any, of local shielding

Table 30. Construction Noise

| Source Data: | Maximum Sound Level (dBA) | Utilization Factor | Leq Sound Level (dBA) |
|--|------------------------------------|-----------------------|--------------------------|
| Construction Condition: 8-2 Canal Side Channel | | | |
| Source 1: Concrete pump truck - Sound level (dBA) at 50 feet = | 81 | 20% | 74.0 |
| Source 2: Crane - Sound level (dBA) at 50 feet = | 81 | 16% | 73.0 |
| Source 3: Telehandler (based on front end loader) - Sound level (dBA) at 50 feet = | 79 | 40% | 75.0 |
| Calculated Data: | | | |
| All Sources Combined - Lmax sound level (dBA) at 50 feet = | | | 85 |
| All Sources Combined - Leq sound level (dBA) at 50 feet = | | | 79 |

| Distance Between | Geometric | Ground Effect | Calculated | Calculated Leq |
|------------------|------------------|------------------|-------------|----------------|
| Source and | Attenuation (dB) | Attenuation (dB) | Lmax Sound | Sound Level |
| Receiver (ft.) | | | Level (dBA) | (dBA) |
| 15 | 10 | 0.0 | 96 | 89 |
| 25 | 6 | 0.0 | 91 | 85 |
| 50 | 0 | 0.0 | 85 | 79 |
| 75 | -4 | 0.0 | 82 | 75 |
| 100 | -6 | 0.0 | 79 | 73 |
| 200 | -12 | 0.0 | 73 | 67 |
| 300 | -16 | 0.0 | 70 | 63 |
| 500 | -20 | 0.0 | 65 | 59 |
| 1000 | -26 | 0.0 | 59 | 53 |
| 2000 | -32 | 0.0 | 53 | 47 |

Ground affect attenuation based on 1.5 dB per doubling of distance

Note: This calculation does not include the effects, if any, of local shielding

Table 31. Construction Noise

| Source Data: | Maximum Sound Level (dBA) | Utilization Factor | Leq Sound Level (dBA) |
|--|------------------------------------|-----------------------|--------------------------|
| Construction Condition: 8-3 Cover Bathtub and Siphon | | | |
| Source 1: Concrete pump truck - Sound level (dBA) at 50 feet = | 81 | 20% | 74.0 |
| Source 2: Crane - Sound level (dBA) at 50 feet = | 81 | 16% | 73.0 |
| Source 3: Telehandler (based on front end loader) - Sound level (dBA) at 50 feet = | 79 | 40% | 75.0 |
| Calculated Data: | | | |
| All Sources Combined - Lmax sound level (dBA) at 50 feet = | | | 85 |
| All Sources Combined - Leq sound level (dBA) at 50 feet = | | | 79 |

| Distance Between | Geometric | Ground Effect | Calculated | Calculated Leq |
|------------------|------------------|------------------|-------------|----------------|
| Source and | Attenuation (dB) | Attenuation (dB) | Lmax Sound | Sound Level |
| Receiver (ft.) | | | Level (dBA) | (dBA) |
| 15 | 10 | 0.0 | 96 | 89 |
| 25 | 6 | 0.0 | 91 | 85 |
| 50 | 0 | 0.0 | 85 | 79 |
| 75 | -4 | 0.0 | 82 | 75 |
| 100 | -6 | 0.0 | 79 | 73 |
| 200 | -12 | 0.0 | 73 | 67 |
| 300 | -16 | 0.0 | 70 | 63 |
| 500 | -20 | 0.0 | 65 | 59 |
| 1000 | -26 | 0.0 | 59 | 53 |
| 2000 | -32 | 0.0 | 53 | 47 |

Ground affect attenuation based on 1.5 dB per doubling of distance

Note: This calculation does not include the effects, if any, of local shielding

Appendix E-6 Construction Haul Truck Noise Modeling

Tiger Creek Spillway Haul Truck Noise Summary

| | | Haul Trucks per day | Representative Noise Measurement | Measured Noise levels | Existing | | Haul Only by speed | | | Existing + Haul | |
|------------------|--------------------|------------------------|-------------------------------------|--------------------------|----------|----------|-----------------------|----------|-----------|--------------------|-------|
| | | | | | | Sound So | | Sound | | | |
| | | | | | | | | Energy - | Energy - | dB | |
| Roadway Segment | | | | dB CNEL | dB CNEL | Speed | dB CNEL | Existing | Haul Only | Ldn | Delta |
| Tiger Creek Road | Before Power House | 10 | LT-4, ST-2 | 55 | 55.0 | 25 | 46.6 | 316227.8 | 45767.7 | 55.6 | 0.6 |
| Tiger Creek Road | After Power House | 10 | LT-4, ST-2 | 55 | 55.0 | 15 | 47.9 | 316227.8 | 61789.8 | 55.8 | 0.8 |
| Spur 1 | Before Gate | 38 | LT-3 | 56 | 56.0 | 25 | 50.3 | 398107.2 | 107594.2 | 57.0 | 1.0 |
| Spur 1 | PG&E Side of Gate | 38 | LT-3 | 56 | 56.0 | 15 | 51.7 | 398107.2 | 148805.1 | 57.4 | 1.4 |

^{*} Assumed distance of 50 feet from Roadway Centerline for screening analysis.

Appendix E-7 **Batch Plant Noise Data and Modeling**

Batch Plant Noise Measurements

| Summary of Data to Use Name | | | Assumed Height, feet | | Measurement Location | Noise Source | |
|--------------------------------|--------------|------|----------------------|--|--|---|--|
| Loading/loaded concrete trucks | 80.7 | 50 | 8.5 | | Adjacent to silo/main mixer barrel/loaded concrete trucks | On-site batch plant and truck noise | |
| High silo noise sources | 81.5 | 5 50 | 30 | | Adjacent to silos/scales/conveyors | On-site batch plant and truck noise | |
| Low silo noise sources | 78.7 | 50 | 8.5 | | Adjacent to cement delivery | Cement delivery truck | |
| Truck Yard | 71.3 | 5 50 | 8.5 | | Materials delivery/storage yard. Approx. 54 ft. from grizzly | Various trucks, material deliveries/storage | |
| Truck wash | 72.2 | ? 50 | 8.5 | | Adjacent to truck wash | Truck washout | |
| Assumed heights may be | conservative | | | | | | |

Noise measurement data for a concrete batch plant collected on August 15, 2006. Measurement conducted at an operational concrete batch plant in the City of Gardena.

Tiger Creek Spillway Noise Models

Batch Plant Noise

| | Maximum Sound | | |
|---|------------------|-----------------------|--------------------------|
| Source Data: | Level (dBA) | Utilization Factor | Leq Sound Level (dBA) |
| Concrete Batch Plant Noise | | | |
| Source 1: Loading/loaded concrete trucks - Sound level (dBA) at 50 feet = | 81 | 100% | 80.7 |
| Source 2: High silo noise sources - Sound level (dBA) at 50 feet = | 82 | 100% | 81.5 |
| Source 3: Low silo noise sources - Sound level (dBA) at 50 feet = | 79 | 100% | 78.7 |
| Calculated Data: | | | |
| All Sources Combined - Lmax sound level (dBA) at 50 feet = | | | 85 |
| All Sources Combined - Leq sound level (dBA) at 50 feet = | | | 85 |

| Distance Between | Geometric | Ground Effect | Calculated Calculated Led |
|------------------|-------------|------------------|---------------------------|
| Source and | Attenuation | Attenuation (dB) | Lmax Sound Sound Level |
| Receiver (ft.) | (dB) | | Level (dBA) (dBA) |
| 50 | 0 | 0.0 | 85 85 |
| 100 | -6 | 0.0 | 79 79 |
| 150 | -10 | 0.0 | 76 76 |
| 200 | -12 | 0.0 | 73 73 |
| 280 | -15 | 0.0 | 70 70 |
| 300 | -16 | 0.0 | 70 70 |
| 500 | -20 | 0.0 | 65 65 |
| 1000 | -26 | 0.0 | 59 59 |
| 2000 | -32 | 0.0 | 53 53 |

Geometric attenuation based on 6 dB per doubling of distance.

Ground affect attenuation based on 1.5 dB per doubling of distance

Note: This calculation does not include the effects, if any, of local shielding

from walls, topography or other barriers which may reduce sound levels further.

| Acoustical Average Distance | 150 | 522 |
|-----------------------------|-----|-----|
| | 280 | 275 |

Existing Ambient noise level 71 dBA Leq
Batch Plant Noise 70
Added together 74

Appendix F Tiger Creek Regulator Dam Spillway Replacement Project—Public Comments and Responses

Table F-1. Comments Received on January 2024 Draft IS/MND and State Water Board Responses

| No. | Comment | Response | IS/MND Edits |
|------|---|--|--------------|
| Morg | an Kilgour, Regional Manager, California Department of Fish and Wildl | ife, February 23, 2024 | |
| 1 | COMMENT 1: Lake and Streambed Alteration Notification for Plunge Pool Construction, 3.3 Hydrology and Water Quality, 3.3-12 Issue: Section 3.3.5 describes construction of the plunge pool in Tiger Creek involving excavation and streamflow diversion. CDFW believes this activity may trigger a Notification for a Streambed Alteration Agreement. Section 1602 of the Fish and Game Code requires an entity to notify CDFW prior to commencing any activity that may do one or more of the following: a. Substantially divert or obstruct the natural flow of any river, stream, or lake; b. Substantially change or use any material from the bed, channel or bank of any river, stream, or lake; or c. Deposit debris, waste or other materials where it may pass into any river, stream or lake. Please note that "any river, stream or lake" includes those that are episodic (i.e., those that are dry for periods of time) as well as those that are perennial (i.e., those that flow year-round). This includes ephemeral streams and watercourses with a subsurface flow. It may also apply to work undertaken within the flood plain of a body of water. If upon review of an entity's notification, CDFW determines that the project activities may substantially adversely affect an existing fish or wildlife resource, a Lake and Streambed Alteration (LSA) Agreement will be issued which will include reasonable measures necessary to protect the resource. CDFW's issuance of an LSA Agreement is a "project" subject to CEQA (see Pub. Resources Code 21065). To facilitate issuance of an LSA Agreement, if one is necessary, the environmental document should fully identify the potential impacts to the lake, stream, or riparian resources, and provide adequate avoidance, mitigation, and monitoring and reporting commitments. Early consultation with CDFW is recommended, since modification of the project may avoid or reduce impacts to fish and wildlife resources. LSA Notifications must be submitted online through CDFW's Environmental Permit Information Manaagement System | All necessary federal, state, and local approvals will be obtained before construction of the Proposed Project begins. The Federal Power Act broadly preempts the state's authority over hydroelectric facilities (California v. FERC (1990) 495 U.S. 490; Sayles Hydro Assocs. v. Maughan (9th Cir.) 985 F.2d 451.) Because the Federal Power Act occupies the field of power regulation, state authority to regulate power production facilities is preempted, unless an exception exists. State water quality certification under Clean Water Act section 401 is one such exception. | N/A |

| No. | Comment | Response | IS/MND Edits |
|-----|---|---|---|
| | Recommendation: CDFW recommends that the Proponent notify pursuant to Section 1602 of the Fish and Game Code as early as possible to determine if an LSA is needed. | | |
| 2 | COMMENT 2: Impacts of Plunge Pool Construction on Aquatic Life, 3.5 Biological Resources, 3.5-69 Issue: The excavation and creation of the plunge pool in Tiger Creek would involve the diversion of streamflows around the work area. Dewatering and diversion have the potential to harm aquatic species via stranding. These activities may also disrupt established patterns of instream flow that support ecological and geomorphic function. Recommendations: CDFW recommends the Proponent adopt the following measures during plunge pool construction to minimize impacts to aquatic life: | CDFW's recommendations regarding the fish rescue and relocation plan presented in Mitigation Measure BIO-MM-8: Rescue and Relocate Fish from Affected Habitat, are consistent with what is already described in the mitigation measure. Responses to specific recommendations are provided below. | N/A |
| 2a | Diversion and Dewatering CDFW agrees that it is appropriate to prepare a fish rescue and relocation plan as part of Biological Resources Mitigation Measure 8: Rescue and Relocate Fish from Affected Habitat, 3.5-73. To avoid impact to any non-listed fish species, a Fish Relocation Plan should be submitted to CDFW for approval at least 30 calendar days prior to the start of any in-water project activities. | Mitigation Measure BIO-MM-8: Rescue and Relocate Fish from Affected Habitat, specifies that the plan shall be submitted to CDFW at least 60 days before initiating activities to install the cofferdam (which is the start of in-water work). This is consistent with CDFW's request. | N/A |
| 2b | The Proponent should ensure that any other necessary permits are acquired prior to fish relocation activity. | As described in Chapter 1, Introduction, of the IS/MND, PG&E will seek all necessary permissions, authorizations, concurrences, and permits, which is consistent with CDFW's request. | N/A |
| 2c | The plan should be prepared and implemented by a Qualified Biologist. A Qualified Biologist is defined as a person who is knowledgeable and experienced in the biology, life stages, natural history, and identification of local fish and wildlife resources present at the Project Site. | The text of Mitigation Measure BIO-MM-8: Rescue and Relocate Fish from Affected Habitat, was revised in the Recirculated IS/MND as per CDFW's suggestion. Please note that Mitigation Measure BIO-MM-8 already includes a requirement that only qualified fish biologists lead the fish rescue and relocation, which is consistent with CDFW's request. | PG&E A qualified biologist shall develop and implement a fish rescue and relocation plan to capture and relocate any fish out of harm's way prior to installation of the plywood or steel sheet at the M-76 weir and commencement of dewatering in Tiger Creek to facilitate construction of the new spillway, flip bucket, and plunge pool. A qualified biologist is defined as a person who is knowledgeable and experienced in the biology, life stages, natural history, and identification of local fish and wildlife resources present at the Project Site. |
| 2d | A copy of the approved plan should be available on-site during all project activities. | The text of Mitigation Measure BIO-MM-8: Rescue and Relocate Fish from Affected Habitat, was revised in the Recirculated IS/MND as per CDFW's suggestion. | The fish rescue and relocation plan shall be submitted to CDFW for approval at least 60 days before initiating activities to install the cofferdam and a copy of the approved plan |

| No. | Comment | Response | IS/MND Edits |
|-----|--|--|--|
| | | | shall be available on-site during all project activities. |
| 2e | The Qualified Biologist should be present on site for the duration of dewatering, plunge pool construction, and rewatering of Tiger Creek to ensure all avoidance and minimization measures are implemented. The Qualified Biologist should check daily for stranded aquatic life as the water level in the dewatering area drops. All reasonable efforts shall be made to capture and move all stranded aquatic life observed in the dewatered areas. Capture methods may include fish landing nets, dip nets, bucket, and by hand. Captured aquatic life should be released immediately in the closest body of water adjacent to the work site. This condition does not allow for the take or disturbance of any listed species. The Qualified Biologist shall be authorized to stop any project activities if necessary to protect fish and wildlife resources. If the Proponent encounters a listed or fully protected species during a project activity that could be harmed, the Proponent should suspend work and consult with CDFW. The Fish Relocation Plan should address the monitoring of the fish to be relocated during the water diversion or dewatering process. | Mitigation Measure BIO-MM-8: Rescue and Relocate Fish from Affected Habitat, requires that fish rescue and relocation activities shall commence immediately before plywood or steel sheet installation and continue until no more fish are captured or the site is completely dewatered, whichever occurs first, and that only qualified fish biologists shall lead the fish rescue and relocation. Once the portion of Tiger Creek is dewatered and the bypass pipe has been installed, and all fish have been removed from the plunge pool construction area, there is no further risk of fish stranding. As such, monitoring during plunge pool construction and rewatering of Tiger Creek is not necessary. Further, Mitigation Measure BIO-MM-1: Conduct Worker Environmental Awareness Training and Implement General Requirements, (as revised) requires that a biological monitor shall make regular visits to the Project Area to ensure that environmentally sensitive areas are being protected and to determine if general restrictions and guidelines are being followed. | N/A |
| 2f | A post-relocation report should be provided that includes, at a minimum, the date and time of capture and relocation, the method of capture, map of locations in relation to the Project Site, and the number and species of fish captured and relocated. The post-relocation report should be provided to CDFW within 14 calendar days of completing each fish relocation activity. | Language was added to Mitigation Measure BIO-MM-8: Rescue and Relocate Fish from Affected Habitat, in the Recirculated IS/MND consistent with CDFW's recommendation. | After completion of fish relocation activities, PG&E shall prepare a post-relocation report that includes, at a minimum, the date and time of capture and relocation, the method of capture, map of locations in relation to the Project site, and the number and species of fish captured and relocated. The post- relocation report shall be provided to the State Water Board and CDFW within 14 calendar days of completing each fish relocation activity. |
| 2g | Instream Flows CDFW notes that the Proponent's FERC License (Mokelumne River FERC No. 137 Project) requires the Proponent to maintain minimum instream flows, pulse flows, and ramping rates (Forest Service 4(e) Conditions 5 and 6). The Proponent should ensure that the required flows will be maintained throughout the duration of the Project, even during diversion and dewatering activities. The Proponent should clarify that infrastructure used for diversion and dewatering activities has the capacity to release flows at the magnitude and ramping rates consistent with their License. | Consistent with CDFW's comment, it is already specified in the Project Description (Section 2.2.1.3 Plunge Pool) that PG&E would maintain all Tiger Creek instream flow requirements downstream of the Dam throughout construction. Table 3.3-1 presents the instream flow requirements and ramping rates downstream of the Dam. | N/A |

| No. | Comment | Response | IS/MND Edits |
|-----|--|---|---|
| 3 | COMMENT 3: Impacts on Foothill Yellow-legged Frog; 3.5 Biological Resources, 3.5-35 Issue: The plunge pool construction site at Tiger Creek is potential habitat for the state and federally endangered foothill yellow-legged frog (Rana boylii; FYLF) and individuals have been observed downstream of the Project Site and in Tiger Creek upstream of the Dam (PG&E 2022). Although the MND rates the Project Site as having "low potential" for species occurrence at the site, construction activities at the location of plunge pool and downstream of the Project Site have the potential to impact FYLF. Recommendation: CDFW recommends the Proponent adopt the following mitigation measures: | Foothill yellow-legged frog was not found in Tiger Creek within the Dam construction area during 11 focused surveys conducted between 2001 and 2020 (Pacific Gas and Electric Company 2022). Stream habitat in the Dam construction area is mostly shaded and has an extensive amount of downed wood debris along and within it. While foothill yellow-legged frog may occur downstream of the Dam construction area or upstream of the Reservoir, it is not anticipated to occur in the construction area or be affected by the Proposed Project. The closest record for an occurrence (from 2007) is approximately 0.2 mile downstream of the Dam (California Department of Fish and Wildlife 2023). Potential effects on foothill yellow-legged frog downstream of the Proposed Project would be avoided because instream flow releases downstream of the Dam that are required by the FERC license would be maintained throughout construction and downstream flows would not be affected by the Proposed Project. The Proposed Project would have no impact on foothill yellow-legged frog because the species is not anticipated to occur in the Project Area (based on 11 surveys from 2001 to 2020), Tiger Creek provides suboptimal habitat in the Project Area, and flows to potentially suitable habitat downstream would not be affected by the Proposed Project. Therefore, take of foothill yellow-legged frog is not anticipated and no mitigation is necessary. | N/A |
| 3a | FYLF Surveys A Qualified Biologist should develop a Pre-Construction Survey Plan for FYLF and submit it to CDFW for review at least 30 calendar days prior to commencing ground-disturbing activities and in-water work. The Plan shall include what life-stage(s) shall be surveyed for, survey method(s), and timing of survey(s). The Plan should provide justification for timing and methodology of survey design (e.g., watershed characteristics, regional snowpack, timing and rate of spring runoff, day length, average ambient air and water temperatures, local and seasonal conditions). If the Project Site has suitable frog breeding habitat, the Pre-Construction Survey Plan shall include performing egg mass/larval surveys. Within 3 calendar days prior to ground-disturbing activities and in-water work at the Project Site, the Qualified Biologist should perform a preconstruction survey, as specified in the Pre-Construction Survey Plan, within the boundaries of the Project Site, plus a 500-foot buffer zone upstream and downstream of the Project Site. The survey should include a description of any standing or flowing water. The Proponent should | Because 11 focused surveys for foothill yellow-legged frog have been conducted in the Dam construction area with negative results, a preconstruction survey plan and survey are not warranted. However, a general preconstruction survey for wildlife has been added to Mitigation Measure BIO-MM-1: Conduct Worker Environmental Awareness Training and Implement General Requirements, in the Recirculated IS/MND. Additionally, a biological monitor shall make regular visits to the Project Area, as required by Mitigation Measure BIO-MM-1 (as revised), to note wildlife in the Project Area, to ensure that environmentally sensitive areas are being protected, and to determine if general restrictions and guidelines are being followed. | Silt fencing shall be installed along the eastern and southeastern edges of the Spur 1 staging area to prevent wildlife species that utilize Tiger Creek from entering the staging area. The fence shall extend 50 feet beyond the southern extent of the staging area and shall be curved or bent back towards the creek on both ends of the fencing to direct any small wildlife back to the creek. A biological monitor shall be present during silt fence installation. The biological monitor shall conduct a visual survey for wildlife in the work area prior to the start of work. Wildlife observed during the survey shall be recorded. The results of the |

| No. | Comment | Response | IS/MND Edits |
|-----|---|---|--|
| | provide Pre-Construction Survey results, notes and observations to CDFW prior to commencing ground disturbing activities and in-water work. If the Proponent encounters any life stages of FYLF during preconstruction surveys or during ground-disturbing activities or in-water work, work should be suspended in the Project Site, and CDFW should be notified within 24 hours. Work may not re-initiate in the Project Site until the Project demonstrates compliance with CESA. CDFW is responsible for ensuring appropriate conservation of fish and wildlife resources including threatened, endangered, and/or candidate plant and animal species, pursuant to the CESA. FYLF are state and federally endangered. Pending results of the surveys described above, CDFW recommends that a CESA Incidental Take Permit (ITP) be obtained if the Project has the potential to result in "take" (Fish & G. Code § 86 defines "take" as "hunt, pursue, catch, capture, or kill, or attempt to hunt, pursue, catch, capture, or kill") of State-listed CESA species, including FYLF, either through construction or over the life of the Project. Please note that mitigation measures that are adequate to reduce impacts to a less-than significant level to meet CEQA requirements may not be enough for the issuance of an ITP. To issue an ITP, CDFW must demonstrate that the impacts of the authorized take will be minimized and fully mitigated (Fish & G. Code § 2081 (b)). To facilitate the issuance of an ITP, if applicable, CDFW recommends the IS/MND include measures to minimize and fully mitigate the impacts to any State-listed species the Project has potential to take. CDFW encourages early consultation with CDFW staff to determine appropriate measures to facilitate future permitting processes and to engage with the U.S. Fish and Wildlife Service to coordinate specific measures if both state and federally listed species may be present within the Project vicinity. | • | survey shall be provided to the State Water Board and CDFW. • A biological monitor shall make periodic regular visits to the Project Area to ensure that environmentally sensitive areas continue to remain are being protected, provide environmental awareness training to new crew members, and determine if general restrictions and guidelines are being followed. After the initial activities of identifying sensitive areas, installing protective fencing, and pre-construction surveys, a biologist shall visit the project site weekly during the first two months of active construction; every other week during the next three months of construction, and once a month for the remainder of the work. The biological monitor shall also check no-work buffers around active bird nests during these visits and shall increase the frequency of the visits if active nests are present in the Project Area. Wildlife observed during the site visits shall be recorded. • The biological monitor shall have the authority to stop work in the immediate vicinity if a special-status species or other sensitive resources may be harmed by Project activities. |
| 3b | Instream Flows CDFW also recommends the Proponent adhere to recommendations described above in Comment 2 regarding maintaining instream flows consistent with its FERC license to protect FYLF occurring at or downstream of the Project Site. | Consistent with CDFW's comment, it is already specified in the Project Description (Section 2.2.1.3 <i>Plunge Pool</i>) that PG&E would maintain all Tiger Creek instream flow requirements downstream of the Dam throughout construction. | N/A |
| 4 | COMMENT 4: Impacts of Rock Slope Protection on Channel Hydraulics, 3.3 Hydrology and Water Quality, 3.3-18 Issue: Permanent placement of 500 cubic yards of rock slope protection (RSP) along the banks of Tiger Creek may alter channel hydraulics and local geomorphic processes and may result in scouring. Recommendation: CDFW recommends the Proponent conduct a scour analysis to evaluate the hydraulic and water quality impacts of the | The rock slope protection would be placed on the banks of the existing plunge pool, which is an off-channel feature, in an area that has existing rock slope protection. No rock slope protection would be placed in Tiger Creek. No impacts to stream hydrology or morphology are anticipated. | N/A |

| No. | Comment | Response | IS/MND Edits |
|-----|--|--|---|
| | installation of RSP. The analysis should ensure that the RSP does not transfer the erosion force of the stream to the opposite bank, or to another area downstream, or cause the formation of downstream eddies. | | |
| 5 | COMMENT 5: Impacts of Rock Slope Protection Placement on Water Quality, 3.3 Hydrology and Water Quality, 3.3-18 Issue: Initial RSP placement may dislodge and mobilize sediment, resulting in a temporary increase in suspended sediment and turbidity. Inadequately placed RSP may mobilize and create water quality and hydraulic issues. Recommendation: CDFW agrees that installation of a silt curtain for sediment control is appropriate prior to RSP placement. In addition, CDFW recommends that RSP consist of clean rock, sufficient for the application, sized and properly installed to resist washout. RSP slopes shall be supported with competent boulders keyed into a footing trench with a depth sufficient to properly seat the footing course boulders and prevent instability. | Section 2.2.2.2 Temporary Access Road, Bridges, and Access Trails, in the Recirculated IS/MND now specifies that the rock slope protection will be clean. The rock slope protection would be placed within the existing plunge pool only (not Tiger Creek). Best management practices required as part of Mitigation Measure WQ-MM-3: Implement Sediment Control Measures along Downstream Edge of Existing Plunge Pool prior to Rock Slope Protection Placement, such as the proposed placement of gravel or sand bags around the downstream edges of the plunge pool or lowering the plunge pool's water elevation, would prevent any changes to Tiger Creek's hydrology or water quality. The purpose of the rock slope protection is to stabilize the embankment at select locations on the perimeter of the existing plunge pool and support temporary bridge abutments for the proposed temporary lower access road. Due to the known geology at these locations and the displacement tolerance of the temporary bridge, keyed foundations are not necessary. | Prior to installing the temporary bridge across the existing plunge pool, approximately 500 CY of <u>clean</u> rock slope protection would be installed at the downstream end of the plunge pool to repair previous bank erosion. |
| 6 | COMMENT 6: Inadequate Evaluation of Additional Impacts Issue: The MND does not fully evaluate impacts of two activities, (1) the installation of four temporary bridges, and (2) the abandonment of the existing spillway. The MND also does not discuss any mitigation measures associated with the removal of 13.5 acres of Sierran mixed conifer forest. Recommendation: CDFW encourages the Proponent to further evaluate potential temporary and permanent impacts associated with bridge installation. CDFW recommends the Proponent evaluate impacts of abandoning the existing spillway and to provide further details related to upkeep and maintenance of the old spillway structure. CDFW also recommends the Proponent propose mitigation for the impact of vegetation removal, the abandonment of the existing spillway, and bridge installation during project activities to ensure no net loss of habitat or fish and wildlife resource value occurs as a result of the Project. Mitigation would serve to offset the impacts of the tree removal and/or habitat degradation. Mitigation may include restoring, enhancing, or preserving similar habitat types proposed for removal at higher ratios than those that were removed in order to compensate for habitat loss. | See below for responses to the separate topics raised in this comment. | N/A |

| No. | Comment | Response | IS/MND Edits |
|-----|--|--|--------------|
| 6a | The MND does not fully evaluate impacts of the installation of four temporary bridges. | As described in Section 2.2.2.2 Temporary Access Road, Bridges, and Access Trails, the temporary bridges would be installed to keep the bridges out of the stream and would be designed to pass the expected maximum flows during construction. Potential impacts associated with installation of the temporary bridges were analyzed fully in the IS/MND. Potential impacts associated with the temporary bridge crossings are discussed in Section 3.3 Hydrology and Water Quality, under CEQA checklist item c ("Would the project substantially alter the drainage pattern of the site or area, including through the alteration of a course of a stream or river or through the addition of impervious surfaces, in a manner that would result in substantial erosion or siltation on or off site or substantially increase the rate or amount of surface runoff in a manner that would result in flooding on or off site?"); in Section 3.5 Biological Resources, under CEQA checklist items c ("Would the project have a substantial adverse effect on state or federally protected wetlands [including, but not limited to, marshes, vernal pools, coastal wetlands, etc.] and non-wetland waters through direct removal, filling, hydrological interruption, or other means?") and d ("Would the project interfere substantially with the movement of any native resident or migratory fish or wildlife species or with established native resident or migratory wildlife corridors, or impede the use of native wildlife nursery sites?"); and in the Section 3.13 Aesthetics, under CEQA checklist item c ("In non-urbanized areas, would the project substantially degrade the existing visual character or quality of public views of the site and its surroundings? If the project is in an urbanized area, would the project conflict with applicable zoning and other regulations governing scenic quality?"). | N/A |
| 6b | The MND does not fully evaluate impacts of the abandonment of the existing spillway. | As described in Section 2.2.4 Abandonment of Existing Spillway, once the new spillway is operational, modifications would be made to the existing spillway to prevent water from entering and flowing through the old spillway structure. As shown in Figure 1-2, the existing spillway is a completely human-made structure and the proposed abandonment modifications would not affect any habitat, fish, or wildlife. Although the existing spillway would not be used to pass flood flows after completion of the Proposed Project, all dam infrastructure would remain under the jurisdiction of DSOD and FERC and would continue to be maintained to ensure dam safety. Potential impacts associated with spillway abandonment activities are fully | N/A |

| No. | Comment | Response | IS/MND Edits |
|-----|--|--|--------------|
| | | evaluated in Section 3.5 Biological Resources, under CEQA checklist item c ("Would the project have a substantial adverse effect on state or federally protected wetlands [including, but not limited to, marshes, vernal pools, coastal wetlands, etc.] and non-wetland waters through direct removal, filling, hydrological interruption, or other means?") and in Section 3.11 Cultural Resources, under CEQA checklist item a ("Would the project cause a substantial adverse change in the significance of a historical resource pursuant to section 15064.5?"). | |
| 6c | The MND also does not discuss any mitigation measures associated with the removal of 13.5 acres of Sierran mixed conifer forest. | There is no CEQA threshold requiring mitigation for removal of Sierran mixed conifer forest as proposed under the Proposed Project. Sierran mixed conifer forest is not a sensitive natural community identified in any local or regional plans, policies, or regulations, or by CDFW or USFWS. All potential impacts associated with removal of Sierran mixed conifer forest on species identified as candidate, sensitive, or special-status species are fully evaluated in the IS/MND in Section 3.5 Biological Resources, under CEQA checklist item a ("Would the project have a substantial adverse effect, either directly or through habitat modifications, on any species identified as a candidate, sensitive, or special-status species in local or regional plans, policies, or regulations, or by the California Department of Fish and Wildlife or U.S. Fish and Wildlife Service?") and are reduced to a less-than- significant level through Mitigation Measure BIO-MM-3: Evaluate Trees for Removal and Implement Protective Measures to Avoid or Minimize Injury or Mortality of Special-status Roosting Bats. Potential impacts associated with tree removal on nesting migratory birds are fully analyzed in Section 3.5 Biological Resources, under CEQA checklist item d ("Would the project interfere substantially with the movement of any native resident or migratory fish or wildlife species or with established native resident or migratory sites?") and are reduced to a less-than-significant level through Mitigation Measure BIO-MM-9: Conduct a Preconstruction Survey for Nesting Birds and Implement Protective Buffers around Active Nests. Further, as discussed in Section 1.5.6 California Forest Practice Act of 1973, and Section 3.16 Agriculture and Forestry Resources, PG&E will prepare and implement a Timber Harvest Plan in coordination with CAL FIRE and will apply for a Timberland Conversion Permit for permanent conversion of timberland as a result of implementation of the Proposed Project. Tree removal would be conducted in a manner consistent with the Tim | N/A |

| No. | Comment | Response | IS/MND Edits |
|-----|--|---|--|
| | | logging activities are in compliance with California's Forest Practice Rules, and which are approved by CAL FIRE. | |
| 7 | COMMENT 7: Impacts of Tree Removal on Nesting Birds and Bats, 3.5 Biological Resources, 3.5-43 Issue: The Project would result in the removal of 13.5 acres of Sierran Mixed Conifer Forest, or approximately 747 trees. Removal of these trees could result in significant habitat loss for a variety of bird and bat species, including bald eagle (Haliaeetus leucocephalus), northern goshawk (Accipiter gentilis), California spotted owl (Strix occidentalis occidentalis), fringed myotis (Myotis thysanodes), long-legged myotis (Myotis volans), hoary bat (Lasiurus cinereus), silver-haired bat (Lasionycteris noctivagan), and Townsend's big eared bat (Corynorhinus townsendi). The significance of the impact of habitat clearing is not reduced by virtue of the abundance of similar or equivalent adjacent habitat to the Project Site, and would reduce available habitat for wildlife, and potentially, special-status species which may use these forest stands. Migratory non-game native bird species are protected under the federal Migratory Bird Treaty Act (MBTA) of 1918, as amended (16 U.S.C. 703 et seq.). In addition, sections 3503, 3503.5, and 3513 of the Fish & G. Code also afford protective measures as follows: section 3503 states that it is unlawful to take, possess, or needlessly destroy the nest or eggs of any bird, except as otherwise provided by Fish & G. Code or any regulation made pursuant thereto; section 3503.5 states that it is unlawful to take, possess, or destroy any birds in the orders Falconiformes or Strigiformes (birds-of-prey) or to take, possess, or destroy the nest or eggs of any such bird except as otherwise provided by Fish & G. Code or any regulation adopted pursuant thereto; and section 3513 states that it is unlawful to take or possess any migratory nongame bird as designated in the MBTA or any part of such migratory nongame bird except as provided by rules and regulations adopted by the Secretary of the Interior under provisions of the MBTA. Recommendation: CDFW acknowledges that the Proponent has undert | See below for responses to the specific recommendations made in this comment. | N/A |
| 7a | Nesting Bird Surveys To avoid impacts to nesting and migratory birds, CDFW recommends that a Qualified Biologist conduct a preconstruction nesting bird survey be scheduled no more than 3 calendar days prior to vegetation removal activities if construction is scheduled to begin between February 1 and | Due to the size of the Project Area and the amount of vegetation in the Project Area, it is not possible to survey all vegetation no more than 3 days prior to vegetation removal. In addition, a survey so close to the start of work may not allow enough time to determine if a nest is active, as this can sometimes take multiple visits to determine. | As work is scheduled to begin in July, which is If initial work activities are scheduled during the nesting bird season (February 15 to August 31), qualified biologists (i.e., biologists with experience locating and identifying bird nests |

| No. | Comment | Response | IS/MND Edits |
|-----|---|--|--|
| | August 31. Because construction noise and vibrations may disturb nearby nesting birds to the point of causing nest failure, CDFW recommends the survey be conducted within a minimum of 1500 feet around the construction area. If an active nest is observed, an appropriate buffer shall be established to avoid impacts to nesting activities. Please note that the MBTA and Fish & G. Code apply regardless of the time of year. Therefore, if an active nest is discovered outside of the typical nesting season, it should be avoided using the same avoidance measures that would be applied during the typical nesting season until such time as the young have fully fledged and are foraging independently of their parents. CDFW recommends the Qualified Biologist remain on-site for the duration of the project, as appropriate, to ensure avoidance and minimization measures are implemented. The Qualified Biologist shall be authorized to stop construction if necessary to protect fish and wildlife resources. | Mitigation Measure BIO-MM-9: Conduct a Preconstruction Survey for Nesting Birds and Implement Protective Buffers around Active Nests was revised in the Recirculated IS/MND to state that at least one survey shall be conducted at the height of the nesting season and a follow-up survey shall be conducted within 5 days of the start of work. This should allow enough time to identify active nests and recheck the site close to the start of work. Regarding the recommendation to increase the survey buffer to 1,500 feet around the construction area to address potential construction noise and vibrations, surveys for northern goshawk and California spotted owl have determined that these species do not nest in the project vicinity. Therefore, these species would not be affected by noise from the Proposed Project. For other raptors, the survey buffer specified in Mitigation Measure BIO-MM-9 was extended in the Recirculated IS/MND to 1,320 feet at the Dam area and Doakes Ridge staging area based on ambient noise levels being below 50 dB, and U.S. Fish and Wildlife Service guidance on auditory disturbance on northern spotted owls and marbled murrelets¹. If nests of passerines are found, they would be recorded but the survey would focus on locating nesting raptors. Mitigation Measure BIO-MM-9 requires no-work buffers to be established to protect active nests and requires monitoring of active nests during high disturbance activities. Additionally, Mitigation Measure BIO-MM-1: Conduct Worker Environmental Awareness Training and Implement General Requirements (as revised), requires a biological monitor to make regular visits to the Project Area. The biological monitor shall check the no-work buffers around nests during these visits and increase the frequency of the visits if active nests are present in the Project Area. Implementation of Mitigation Measures BIO-MM-1 and BIO-MM-9 would protect nesting birds and other fish and wildlife resources such that daily monitoring would not be necessary. | and nesting behaviors) shall conduct at least one preconstruction survey for nesting birds during the height of the nesting season (March 1 to June 1) to identify potential nest sites in the work area. A follow up nesting bird survey shall be conducted no more than 5 14-days before mobilization and the start of vegetation removal. If work does not begin within 14 days of the survey or construction activities stop for 14 days or more during the nesting season, work areas shall be resurveyed for active nests. At the Cedar Mill staging area, the Project Area footprint shall be surveyed. At the Dam area and Doakes Ridge staging and spoils site, the Project Area and a 300 1,320-foot buffer for raptors and a 75-foot buffer for passerines around the Project Area shall be surveyed, except for at the Spur 1 staging area where a 280-foot buffer shall be surveyed for passerines. |
| 7b | Bat Surveys Within 15 calendar days prior to the start of vegetation removal, a Qualified Biologist should conduct a pre-construction survey to identify potentially suitable bat roosting habitat. The pre-construction survey shall | Bat Surveys Mitigation Measure BIO-MM-3: Evaluate Trees for Removal and Implement Protective Measures to Avoid or Minimize Injury or Mortality of Special-status Roosting Bats, requires trees to be | [Text added to discussion of potential disturbance of bats under CEQA checklist item a in Section 3.5 <i>Biological Resources</i> :] |

U.S. Fish and Wildlife Service. 2006. Memorandum. Transmittal of Guidance: Estimating the Effects of Auditory and Visual Disturbance to Northern Spotted Owls and Marbled Murrelets in Northwestern California. Arcata, CA. July 31.

Tiger Creek Regulator Dam Spillway Replacement Project Recirculated IS/MND

No. | Comment

be performed at potential habitat structures during the peak activity period, typically 45 minutes before sunset and continue the survey until 2 hours after sunset. The Qualified Biologist shall conduct a minimum of 3 emergence surveys within a 7-calendar day period. The habitat assessment should include a visual inspection of suitable habitat features (e.g., trees, bridges, and other structures) for suitable bat roosting habitat within the Project Site and a minimum of a 500-foot radius adjacent to these areas that may be impacted by project activities.

If bat roosting habitat is present, and activities are scheduled during the maternity season (April 15 to August 31) or the hibernation season (October 15 to March 1), the Proponent should develop a Bat Avoidance and Exclusion Plan (BAEP). The BAEP should include the following:

- 1. A bat roost buffer, which would establish an appropriate no-disturbance buffer around bat roosts during maternity (April 15 to August 31) or hibernation (October 15 to March 1) seasons. The Qualified Biologist shall clearly delineate habitat and bat roosts within the Project Site with posted signs demarking the avoidance areas using stakes, flags, and/or rope or cord.
- 2. Exclusion devices, which should be installed either (1) between approximately March 1 (or when evening temperatures are above 45°F and rainfall less than ½-inch in 24 hours occurs) and April 15, prior to parturition of pups; or (2) between September 1 and October 15 (or prior to evening temperatures dropping below 45°F and onset of rainfall greater than ½-inch in 24 hours). Specific exclusion devices may include one-way doors, lights and fans, foam or steel wool.
- 3. Tree trimming and/or removal guidance. Tree trimming and/or tree removal should be scheduled either (1) between approximately March 1 (or when evening temperatures are above 45°F and rainfall less than ½-inch in 24 hours occurs) and April 15, prior to parturition of pups; or (2) between September 1 and October 15 (or prior to evening temperatures dropping below 45°F and onset of rainfall greater than ½-inch in 24 hours). Additionally, trees should be removed in two steps over a period of two days. On the first day, all branches that do not contain roosting habitat shall be removed. The remaining portion of the tree should be removed on the second day. All branch removal will be conducted using chainsaws or similar handheld equipment.

Response

removed to be evaluated for their potential to provide bat roosting habitat by qualified biologists. The purpose of this survey is to identify the trees that have higher potential to support roosting bats, so that they may be removed in a manner that avoids and minimizes potential effects on individual bats. While conducting emergence surveys, as recommended by CDFW, may result in the identification of bats occurring in the Project Area, those surveys are unlikely to be effective in identifying bat roost sites in trees because the Project Area contains numerous trees that are spaced closely together. making examination of the entirety of each tree for emerging bats impossible, as trees would obstruct line of sight of the biologist during the surveys. Therefore, emergence surveys are not included in the measure. An explanation of the infeasibility of emergence surveys was added to the discussion of potential disturbance of bats in the Recirculated IS/MND under CEQA checklist item a in Section 3.5 Biological Resources. While exclusion devices such as one-way doors, foam, and steel wool may be effective for buildings and bridges, they are not feasible for trees. Fans would also be ineffective for tree roosts. Lights may be an effective deterrent if a roost site was discovered.

Mitigation Measure BIO-MM-3 was revised in the Recirculated IS/MND to include the potential use of light as a deterrent or establishing a bat roost buffer in the event that a tree roosting bat is discovered. Mitigation Measure BIO-MM-3 (as revised) requires trees to be removed between March 1 and April 15 or between September 1 and October 15, if possible, in order to avoid the hibernation period and maternity season, when bats are most vulnerable. The tree removal guidance recommended by CDFW has been incorporated into Mitigation Measure BIO-MM-3 in the Recirculated IS/MND, with an exception for trees that are not safe to remove in this manner.

IS/MND Edits

While conducting emergence surveys (as recommended by CDFW), may result in the identification of bats occurring in the Project Area, they would not be effective in identifying bat roosts in trees because the Project Area contains numerous trees that are spaced closely together, making examination of the entirety of each tree for emerging bats impossible, as trees would obstruct line of sight of the biologist during the surveys. Therefore, emergence surveys are not included in Mitigation Measure BIO-MM-3. This measure requires trees that would be removed to be evaluated for their potential to provide bat roosting habitat by qualified biologists. The purpose of this survey is to identify the trees that have higher potential to support roosting bats, so that they may be removed in a manner that avoids and minimizes potential effects on individual bats. [Text revisions made to Mitigation Measure BIO-MM-3:1 If possible, trees shall be removed between

March 1 and April 15 or between September 1 and October 15 to avoid the bat maternity and hibernation periods. Trees with low-quality or no bat roosting habitat can be removed without restrictions. If a bat roost or a tree roosting bat is discovered during the tree assessment, and it is outside of the maternity and hibernation periods, the qualified biologist shall prepare a bat exclusion and avoidance plan for CDFW review and approval. Lights are likely the only feasible and effective roosting deterrent. To avoid or minimize the potential for injury or mortality of tree roosting special-status bats. removal of trees with moderate or high quality bat roosting habitat shall be performed by implementing the following measures:

| scheduled valued value v | |
|--|--|
| above 45 de been less the hours. Trees provier roosting hal | ng and/or tree removal shall be |
| been less the hours. Trees provide roosting hal | when evening temperatures are |
| hours. Trees provide roosting hal | egrees Fahrenheit and there has |
| Trees provide roosting half | han 0.5 inch of rain in the last 24 |
| roosting hal | |
| | ding high or moderate bat |
| the warmer | bitat should be removed under |
| | st possible conditions. The day |
| | erm (warmer than average, if |
| | nd removal should begin in the |
| | g and take place during the arts of the day. |
| | be removed in two steps over a |
| | vo days. On the first day, all |
| | nat do not contain roosting |
| | be removed. The remaining |
| | ne tree shall be removed on the |
| | . All branch removal shall be |
| conducted | using chainsaws or similar |
| | quipment. If a tree is not safe to |
| remove in t | wo steps over a period of two |
| days, an alt | ternate process shall be used |
| that creates | <u>S</u> |
| | larger than 12 inches dbh that |
| | gh or moderate bat roosting |
| | ate noise and disturbance at the |
| | uch that roosting bats would |
| | vibration. This process shall |
| | elemented in the late afternoon or |
| | sunset as possible, unless |
| | letermined appropriate by the blogist. Disturbance should be |
| | inuous for several minutes. |
| | vibrations should be created by |
| | the following steps: |
| | the chain saw and making |
| | cuts or pie cuts in the trunk. |
| | the tree base with fallen limbs, |
| | ch as hammers, or heavy |

| No. | Comment | Response | IS/MND Edits |
|------|--|---|--|
| | | | equipment such as the arm of an excavator. c. Disturbance should be near-continuous for two minutes, then another five minutes should pass with no disturbance to allow bats time to evacuate the tree. Create disturbance for another minute, then wait another minute before felling the tree. 2. When conspicuous bole cavities are observed, the tree should be climbed (if safe to do so) and disturbance generated in the vicinity of the cavity by banging on the trunk. This step should be followed by the procedure outlined in Steps a through c above. If an active bat roost is found during tree removal during the bat maternity period (April 15 to August 31) or hibernation period (October 15 to March 1), work shall stop in the immediate area and the qualified biologists shall clearly delineate an appropriate nodisturbance buffer around the bat roost using stakes, flags, and/or rope or cord, and posted signs. The roost shall not be disturbed until the end of the maternity period or hibernation period, or until a qualified biologist determines |
| Gro | goria Bonco' Chief Office of Bural Blanning California Department of T | ransportation Echruary 14, 2024 | that the roost is no longer occupied. |
| Greg | goria Ponce', Chief, Office of Rural Planning, California Department of Tome Commental | ransportation, February 14, 2024 No activities are proposed within the Caltrans ROW, nor would the | N/A |
| ľ | If any materials or equipment are stored in Caltrans right-of-way (ROW) at the Cedar Mills Staging area or anywhere else, then specify the types of materials and equipment. | Proposed Project encroach into the Caltrans ROW. | |
| | Those activities would require an Encroachment Permit from Caltrans prior to the start of any construction-related activities. If any construction-related activities, including staging and/or vegetation management, will encroach into Caltrans ROW, the project proponent must apply for an Encroachment Permit to the Caltrans District 10 Encroachment Permit Office. All California Environmental Quality Act (CEQA) documentation, with supporting technical studies, must be submitted with the | | |

| No. | Comment | Response | IS/MND Edits |
|-----|--|---|--------------|
| | Encroachment Permit Application. These studies will include an analysis of potential impacts to any cultural sites, historic properties, biological resources, hazardous waste locations, scenic highways, and/or other environmental resources within Caltrans Right of Way, at the project site(s). Evidence of consultation with local Native American tribes and interested parties will need to be presented within the technical documents for approval of encroachment in the Caltrans ROW. If there are impacts to protected water resources within Caltrans ROW, Caltrans will need to see the correspondence with the permitting authorities (California Department of Fish and Wildlife, United States Army Corps of Engineers, Regional Water Quality Control Board) and be provided copies of any required permits prior to the start of any construction in Caltrans ROW. There are mature trees within and/or near Caltrans ROW at the Cedar Mill Staging Area location that could provide suitable nesting habitat. If work, staging, and/or vegetation management occurs at this location or any other location in Caltrans ROW as a result of the project between February 1 and September 30 of any year, a pre-construction bird survey must be conducted by a qualified biologist prior to the start of any construction related activities in Caltrans ROW. If an active nest is observed, a protective buffer must be established around the nest per CDFW guidelines. No work is allowed within the protective buffer limits until the young have fledged and until authorized by the Caltrans District 10 Environmental Office. Results of the pre-construction bird survey(s) must be provided to the Caltrans District 10 Environmental Office prior to the start of construction. | | |
| 2 | COMMENT 2: Hydrology Based on Dam_Location_Map_1-24-2024.docx, the crossing is at the AMA/CAL county line on SR26, which is inconsistent with the Notice of Completion & Environmental Document Transmittal. More information is needed to determine the implications of the state route crossings. Additional review is required for review. | Caltrans did not provide a copy of the referenced file, "Dam_Location_Map_1-24-2024.docx," nor does the CEQA Notice of Completion require the identification of any state route (SR) crossings. However, the SR 26 crossing over the Mokelumne River is located more than six miles from the Tiger Creek Regulator Reservoir, where construction of the Proposed Project would occur. The Tiger Creek Regulator Reservoir is not the same as what Google Maps identifies as the "Tiger Creek Reservoir," which is located closer to the SR 26 crossing over the Mokelumne River. SR 26 would not be used as part of the Proposed Project. | N/A |

| No. | Comment | Response | IS/MND Edits | | | |
|------|---|--|--------------|--|--|--|
| 3 | COMMENT 3: Traffic Operations Please provide the off-tracking templates for this project's largest truck for all turning movements at Cedar Mills Staging area, Tiger Creek Road, and Salt Springs Road (Spur 1). Caltrans suggests Amador County continue to coordinate and consult with Caltrans to identify and address potential cumulative transportation impacts that may occur from this project and other developments near this location. This will assist Caltrans in ensuring that traffic safety and quality standards are maintained for the traveling public on existing and future state transportation facilities. | The longest haul trucks that would be used during construction of the Proposed Project on the roads identified in the comment would be standard-length haul trucks, such as truck and transfers and lowboy trailers. These are on-road vehicles commonly used during construction projects. PG&E and its contractors have successfully used these types of vehicles on past projects with no issues on the identified roads. | N/A | | | |
| 4 | COMMENT 4: Encroachment Permits If any future project activities encroach into Caltrans ROW, the project proponent must submit an application for an Encroachment Permit to the Caltrans District 10 Encroachment Permit Office. Appropriate environmental studies must be submitted with this application. These studies will include an analysis of potential impacts to any cultural sites, biological resources, hazardous waste locations, and/or other resources within Caltrans ROW at the project site(s). For more information, please visit the Caltrans Website at: https://dot.ca.gov/programs/traffic-operations/ep/applications. | As described above under Comment 1, the Proposed Project would not encroach into the Caltrans ROW. No changes to the scope of work are anticipated that would result in any such encroachment. | N/A | | | |
| Yvo | Yvonne Perkins, Tribal Historic Preservation Officer, Yocha Dehe Wintun Nation, February 21, 2024 | | | | | |
| 1 | The Cultural Resources Department has reviewed the project and concluded that it is not within the aboriginal territories of the Yocha Dehe Wintun Nation. Therefore, we respectfully decline any comment on this project. However, based on the information provided, please defer correspondence to the following: United Auburn Indian Community Attn: Tribal Historic Preservation Officer 10720 Indian Hill Road Auburn, CA 95603 | As part of Assembly Bill 52 consultation, the State Water Board sent an opportunity for consultation letter to the United Auburn Indian Community on January 20, 2023. The United Auburn Indian Community did not request consultation. | N/A | | | |
| Pete | Peter Minkel, Engineering Geologist, Central Valley Regional Water Quality Control Board, February 22, 2024 | | | | | |
| 1 | COMMENT 1: Regulatory Setting Basin Plan The Central Valley Water Board is required to formulate and adopt Basin Plans for all areas within the Central Valley region under Section 13240 of the Porter-Cologne Water Quality Control Act. Each Basin Plan must contain water quality objectives to ensure the reasonable protection of beneficial uses, as well as a program of implementation for achieving | Potential impacts to surface and groundwater quality associated with the Proposed Project are fully evaluated in Section 3.3 <i>Hydrology and Water Quality</i> , and the evaluation includes an analysis of Proposed Project compliance with the water quality objectives in the <i>Water Quality Control Plan for the Sacramento and San Joaquin River Basins</i> . | N/A | | | |

| No. | Comment | Response | IS/MND Edits |
|-----|--|----------|--------------|
| | water quality objectives with the Basin Plans. Federal regulations require | | |
| | each state to adopt water quality standards to protect the public health or | | |
| | welfare, enhance the quality of water and serve the purposes of the Clean | | |
| | Water Act. In California, the beneficial uses, water quality objectives, and | | |
| | the Antidegradation Policy are the State's water quality standards. Water | | |
| | quality standards are also contained in the National Toxics Rule, 40 CFR | | |
| | Section 131.36, and the California Toxics Rule, 40 CFR Section 131.38. | | |
| | The Basin Plan is subject to modification as necessary, considering | | |
| | applicable laws, policies, technologies, water quality conditions and | | |
| | priorities. The original Basin Plans were adopted in 1975, and have been | | |
| | updated and revised periodically as required, using Basin Plan amendments. Once the Central Valley Water Board has adopted a Basin | | |
| | Plan amendment in noticed public hearings, it must be approved by the | | |
| | State Water Resources Control Board (State Water Board), Office of | | |
| | Administrative Law (OAL) and in some cases, the United States | | |
| | Environmental Protection Agency (USEPA). Basin Plan amendments only | | |
| | become effective after they have been approved by the OAL and in some | | |
| | cases, the USEPA. Every three (3) years, a review of the Basin Plan is | | |
| | completed that assesses the appropriateness of existing standards and | | |
| | evaluates and prioritizes Basin Planning issues. For more information on | | |
| | the Water Quality Control Plan for the Sacramento and San Joaquin River | | |
| | Basins, please visit our website: | | |
| | http://www.waterboards.ca.gov/centralvalley/water_issues/basin_plans/ | | |
| | Antidegradation Considerations | | |
| | All wastewater discharges must comply with the Antidegradation Policy | | |
| | (State Water Board Resolution 68-16) and the Antidegradation | | |
| | Implementation Policy contained in the Basin Plan. The Antidegradation | | |
| | Implementation Policy is available on page 74 at: | | |
| | https://www.waterboards. | | |
| | ca.gov/centralvalley/water_issues/basin_plans/sacsjr_201805.pdf | | |
| | In part it states: | | |
| | Any discharge of waste to high quality waters must apply best practicable | | |
| | treatment or control not only to prevent a condition of pollution or | | |
| | nuisance from occurring, but also to maintain the highest water quality | | |
| | possible consistent with the maximum benefit to the people of the State. | | |
| | This information must be presented as an analysis of the impacts and | | |
| | potential impacts of the discharge on water quality, as measured by | | |
| | background concentrations and applicable water quality objectives. | | |
| | The antidegradation analysis is a mandatory element in the National | | |
| | Pollutant Discharge Elimination System and land discharge Waste | | |

| I/A |
|-----|
| J/A |

| No. | Comment | Response | IS/MND Edits |
|-----|--|----------|--------------|
| | of the United States (such as streams and wetlands), then a Water Quality Certification must be obtained from the Central Valley Water Board prior to initiation of project activities. There are no waivers for 401 Water Quality Certifications. For more information on the Water Quality Certification, visit the Central Valley Water Board website at: | | |
| | https://www.waterboards.ca.gov/centralvalley/water_issues/ water_quality_certification/ | | |
| | Waste Discharge Requirements – Discharges to Waters of the State If USACE determines that only non-jurisdictional waters of the State (i.e., "non-federal" waters of the State) are present in the proposed project area, the proposed project may require a Waste Discharge Requirement (WDR) permit to be issued by Central Valley Water Board. Under the California Porter-Cologne Water Quality Control Act, discharges to all waters of the State, including all wetlands and other waters of the State including, but not limited to, isolated wetlands, are subject to State regulation. For more information on the Waste Discharges to Surface Water NPDES Program and WDR processes, visit the Central Valley | | |
| | Water No DEG Frogram and WBR processes, visit the Gentral valley Water Board website at: https://www.waterboards.ca.gov/centralvalley/water_issues/ waste to surface water/ | | |
| | Projects involving excavation or fill activities impacting less than 0.2 acre or 400 linear feet of non-jurisdictional waters of the state and projects involving dredging activities impacting less than 50 cubic yards of non-jurisdictional waters of the state may be eligible for coverage under the State Water Resources Control Board Water Quality Order No. 2004-0004-DWQ (General Order 2004-0004). For more information on the General Order 2004-0004, visit the State Water Resources Control Board website at: | | |
| | https://www.waterboards.ca.gov/board_decisions/adopted_orders/water_quality/2004/wqo/wqo2004-0004.pdf <u>Dewatering Permit</u> | | |
| | If the proposed project includes construction or groundwater dewatering to be discharged to land, the proponent may apply for coverage under State Water Board General Water Quality Order (Low Threat General Order) 2003-0003 or the Central Valley Water Board's Waiver of Report of Waste Discharge and Waste Discharge Requirements (Low Threat Waiver) R5-2018-0085. Small temporary construction dewatering projects | | |
| | are projects that discharge groundwater to land from excavation activities or dewatering of underground utility vaults. Dischargers seeking coverage | | |

| No. | Comment | Response | IS/MND Edits |
|-----|--|----------|--------------|
| | under the General Order or Waiver must file a Notice of Intent with the Central Valley Water Board prior to beginning discharge. | | |
| | For more information regarding the Low Threat General Order and the | | |
| | application process, visit the Central Valley Water Board website at: | | |
| | http://www.waterboards.ca.gov/board_decisions/adopted_orders/ | | |
| | water_quality/2003/wqo/wqo2003-0003.pdf | | |
| | For more information regarding the Low Threat Waiver and the application process, visit the Central Valley Water Board website at: | | |
| | https://www.waterboards.ca.gov/centralvalley/board_decisions/ | | |
| | adopted_orders/waivers/r5-2018-0085.pdf | | |
| | Limited Threat General NPDES Permit | | |
| | If the proposed project includes construction dewatering and it is | | |
| | necessary to discharge the groundwater to waters of the United States, | | |
| | the proposed project will require coverage under a National Pollutant Discharge Elimination System (NPDES) permit. Dewatering discharges | | |
| | are typically considered a low or limited threat to water quality and may be | | |
| | covered under the General Order for Limited Threat Discharges to | | |
| | Surface Water (Limited Threat General Order). A complete Notice of Intent | | |
| | must be submitted to the Central Valley Water Board to obtain coverage | | |
| | under the Limited Threat General Order. For more information regarding | | |
| | the Limited Threat General Order and the application process, visit the | | |
| | Central Valley Water Board website at: https://www.waterboards.ca.gov/centralvalley/board-decisions/ | | |
| | adopted orders/general orders/r5-2016-0076-01.pdf | | |
| | NPDES Permit | | |
| | If the proposed project discharges waste that could affect the quality of | | |
| | surface waters of the State, other than into a community sewer system, | | |
| | the proposed project will require coverage under a National Pollutant | | |
| | Discharge Elimination System (NPDES) permit. A complete Report of | | |
| | Waste Discharge must be submitted with the Central Valley Water Board | | |
| | to obtain a NPDES Permit. For more information regarding the NPDES | | |
| | Permit and the application process, visit the Central Valley Water Board website at: | | |
| | https://www.waterboards.ca.gov/centralvalley/help/permit/ | | |
| | mtps://www.waterboards.ca.gov/centrarvalley/neip/permit/ | | |

Table F-2. Comments Received on September 2024 Recirculated Draft IS/MND and State Water Board Responses

| No. | Comment | Response | IS/MND Edits |
|---------------|---|--|--------------|
| Alyssa Obeste | , Senior Environmental Scientist – Water Infrastructure, Cali | fornia Department of Fish and Wildlife, October 15, 2024 | |
| 1 | Attached to this email are the comments CDFW provided on the original Project IS/MND on February 23, 2024. CDFW appreciates the updates that have been made to the Project IS/MND document, recirculated on September 27, 2024, in response to CDFW's comments. CDFW would like to reiterate previous comments that remain relevant to the recirculated Project IS/MND: | N/A | N/A |
| 2 | In COMMENT 3: Impacts on Foothill Yellow-legged Frog (FYLF); 3.5 Biological Resources, 3.5- 35, CDFW recommended that FYLF pre-construction surveys (including egg mass/larval surveys) be conducted within the boundaries of the Project Site, plus a 500-foot buffer zone upstream and downstream of the Project Site. Although FYLF have not been observed at the Project Site, the closest record for FYLF is approximately 0.2 miles downstream of the Dam, near the Project Site. Because records of FYLF exist in close proximity to the Project Site, CDFW recommends the Project Proponent survey the area for presence of FYLF. | As described in the response to comments 3 and 3a in Table F-1, foothill yellow-legged frog was not found in Tiger Creek within the Project Area during 11 focused surveys conducted between 2001 and 2020 (Pacific Gas and Electric Company 2022). Additionally, PG&E's contractor conducted a survey for foothill yellow-legged frog in the Project Area and downstream of the Project Area in 2024, and no foothill yellow-legged frogs were observed in the Project Area. A preconstruction wildlife survey, which shall include searching for foothill yellow-legged frog along Tiger Creek, was added to Mitigation Measure BIO-MM-1: Conduct Worker Environmental Awareness Training and Implement General Requirements, in the Recirculated IS/MND. Potential impacts on foothill yellow-legged frog downstream of the Proposed Project would be avoided because instream flow releases downstream of the Dam that are required by the FERC license would be maintained throughout construction and downstream flows would not be affected by the Proposed Project. There would be no potentially significant impact on foothill yellow-legged frog. | N/A |
| 3 | In COMMENT 6: Inadequate Evaluation of Additional Impacts, CDFW recommended that the Project Proponent evaluate the impacts of abandoning the existing spillway in place. CDFW recommends the Project Proponent consider the long-term consequences and precedent associated with abandoning man-made features adjacent to species habitat, and assess impacts accordingly. | The existing spillway would not be "abandoned" in the sense that it would be left to deteriorate and fall to ruin; rather, "abandonment" here simply means that it would no longer be used for its intended purpose, with flood flows being directed to the new spillway instead. As described in the response to comment 6b in Table F-1, although the existing spillway would not be used to pass flood flows after completion of the Proposed Project, all dam infrastructure, including the existing spillway, would remain under the jurisdiction of DSOD and FERC and would continue to be maintained to ensure dam safety. Also as described in the response to comment 6b in Table F-1, potential impacts associated with spillway abandonment activities are fully evaluated in the IS/MND. | N/A |

Appendix G

Mitigation Monitoring and Reporting Program for the Tiger Creek Regulator Dam Spillway Replacement Project

The State Water Resources Control Board (State Water Board) has developed this Mitigation Monitoring and Reporting Program (MMRP) for the Tiger Creek Regulator Dam Spillway Replacement Project (Proposed Project). The MMRP identifies the mitigation measures that will be implemented for the Proposed Project, the individual or entity responsible for implementation, the schedule for mitigation measure implementation, and relevant mitigation and monitoring details. The State Water Board is the Lead Agency for the Proposed Project.

Table G-1. Mitigation Monitoring and Reporting Program for the Tiger Creek Regulator Dam Spillway Replacement Project

| Mitigation Measure | Responsibility for Implementation | Implementation Schedule | Mitigation and Monitoring Details |
|---|--------------------------------------|--|--|
| WQ-MM-1: Implement Water Quality Protection Measures and Erosion and Sediment Control Plans | PG&E and its construction contractor | Prior to, during, and after construction | PG&E shall comply with all applicable construction BMPs specified in PG&E's Activity Specific Erosion and Sediment Control Plans¹, the SWPPP, and any other permit conditions to minimize the introduction of construction-related contaminants and mobilization of sediment into wetlands and other waters in and adjacent to the project area. These BMPs shall address soil stabilization, sediment control, wind erosion control, vehicle tracking control, non-stormwater management, and waste management practices. The BMPs shall be based on the best available technology. In California, the National Pollution Discharge Elimination System (NPDES) program requires that any construction activity disturbing one or more acres comply with the statewide General Permit for Stormwater Discharges Associated with Construction and Land Disturbance Activities (General Permit), as authorized by the State Water Board. The General Permit requires elimination or minimization of non-stormwater discharges from construction sites and development and implementation of a SWPPP for the site. The SWPPP shall include the following primary elements: • Description of site characteristics—including runoff and streamflow characteristics and soil erosion hazard—and construction procedures; • Guidelines for proper application of erosion and sediment control BMPs; • Description of measures to prevent and control toxic materials spills; and • Description of construction site housekeeping practices. In addition to these primary elements, the SWPPP shall specify that the extent of soil and vegetative disturbance shall be minimized by exclusionary fencing, erosion control fencing, or other means; and that the extent of soil disturbed at any given time shall be minimized. The SWPPP shall be retained at the construction site. PG&E shall perform routine inspections of the construction area to verify that the BMPs are properly implemented and maintained. These BMPs shall include, but are not limited to the following, as well as those listed in Mitigation Me |
| WQ-MM-2: Implement Spur 1 Staging Area Water | PG&E and its construction contractor | Prior to and during construction | To minimize the potential for water quality impacts on Tiger Creek related to the operation of the mobile batch plant and concrete production at the Spur 1 staging area, a portion of which is located within 100 feet of Tiger Creek, PG&E and/or the construction contractor shall implement the following BMPs: |

| | Responsibility for | Implementation | |
|--|--------------------------------------|----------------------------------|---|
| Mitigation Measure | Implementation | Schedule | Mitigation and Monitoring Details |
| Quality Protection Measures | | | All vehicle refueling at the Spur 1 staging area shall occur at least 100 feet from Tiger Creek. This does not include the mobile batch plant. |
| | | | Mobile Batch Plant Area |
| | | | • An earthen berm (minimum of 8 feet wide by 3 feet high) and silt fence shall surround the side of the mobile batch plant adjacent to Tiger Creek; |
| | | | The mobile batch plant generator shall include secondary containment for the attached fuel tank; |
| | | | • Bulk fuel for the mobile batch plant shall be stored at Doakes Ridge staging and spoils site and shall be transported to the Spur 1 staging area, as needed, using fuel and lube trucks. |
| | | | • Material stockpiles shall fully contained within K-rail barriers and, when not in regular use (i.e., when concrete is not being made) and during precipitation events, be covered; |
| | | | The height of material stockpiles shall be reduced from approximately 12 feet to 6 feet or lower if heavy precipitation is anticipated; |
| | | | A temporary construction entrance/exit shall be installed at the mobile batch plant area to limit off-site tracking of dirt, sand, concrete, and other related materials. Signage identifying the entrance/exit shall be placed in a visible location and all vehicles entering and exiting the area shall use this entrance/exit; |
| | | | Cement and fly ash silos shall be fully enclosed and weatherproofed; and |
| | | | Any excess wet concrete shall be discarded in an above-grade concrete washout container and then disposed of offsite at an approved facility. |
| | | | Concrete Washout Area |
| | | | Signage identifying the concrete washout area shall be placed in a visible location. |
| | | | • The concrete washout area shall be located at least 100 feet from Tiger Creek and contained within an earthen berm surrounded by a silt fence; |
| | | | Washout of all-terrain concrete mixer vehicles and other concrete-coated equipment shall be performed only within the designated concrete washout area; |
| | | | • To contain washout water and cement waste, all equipment washout shall occur within a roll-off concrete washout container or an above-grade straw bale washout facility. The above-grade washout shall be lined with a minimum of 10-millimeter (0.01-inch) plastic sheeting that is free of holes, tears, and other defects. The sheeting shall be secured via staples to the wire-bound straw bales, which shall be staked in place. If an above-grade washout is used, the lining shall be inspected daily and after each storm event for leaks, and shall be replaced after every cleaning; and |
| | | | Washout water and material shall be disposed of offsite at an approved facility. If an above-grade washout is used, washout water shall be allowed to evaporate onsite. |
| WQ-MM-3: Implement Sediment Control Measures along Downstream | PG&E and its construction contractor | Prior to and during construction | Prior to rock slope protection (riprap or similar material) placement on either bank of the existing plunge pool, PG&E and/or its contractor shall install a silt curtain or implement other appropriate sediment control measures, such as clean gravel bags or sand bags, around the downstream edges of the plunge pool as a barrier to sediment movement. Lowering the plunge pool's water level by pumping water into water trucks and using it for dust suppression could also be implemented. The sediment control measures |
| Edge of Existing | | | shall be determined by PG&E's Water Quality Specialists based on field conditions at the time of construction. The purpose of the |
| Plunge Pool prior to | | | silt curtain or other appropriate measures is to contain any sediment dislodged during the placement of rock slope protection within |

| Mitigation Measure | Responsibility for Implementation | Implementation Schedule | Mitigation and Monitoring Details |
|---|--------------------------------------|----------------------------------|--|
| Rock Slope Protection Placement | | | the existing plunge pool perimeter and not allow it to enter Tiger Creek. The sediment control measures shall not be removed until all associated temporary bridge construction activities are complete (i.e., the rock slope protection is tamped in, and the temporary bridge is in place). If a significant summer storm is forecasted that could reengage the existing spillway during rock slope protection placement activities, then sediment control measures, such as plastic sheeting, fiber roll, or erosion control blanket, shall be installed and all construction activity shall immediately stop until the storm has passed and any associated runoff into the existing plunge pool has ceased. |
| WQ-MM-4: Develop and Implement a Water Quality Monitoring and Adaptive Management Plan | PG&E | Prior to and during construction | PG&E shall develop a Water Quality Monitoring and Adaptive Management Plan (Water Quality Plan) in consultation with Central Valley Regional Water Quality Control Board and State Water Board staff. The Water Quality Plan shall include monitoring protocols to ensure Mitigation Measures WQ-MM-1, WQ-MM-2, and WQ-MM-3 prevent construction activities from violating water quality objectives identified in the SJR/SR Basin Plan. The Water Quality Plan shall also include adaptive management procedures to develop and implement new water quality protection measures with Central Valley Regional Water Quality Control Board and State Water Board staff if construction violates water quality objectives. PG&E shall not commence construction until the State Water Board Deputy Director of the Division of Water Rights approves the Water Quality Plan. |
| BIO-MM-1: Conduct Worker Environmental Awareness Training and Implement General Requirements | PG&E and its construction contractor | Prior to and during construction | PG&E shall retain a qualified biologist to develop and conduct a mandatory worker environmental awareness training about special-status species and other sensitive resources that could be encountered during Proposed Project work (e.g., sensitive natural communities, northwestern pond turtle, special-status bats). In addition, construction employees shall be educated about the importance of controlling and preventing the spread of invasive plant infestations. The biologist shall prepare a handout that contains information (including photographs) about how to identify pertinent species, their habitat requirements, and the avoidance and minimization measures to be implemented. All personnel shall receive worker environmental awareness training before conducting Proposed Project work and new personnel shall receive the training at they are brought onto the Proposed Project. Proof of personnel environmental training attendance shall be kept on file by PG&E. Each worker shall be provided with a copy of the handout and at least one copy shall remain onsite throughout the duration of the Proposed Project with the construction foreman. General restrictions and guidelines that shall be in the training and followed by Proposed Project personnel are listed below. The Proposed Project foreman shall be responsible for ensuring that crew members adhere to these guidelines and restrictions: • Before construction begins, the construction contractor shall work with the Proposed Project engineer and a biologist to identify sensitive locations to be protected with orange construction fencing or other high visibility materials (e.g., stanchions or pilons and flagging) and shall place stakes to indicate these locations. Sensitive locations shall include ditches at the Cedar Mill staging area, seasonal and emergent wetlands, ephemeral drainages, and perennial drainages. Fencing shall be installed with a one-foot gap between the ground and the bottom of the fence so that small animals do not become trapped in the fence. The fencing |

| | Responsibility for | Implementation | |
|---------------------------|--------------------|----------------|---|
| Mitigation Measure | Implementation | Schedule | Mitigation and Monitoring Details |
| Mitigation Measure | | - | The biological monitor shall conduct a visual survey for wildlife in the work area prior to the start of work. Wildlife observed during the survey shall be recorded. The results of the survey shall be provided to the State Water Board and CDFW. Work crews shall be restricted to designated and clearly defined work areas and access routes. Staging of equipment and material sites shall be restricted to designated areas; A biological monitor shall make regular visits to the Project Area to ensure that environmentally sensitive areas continue to remain protected, provide environmental awareness training to new crew members, and determine if general restrictions and guidelines are being followed. After the initial activities of identifying sensitive areas, installing protective fencing and preconstruction surveys a biologist shall visit the Project Area weekly during the first two months of active construction; every other week during the next three months of construction, and once a month for the remainder of the work. The biological monitor shall also check no-work buffers around active bird nests during these visits and shall increase the frequency of the visits if active nests are present in the Project Area. Wildlife observed during the site visits shall be recorded. The biological monitor shall have the authority to stop work in the immediate vicinity if a special-status species or other sensitive resources may be harmed by Project Area, all equipment shall be pressure washed clean to ensure noxious weeds are not imported into or out of the Project Area. Equipment shall be considered clean when there is no visible soil or plant parts. |
| | | | At the end of each workday, an escape ramp shall be placed at each end of any open excavation to allow wildlife that may become trapped to climb out overnight. The ramp may be constructed of either dirt fill or wood planking or other suitable material that is placed at an angle no greater than 30 degrees. The biological monitor or designated construction personnel shall check excavations, open pipes, and other areas prior to filling, moving, or disturbing to ensure that animals are not trapped or harmed by construction activities; |
| | | | Vehicles shall not exceed a speed of 10 miles per hour when traveling off paved roads; |
| | | | Vehicle access across streams and wetlands shall be limited to existing roads and designated crossings; |
| | | | Laydown and staging areas shall be located in previously developed or disturbed areas; |
| | | | Any erosion control materials required for the project shall be rice straw or come from certified weed-free sources, as practicable (i.e., certified weed free straw wattles, mulch, etc); |
| | | | Maintain gravel and soil spoil piles free of invasive weeds; |
| | | | All trash shall be disposed of and removed from the work area daily. Workers shall not feed or otherwise attract fish or wildlife to the work area; |
| | | | No pets or firearms shall be allowed in the Project Area; |
| | | | Workers shall look underneath vehicles and other heavy equipment for wildlife before moving vehicles or equipment to ensure that no animals are crushed; |
| | | | No wildlife species shall be handled and/or removed from the site by anyone except qualified biologists. Wildlife found in work areas shall be allowed to move out of the area on their own. Contact the PG&E biologist if the animal does not move or if further guidance is needed; and |
| | | | Any worker who inadvertently injures or kills an animal or finds one dead, injured, or entrapped shall immediately report the incident to the Proposed Project foreman, who shall immediately report the incident to the PG&E biologist. Questions about wetlands, protected species, or mitigation measures should also be directed to the PG&E biologist. |

| Mitigation Measure | Responsibility for Implementation | Implementation Schedule | Mitigation and Monitoring Details |
|---|--------------------------------------|----------------------------------|--|
| BIO-MM-2: Conduct a Preconstruction Survey for Northwestern Pond Turtle at the Cedar Mill Staging Area | PG&E | Prior to construction | To avoid potential injury or mortality of northwestern pond turtles, PG&E shall ensure that the following steps are taken: Prior to grading in annual grassland for equipment or materials staging at the Cedar Mill staging area, a qualified biologist (i.e., a biologist familiar with the habitat requirements and biology of northwestern pond turtle) will conduct a preconstruction survey for turtle nests or hibernating turtles; and. If a northwestern pond turtle is encountered in the work area, work in the immediate area shall stop and the turtle shall be allowed to leave the area on its own. The PG&E biologist shall be contacted immediately, and the biological monitor (or other project personnel) shall continuously monitor the individual's movements until it is safely out of the work area. The PG&E biologist shall report any northwestern pond turtles in the Project Area to the State Water Board, CDFW, and USFWS within one day. |
| BIO-MM-3: Evaluate Trees for Removal and Implement Protective Measures to Avoid or Minimize Injury or Mortality of Special-status Roosting Bats | PG&E and its construction contractor | Prior to and during construction | Qualified biologists (i.e., biologists with experience with tree roosting habitats and life histories of special-status bats that may occur in the Project Area) shall examine trees for suitable special-status bat roosting habitat (e.g., large tree cavities, basal hollows, loose or peeling bark, larger snags, medium to large deciduous trees that receive at least six hours of daily sun exposure and a nearby water source less than a quarter-mile away) before tree removal. The biologists shall categorize trees for their suitability to support roosting special-status bats (i.e., high, moderate, and low suitability). Trees providing high or moderate bat roosting habitat shall be marked with flagging and identified as habitat. If possible, trees shall be removed between March 1 and April 15 or between September 1 and October 15 to avoid the bat maternity and hibernation periods. Trees with low-quality or no bat roosting habitat can be removed without restrictions. If a bat roost or a tree roosting bat is discovered during the tree assessment, and it is outside of the maternity and hibernation periods, the qualified biologist shall prepare a bat exclusion and avoidance plan for CDFW review and approval. Lights are likely the only feasible and effective roosting deterrent. To avoid or minimize the potential for injury or mortality of tree roosting special-status bats, removal of trees with moderate or high quality bat roosting habitat shall be performed by implementing the following measures: 1. Tree trimming and/or tree removal shall be scheduled when evening temperatures are above 45 degrees Fahrenheit and there has been less than 0.5 inch of rain in the last 24 hours. 2. Trees shall be removed in two steps over a period of two days. On the first day, all branches that do not contain roosting habitat shall be removed in two steps over a period of two days, an alternate process shall only the implemented in the late afternoon or as close to sunset as possible, unless otherwise determined appropriate by the qualified |

| Mitigation Measure | Responsibility for Implementation | Implementation Schedule | Mitigation and Monitoring Details |
|---|--------------------------------------|----------------------------------|--|
| | | | until the end of the maternity period or hibernation period, or until a qualified biologist determines that the roost is no longer occupied. |
| BIO-MM-4: Minimize the Introduction and Spread of Invasive Plants | PG&E and its construction contractor | Prior to and during construction | PG&E or its contractor shall take caution to limit the introduction of new invasive plants and the spread of invasive plants previously documented in the Project Area. Accordingly, the following measures shall be implemented during construction: Prior to mobilization to the Project Area, all equipment shall be pressure-washed clean to ensure noxious weeds are not imported into or out of the Project Area. Equipment shall be considered clean when there are no visible soils or plant parts on the equipment; Any erosion control measures required for the Proposed Project shall be rice straw or come from certified weed-free sources, as practicable (e.g., certified weed-free straw wattles, mulch); Gravel and spoil piles shall be maintained free of noxious weeds; Areas known to be weed-free shall be used for staging and laydown areas; Prior to use of the Cedar Mill staging area, any vegetated areas proposed for use shall be graded and topsoil shall be removed to minimize the presence and spread of invasive plant material. Existing graded areas at the Cedar Mill staging area shall be prioritized for use to minimize the area needing to be graded; Topsoil containing invasive plant material shall be placed in plastic garbage bags or under tarps with no viable plant parts (seed or parts that can sprout) protruding and shall be disposed of at an appropriate offsite disposal facility to avoid the spread of invasive plants into natural areas; Tools, equipment, and vehicles used within vegetated areas at the Cedar Mill staging area shall be cleaned before moving to the Dam area or Doakes Ridge staging and spoils site. Approved methods for cleaning without water include using bristle brushes, brooms, scraper, vacuum, high pressure air device, and hand removal. When feasible, clean equipment and vehicles in graded areas with low or no vegetation; and Within the Dam area and Doakes Ridge staging and spoils site, minimize surface disturbance to the grea |
| BIO-MM-5: Avoid and Minimize Disturbance of Waters of the United States/Waters of the State | PG&E and its construction contractor | During construction | To the extent possible, PG&E shall avoid and minimize impacts on waters of the United States and waters of the State by implementing the following measures. These measures shall be incorporated into contract specifications and implemented by the construction contractor: • Avoid temporary impacts to the maximum extent possible where construction activities can be excluded from wetlands and non-wetland waters; • Avoid construction activities in saturated or ponded natural wetlands and drainages during the wet season (spring and winter) to the maximum extent possible; • Stabilize streams/drainages immediately upon completion of construction activities. Non-wetland waters of the United States that were vegetated prior to construction shall be restored in a manner that encourages vegetation to re-establish to pre-Proposed Project condition and reduces the effects of erosion on the drainage system; • Remove any debris or soils that are inadvertently deposited below the OHWM of the Reservoir or perennial drainage in a manner that minimizes disturbance of the bed and bank; and • Complete all activities promptly to minimize their duration and resultant impacts. |

| Mitigation Measure | Responsibility for Implementation | Implementation Schedule | Mitigation and Monitoring Details |
|--|--------------------------------------|----------------------------------|---|
| BIO-MM-6: Compensate for the Temporary and Permanent Losses of Waters of the United States/Waters of the State | PG&E and its construction contractor | During and after construction | To compensate for temporary impacts on waters of the United States and waters of the State in Tiger Creek Regulator Reservoir and Tiger Creek, all temporary fill shall be removed and the Reservoir bed and creek bed shall be restored to pre-Proposed Project contours and conditions within 30 days following completion of construction activities. To compensate for permanent loss of approximately 0.14 acre of waters of the United States and waters of the State in Tiger Creek Regulator Reservoir, Tiger Creek, and the existing plunge pool, PG&E shall pay into the National Fish and Wildlife Foundation Sacramento District In-lieu Fee Program to ensure no net loss of wetland functions and values. The compensation ratio shall be a minimum of 1:1 (one acre of habitat credit for every one acre of impact). The actual mitigation ratio and associated credit acreage may be modified based on Clean Water Act section 404 and section 401 permitting, which shall dictate the ultimate compensation for permanent impacts on waters of the United States and waters of the State. |
| BIO-MM-7: Implement Flow Pumping System and Water Drafting Requirements | PG&E and its construction contractor | During construction | All pump intakes that are placed in Tiger Creek, the Reservoir, existing plunge pool, or any other waterbody to fill water trucks or to lower the plunge pool shall be screened to prevent fish species from being entrained with water being pumped from the creek or reservoir. A round or square screen mesh that is no larger than 2.38 millimeters (0.094 inch) in the narrow dimension, or any other shape that is no larger than 1.75 millimeters (0.069 inch) in the narrow dimension shall be used. |
| BIO-MM-8: Rescue and Relocate Fish from Affected Habitat | PG&E | Prior to and during construction | A qualified biologist shall develop and implement a fish rescue and relocation plan to capture and relocate any fish out of harm's way prior to installation of the plywood or steel sheet at the M-76 weir and commencement of dewatering in Tiger Creek to facilitate construction of the new spillway, flip bucket, and plunge pool. A qualified biologist is defined as a person who is knowledgeable and experienced in the biology, life stages, natural history, and identification of local fish and wildlife resources present at the Project site. The fish rescue and relocation plan shall be submitted to CDFW for approval at least 60 days before initiating activities to install the cofferdam and a copy of the approved plan shall be available on-site during all Project activities. At a minimum, the plan shall include the following: • A requirement that fish rescue and relocation activities commence immediately before plywood or steel sheet installation and that fish rescue and relocation in the affected stream reach shall occur immediately before (to the extent feasible) and as dewatering is occurring until no more fish are captured or the site is completely dewatered, whichever occurs first; • A requirement that all gear and tools (e.g., waders, boots, nets, buckets) be decontaminated to minimize and avoid spreading aquatic invasive species and diseases (e.g., chytrid fungus), as briefly summarized below; • Soak equipment and gear for 10 minutes in a 7 percent bleach solution: 9 liquid ounces of bleach per gallon of water; or • Soak equipment and gear for 30 seconds in 0.015 percent Quat 128: 1/8 teaspoon per gallon of water. • A description of the methods and equipment proposed to collect, transfer, and release all rescued fish. Capture methods may include seining, dip netting, and electrofishing, as approved by CDFW. The precise methods and equipment to be used shall be developed cooperatively by CDFW and PG&E and • A requirement that only qualified fish biologists lead the fish rescue and relocation report that in |

| Mitigation Measure | Responsibility for Implementation | Implementation Schedule | Mitigation and Monitoring Details |
|--|--------------------------------------|----------------------------------|--|
| BIO-MM-9: Conduct a Preconstruction Survey for Nesting Birds and Implement Protective Buffers around Active Nests | PG&E | Prior to and during construction | As work is scheduled to begin in July, which is during the nesting bird season (February 15 to August 31), qualified biologists (i.e., biologists with experience locating and identifying bird nests and nesting behaviors) shall conduct at least one preconstruction survey for nesting birds during the height of the nesting season (March 1 to June 1) to identify potential nest sites in the work area. A follow-up nesting bird survey shall be conducted no more than 5 days before mobilization and the start of vegetation removal. If work does not begin within 14 days of the survey or construction activities stop for 14 days or more during the nesting season, work areas shall be resurveyed for active nests. At the Cedar Mill staging area, the Project Area footprint shall be surveyed. At the Dam area and Doakes Ridge staging and spoils site, the Project Area and a 1,320-foot buffer for raptors and a 75-foot buffer for passerines around the Project Area shall be surveyed, except for at the Spur 1 staging area where a 280-foot buffer shall be surveyed for passerines. If an active nest is found in a tree or other vegetation to be removed, a no-disturbance buffer area shall be established around the tree, and removal of the tree shall be delayed until the biologist has determined that the young have fledged. If other active nests are no longer active. The qualified biologists and the PG&E biologist shall determine the extent of the no-disturbance until the nests are no longer active. The qualified biologists and the PG&E biologist shall determine the extent of the no-disturbance puffers, which shall be based on the species present and their sensitivity to disturbance, the level of noise or construction disturbance, line-of-sight between the nest and the disturbance, ambient levels of noise and other disturbances, and other topographical or artificial barriers. Suitable buffer distances may vary between species. Monitoring of active nests by a biologist may be required during high disturbance activities (i.e., vegetation rem |
| GEO-MM-1: Educate Construction Personnel in Recognizing Fossil Material | PG&E | Prior to construction | Prior to construction, PG&E shall ensure that all construction personnel receive training provided by a qualified professional paleontologist who is experienced in teaching non-specialists. This training shall ensure that construction personnel can recognize fossil materials in the event any are discovered during construction. |
| GEO-MM-2: Stop Work if Substantial Fossil Remains are Encountered during Construction | PG&E and its construction contractor | During construction | If substantial fossil remains (particularly vertebrate remains) are discovered during earth-disturbing activities, the construction contractor shall immediately stop activities and wait until a state-registered professional geologist or qualified professional paleontologist can assess the nature and importance of the find and a qualified professional paleontologist can recommend appropriate treatment. Treatment may include preparation and recovery of fossil materials so that they can be housed in an appropriate museum or university collection and may also include preparation of a report for publication describing the finds. PG&E shall be responsible for ensuring that recommendations regarding treatment and reporting are implemented. |
| AQ-MM-1: Implement Fugitive Dust Abatement Measures | PG&E and its construction contractor | During construction | To limit fugitive dust from project activities, PG&E shall implement the following measures: Vehicle speeds shall be limited to 15 miles per hour when traveling on unpaved roads; A water truck shall be used full time to control dust on roads and in the laydown areas; The water truck shall be equipped to provide a focused knockdown spray during excavation activities if excessive dust is created; and Other emission controls, such as covering stockpiles, shall be used as needed. |

| Mitigation Measure | Responsibility for Implementation | Implementation Schedule | Mitigation and Monitoring Details |
|--|--------------------------------------|-------------------------|--|
| GHG-MM-1: Implement Best Management Practices to Mitigate Tree Loss and Reduce Construction Generated Greenhouse Gas Emissions | PG&E and its construction contractor | During construction | PG&E shall reduce GHG emissions by implementing the following measures. Tree Removal PG&E will employ a two-tiered approach to compensate for the GHG emissions impact resulting from tree removal. 1. All trees removed during Proposed Project construction shall be replaced at a 1:1 ratio (for every tree removed, a deepot 40 or similar-sized containerized tree will be planted). Deepot 40 containers generally measure 2.5 inches in diameter and 10 inches deep. Trees may be planted at the construction site, within the Project Area, or throughout PG&E's service territory. PG&E shall prioritize tree plantings of the same species as the trees removed. The final planting location and species shall be selected to maximize tree survivability and growth. 2. Given the number of affected trees, if replacement of all individuals is not desired by PG&E or deemed infeasible by PG&E, PG&E will purchase GHG offsets equal to the number of emissions from lost carbon sequestration of the removed trees. Emissions from lost sequestration from removal of all affected trees over the design life expectancy of the Dam upgrades have been quantified as part of this IS/MND and total 3,733 metric tons CO2. This yields a maximum offset performance standard of 3,733 metric tons CO2. If trees are replaced according to (1) above, PG&E may recalculate the number of required offsets based on the remaining trees that have been removed and will not be replaced. An updated emissions analysis conducted for the Proposed Project will be performed using approved emissions models and methods available at the time of the reanalysis. Consistent with the methodology used in this IS/MND, lifetime emissions from lost sequestration must be quantified over the design life expectancy of the Dam upgrades (100 years). All GHG offsets must be created through a CARB-approved registry. These registries are currently the American Carbon Registry, Climate Action Reserve, and Verra, although additional registries may be accredited by CARB in the future. These registrie |

| Mitigation Measure | Responsibility for Implementation | Implementation Schedule | Mitigation and Monitoring Details |
|--|--------------------------------------|----------------------------------|--|
| | | | Construction Idling times shall be minimized either by shutting equipment off when not in use or reducing the maximum idling time to 5 minutes (as required by the California airborne toxics control measure Title 13, section 2485 of CCR). Clear signage shall be provided for construction workers at all access points. Encourage construction contractors to operate vehicles with the highest tier engines commercially available. Prioritize use of alternative fuel (e.g., biodiesel, electric) or renewable diesel in Proposed Project construction vehicles/equipment. |
| HAZ-MM-1: Implement Hazardous Materials Control Measures | PG&E and its construction contractor | Prior to and during construction | Hazardous materials such as fuel (gasoline/diesel), hydraulic oil, motor oil and other lubricants, and cementitious materials would be used during project construction. To ensure the potential effects of hazardous materials or potential spills are minimized, PG&E shall implement the following measures: • Construction personnel shall be trained in proper hazardous material management and shall be able to access safety data sheets for all substances used on the Project Area by contacting Safetec at 800-704-9215; • All hazardous materials shall be contained in appropriate spill-proof containers and/or secondary containment areas, and stored in a designated area at least 100 feet away from waterbodies, except at the temporary batch plant location in the Spur 1 staging area, a portion of which is within 100 feet of Tiger Creek. For the areas within 100 feet of Tiger Creek, alternative protection measures shall be implemented as part of Mitigation Measure WQ-MM-2: Implement Spur 1 Staging Area Water Quality Protection Measures; • Temporary storage of hazardous materials, equipment staging, and servicing and refueling of equipment shall be conducted at pre-designated locations away from waterbodies and shall only be permitted at designated areas; • Except for cranes, which are addressed in the next bullet, and the mobile batch plant, which is addressed in Mitigation Measure WQ-MM-2: Implement Spur 1 Staging Area Water Quality Protection Measures, refueling shall only take place in a designated area. Designated refueling areas shall be located greater than 100 feet away from any waterbodies. Drip pans and/or absorbent pads shall be used during equipment fueling. Absorbent spill clean-up materials and spill kits shall be available in fueling areas. Fuels shall be stored in containment basins; • To the extent feasible, crane refueling shall occur greater than 100 feet away from any waterbody, with a minimum of 20 feet. Fuel trucks used for crane refueling shall be equipped with an automatic shut-off nozzle to aid in |

| Mitigation Measure | Responsibility for Implementation | Implementation Schedule | Mitigation and Monitoring Details |
|---|--------------------------------------|----------------------------------|--|
| | | | Small-engine-powered equipment shall be provided with secondary containment areas. Whenever possible, vehicles and equipment with engines supplying motive power shall be parked in designated areas located 200 feet or more from waterbodies. Drip pans or other containment measures shall be placed under vehicles and equipment when not in use and within 200 feet of waterbodies; Equipment shall be staged overnight in secondary containment areas or with other suitable barriers to prevent accidental leakage of fuel, oils, or other liquid from soaking into the soil or being carried to waterbodies; Appropriate spill containment and clean-up materials shall be available onsite at all times. Any spills shall be cleaned up immediately and shall not be buried or washed with water. Initial containment would be with absorbent material or, if necessary, the construction of berms. Contaminated soil shall be excavated, contained, and transported to an approved disposal site; and In accordance with PG&E policy, all hazardous substance releases to the environment shall be reported internally and to the State Water Board. A spill kit shall be maintained onsite to ensure prompt containment in the unlikely event of a release to the environment. All media affected by a spill shall be cleaned up and disposed of offsite in accordance with applicable regulations. Hazardous materials permits shall be obtained from Amador County Environmental Health as needed for project support locations that store threshold quantities of hazardous materials for 30 days or more. Hazardous materials business plans and spill prevention control and countermeasure plans shall detail hazardous materials inventories, emergency contacts, spill prevention/response, and contingency plans. |
| CUL-MM-1: Conduct Mandatory Cultural Resources Awareness Training for All Project Personnel | PG&E and its construction contractor | Prior to and during construction | Before any ground-disturbing work commences, a qualified archaeologist shall conduct mandatory cultural resources awareness training for all construction personnel. The training shall cover the types of materials that could be encountered and the inadvertent discovery protocol to follow in such an event. If new construction personnel are added to the project, the contractor shall ensure that the new personnel receive the mandatory training before starting work. |
| CUL-MM-2: Stop Work if Previously Unidentified Archaeological Resources are Encountered until a Qualified Archaeologist Assesses the Find and Native American Consultation Has Been Conducted | PG&E and its construction contractor | During construction | If previously unknown buried archaeological resources, such as chipped or ground stone artifacts, historic debris, or building foundations are inadvertently unearthed during ground-disturbing activities, work shall stop at the location of the find and all areas within 100 feet of the find until a qualified archaeologist can assess the significance of the find. If avoidance is not possible and the resource is determined to be significant, a qualified archaeologist shall develop a treatment plan in consultation with project stakeholders. If the find is Native American in origin, consultation with local Native American representatives shall be reinitiated to determine appropriate treatment of the resource. |
| CUL-MM-3: Stop Work in Case of Accidental Discovery of Buried Human | PG&E and its construction contractor | During construction | In the event that human remains are discovered, all project-related ground disturbance shall halt within 100 feet of the find and the Amador County coroner shall be notified immediately. If the coroner determines the remains to be Native American in origin, the coroner shall be responsible for notifying the Native American Heritage Commission (NAHC), which shall appoint a most likely descendant (MLD) (Public Resources Code 5097.99). The project applicant and MLD shall make all reasonable efforts to develop |

| Mitigation Measure | Responsibility for Implementation | Implementation Schedule | Mitigation and Monitoring Details |
|--|--------------------------------------|----------------------------------|---|
| Remains until Procedures in Public Resources Code Section 5097 have been Completed | | | an agreement for the dignified treatment of human remains and associated or unassociated funerary objects (CEQA Guidelines 15064.5[d]). The agreement should take into consideration the appropriate excavation, removal, recordation, analysis, custodianship, curation, and final disposition of the human remains and associated or unassociated funerary objects. The MLD shall have 48 hours after being granted access to the site to make a recommendation (Public Resources Code 5097.98). If the MLD does not agree to the treatment method, the project shall follow Public Resources Code section 5097.98(e), which states, "the landowner or his or her authorized representative shall reinter the human remains and items associated with Native American human remains with appropriate dignity on the property in a location not subject to further and future subsurface disturbance. |
| TRAN-MM-1: Implement a Traffic | PG&E and its construction | During construction | To avoid potential conflicts between members of the public and construction vehicles, a traffic control plan shall be implemented that contains the following measures: |
| Control Plan | contractor | | Warning signs of construction activities and road closures shall be posted along Tiger Creek Road between SR 88 and the Project Area; |
| | | | Flaggers shall be used for traffic control along the portions of the construction access roads shared with the public as needed or when heavy construction traffic is expected. Alternatively, PG&E-managed roads such as Tiger Creek Road shall be closed to the public as needed; |
| | | | The construction contractor shall comply with Title 13 of the CCR, which includes idling restrictions on construction vehicles and equipment to no more than 5 minutes; |
| | | | Construction equipment and vehicles shall be properly tuned and maintained; All an attract construction traffic about he required to construct the back and instantian and attraction are different and the construction are |
| | | | All on-street construction traffic shall be required to comply with the local jurisdiction's standard construction specifications; and To the extent feasible, construction traffic shall be scheduled and routed to reduce congestion and related air quality impacts caused by idling vehicles along local roads during peak travel times. |
| FIRE-MM-1: Implement Fire Hazard Prevention Measures | PG&E and its construction contractor | Prior to and during construction | During construction, crews shall take appropriate measures to eliminate the potential for fire, including the following: Construction crews shall follow the safe working practices outlined below and shall abide by all facility programs to prevent and suppress fires in the Project Area. Initial action shall be prompt and shall include the use of all personnel and equipment available in the Project Area. All personnel are expected to take all reasonable action to prevent the occurrence of fires; Crews shall follow PG&E's latest guidelines described in Utility Standard TC-1464S, Preventing and Mitigating Fires While Performing PG&E Work (Pacific Gas and Electric Company 2022); |
| | | | • For any hot work (welding, cutting, or heating) onsite, fire prevention and suppression tools (e.g., backpack-type water pumps, shovels) shall be made available; |
| | | | Project vehicles shall be equipped with appropriate fire response equipment and fire prevention and suppression tools; Construction crews shall have the following equipment: |
| | | | One shovel, one axe, and one or more UL-rated 4BC extinguishers on each crew truck/vehicle; |
| | | | One shovel and one five-gallon, water-filled backpack pump with each welder; and |
| | | | • One shovel and one fully charged chemical fire extinguisher at a point not more than 25 feet from the work site for each gasoline-powered tool, including rock drills. |
| | | | Fire extinguishers shall be placed in easily accessible locations near potential ignition sources (e.g., internal combustion engines). Each vehicle and trailer shall be equipped with a multi-purpose dry chemical extinguisher in a readily accessible location. All internal combustion engines brought onto the job site shall be equipped with a spark arrestor; |

| Mitigation Measure | Responsibility for Implementation | Implementation Schedule | Mitigation and Monitoring Details |
|--------------------|-----------------------------------|-------------------------|---|
| | | | All personnel shall perform daily inspections of work areas, laydown areas, and walkways to ensure they are clear of debris and trash and that flammable or combustible materials are not allowed to accumulate. All flammable liquids shall be stored appropriately and at a safe distance from ignition sources. All flammable gas containers shall be secured in an upright position with their valve caps in place at a safe distance from ignition sources; |
| | | | PG&E's hot work permit process (Pacific Gas and Electric Company 2008) shall be followed before any welding or cutting operations are performed. A fire watch shall be stationed at the location of the hot work activity until at least 30 minutes after the completion of that activity, and shall have either a portable fire extinguisher or water hose with a nozzle immediately available. The fire watch and person that will be performing the hot work shall ensure that the area is safe for hot work before work will be allowed to begin. The hot work permit shall be posted at the job site until hot work is complete; |
| | | | • If there is a need to activate fire hazard response measures, project crews shall be directed to the temporary construction emergency action plan (TCEAP) for response actions developed to respond to a potential fire near the Project Area. The TCEAP shall be developed prior to construction and will provide instructional evacuation orders and procedures. |

Notes:

¹ The relevant Activity Specific Erosion and Sediment Control Plans are *Good Housekeeping* (Pacific Gas and Electric Company Construction Stormwater Group 2017a), *Laydown/Staging Area Construction* (Pacific Gas and Electric Company Storm Water Program Group 2011), *Dirt and Gravel Access Road Maintenance—Mountainous Regions* (Pacific Gas and Electric Company Water Quality Group 2013), and *Stockpile Management* (Pacific Gas and Electric Company Construction Stormwater Group 2017b).

References:

Pacific Gas and Electric Company. 2008. SH&C Procedure 236, Fire Prevention during Welding, Cutting and other Hot Work. August.

Pacific Gas and Electric Company. 2022. Utility Standard: TD-1464S, Preventing and Mitigating Fires While Performing PG&E Work. Internal. June 13.

Pacific Gas and Electric Company Construction Stormwater Group. 2017a. Good Housekeeping Activity Specific Erosion and Sediment Control Plan (A-ESCP). April.

Pacific Gas and Electric Company Construction Stormwater Group. 2017b. Stockpile Management Activity Specific Erosion and Sediment Control Plan A-ESCP). March.

Pacific Gas and Electric Company Storm Water Program Group. 2011. Laydown/Staging Area Construction Activity Specific Erosion and Sediment Control Plan (A-ESCP). January.

Pacific Gas and Electric Company Water Quality Group. 2013. Dirt and Gravel Access Road Maintenance—Mountain Regions Activity Specific Erosion and Sediment Control plan (A-ESCP). November.